



**HAL**  
open science

# Extrapolation-based Path Invariants for Abstraction Refinement of Fifo Systems

Alexander Heussner, Tristan Le Gall, Grégoire Sutre

► **To cite this version:**

Alexander Heussner, Tristan Le Gall, Grégoire Sutre. Extrapolation-based Path Invariants for Abstraction Refinement of Fifo Systems. 2009. hal-00380517v1

**HAL Id: hal-00380517**

**<https://hal.science/hal-00380517v1>**

Submitted on 1 May 2009 (v1), last revised 6 Jul 2011 (v2)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Laboratoire Bordelais de Recherche en Informatique  
UMR CNRS 5800 – Université de Bordeaux  
351 cours de la Libération  
33405 Talence cedex, France

Research Report RR-1459-09

# Extrapolation-based Path Invariants for Abstraction Refinement of Fifo Systems

Alexander Heußner, Grégoire Sutre

LaBRI, CNRS, Université Bordeaux 1

{heussner,sutre}@labri.fr

Tristan Le Gall

Université Libre de Bruxelles

tlegall@ulb.ac.be

Mai 2009

This report is the long and extended version of the paper with the same title to appear in the Proceedings of the 16th International SPIN Workshop on Model Checking of Software – SPIN 2009, Grenoble, France, June 2009.



# Extrapolation-based Path Invariants for Abstraction Refinement of Fifo Systems<sup>\*</sup>

Alexander Heußner<sup>1</sup>, Tristan Le Gall<sup>2</sup>, and Grégoire Sutre<sup>1</sup>

<sup>1</sup> LaBRI, Université Bordeaux, CNRS {heussner, sutre}@labri.fr

<sup>2</sup> Université Libre de Bruxelles (ULB) tlegall@ulb.ac.be

**Abstract.** The technique of counterexample-guided abstraction refinement (CEGAR) has been successfully applied in the areas of software and hardware verification. Automatic abstraction refinement is also desirable for the safety verification of complex infinite-state models. This paper investigates CEGAR in the context of formal models of network protocols, in our case, the verification of fifo systems. Our main contribution is the introduction of *extrapolation-based path invariants* for abstraction refinement. We develop a range of algorithms that are based on this novel theoretical notion, and which are parametrized by different extrapolation operators. These are utilized as subroutines in the refinement step of our CEGAR semi-algorithm that is based on recognizable partition abstractions. We give sufficient conditions for the termination of CEGAR by constraining the extrapolation operator. Our empirical evaluation confirms the benefit of extrapolation-based path invariants.


## 1 Introduction

Distributed processes that communicate over a network of reliable and unbounded fifo channels are an important model for the automatic verification of client-server architectures and network protocols. As easy as this model seems at a first glance, as hard is the verification of communication protocols in general: distributed processes that run in parallel and that exchange messages in an asynchronous way, therefore exhibiting complex interactions, allow for a gargantuan (and sometimes infinite) number of possible – emergent – behaviors. Hence, verifying these multitude of behaviors is far beyond any checking by hand and, regarding the emergence of behaviors, not directly deducible from the originally given set of simple processes; consequently, verification is not possible without automatic methods and the support of algorithmic tools.

*Fifo Systems.* We focus on communicating fifo systems that consist of a set of finite automata that model the processes, and a set of reliable, unbounded fifo queues that model the communication channels. This class of infinite-state systems is, unfortunately, Turing-complete even in the case of one fifo queue [BZ83]. In general, two approaches for the automatic verification of Turing-complete

---

<sup>\*</sup> This work was partly supported by ANR project AVERISS (ANR-06-SETIN-001).

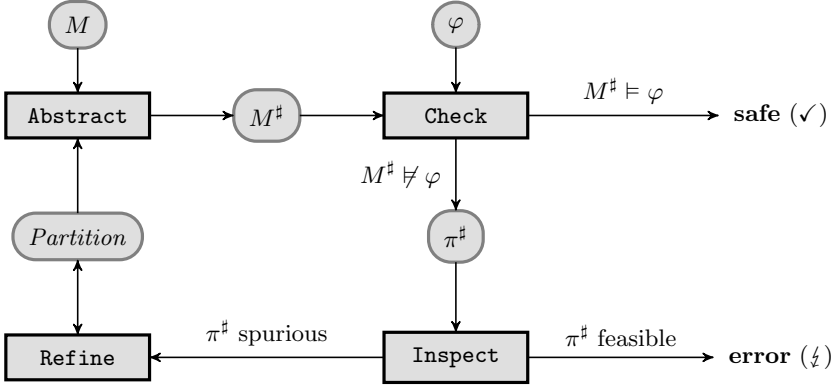

**Fig. 1.** Basic Steps of the CEGAR Loop

infinite-state models have been considered in the literature: (a) exact semi-algorithms that compute forward or backward reachability sets (e.g., [BG99, BH99, FIS03] for fifo systems) but may not terminate, and (b) algorithms that always terminate but only compute an over-approximation of these reachability sets (e.g., [LGJJ06, YBCI08] for fifo systems).

*CEGAR.* In the last decade, counterexample-guided abstraction refinement [CGJ<sup>+</sup>03] has emerged as a powerful technique that bridges the gap between these two approaches. CEGAR plays a prominent role in the automatic, iterative approximation and refinement of abstractions and has been applied successfully in the areas of software [BR01, HJMS02] and hardware verification [CGJ<sup>+</sup>03]. Briefly, the CEGAR approach to the verification of a safety property  $\varphi$  for an (infinite-state) model  $M$ , i.e., the decision whether  $M \models \varphi$ , consists in an abstract-check-refine loop that iterates the four following steps:

1. build a safety conservative, finite-state abstraction  $M^\#$  of the model (e.g., a predicate abstraction [GS97] which partitions the state space);
2. model-check the abstraction against the given safety property (check whether  $M^\# \models \varphi$ ): if the abstraction is safe, then so is the original model (return  $\checkmark$ ), otherwise a finite counterexample path  $\pi^\#$  is found in the abstraction;
3. symbolically simulate the abstract counterexample on the original model: if the counterexample is *feasible* then the original model is unsafe (return  $\times$ ), otherwise it is *spurious* (i.e., a false negative) and
4. one extracts a refinement for  $M^\#$  that rules out the spurious counterexample before iterating this procedure (jump back to 1).

*Our Contribution.* We present a CEGAR semi-algorithm for safety verification of fifo systems based on finite partition abstractions where equivalence classes are recognizable languages of queue contents, or, equivalently, QDDs [BG99]. The crucial part in CEGAR-based verification is refinement, which must find a new partition that is both (1) precise enough to rule out the spurious counterexample

and (2) computationally “simple”. In most techniques, refinement is based on the generation of *path invariants*; these are invariants along the spurious counterexample that prove its unfeasibility (in our case, given by a series of recognizable languages). We follow this approach, and present several generic algorithms to obtain path invariants based on parametrized extrapolation operators for queue contents. Our path invariant generation procedures are fully generic with respect to the extrapolation. Refining the partition consists in splitting abstract states that occur on the counterexample with the generated path invariant.

We formally present the resulting CEGAR semi-algorithm and give partial termination results that, in contrast to the classical CEGAR literature, do not rely on an “a priori finiteness condition” on the set of all possible abstractions. Actually, our results depend mainly on our generic extrapolation-based path invariant generation. In particular we show that our semi-algorithm always terminates if (at least) one of these two conditions is satisfied: (1) the fifo system under verification is unsafe, or (2) it has a finite reachability set and the parametrized extrapolation has a finite image for each value of the parameter. We cannot expect termination in general since safety verification is known to be undecidable for fifo systems [BZ83].

We have implemented our approach in the tool McSCM [Mcs] that performs CEGAR-based safety verification of fifo systems. Experimental results on a suite of (small to medium size) network protocols allow for a first discussion of our approach’s advantages.

*Related Work.* Exact semi-algorithms for reachability set computations of fifo systems usually apply *acceleration techniques* [BG99, BH99, FIS03] that, intuitively, compute the effect of iterating a given “control flow” loop. The tools LASH [Las] (for counter/fifo systems) and TRex [Tre] (for lossy fifo systems) implement these techniques. However, recognizable languages equipped with Presburger formulas (CQDDs [BH99]) are required to represent (and compute) the effect of *counting* loops [BG99, FIS03]. Moreover such tools may only terminate when the fifo system can be flattened into an equivalent system without nested loops. Our experiments show that our approach can cope with both counting loops and nested loops that cannot be flattened.

The closest approach to ours is *abstract regular model checking* [BHV04], an extension of the generic regular model-checking framework based on the abstract-check-refine paradigm. As in classical regular model-checking, a system is modeled as follows: configurations are words over a finite alphabet and the transition relation is given by a finite-state transducer. The analysis consists in an over-approximated forward exploration (by Kleene iteration), followed, in case of a non-empty intersection with the bad states, by an exact backward computation along the reached sets. Two parametrized automata abstraction schemes are provided in [BHV04], both based on state merging. These schemes fit in our definition of extrapolation, and therefore can also be used in our framework. Notice that in ARMC, abstraction is performed on the data structures that are used to represent sets of configurations, whereas in our case the system itself is abstracted. After each refinement step, ARMC restarts (from scratch) the

approximated forward exploration from the refined reached set, whereas our refinement is *local* to the spurious counterexample path. Moreover, the precision of the abstraction is *global* in ARMC, and may only increase (for the entire system) at each refinement step. In contrast, our path invariant generation procedures only use the precision *required* for each spurious counterexample. Preliminary benchmarks demonstrate the benefit of our local and adaptive approach for the larger examples, where a “highly” precise abstraction is required only for a few control loops. Last, our approach is not tied to words and automata. In this work we only focus on fifo systems, but our framework is fully generic and could be applied to other infinite-state systems (e.g., hybrid systems), provided that suitable parametrized extrapolations are designed (e.g., on polyhedra).

*Outline.* We recapitulate fifo systems in Section 2 and define their partition abstractions in Section 3. Refinement and extrapolation-based generation of path invariants are developed in Section 4. In Sections 5 and 6, we present the general CEGAR semi-algorithm, and analyze its correctness and termination. Section 7 provides an overview of the extrapolation used in our implementation. Experimental results are presented in Section 8, along with some perspectives.

For the sake of completeness, all results are proved in detail. This technical report is the long version of our SPIN 2009 paper.

## 2 Fifo Systems


This section presents basic definitions and notations for fifo systems that will be used throughout the paper.

For any set  $S$  we write  $\wp(S)$  for the set of all subsets of  $S$ , and  $S^n$  for the set of  $n$ -tuples over  $S$  (when  $n \geq 1$ ). For any  $i \in \{1, \dots, n\}$ , we denote by  $\mathbf{s}(i)$  the  $i^{\text{th}}$  component of an  $n$ -tuple  $\mathbf{s}$ . Given  $\mathbf{s} \in S^n$ ,  $i \in \{1, \dots, n\}$  and  $u \in S$ , we write  $\mathbf{s}[i \leftarrow u]$  for the  $n$ -tuple  $\mathbf{s}' \in S^n$  defined by  $\mathbf{s}'(i) = u$  and  $\mathbf{s}'(j) = \mathbf{s}(j)$  for all  $j \in \{1, \dots, n\}$  with  $j \neq i$ .

Let  $\Sigma$  denote an *alphabet* (i.e., a non-empty set of *letters*). We write  $\Sigma^*$  for the set of all *finite words* (*words* for short) over  $\Sigma$ , and we let  $\varepsilon$  denote the *empty word*. For any two words  $w, w' \in \Sigma^*$ , we write  $w \cdot w'$  for their *concatenation*. A *language* is any subset of  $\Sigma^*$ . For any language  $L$ , we denote by  $L^*$  its *Kleene closure* and we write  $L^+ = L \cdot L^*$ . The *alphabet of  $L$* , written  $\text{alph}(L)$ , is the least subset  $A$  of  $\Sigma$  such that  $L \subseteq A^*$ . For any word  $w \in \Sigma^*$ , the singleton language  $\{w\}$  will be written simply as word  $w$  when no confusion is possible.

### 2.1 Safety Verification of Labeled Transition Systems

We will use labeled transition systems to formally define the behavioral semantics of fifo systems. A *labeled transition system* is any triple  $LTS = \langle \mathcal{C}, \Sigma, \rightarrow \rangle$  where  $\mathcal{C}$  is a set of *configurations*,  $\Sigma$  is a finite set of *actions* and  $\rightarrow \subseteq \mathcal{C} \times \Sigma \times \mathcal{C}$  is a (labeled) *transition relation*. We say that  $LTS$  is *finite* when  $\mathcal{C}$  is finite. For simplicity, we will often write  $c \xrightarrow{l} c'$  in place of  $(c, l, c') \in \rightarrow$ .

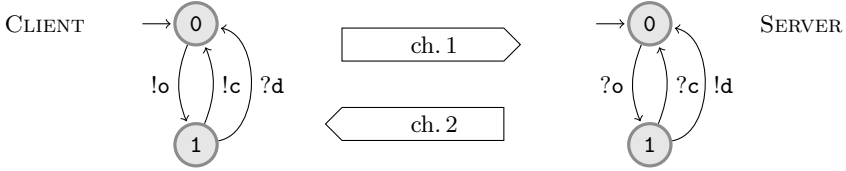

**Fig. 2.** The Connection/Disconnection Protocol [JR86]

A *finite path* (*path* for short) in *LTS* is any pair  $\pi = (c, u)$  where  $c \in \mathcal{C}$ , and  $u$  is either the empty sequence, or a non-empty finite sequence of transitions  $(c_0, l_0, c'_0), \dots, (c_{h-1}, l_{h-1}, c'_{h-1})$  such that  $c_0 = c$  and  $c'_{i-1} = c_i$  for every  $0 < i < h$ . We simply write  $\pi$  as  $c_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} c_h$ . The natural number  $h$  is called the *length* of  $\pi$ . We say that  $\pi$  is a *simple path* if  $c_i \neq c_j$  for all  $0 \leq i < j \leq h$ . For any two sets  $Init \subseteq \mathcal{C}$  and  $Bad \subseteq \mathcal{C}$  of configurations, a *path from  $Init$  to  $Bad$*  is any path  $c_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} c_h$  such that  $c_0 \in Init$  and  $c_h \in Bad$ . Observe that if  $c \in Init \cap Bad$  then  $c$  is a path (of zero length) from  $Init$  to  $Bad$ . The *reachability set* of *LTS* from  $Init$  is the set of configurations  $c$  such that there is a path from  $Init$  to  $\{c\}$ .

In this paper, we focus on the verification of safety properties on fifo systems. A safety property is in general specified as a set of “bad” configurations that should not be reachable from the initial configurations. Formally, a *safety condition* for a labeled transition system  $LTS = \langle \mathcal{C}, \Sigma, \rightarrow \rangle$  is a pair  $(Init, Bad)$  of subsets of  $\mathcal{C}$ . We say that *LTS* is  $(Init, Bad)$ -unsafe if there is a path from  $Init$  to  $Bad$  in *LTS*, which is called a *counterexample*. We say that *LTS* is  $(Init, Bad)$ -safe when it is not  $(Init, Bad)$ -unsafe.

## 2.2 Fifo Systems

The asynchronous communication of distributed systems is usually modeled as a set of local processes together with a network topology given by channels between processes. Each process can be modeled by a finite-state machine that sends and receives messages on the channels to which it is connected. Let us consider a classical example, which will be used in the remainder of this paper to illustrate our approach.

*Example 2.1.* The connection/disconnection protocol [JR86] – abbreviated as *c/d* protocol – between two hosts is depicted in Figure 2. This model is composed of two processes, a client and a server, as well as two unidirectional channels. The client can open a session by sending the message **open** (abbreviated **o**) to the server and changing its state to 1 (session established). Afterwards, he may close it either actively by sending the message **c** (**lose**), or passively as a reaction to the **d** (**isconnect**) message from the server. The server receives the request to establish a shared session by the message **open** and thereupon enters its state 1 (session on server-side established). He as well can either actively or passively close the session by sending a **disconnect** request or by receiving a **close**.  $\diamond$



To simplify the presentation, we restrict our attention to the case of one finite-state control process. The general case of multiple processes can be reduced to this simpler form by taking the asynchronous product of all processes. For the connection/disconnection protocol, the asynchronous product of the two processes is depicted in Figure 3. For instance, the global control state **11** combines the local “session established” control state of both peers.

We assume that channels respect the fifo semantics for send and receive actions, and, hence, we call them “queues” in the remainder of the paper.

**Definition 2.2.** A fifo system  $\mathcal{A}$  is a 4-tuple  $\langle Q, M, n, \Delta \rangle$  where:

- $Q$  is a finite set of control states,
- $M$  is a finite alphabet of messages,
- $n \geq 1$  is the number of fifo queues,
- $\Delta \subseteq Q \times \Sigma \times Q$  is a set of transition rules,  
where  $\Sigma = \{1, \dots, n\} \times \{!, ?\} \times M$  is the set of fifo actions over  $n$  queues.


Simplifying notation, fifo actions in  $\Sigma$  will be shortly written  $i!m$  and  $i?m$  instead of  $(i, !, m)$  and  $(i, ?, m)$ . The intended meaning of fifo actions is the following:  $i!m$  means “emission of message  $m$  on queue  $i$ ” and  $i?m$  means “reception of message  $m$  from queue  $i$ ”. The operational semantics of a fifo system  $\mathcal{A}$  is formally given by its associated labeled transition system  $\llbracket \mathcal{A} \rrbracket$  defined below.

**Definition 2.3.** The operational semantics of a fifo system  $\mathcal{A} = \langle Q, M, n, \Delta \rangle$  is the labeled transition system  $\llbracket \mathcal{A} \rrbracket = \langle \mathcal{C}, \Sigma, \rightarrow \rangle$  defined as follows:

- $\mathcal{C} = Q \times (M^*)^n$  is the set of configurations,
- $\Sigma = \{1, \dots, n\} \times \{!, ?\} \times M$  is the set of actions,
- the transition relation  $\rightarrow \subseteq \mathcal{C} \times \Sigma \times \mathcal{C}$  is the set of triples  $((q, \mathbf{w}), l, (q', \mathbf{w}'))$  such that  $(q, l, q') \in \Delta$  and that satisfy the two following conditions:
  - if  $l = i!m$  then  $\mathbf{w}'(i) = \mathbf{w}(i) \cdot m$  and  $\mathbf{w}'(j) = \mathbf{w}(j)$  for all  $j \neq i$ ,
  - if  $l = i?m$  then  $\mathbf{w}(i) = m \cdot \mathbf{w}'(i)$  and  $\mathbf{w}'(j) = \mathbf{w}(j)$  for all  $j \neq i$ .

The configurations of  $\mathcal{C}$  can be seen as momentary snapshots of the whole system: each configuration includes the current control state and the current queue contents. The transition relation between configurations captures the effect of send and receive actions on queues, ensuring the fifo ordering of actions: messages sent to a queue are received in the same order; further, a receive action can only be taken if the appropriate message is at front of the queue.

*Example 2.4.* The fifo system  $\mathcal{A} = \langle \{00, 01, 10, 11\}, \{o, c, d\}, 2, \Delta \rangle$  that corresponds to the c/d protocol is displayed in Figure 3. Its operational semantics is presented in Figure 4. The set of initial configurations is  $Init = \{(00, \varepsilon, \varepsilon)\}$ . A set of bad configurations for this protocol is  $Bad = \{00, 10\} \times (c \cdot M^* \times M^*)$ . This set contains configurations where the server is in local state **0** but the first message in the first queue is **close**. This is the classical case of an *undefined reception* which results in a (local) *deadlock* for the server. Setting the initial configuration to  $c_0 = (00, \varepsilon, \varepsilon)$ , a counterexample to the safety condition  $(\{c_0\}, Bad)$  is

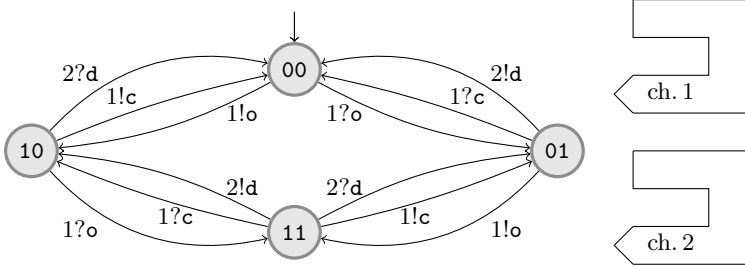

**Fig. 3.** Fifo System Representing the Connection/Disconnection Protocol

the path  $(00, \varepsilon, \varepsilon) \xrightarrow{1!o} (10, o, \varepsilon) \xrightarrow{1?o} (11, \varepsilon, \varepsilon) \xrightarrow{2!d} (10, \varepsilon, d) \xrightarrow{1!c} (00, c, d)$  in  $\llbracket \mathcal{A} \rrbracket$ . As can be deduced from Figure 4, no counterexample has less than four transitions. Further, there is an infinite path that never visits the same configuration twice nor reaches *Bad*, e.g., by alternating the actions  $1!o$  and  $1!c$ .  $\diamond$


### 3 Partition Abstraction for Fifo Systems

In the context of CEGAR-based safety verification, automatic abstraction techniques are usually based on predicates [GS97] or partitions [CGJ<sup>+</sup>03]. In this work, we focus on partition-based abstraction and refinement techniques for fifo systems. Still, our extrapolation-based path invariant generation techniques could also be used in the context of predicate-based abstractions.

A *partition* of a set  $S$  is any set  $P$  of non-empty pairwise disjoint subsets of  $S$  such that  $S = \bigcup_{p \in P} p$ . Elements  $p$  of a partition  $P$  are called *classes*. For any element  $s$  in  $S$ , we denote by  $[s]_P$  the class in  $P$  containing  $s$ .

At the labeled transition system level, partition abstraction consists of merging configurations that are equivalent with respect to a given equivalence relation, or a given partition. In practice, it is often desirable to maintain different partitions for different control states, to keep partition sizes relatively small (as in predicate abstraction of programs, where predicates are local to each control point). We follow this approach in our definition of partition abstraction for fifo systems, by associating a partition of  $(M^*)^n$  with each control state. To ease notation, we write  $\bar{L} = (M^*)^n \setminus L$  for the *complement* of any subset  $L$  of  $(M^*)^n$ .

To effectively compute partition abstractions for fifo systems, we need a family of finitely representable subsets of  $(M^*)^n$ . A natural candidate is the class of recognizable subsets of  $(M^*)^n$ , or, equivalently, of QDD-definable subsets of  $(M^*)^n$  [BGWW97], since this class is effectively closed under Boolean operations. The definition and main properties of QDDs are recalled in Appendix A. Recall that a subset  $L$  of  $(M^*)^n$  is *recognizable* if (and only if) it is a finite union of subsets of the form  $L_1 \times \dots \times L_n$  where each  $L_i$  is a regular language over  $M$  [Ber79]. We extend recognizability in the natural way to subsets of the set  $\mathcal{C} = Q \times (M^*)^n$  of configurations. A subset  $C \subseteq \mathcal{C}$  is *recognizable* if  $\{\mathbf{w} \mid (q, \mathbf{w}) \in C\}$  is recognizable for every  $q \in Q$ . We denote by  $\mathcal{R}ec((M^*)^n)$  the

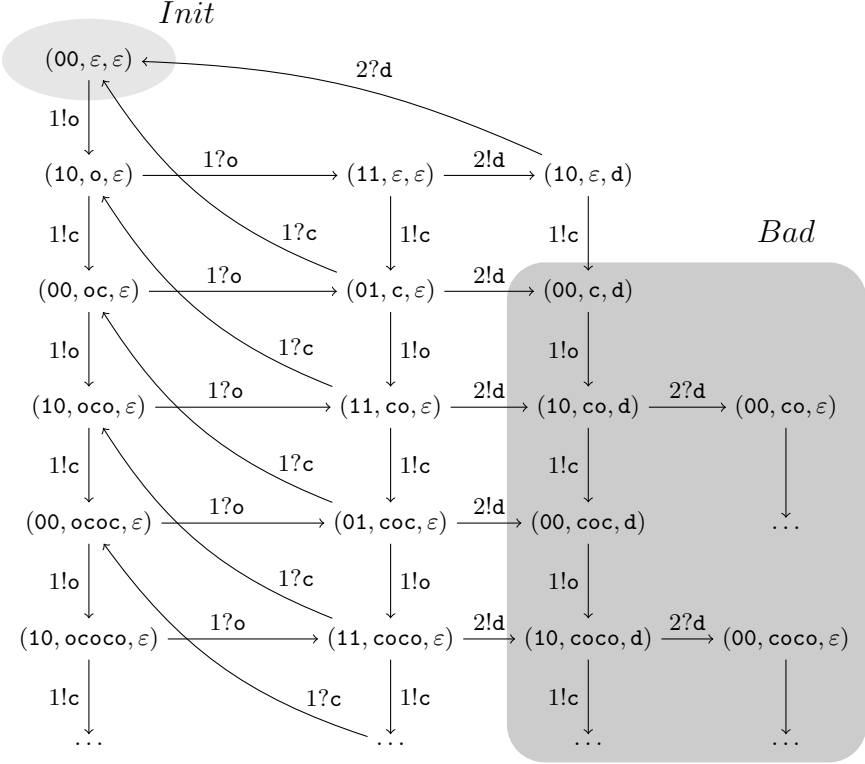

**Fig. 4.** Operational Semantics of the C/D Protocol [JR86] (Example 2.4)

set of recognizable subsets of  $(M^*)^n$ , and write  $\mathbb{P}((M^*)^n)$  for the set of all finite partitions of  $(M^*)^n$  where classes are recognizable subsets of  $(M^*)^n$ .

**Definition 3.1.** Consider a fifo system  $\mathcal{A} = \langle Q, M, n, \Delta \rangle$  and a partition map  $P : Q \rightarrow \mathbb{P}((M^*)^n)$ . The partition abstraction of  $\llbracket \mathcal{A} \rrbracket$  induced by  $P$  is the finite labeled transition system  $\llbracket \mathcal{A} \rrbracket_P^\# = \langle \mathcal{C}_P^\#, \Sigma, \rightarrow_P^\# \rangle$  defined as follows:

- $\mathcal{C}_P^\# = \{(q, p) \mid q \in Q \text{ and } p \in P(q)\}$  is the set of abstract configurations,
- $\Sigma = \{1, \dots, n\} \times \{!, ?\} \times M$  is the set of actions,
- the abstract transition relation  $\rightarrow_P^\# \subseteq \mathcal{C}_P^\# \times \Sigma \times \mathcal{C}_P^\#$  is the set of triples  $((q, p), l, (q', p'))$  such that  $(q, \mathbf{w}) \xrightarrow{l} (q', \mathbf{w}')$  for some  $\mathbf{w} \in p$  and  $\mathbf{w}' \in p'$ .

To relate concrete and abstract configurations, we define the *abstraction function*  $\alpha_P : \mathcal{C} \rightarrow \mathcal{C}_P^\#$ , and its extension to  $\wp(\mathcal{C}) \rightarrow \wp(\mathcal{C}_P^\#)$ , as well as the *concretization function*  $\gamma_P : \mathcal{C}_P^\# \rightarrow \mathcal{C}$ , extended to  $\wp(\mathcal{C}_P^\#) \rightarrow \wp(\mathcal{C})$ , as expected:

$$\begin{aligned} \alpha_P((q, \mathbf{w})) &= (q, [\mathbf{w}]_{P(q)}) & \alpha_P(C) &= \{\alpha(c) \mid c \in C\} \\ \gamma_P((q, p)) &= \{q\} \times p & \gamma_P(C^\#) &= \bigcup \{\gamma(c^\#) \mid c^\# \in C^\#\} \end{aligned}$$

To simplify notations, we shall drop the  $P$  subscript when the partition map can easily be derived from the context. Intuitively, an abstract configuration  $(q, p)$  of  $\llbracket \mathcal{A} \rrbracket^\sharp$  represents the set  $\{q\} \times p$  of (concrete) configurations of  $\llbracket \mathcal{A} \rrbracket$ . The abstract transition relation  $\rightarrow^\sharp$  is the existential lift of the concrete transition relation  $\rightarrow$  to abstract configurations.

The following forward and backward language transformers will be used to capture the effect of fifo actions. The functions  $post : \Sigma \times \wp((M^*)^n) \rightarrow \wp((M^*)^n)$  and  $pre : \Sigma \times \wp((M^*)^n) \rightarrow \wp((M^*)^n)$  are defined by:

$$\begin{aligned} post(i!m, L) &= \{\mathbf{w}[i \leftarrow u] \mid \mathbf{w} \in L, u \in M^* \text{ and } \mathbf{w}(i) \cdot m = u\} \\ post(i?m, L) &= \{\mathbf{w}[i \leftarrow u] \mid \mathbf{w} \in L, u \in M^* \text{ and } \mathbf{w}(i) = m \cdot u\} \\ pre(i!m, L) &= \{\mathbf{w}[i \leftarrow u] \mid \mathbf{w} \in L, u \in M^* \text{ and } \mathbf{w}(i) = u \cdot m\} \\ pre(i?m, L) &= \{\mathbf{w}[i \leftarrow u] \mid \mathbf{w} \in L, u \in M^* \text{ and } m \cdot \mathbf{w}(i) = u\} \end{aligned}$$

Obviously,  $post(l, L)$  and  $pre(l, L)$  are effectively recognizable subsets of  $(M^*)^n$  for any  $l \in \Sigma$  and any recognizable subset  $L \subseteq (M^*)^n$ . Moreover, we may use  $post$  and  $pre$  to characterize the abstract transition relation of a partition abstraction  $\llbracket \mathcal{A} \rrbracket_P^\sharp$ , as follows: for any rule  $(q, l, q') \in \Delta$  and for any pair  $(p, p') \in P(q) \times P(q')$ , we have  $(q, p) \xrightarrow{l}^\sharp (q', p')$  iff  $post(l, p) \cap p' \neq \emptyset$  iff  $p \cap pre(l, p') \neq \emptyset$ .

**Lemma 3.2.** *For any fifo system  $\mathcal{A}$  and partition map  $P : Q \rightarrow \mathbb{P}((M^*)^n)$ ,  $\llbracket \mathcal{A} \rrbracket^\sharp$  is effectively computable. For any recognizable subset  $C \subseteq \mathcal{C}$ ,  $\alpha(C)$  is effectively computable.*

*Proof.* The lemma follows from (1) closure under intersection, complement and  $post$  (or  $pre$ ) of recognizable subsets of  $(M^*)^n$ , and (2) decidability of emptiness for recognizable subsets of  $(M^*)^n$ .  $\square$


We extend  $\alpha$  to paths in the obvious way:  $\alpha(c_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} c_h) = \alpha(c_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp \alpha(c_h)$ . Observe that  $\alpha(\pi)$  is an abstract path in  $\llbracket \mathcal{A} \rrbracket^\sharp$  for any concrete path  $\pi$  in  $\llbracket \mathcal{A} \rrbracket$ . We therefore obtain the following safety preservation property.

**Proposition 3.3.** *Consider a fifo system  $\mathcal{A}$  and a safety condition  $(Init, Bad)$  for  $\llbracket \mathcal{A} \rrbracket$ . For any partition abstraction  $\llbracket \mathcal{A} \rrbracket^\sharp$  of  $\llbracket \mathcal{A} \rrbracket$ , if  $\llbracket \mathcal{A} \rrbracket^\sharp$  is  $(\alpha(Init), \alpha(Bad))$ -safe then  $\llbracket \mathcal{A} \rrbracket$  is  $(Init, Bad)$ -safe.*

*Proof.* If  $\llbracket \mathcal{A} \rrbracket$  is  $(Init, Bad)$ -unsafe then there is a path  $\pi$  in  $\llbracket \mathcal{A} \rrbracket$  from  $Init$  to  $Bad$ , and hence  $\alpha(\pi)$  is an abstract path from  $\alpha(Init)$  to  $\alpha(Bad)$  in  $\llbracket \mathcal{A} \rrbracket^\sharp$ .  $\square$

The converse to this proposition does not hold generally. An abstract counterexample  $\pi^\sharp$  is called *feasible* if there exists a concrete counterexample  $\pi$  such that  $\pi^\sharp = \alpha(\pi)$ , and  $\pi^\sharp$  is called *spurious* otherwise.

**Lemma 3.4.** *For any fifo system  $\mathcal{A}$ , any partition map  $P : Q \rightarrow \mathbb{P}((M^*)^n)$ , and any safety condition  $(Init, Bad)$  for  $\llbracket \mathcal{A} \rrbracket$ , feasibility of abstract counterexamples is effectively decidable.*

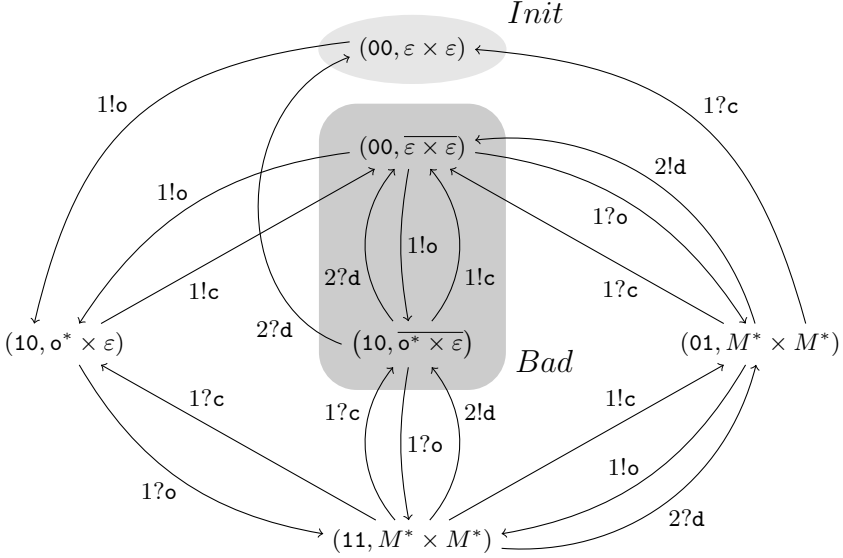

**Fig. 5.** Example Partition Abstraction of the C/D Protocol (Example 3.5)

*Proof.* Given an abstract counterexample  $\pi^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ , we deduce from the definition of feasibility that  $\pi^\sharp$  is feasible iff the subset  $L \subseteq (M^*)^n$  defined below is non-empty:

$$L = p_h \cap \text{post}(l_{h-1}, (p_{h-1} \cap \dots \cap \text{post}(l_1, p_1 \cap \text{post}(l_0, p_0 \cap \text{Init}))) \dots) \cap \text{Bad}$$

Since  $L$  is an effectively computable recognizable subset of  $(M^*)^n$ , we may effectively decide whether  $L$  is non-empty, which concludes the proof.  $\square$

*Example 3.5.* Continuing the discussion of the c/d protocol, we consider the partition abstraction induced by the following partition map:

$q \in Q$	00	10	01	11
$P(q)$	$\varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon}$	$\mathfrak{o}^* \times \varepsilon, \overline{\mathfrak{o}^* \times \varepsilon}$	$M^* \times M^*$	$M^* \times M^*$

The set of initial abstract configurations is  $\alpha(\text{Init}) = \{(00, \varepsilon \times \varepsilon)\}$ , and the set of bad abstract configurations is  $\alpha(\text{Bad}) = \{(00, \overline{\varepsilon \times \varepsilon}), (10, \overline{\mathfrak{o}^* \times \varepsilon})\}$ . The resulting partition abstraction is the finite labeled transition system depicted in Figure 5. A simple graph search reveals several abstract counterexamples, for instance  $\pi^\sharp = (00, \varepsilon \times \varepsilon) \xrightarrow{1!o}^\sharp (10, \mathfrak{o}^* \times \varepsilon) \xrightarrow{1!c}^\sharp (00, \overline{\varepsilon \times \varepsilon})$ . This counterexample is spurious since the only concrete path that corresponds to  $\pi^\sharp$  (i.e., whose image under  $\alpha$  is  $\pi^\sharp$ ) is  $\pi = (00, \varepsilon, \varepsilon) \xrightarrow{1!o} (10, \mathfrak{o}, \varepsilon) \xrightarrow{1!c} (00, \mathfrak{o}c, \varepsilon) \notin \text{Bad}$ .  $\diamond$

This section presented partition abstraction for fifo systems, as a means to finitely and conservatively approximate their semantics. The next step consists in refinement techniques to increase the precision of partition abstractions.

## 4 Counterexample-based Partition Refinement

The abstraction-based verification of safety properties relies on refinement techniques that gradually increase the precision of abstractions in order to rule out spurious abstract counterexamples. Refinement for partition abstractions simply consists in splitting some classes into a sub-partition.

Given two partitions  $P$  and  $\tilde{P}$  of a set  $S$ , we say that  $\tilde{P}$  *refines*  $P$  when each class  $\tilde{p} \in \tilde{P}$  is contained in some class  $p \in P$ . Moreover we then write  $[\tilde{p}]_P$  for the class  $p \in P$  containing  $\tilde{p}$ .

Let us fix, for the remainder of this section, a fifo system  $\mathcal{A} = \langle Q, M, n, \Delta \rangle$  and a safety condition  $(Init, Bad)$  for  $\llbracket \mathcal{A} \rrbracket$ . Given two partition maps  $P, \tilde{P} : Q \rightarrow \mathbb{P}((M^*)^n)$ , we say that  $\tilde{P}$  *refines*  $P$  if  $\tilde{P}(q)$  refines  $P(q)$  for every control state  $q \in Q$ . If  $\tilde{P}$  refines  $P$ , then for any abstract path  $(q_0, \tilde{p}_0) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{h-1}}^\# (q_h, \tilde{p}_h)$  in  $\llbracket \mathcal{A} \rrbracket_{\tilde{P}}^\#$ , it holds that  $(q_0, [\tilde{p}_0]_{P(q_0)}) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{h-1}}^\# (q_h, [\tilde{p}_h]_{P(q_h)})$  is an abstract path in  $\llbracket \mathcal{A} \rrbracket_P^\#$ . This fact shows that, informally, refining a partition abstraction does not introduce any new spurious counterexample.

When a spurious counterexample is found in the abstraction, the partition map must be refined so as to rule out this counterexample. We formalize this concept for an abstract path  $\pi_P^\# = (q_0, p_0) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{h-1}}^\# (q_h, p_h)$  in  $\llbracket \mathcal{A} \rrbracket_P^\#$  from  $\alpha_P(Init)$  to  $\alpha_P(Bad)$  as follows: a refinement  $\tilde{P}$  of  $P$  is said to *rule out* the abstract counterexample  $\pi_P^\#$  if there exists no path  $\pi_{\tilde{P}}^\# = (q_0, \tilde{p}_0) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{h-1}}^\# (q_h, \tilde{p}_h)$  from  $\alpha_{\tilde{P}}(Init)$  to  $\alpha_{\tilde{P}}(Bad)$  in  $\llbracket \mathcal{A} \rrbracket_{\tilde{P}}^\#$  satisfying  $\tilde{p}_i \subseteq p_i$  for all  $0 \leq i \leq h$ . Note that if  $\pi_P^\#$  is a feasible counterexample, then no refinement of  $P$  can rule it out. Conversely, if  $\tilde{P}$  is a refinement of  $P$  that rules out  $\pi_P^\#$  then any refinement of  $\tilde{P}$  also rules out  $\pi_P^\#$ .

The main challenge in CEGAR is the discovery of “suitable” refinements, that are computationally “simple” but “precise enough” to rule out spurious counterexamples. In this work, we focus on counterexample-guided refinements based on path invariants.

**Definition 4.1.** *Consider a partition map  $P$  and a spurious counterexample  $\pi^\# = (q_0, p_0) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{h-1}}^\# (q_h, p_h)$  in  $\llbracket \mathcal{A} \rrbracket_P^\#$ . A path invariant for  $\pi^\#$  is any sequence  $L_0, \dots, L_h$  of recognizable subsets of  $(M^*)^n$  such that:*

- (i) we have  $(\{q_0\} \times p_0) \cap Init \subseteq \{q_0\} \times L_0$ , and
- (ii) we have  $post(l_i, p_i \cap L_i) \subseteq L_{i+1}$  for every  $0 \leq i < h$ , and
- (iii) we have  $(\{q_h\} \times L_h) \cap Bad = \emptyset$

Observe that condition (ii) is more general than  $post(l_i, L_i) \subseteq L_{i+1}$  which is classically required for inductive invariants. With this relaxed condition, path invariants are tailored to the given spurious counterexample, and therefore can be simpler (e.g., be coarser or have more empty  $L_i$ ).

**Proposition 4.2.** *Consider a partition map  $P$  and a simple spurious counterexample  $\pi^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ . Given a path invariant  $L_0, \dots, L_h$  for  $\pi^\sharp$ , the partition map  $\tilde{P}$  defined below is a refinement of  $P$  that rules out  $\pi^\sharp$ :*

$$\tilde{P}(q) = (P(q) \setminus \{p_i \mid i \in I(q)\}) \cup \bigcup_{i \in I(q)} \{p_i \cap L_i, p_i \cap \overline{L_i}\} \setminus \{\emptyset\}$$

where  $I(q) = \{i \mid 0 \leq i \leq h, q_i = q\}$  for each control state  $q \in Q$ .

*Proof.* For any control state  $q \in Q$ , since  $\pi^\sharp$  is simple, we have  $p_i = p_j \Rightarrow i = j$  for every  $i, j \in I(q)$ . The function  $\tilde{P}$  defined in the proposition is therefore a partition map that refines  $P$  by definition. We need to show that  $\tilde{P}$  rules out  $\pi^\sharp$ . By contradiction, assume there exists a path  $\pi_{\tilde{P}}^\sharp = (q_0, \tilde{p}_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, \tilde{p}_h)$  from  $\alpha_{\tilde{P}}(Init)$  to  $\alpha_{\tilde{P}}(Bad)$  in  $\llbracket \mathcal{A} \rrbracket_{\tilde{P}}^\sharp$  satisfying  $\tilde{p}_i \subseteq p_i$  for all  $0 \leq i \leq h$ .

We first show that  $\tilde{p}_i \in \{p_i \cap L_i, p_i \cap \overline{L_i}\}$  for every  $0 \leq i \leq h$ . Consider any integer  $i$  with  $0 \leq i \leq h$ . Observe that  $i \in I(q_i)$ . If  $\tilde{p}_i \in P(q_i)$  then  $\tilde{p}_i = p_i$  as  $\tilde{p}_i \subseteq p_i$ . Hence,  $\tilde{p}_i \notin (P(q_i) \setminus \{p_j \mid j \in I(q_i)\})$ . Since  $\tilde{p}_i \in \tilde{P}(q_i)$ , we obtain that  $\tilde{p}_i \in \{p_j \cap L_j, p_j \cap \overline{L_j}\}$  for some  $j \in I(q_i)$ . Let us now prove that  $i = j$ . Remark that  $q_i = q_j$  as  $j \in I(q_i)$ . Moreover, we get  $\tilde{p}_i \subseteq p_j$ , and hence  $\tilde{p}_i \subseteq p_i \cap p_j$ . Therefore  $p_i = p_j$  since  $p_i$  and  $p_j$  are classes of the same partition  $P(q_i)$ . We arrive at  $(q_i, p_i) = (q_j, p_j)$  which implies that  $i = j$  since  $\pi^\sharp$  is simple. We have thus shown that  $\tilde{p}_i \in \{p_i \cap L_i, p_i \cap \overline{L_i}\}$  for every  $0 \leq i \leq h$ .

Recall that  $L_0, \dots, L_h$  is a path invariant for  $\pi^\sharp$ . We prove by induction on  $i$  that  $\tilde{p}_i = p_i \cap L_i$  for every  $0 \leq i \leq h$ . For the basis, we derive from item (i) of Definition 4.1 that  $\{q_0\} \times (p_0 \cap \overline{L_0})$  is disjoint from  $Init$ . Since  $(q_0, \tilde{p}_0) \in \alpha_{\tilde{P}}(Init)$ , we get that  $\{q_0\} \times \tilde{p}_0$  intersects  $Init$ . Therefore  $\tilde{p}_0 \neq p_0 \cap \overline{L_0}$ , and hence  $\tilde{p}_0 = p_0 \cap L_0$ . For the induction step, assume that  $\tilde{p}_i = p_i \cap L_i$  for some  $0 \leq i < h$ . We have  $post(l_i, \tilde{p}_i) \subseteq L_{i+1}$  according to item (ii) of Definition 4.1. Therefore, we get that  $p_{i+1} \cap \overline{L_{i+1}}$  is disjoint from  $post(l_i, \tilde{p}_i)$ . Since  $(q_i, \tilde{p}_i) \xrightarrow{l_i}^\sharp (q_{i+1}, \tilde{p}_{i+1})$  is an abstract transition in  $\llbracket \mathcal{A} \rrbracket_{\tilde{P}}^\sharp$ , we get that  $\tilde{p}_{i+1}$  intersects  $post(l_i, \tilde{p}_i)$ . Therefore  $\tilde{p}_{i+1} \neq p_{i+1} \cap \overline{L_{i+1}}$ , and hence  $\tilde{p}_{i+1} = p_{i+1} \cap L_{i+1}$ .

We thus obtain that  $\tilde{p}_h = p_h \cap L_h$ , and we derive from item (iii) of Definition 4.1 that  $\{q_h\} \times \tilde{p}_h$  is disjoint from  $Bad$ , which contradicts the assumption that  $(q_h, \tilde{p}_h) \in \alpha_{\tilde{P}}(Bad)$ .  $\square$

We propose a generic approach to obtain path invariants by utilizing a parametrized approximation operator for queue contents. The parameter (the  $k$  in the definition below) is used to adjust the precision of the approximation.

**Definition 4.3.** *A (parametrized) extrapolation is any function  $\nabla$  from  $\mathbb{N}$  to  $Rec((M^*)^n) \rightarrow Rec((M^*)^n)$  that satisfies, for any  $L \in Rec((M^*)^n)$ , the two following conditions (with  $\nabla(k)$  written as  $\nabla_k$ ):*

- (i) we have  $L \subseteq \nabla_k(L)$  for every  $k \in \mathbb{N}$ ,
- (ii) there exists  $k_L \in \mathbb{N}$  such that  $L = \nabla_k(L)$  for every  $k \geq k_L$ .

Our definition of extrapolation is quite general, in particular, it does not require monotonicity in  $k$  or in  $L$ , but it is adequate for the design of path invariant generation procedures. The most simple extrapolation is the *identity extrapolation*  $\lambda k.(\lambda L.L)$  that maps each  $k \in \mathbb{N}$  to the identity on  $\mathcal{Rec}((M^*)^n)$ . As shown in Appendix B, the parametrized automata approximations of [BHV04] and [LGJJ06] also satisfy the requirements of Definition 4.3. The choice of an appropriate extrapolation with respect to the underlying domain of fifo systems is crucial for the implementation of CEGAR’s refinement step, and will be discussed in Section 7.

*Remark 4.4.* Extrapolations are closed under various operations, such as functional composition, functional union and intersection, as well as round-robin combination. Formally, for any finite sequence  $\nabla^0, \dots, \nabla^m$  of extrapolations, the functions  $\lambda k.(\nabla_k^0 \circ \dots \circ \nabla_k^m)$ ,  $\lambda k.(\lambda L. \bigcup_{i=0}^m \nabla_k^i(L))$  and  $\lambda k.(\lambda L. \bigcap_{i=0}^m \nabla_k^i(L))$  are extrapolations. Moreover, for any infinite sequence  $(\mu_k, \nu_k)_{k \in \mathbb{N}}$  of pairs in  $\{0, \dots, m\} \times \mathbb{N}$  such that  $(\nu_k)_{k \in \mathbb{N}}$  diverges to infinity, the function  $\lambda k. \nabla_{\nu(k)}^{\mu(k)}$  is an extrapolation. Notice also that any function  $f : \mathcal{Rec}((M^*)^n) \rightarrow \mathcal{Rec}((M^*)^n)$  that is extensive (i.e.,  $L \subseteq f(L)$ ) can be turned into an extrapolation as follows:  $\nabla_0 = f$  and  $\nabla_k = \lambda L.L$  for all  $k \geq 1$ .

We now present two extrapolation-based path invariant generation procedures (Figure 6). Recall that the parameter  $k$  of an extrapolation intuitively indicates the desired precision of the approximation. The first algorithm, **UPIInv**, performs an approximated *post* computation along the spurious counterexample, and iteratively increases the precision  $k$  of the approximation until a path invariant is obtained. The applied precision in **UPIInv** is uniform along the counterexample. Due to its simplicity, the termination analysis of CEGAR in Section 6 will refer to **UPIInv**. The second algorithm, **APIInv**, first performs an exact *pre* computation along the spurious counterexample to identify the “bad” coreachable subsets  $B_i$ . The path invariant is then computed with a forward traversal that uses the **Split** subroutine to simplify each *post* image while remaining disjoint from the  $B_i$ . The precision used in **Split** is therefore tailored to each *post* image, which may lead to simpler path invariants. Naturally, both algorithms may be “reversed” to generate path invariants backwards (more precisely, the complement of a path invariant would be generated with the reversed version).

Observe that if the extrapolation  $\nabla$  is effectively computable, then all steps in the algorithms **UPIInv**, **Split** and **APIInv** are effectively computable. We now prove correctness and termination of these algorithms. Let us fix, for the remainder of this section, an extrapolation  $\nabla$  and a partition map  $P : Q \rightarrow \mathbb{P}((M^*)^n)$ , and assume that *Init* and *Bad* are recognizable.

**Proposition 4.5.** *For any spurious abstract counterexample  $\pi_P^\sharp$ , the execution of **UPIInv** ( $\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp$ ) terminates and returns a path invariant for  $\pi_P^\sharp$ .*

*Proof.* Consider a spurious counterexample  $\pi_P^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ . Let us define the sequence  $R_0, \dots, R_h$  of subsets of  $(M^*)^n$  by  $R_0 = p_0 \cap$



UPIInv ( $\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp$ )

**Input:** extrapolation  $\nabla$ , recognizable subsets  $\text{Init}, \text{Bad}$  of  $Q \times (M^*)^n$ , spurious counterexample  $\pi_P^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$

```

1   $k \leftarrow 0$ 
2  do
3     $L_0 \leftarrow \nabla_k(p_0 \cap \{\mathbf{w} \mid (q_0, \mathbf{w}) \in \text{Init}\})$ 
4    for  $i$  from 1 upto  $h$ 
5       $F_i \leftarrow \text{post}(l_{i-1}, p_{i-1} \cap L_{i-1})$ 
6      if  $p_i \cap F_i = \emptyset$ 
7         $L_i \leftarrow \emptyset$ 
8      else
9         $L_i \leftarrow \nabla_k(F_i)$ 
10    $k \leftarrow k + 1$ 
11  while  $(\{q_h\} \times L_h) \cap \text{Bad} \neq \emptyset$ 
12  return  $(L_0, \dots, L_h)$ 

```

Split ( $\nabla, L_0, L_1$ )

**Input:** extrapolation  $\nabla$ , disjoint recognizable subsets  $L_0, L_1$  of  $(M^*)^n$

```

1   $k \leftarrow 0$ 
2  while  $\nabla_k(L_0) \cap L_1 \neq \emptyset$ 
3     $k \leftarrow k + 1$ 
4  return  $\nabla_k(L_0)$ 

```

APIInv ( $\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp$ )

**Input:** extrapolation  $\nabla$ , recognizable subsets  $\text{Init}, \text{Bad}$  of  $Q \times (M^*)^n$ , spurious counterexample  $\pi_P^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$

```

1   $B_h \leftarrow p_h \cap \{\mathbf{w} \mid (q_h, \mathbf{w}) \in \text{Bad}\}$ 
2   $i \leftarrow h$ 
3  while  $B_i \neq \emptyset$  and  $i > 0$ 
4     $i \leftarrow i - 1$ 
5     $B_i \leftarrow p_i \cap \text{pre}(l_i, B_{i+1})$ 
6  if  $i = 0$ 
7     $I \leftarrow p_0 \cap \{\mathbf{w} \mid (q_0, \mathbf{w}) \in \text{Init}\}$ 
8     $L_0 \leftarrow \text{Split}(\nabla, I, B_0)$ 
9  else
10    $(L_0, \dots, L_i) \leftarrow ((M^*)^n, \dots, (M^*)^n)$ 
11  for  $j$  from  $i$  upto  $h - 1$ 
12    $L_{j+1} \leftarrow \text{Split}(\nabla, \text{post}(l_j, p_j \cap L_j), B_{j+1})$ 
13  return  $(L_0, \dots, L_h)$ 

```

**Fig. 6.** Extrapolation-based Path Invariant Generation Algorithms

$\{\mathbf{w} \mid (q_0, \mathbf{w}) \in \text{Init}\}$  and  $R_i = \text{post}(l_{i-1}, p_{i-1} \cap L_{i-1})$  for all  $1 \leq i \leq h$ . Notice that  $(\{q_h\} \times R_h) \cap \text{Bad} = \emptyset$  since  $\pi_P^\sharp$  is spurious. According to Definition 4.3, there exists  $k_R \in \mathbb{N}$  such that  $\nabla_{k_R}(R_i) = R_i$  for every  $0 \leq i \leq h$ . Consequently, the **while**-loop of the algorithm **UPInv** (lines 2–11) is re-iterated at most  $k_R$  times. Indeed, if  $k = k_R$  at some iteration of the **while**-loop, then for this iteration we have  $L_i = R_i$  for each  $0 \leq i \leq h$  and therefore  $(\{q_h\} \times L_h) \cap \text{Bad} = \emptyset$ . We conclude that the execution of **UPInv**  $(\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp)$  terminates.

Let  $(L_0, \dots, l_h)$  denote the value returned by **UPInv**  $(\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp)$ . It obviously holds that  $(\{q_h\} \times L_h) \cap \text{Bad} = \emptyset$ . Recall that according to Definition 4.3, we have  $L \subseteq \nabla_k(L)$  for every  $L \in \text{Rec}((M^*)^n)$  and  $k \in \mathbb{N}$ . We deduce from the definition of the **while**-loop (lines 2–11) that  $L_0 \supseteq p_0 \cap \{\mathbf{w} \mid (q_0, \mathbf{w}) \in \text{Init}\}$  and  $L_i \supseteq \text{post}(l_{i-1}, p_{i-1} \cap L_{i-1})$  for all  $1 \leq i \leq h$ . We conclude that  $(L_0, \dots, L_h)$  is a path invariant.  $\square$

**Lemma 4.6.** *For any two recognizable subsets  $L_0, L_1$  of  $(M^*)^n$ , if  $L_0 \cap L_1 = \emptyset$  then **Split**  $(\nabla, L_0, L_1)$  terminates and returns a recognizable subset  $L$  of  $(M^*)^n$  that satisfies  $L_0 \subseteq L \subseteq \overline{L_1}$ .*

*Proof.* Consider any two disjoint recognizable subsets  $L_0, L_1$  of  $(M^*)^n$ . According to Definition 4.3, we have  $L = \nabla_k(L)$  for some  $k_L \in \mathbb{N}$ , and therefore **Split**  $(\nabla, L_0, L_1)$  terminates. There exists  $k \in \mathbb{N}$  such that the returned value  $L$  satisfies  $L = \nabla_k(L_0)$  and  $\nabla_k(L_0) \cap L_1 = \emptyset$ . Since  $L_0 \subseteq \nabla_k(L_0)$  from Definition 4.3, we obtain that  $L_0 \subseteq L \subseteq \overline{L_1}$ .  $\square$

**Proposition 4.7.** *For any spurious abstract counterexample  $\pi_P^\sharp$ , the execution of **APIInv**  $(\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp)$  terminates and returns a path invariant for  $\pi_P^\sharp$ .*

*Proof.* Consider a spurious counterexample  $\pi_P^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ . Let us define the sequence  $R_0, \dots, R_h$  of subsets of  $(M^*)^n$  by  $R_h = p_h \cap \{\mathbf{w} \mid (q_h, \mathbf{w}) \in \text{Bad}\}$  and  $R_i = p_i \cap \text{pre}(l_i, R_{i+1})$  for all  $0 \leq i < h$ . This sequence satisfies the following disjointness property: for any subset  $L \subseteq (M^*)^n$  and for any  $0 \leq i < h$ , if  $L \subseteq \overline{R_i}$  then  $\text{post}(l_i, p_i \cap L) \subseteq \overline{R_{i+1}}$ . Remark that  $(\{q_0\} \times R_0) \cap \text{Init} = \emptyset$  since  $\pi_P^\sharp$  is spurious.

As the variable  $i$  remains nonnegative along the execution of **APIInv**  $(\nabla, \text{Init}, \text{Bad}, \pi_P^\sharp)$ , the **while**-loop (lines 3–5) and the **for**-loop (lines 11–12) both perform at most  $h$  iterations. Hence the execution terminates if each call to **Split** (lines 8 and 12) terminates. Let us write  $i_6$  the value of the variable  $i$  at line 6. Remark that, at line 6 onwards, it holds that  $0 \leq i = i_6 \leq h$  and  $B_j = R_j$  for each  $i_6 \leq j \leq h$ . Define  $I = p_0 \cap \{\mathbf{w} \mid (q_0, \mathbf{w}) \in \text{Init}\}$ . We consider two cases:

- if  $i_6 > 0$  then the execution takes the **else** branch (line 10) and therefore  $L_j = (M^*)^n$  for all  $0 \leq j \leq i_6$  at line 11 onwards. Moreover, we deduce from the condition of the **while**-loop (line 3) that  $B_{i_6} = \emptyset$ . This implies in particular that  $R_j = \emptyset$  for all  $0 \leq j \leq i_6$ .
- otherwise,  $i_6 = 0$  and the execution proceeds through lines 7–8. Since  $B_0 = R_0$ , we get that  $I \cap B_0 = \emptyset$  at line 8. According to Lemma 4.6, the call to **Split** at line 8 terminates and  $L_0$  satisfies  $I \subseteq L_0 \subseteq \overline{B_0}$ .

We obtain in both cases that, before the **for**-loop at line 11, we have:  $I \subseteq L_0$  and  $post(l_{j-1}, p_{j-1} \cap L_{j-1}) \subseteq L_j \subseteq \overline{R_j}$  for each  $0 < j \leq i_6$ . We now turn our attention to the **for**-loop (lines 11–12). We deduce from the above mentioned disjointness property and from Lemma 4.6 that, at each iteration  $i_6 \leq j < h$  of the **for**-loop,  $post(l_j, p_j \cap L_j)$  is disjoint from  $R_{j+1} = B_{j+1}$  and, therefore, the call to **Split** at line 12 terminates and  $post(l_j, p_j \cap L_j) \subseteq L_{j+1} \subseteq \overline{R_{j+1}}$ . We conclude that the execution terminates, and that  $I \subseteq L_0$ ,  $L_h \subseteq \overline{R_h}$  and  $post(l_j, p_j \cap L_j) \subseteq L_{j+1}$  for each  $0 \leq j < h$ , which precisely means that  $(L_0, \dots, L_h)$  is a path invariant.  $\square$

*Example 4.8.* Consider again the c/d protocol, and assume an extrapolation  $\nabla$  satisfying  $\nabla_0(L \times \varepsilon) = (alph(L))^* \times \varepsilon$  for all  $L \subseteq M^*$ , and  $\nabla_1(u \times \varepsilon) = u \times \varepsilon$  for each  $u \in \{\varepsilon, \mathbf{o}, \mathbf{oc}\}$ , e.g., the extrapolation  $\rho''$  presented in Remark 7.1. The **UPInv** algorithm, applied to the spurious counterexample  $(00, \varepsilon \times \varepsilon) \xrightarrow{1\mathbf{o}}^\sharp (10, \mathbf{o}^* \times \varepsilon) \xrightarrow{1\mathbf{c}}^\sharp (00, \overline{\varepsilon \times \varepsilon})$  of Example 3.5, would perform two iterations of the **while**-loop and produce the path invariant  $(\varepsilon \times \varepsilon, \mathbf{o} \times \varepsilon, \mathbf{oc} \times \varepsilon)$ . These iterations are detailed in the table below. The mark  $\zeta$  or  $\checkmark$  indicates whether the condition at line 11 is satisfied.

	$L_0$	$L_1$	$L_2$	Line 11
$k = 0$	$\varepsilon \times \varepsilon$	$\mathbf{o}^* \times \varepsilon$	$\{\mathbf{o}, \mathbf{c}\}^* \times \varepsilon$	$\zeta$
$k = 1$	$\varepsilon \times \varepsilon$	$\mathbf{o} \times \varepsilon$	$\mathbf{oc} \times \varepsilon$	$\checkmark$

Following Proposition 4.2, the partition map would be refined to:

$q \in Q$	00	10	01, 11
$P(q)$	$\varepsilon \times \varepsilon, \mathbf{oc} \times \varepsilon, (\varepsilon \cup \mathbf{oc}) \times \varepsilon$	$\mathbf{o} \times \varepsilon, (\varepsilon \cup (\mathbf{o} \cdot \mathbf{o}^+)) \times \varepsilon, \mathbf{o}^* \times \varepsilon$	$M^* \times M^*$

This refined partition map clearly rules out the spurious counterexample.  $\diamond$

## 5 Safety Cegar Semi-Algorithm for Fifo Systems

We are now equipped with the key ingredients to present our CEGAR semi-algorithm for fifo systems. The semi-algorithm takes as input a fifo system  $\mathcal{A}$ , a recognizable safety condition  $(Init, Bad)$ , an initial partition map  $P_0$ , and a path invariant generation procedure **PathInv**. The initial partition map may be the trivial one, mapping each control state to  $(M^*)^n$ . We may use any path invariant generation procedure, such as the ones presented in the previous section. The semi-algorithm iteratively refines the partition abstraction until either the abstraction is precise enough to prove that  $\llbracket \mathcal{A} \rrbracket_P$  is  $(Init, Bad)$ -safe (line 10), or a feasible counterexample is found (line 4).

The semi-algorithm maintains the current partition map in variable  $P$ . At each iteration of the **while**-loop, the partition abstraction  $\llbracket \mathcal{A} \rrbracket_P^\sharp$  is finite, and any standard graph exploration algorithm may be used to search for an abstract counterexample (lines 1–2). If there is none then  $\llbracket \mathcal{A} \rrbracket_P^\sharp$  is  $(\alpha(Init), \alpha(Bad))$ -safe,

CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{PathInv})$

**Input:** fifo system  $\mathcal{A} = \langle Q, M, n, \Delta \rangle$ , recognizable subsets  $\text{Init}, \text{Bad}$  of  $Q \times (M^*)^n$ , partition map  $P_0 : Q \rightarrow \mathbb{P}((M^*)^n)$ , procedure  $\text{PathInv}$

```

1  while  $\llbracket \mathcal{A} \rrbracket_P^\sharp$  is  $(\alpha_P(\text{Init}), \alpha_P(\text{Bad}))$ -unsafe
2      pick a simple abstract counterexample  $\pi^\sharp$  in  $\llbracket \mathcal{A} \rrbracket_P^\sharp$ 
3      if  $\pi^\sharp$  is a feasible abstract counterexample
4          return  $\not\checkmark$ 
5      else
6          write  $\pi^\sharp$  as the abstract path  $(q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ 
7           $(L_0, \dots, L_h) \leftarrow \text{PathInv}(\text{Init}, \text{Bad}, \pi^\sharp)$ 
8          foreach  $i \in \{0, \dots, h\}$ 
9               $P(q_i) \leftarrow (P(q_i) \setminus \{p_i\}) \cup (\{p_i \cap L_i, p_i \cap \overline{L_i}\} \setminus \{\emptyset\})$ 
10     return  $\checkmark$ 
    
```

and the semi-algorithm returns that  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -safe ( $\checkmark$ ). Otherwise, an arbitrary simple abstract counterexample is chosen depending on an underlying graph search strategy (e.g., breadth-first or depth-first). If this abstract counterexample is feasible then the semi-algorithm returns that  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -unsafe ( $\not\checkmark$ ). Or else, a path invariant is generated from the spurious abstract counterexample, and is used to refine the partition. The new partition map obtained after the **foreach** loop (lines 8–9) is precisely the partition map  $\tilde{P}$  from Proposition 4.2, and hence it rules out this abstract counterexample. Recall that Lemmata 3.2 and 3.4 ensure that the steps at lines 1 and 3 are effectively computable.

Let us fix, for the remainder of this section, a fifo system  $\mathcal{A}$ , two recognizable subsets  $\text{Init}, \text{Bad}$  of  $Q \times (M^*)^n$ , an initial partition map  $P_0 : Q \rightarrow \mathbb{P}((M^*)^n)$ , and a path invariant generation procedure  $\text{PathInv}$ . The correctness of the CEGAR semi-algorithm is expressed by the following proposition, which directly follows from Proposition 3.3 and from the definition of feasible abstract counterexamples.

**Proposition 5.1.** *For any terminating execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{PathInv})$ , if the execution returns  $\checkmark$  (resp.  $\not\checkmark$ ) then  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -safe (resp.  $(\text{Init}, \text{Bad})$ -unsafe).*

*Example 5.2.* We show a full execution of CEGAR on the c/d protocol with initial partition map  $P_0$  defined by  $P_0(q) = \{M^* \times M^*\}$  for every  $q \in Q$ . Recall that  $\text{Init} = \{(00, \varepsilon, \varepsilon)\}$  and  $\text{Bad} = \{00, 10\} \times (\mathbf{c} \cdot M^* \times M^*)$ . Let us assume an extrapolation  $\nabla$  that fulfills the following requirements (e.g., the extrapolation  $\rho''$  presented in Remark 7.1):

$$\left\{ \begin{array}{l} \nabla_0(L) = (\text{alph}(\{\mathbf{w}(1) \mid \mathbf{w} \in L\}))^* \times (\text{alph}(\{\mathbf{w}(2) \mid \mathbf{w} \in L\}))^* \\ \nabla_1(u \times \varepsilon) = u \times \varepsilon \text{ for each } u \in \{\varepsilon, \mathbf{o}, \mathbf{oc}, \mathbf{ococ}\} \\ \nabla_1(\mathbf{ococ} \times \varepsilon) = (\mathbf{oc})^+ \times \varepsilon \end{array} \right.$$

We present below the successive iterations of CEGAR. For each iteration, we give the abstract counterexample, the path invariant computed by  $\text{UPInv}$ ,

and the refined partition map. We detail the executions of **UPIInv** by providing the potential path invariant at each iteration of the **while**-loop; the mark  $\frac{1}{2}$  or  $\checkmark$  indicates whether the condition at line 11 of **UPIInv** is satisfied. The abstract counterexamples picked at line 2 of **CEGAR** are obtained by a breadth-first search of the partition abstraction. All abstract counterexamples are spurious except for the last one which is feasible, and hence the execution of **CEGAR** returns  $\frac{1}{2}$ .

Remark that the partition abstraction obtained at the end of iteration 1 is precisely the one of Example 3.5, and iteration 2 was already presented in Example 4.8.

(0)  $\pi_0^\sharp$  is the empty path  $(00, M^* \times M^*)$ .

$$\text{UPIInv: } \boxed{k = 0 \mid (\varepsilon \times \varepsilon) \mid \checkmark}$$

$$\frac{q \mid 00 \mid 10, 01, 11}{P(q) \mid \varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon} \mid M^* \times M^*}$$

(1)  $\pi^\sharp : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o, \sharp} (10, M^* \times M^*)$

$$\text{UPIInv: } \boxed{k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon) \mid \checkmark}$$

$$\frac{00 \mid 10 \mid 01, 11}{\varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon} \mid o^* \times \varepsilon, \overline{o^* \times \varepsilon} \mid M^* \times M^*}$$

(2)  $\pi^\sharp : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o, \sharp} (10, o^* \times \varepsilon) \xrightarrow{1!c, \sharp} (00, \overline{\varepsilon \times \varepsilon})$

$$\text{UPIInv: } \boxed{\begin{array}{l} k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon, \{o, c\}^* \times \varepsilon) \mid \frac{1}{2} \\ k = 1 \mid (\varepsilon \times \varepsilon, o \times \varepsilon, oc \times \varepsilon) \mid \checkmark \end{array}}$$

$$\frac{00 \mid 10 \mid 01, 11}{\varepsilon \times \varepsilon, oc \times \varepsilon, \overline{(\varepsilon \cup oc) \times \varepsilon} \mid o \times \varepsilon, (\varepsilon \cup (o \cdot o^+)) \times \varepsilon, \overline{o^* \times \varepsilon} \mid M^* \times M^*}$$

(3)  $\pi^\sharp : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o, \sharp} (10, o \times \varepsilon) \xrightarrow{1!c, \sharp} (00, oc) \xrightarrow{1!o, \sharp} (10, \overline{o^* \times \varepsilon})$

$$\text{UPIInv: } \boxed{\begin{array}{l} k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon, \{o, c\}^* \times \varepsilon, \{o, c\}^* \times \varepsilon) \mid \frac{1}{2} \\ k = 1 \mid (\varepsilon \times \varepsilon, o \times \varepsilon, oc \times \varepsilon, oco \times \varepsilon) \mid \checkmark \end{array}}$$

$$\frac{00 \mid \varepsilon \times \varepsilon, oc \times \varepsilon, \overline{(\varepsilon \cup oc) \times \varepsilon}}{10 \mid o \times \varepsilon, (\varepsilon \cup (o \cdot o^+)) \times \varepsilon, oco \times \varepsilon, \overline{(o^* \cup oco) \times \varepsilon}} \\ 01, 11 \mid M^* \times M^*$$

$$(4) \pi^\# : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o}^\# (10, o \times \varepsilon) \xrightarrow{1?o}^\# (11, M^* \times M^*) \xrightarrow{1?c}^\# (10, \overline{(o^* \cup oco) \times \varepsilon})$$

$$\text{UPIInv: } \boxed{k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon, \varepsilon \times \varepsilon, \emptyset) \mid \checkmark}$$

00	$\varepsilon \times \varepsilon, o\mathbf{c} \times \varepsilon, \overline{(\varepsilon \cup o\mathbf{c}) \times \varepsilon}$
10	$o \times \varepsilon, (\varepsilon \cup (o \cdot o^+)) \times \varepsilon, o\mathbf{c}o \times \varepsilon, \overline{(o^* \cup o\mathbf{c}o) \times \varepsilon}$
01	$M^* \times M^*$
11	$\varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon}$

$$(5) \pi^\# : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o}^\# (10, o \times \varepsilon) \xrightarrow{1?o}^\# (11, \varepsilon \times \varepsilon) \xrightarrow{2!d}^\# (10, \overline{(o^* \cup oco) \times \varepsilon})$$

$$\text{UPIInv: } \boxed{k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon, \varepsilon \times \varepsilon, \varepsilon \times \mathbf{d}^*) \mid \checkmark}$$

00	$\varepsilon \times \varepsilon, o\mathbf{c} \times \varepsilon, \overline{(\varepsilon \cup o\mathbf{c}) \times \varepsilon}$
10	$o \times \varepsilon, (\varepsilon \cup (o \cdot o^+)) \times \varepsilon, o\mathbf{c}o \times \varepsilon, \varepsilon \times \mathbf{d}^+, \overline{((o^* \cup o\mathbf{c}o) \times \varepsilon) \cup (\varepsilon \times \mathbf{d}^+)}$
01	$M^* \times M^*$
11	$\varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon}$

$$(6) \pi^\# : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o}^\# (10, o \times \varepsilon) \xrightarrow{1!c}^\# (00, o\mathbf{c} \times \varepsilon) \xrightarrow{1!o}^\# (10, o\mathbf{c}o \times \varepsilon) \xrightarrow{1!c}^\# (00, (\varepsilon \cup o\mathbf{c}) \times \varepsilon)$$

$$\text{UPIInv: } \boxed{\begin{array}{l} k = 0 \mid (\varepsilon \times \varepsilon, o^* \times \varepsilon, \{o, \mathbf{c}\}^* \times \varepsilon, \{o, \mathbf{c}\}^* \times \varepsilon, \{o, \mathbf{c}\}^* \times \varepsilon) \mid \not\checkmark \\ k = 1 \mid (\varepsilon \times \varepsilon, o \times \varepsilon, o\mathbf{c} \times \varepsilon, o\mathbf{c}o \times \varepsilon, (o\mathbf{c})^+ \times \varepsilon) \mid \checkmark \end{array}}$$

00	$\varepsilon \times \varepsilon, o\mathbf{c} \times \varepsilon, (o\mathbf{c} \cdot (o\mathbf{c})^+) \times \varepsilon, \overline{(o\mathbf{c})^* \times \varepsilon}$
10	$o \times \varepsilon, (\varepsilon \cup (o \cdot o^+)) \times \varepsilon, o\mathbf{c}o \times \varepsilon, \varepsilon \times \mathbf{d}^+, \overline{((o^* \cup o\mathbf{c}o) \times \varepsilon) \cup (\varepsilon \times \mathbf{d}^+)}$
01	$M^* \times M^*$
11	$\varepsilon \times \varepsilon, \overline{\varepsilon \times \varepsilon}$

$$(7) \pi^\# : (00, \varepsilon \times \varepsilon) \xrightarrow{1!o}^\# (10, o \times \varepsilon) \xrightarrow{1!c}^\# (00, o\mathbf{c} \times \varepsilon) \xrightarrow{1?o}^\# (01, M^* \times M^*) \xrightarrow{2!d}^\# (00, \overline{(o\mathbf{c})^* \times \varepsilon}). \text{ This abstract counterexample is feasible. } \diamond$$

Termination of the CEGAR semi-algorithm cannot be assured as, otherwise, it would solve the general reachability problem (given any two configurations  $c$  and  $c'$  in  $\mathcal{C}$ , decide whether there exists a path from  $c$  to  $c'$ ), which is known to be undecidable for fifo systems [BZ83]. However, *(Init, Bad)*-unsafety is semi-decidable for fifo systems by forward or backward symbolic exploration when *Init* and *Bad* are recognizable [BG99]. Moreover, this problem becomes decidable for fifo systems having a finite reachability set from *Init*.

## 6 Termination Analysis of the CEGAR Semi-Algorithm

We investigate in this section the termination of the CEGAR semi-algorithm when  $\mathcal{A}$  is  $(Init, Bad)$ -unsafe or has a finite reachability set from  $Init$ . In contrast to other approaches where abstractions are refined globally (e.g., predicate abstraction [GS97]), partition abstractions [CGJ<sup>+</sup>03] are refined locally by splitting abstract configurations along the abstract counterexample (viz. lines 8 – 9 of the CEGAR semi-algorithm). The abstract transition relation only needs to be refined locally around the abstract configurations which have been split, and, hence, its refinement can be computed efficiently. However, this local nature of refinement complicates the analysis of the algorithm.

### 6.1 Characterization of Non-Terminating Executions of CEGAR

First we introduce some additional notations. For any set  $\mathcal{L}$  of subsets of  $(M^*)^n$ , we denote by  $\Psi(\mathcal{L})$  the set of equivalence classes of the equivalence relation  $\sim_{\mathcal{L}}$  on  $(M^*)^n$  defined by:  $\mathbf{w} \sim_{\mathcal{L}} \mathbf{w}'$  if for every  $L \in \mathcal{L}$ , we have  $\mathbf{w} \in L$  if and only if  $\mathbf{w}' \in L$ . Intuitively,  $\Psi(\mathcal{L})$  is the partition “generated” by  $\mathcal{L}$ . Notice that if  $\mathcal{L}$  is finite then so is  $\Psi(\mathcal{L})$ .

Given an execution of CEGAR  $(\mathcal{A}, Init, Bad, P_0, PathInv)$ , and for each iteration  $\theta \in \{0, 1, 2, \dots\}$  of the **while**-loop<sup>3</sup>, we take a “snapshot” between lines 7 and 8, and remember the current partition map as  $P_\theta$ , the simple abstract counterexample as  $\pi_\theta^\sharp$  and its length as  $h_\theta$ , and the path invariant as  $(L_0^\theta, \dots, L_{h_\theta}^\theta)$ . Moreover we shortly write  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$ ,  $\mathcal{C}_\theta^\sharp$  and  $\alpha_\theta$  instead of  $\llbracket \mathcal{A} \rrbracket_{P_\theta}^\sharp$ ,  $\mathcal{C}_{P_\theta}^\sharp$  and  $\alpha_{P_\theta}$ , respectively. We also define  $Init_\theta^\sharp = \alpha_\theta(Init)$  and  $Bad_\theta^\sharp = \alpha_\theta(Bad)$ . For any bound  $b \in \mathbb{N}$ , we let  $Reach_\theta^{\leq b}$  denote the set of abstract configurations  $(q, p) \in \mathcal{C}_\theta^\sharp$  such that there exists in  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$  a path of length at most  $b$  from  $Init_\theta^\sharp$  to  $(q, p)$ .

**Lemma 6.1.** *Consider any execution of CEGAR  $(\mathcal{A}, Init, Bad, P_0, PathInv)$ . For any iteration  $\theta$  and for any  $(q, p) \in \mathcal{C}_\theta^\sharp$ , it holds that  $p \in \Psi(\mathcal{L}_\theta(q))$  where:*

$$\mathcal{L}_\theta(q) = P_0(q) \cup \{L_i^\eta \mid 0 \leq \eta < \theta \text{ and } 0 \leq i \leq h_\eta\}$$

*Proof.* We prove the lemma by induction on  $\theta$ . The basis is trivial, since  $p \in P_0(q)$  for every  $(q, p) \in \mathcal{C}_0^\sharp$ . Assume that the lemma holds for the iteration  $\theta$  and let us show that the lemma also holds for the iteration  $\theta+1$ . Let  $(q, p) \in \mathcal{C}_{\theta+1}^\sharp$ . If  $(q, p) \in \mathcal{C}_\theta^\sharp$ , then we get that  $p \in \Psi(\mathcal{L}_\theta(q))$ . Since  $\mathcal{L}_\theta(q) \subseteq \mathcal{L}_{\theta+1}(q)$ , we obtain that  $p \in \Psi(\mathcal{L}_{\theta+1}(q))$ . Assume now that  $(q, p) \notin \mathcal{C}_\theta^\sharp$ . Since  $p \in P_{\theta+1}(q) \setminus P_\theta(q)$ , we get that  $p$  was added to  $P(q)$  during the iteration  $\theta$  at line 9. We deduce from line 9 that  $p \in \{p' \cap L, p' \cap \bar{L}\}$  for some  $(q', p') \in \mathcal{C}_\theta^\sharp$  and  $L \in \{L_i^\theta \mid 0 \leq i \leq h_\theta\}$ . We deduce from the induction hypothesis  $p' \in \Psi(\mathcal{L}_\theta(q'))$  and therefore  $p \in \Psi(\mathcal{L}_{\theta+1}(q))$ .  $\square$

**Proposition 6.2.** *For any non-terminating execution of CEGAR  $(\mathcal{A}, Init, Bad, P_0, PathInv)$ , the set  $\{L_i^\theta \mid \theta \in \mathbb{N} \text{ and } 0 \leq i \leq h_\theta\}$  is infinite.*

<sup>3</sup> We implicitly only consider iterations of the **while**-loop that do not return at line 4.

*Proof.* Consider a non-terminating execution and let us show that the set  $\mathcal{L} = \{L_i^\theta \mid \theta \in \mathbb{N}, 0 \leq i \leq h_\theta\}$  is infinite. We get from Lemma 6.1 that for every  $q \in Q$  and  $\theta \in \mathbb{N}$ , we have  $P_\theta(q) \subseteq \Psi(P_0(q) \cup \mathcal{L})$ . According to line 9 of the CEGAR semi-algorithm,  $P_{\theta+1}$  refines  $P_\theta$  for every  $\theta \in \mathbb{N}$ , and moreover  $P_{\theta+1} \neq P_\theta$  since  $P_{\theta+1}$  rules out  $\pi_\theta^\sharp$ . We deduce that there exists  $q \in Q$  such that the nondecreasing sequence  $(|P_\theta(q)|)_{\theta \in \mathbb{N}}$  diverges. Since  $P_0(q)$  is finite and  $P_\theta(q) \subseteq \Psi(P_0(q) \cup \mathcal{L})$ , we conclude that  $\mathcal{L}$  is infinite.  $\square$

## 6.2 Properties of Breadth-First Executions of CEGAR

To obtain termination results in the unsafe case, we will, unsurprisingly, restrict ourselves to breadth-first explorations of the partition abstractions. Formally, a *breadth-first* execution of the CEGAR semi-algorithm is any execution where, at each iteration  $\theta$ , the abstract counterexample  $\pi_\theta^\sharp$  picked at line 2 is among the shortest ones.

**Lemma 6.3.** *Consider any breadth-first execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{PathInv})$ . For any iteration  $\theta \geq 1$  and for any  $(q, p) \in \text{Init}_\theta^\sharp \setminus \text{Init}_{\theta-1}^\sharp$ , there exists  $p_0 \in P_{\theta-1}(q)$  such that  $p = p_0 \cap L_0^{\theta-1}$  and  $(\{q\} \times p_0) \cap \text{Init} = (\{q\} \times p) \cap \text{Init}$ .*

*Proof.* Consider an iteration  $\theta + 1$  (with  $\theta \in \mathbb{N}$ ) and let  $(q, p)$  be any abstract configuration in  $\text{Init}_{\theta+1}^\sharp \setminus \text{Init}_\theta^\sharp$ . Observe that  $(\{q\} \times p) \cap \text{Init}$  is non-empty, and therefore  $(q, p) \notin \mathcal{C}_\theta^\sharp$  since otherwise we would have  $(q, p) \in \text{Init}_\theta^\sharp$ . Since  $p \in P_{\theta+1}(q) \setminus P_\theta(q)$ , we get that  $p$  was added to  $P(q)$  during the iteration  $\theta$  at line 9. Let us write  $\pi_\theta^\sharp$  as  $\pi_\theta^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ . We deduce from line 9 that  $p \in \{p_{i_0} \cap L_{i_0}^\theta, p_{i_0} \cap \overline{L_{i_0}^\theta}\}$  for some  $0 \leq i_0 \leq h$  such that  $q = q_{i_0}$ . Observe that  $(q_{i_0}, p_{i_0}) \in \text{Init}_\theta^\sharp$  since we have  $p \subseteq p_{i_0}$  and  $(\{q\} \times p) \cap \text{Init} \neq \emptyset$ . We come to  $i_0 = 0$  since the abstract counterexample  $\pi_\theta^\sharp$  is among the shortest ones. Hence, we get that  $q = q_0$  and  $p \in \{p_0 \cap L_0^\theta, p_0 \cap \overline{L_0^\theta}\}$ . Since  $(L_0^\theta, \dots, L_h^\theta)$  is a path invariant for  $\pi_\theta^\sharp$ , we have  $(\{q_0\} \times p_0) \cap \text{Init} \subseteq \{q_0\} \times L_0^\theta$  and hence  $\{q_0\} \times (p_0 \cap \overline{L_0^\theta})$  is disjoint from  $\text{Init}$ . We deduce that  $p = p_0 \cap L_0^\theta$  and moreover we get that  $(\{q\} \times p_0) \cap \text{Init} = (\{q\} \times p) \cap \text{Init}$ .  $\square$

**Lemma 6.4.** *Consider any breadth-first execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{PathInv})$ . For any iteration  $\theta$ , for any  $b \in \mathbb{N}$  and for any  $(q, p) \in \text{Reach}_\theta^{<b}$ , we have  $p \in \Psi(\mathcal{L}_\theta^b(q))$  where:*

$$\mathcal{L}_\theta^b(q) = P_0(q) \cup \{L_i^\eta \mid 0 \leq \eta < \theta, i \leq h_\theta \text{ and } i \leq b\}$$

*Proof.* For any iteration  $\theta$  and for any  $b \in \mathbb{N}$ , let us denote by  $(H_\theta^b)$  the property: for any  $(q, p) \in \mathcal{C}_\theta^\sharp$ , if there exists in  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$  a path of length at most  $b$  from  $\text{Init}_\theta^\sharp$  to  $(q, p)$ , then  $p \in \Psi(\mathcal{L}_\theta^b(q))$ . We prove by double induction on  $\theta$  and  $b$  that  $(H_\theta^b)$  holds for any iteration  $\theta$  and for any  $b \in \mathbb{N}$ .



Let us prove the basis  $\forall b (H_\theta^b)$  of the induction on  $\theta$ . Observe that  $\mathcal{L}_0^b(q) = P_0(q)$  for every  $q \in Q$ . Therefore  $p \in P_0(q) = \Psi(P_0(q))$  for any  $(q, p) \in \mathcal{C}_0^\sharp$ , and we conclude that the basis obviously holds. We now prove the induction step  $\forall \theta (\forall b (H_\theta^b) \implies \forall b (H_{\theta+1}^b))$  of the induction on  $\theta$ . Consider an iteration  $\theta + 1$  (with  $\theta \in \mathbb{N}$ ) and assume that  $(H_\theta^b)$  holds for every  $b \in \mathbb{N}$ . We prove by induction on  $b$  that  $(H_{\theta+1}^b)$  holds for any  $b \in \mathbb{N}$ . Observe that the basis  $(H_{\theta+1}^0)$  may equivalently be rephrased as: for any  $(q, p) \in \text{Init}_{\theta+1}^\sharp$ , we have  $p \in \Psi(\mathcal{L}_{\theta+1}^0)$ . Let  $(q, p) \in \text{Init}_{\theta+1}^\sharp$ . If  $(q, p) \in \text{Init}_\theta^\sharp$  then we deduce from  $(H_\theta^0)$  that  $p \in \Psi(\mathcal{L}_\theta^0)$ . Since  $\mathcal{L}_\theta^0 \subseteq \mathcal{L}_{\theta+1}^0$  we obtain that  $p \in \Psi(\mathcal{L}_{\theta+1}^0)$ . Otherwise, we obtain from Lemma 6.3 that  $p = p_0 \cap L_\theta^0$  for some  $p_0 \in P_\theta(q)$ . We deduce from  $(H_\theta^0)$  that  $p_0 \in \Psi(\mathcal{L}_\theta^0)$  and therefore  $p \in \Psi(\mathcal{L}_{\theta+1}^0)$ . We therefore have proved that the basis  $(H_{\theta+1}^0)$  of the induction on  $b$  holds.

Let us now show the induction step  $\forall b ((H_{\theta+1}^b) \implies (H_{\theta+1}^{b+1}))$  of the induction on  $b$ . Consider any bound  $b \in \mathbb{N}$  and assume that  $(H_{\theta+1}^b)$  holds. Recall that  $(H_\theta^c)$  holds for every  $c \in \mathbb{N}$ . Let  $(q, p)$  be any abstract configuration in  $\mathcal{C}_{\theta+1}^\sharp$  such that there is in  $\llbracket \mathcal{A} \rrbracket_{\theta+1}^\sharp$  a path  $\pi^\sharp$  of length at most  $b+1$  from  $\text{Init}_{\theta+1}^\sharp$  to  $(q, p)$ . We show that  $p \in \Psi(\mathcal{L}_{\theta+1}^{b+1}(q))$ . Recall that  $P_{\theta+1}(q)$  refines  $P_\theta(q)$  and define  $\hat{p} = [p]_{P_\theta(q)}$ , i.e.  $\hat{p}$  is the class in  $P_\theta(q)$  that contains  $p$ . Observe that  $(q, \hat{p})$  is an abstract configuration in  $\mathcal{C}_\theta^\sharp$ . The “lift” of  $\pi^\sharp$  to  $P_\theta$  yields a path of length at most  $b+1$  in  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$  from  $\text{Init}_\theta^\sharp$  to  $(q, \hat{p})$ . We deduce from  $(H_\theta^{b+1})$  that  $\hat{p} \in \Psi(\mathcal{L}_\theta^{b+1}(q))$ . Since  $\mathcal{L}_\theta^{b+1} \subseteq \mathcal{L}_{\theta+1}^{b+1}$  we obtain that  $\hat{p} \in \Psi(\mathcal{L}_{\theta+1}^{b+1}(q))$ . If  $p \in P_\theta(q)$  then  $p = \hat{p} \in \Psi(\mathcal{L}_{\theta+1}^{b+1}(q))$ . Otherwise,  $p \in P_{\theta+1}(q) \setminus P_\theta(q)$  and we get that  $p$  was added to  $P(q)$  during the iteration  $\theta$  at line 9. Let us write  $\pi_\theta^\sharp$  as  $\pi_\theta^\sharp = (q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{h-1}}^\sharp (q_h, p_h)$ . We deduce from line 9 that  $p \in \left\{ p_{i_0} \cap L_{i_0}^\theta, p_{i_0} \cap \overline{L_{i_0}^\theta} \right\}$  for some  $0 \leq i_0 \leq h$  such that  $q = q_{i_0}$ . Moreover  $p_{i_0} = \hat{p}$  since  $p_{i_0}$  and  $\hat{p}$  both contain  $p$ . Remark that we may replace in  $\pi_\theta^\sharp$  the prefix  $(q_0, p_0) \xrightarrow{l_0}^\sharp \dots \xrightarrow{l_{i_0-1}}^\sharp (q_{i_0}, \hat{p})$  with the “lift” of  $\pi^\sharp$  to  $P_\theta$ . The resulting abstract path is also an abstract counterexample in  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$ , and its length is  $h - i_0 + (b+1)$ . Since  $\pi_\theta^\sharp$  is among the shortest ones, we get that  $i_0 \leq b+1$ . As  $p_{i_0} = \hat{p} \in \Psi(\mathcal{L}_{\theta+1}^{b+1}(q))$ , we conclude that  $p \in \Psi(\mathcal{L}_{\theta+1}^{b+1}(q))$ .  $\square$

**Lemma 6.5.** *Consider any breadth-first execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{PathInv})$ , and define  $\mathcal{I}_\theta = \left\{ p \cap \{\mathbf{w} \mid (q, \mathbf{w}) \in \text{Init}\} \mid (q, p) \in \text{Init}_\theta^\sharp \right\}$  for any iteration  $\theta$ . It holds that  $\mathcal{I}_\theta \subseteq \mathcal{I}_{\theta-1}$  for any iteration  $\theta \geq 1$ .*

*Proof.* Consider an iteration  $\theta \geq 1$  and let  $L \in \mathcal{I}_\theta$ . There exists  $(q, p) \in \text{Init}_\theta^\sharp$  such that  $L = p \cap \{\mathbf{w} \mid (q, \mathbf{w}) \in \text{Init}\}$ . Notice that  $\{q\} \times L = (\{q\} \times p) \cap \text{Init} \neq \emptyset$ . If  $(q, p) \in \text{Init}_{\theta-1}^\sharp$  then  $L \in \mathcal{I}_{\theta-1}$ . Otherwise, we obtain from Lemma 6.3 that  $(\{q\} \times p_0) \cap \text{Init} = (\{q\} \times p) \cap \text{Init}$  for some  $p_0 \in P_{\theta-1}(q)$ . We thus come to  $L = p_0 \cap \{\mathbf{w} \mid (q, \mathbf{w}) \in \text{Init}\}$ . Since  $L \neq \emptyset$ , we get that  $(q, p_0) \in \text{Init}_{\theta-1}^\sharp$  and we conclude that  $L \in \mathcal{I}_{\theta-1}$ .  $\square$

### 6.3 Termination of CEGAR for Unsafe Fifo Systems with UPIInv ( $\nabla$ )

For the rest of this section, we fix an extrapolation  $\nabla$  and we focus on the path invariant generation procedure UPIInv presented in Section 4.

The following proposition shows that for any bound  $b$ , there is an iteration after which the abstract configurations that are reachable from  $Init^\sharp$  by a path of length at most  $b$  are never split, or, put differently, the “reachability set up to depth  $b$ ” of the abstraction remains constant.

**Proposition 6.6.** *For any  $b \in \mathbb{N}$  and for any non-terminating breadth-first execution of CEGAR  $(\mathcal{A}, Init, Bad, P_0, \text{UPIInv}(\nabla))$ , the two following sets are finite:*


$$\bigcup_{\theta \in \mathbb{N}} \text{Reach}_{\bar{\theta}}^{\leq b} \quad \text{and} \quad \{L_i^\theta \mid \theta \in \mathbb{N}, i \leq h_\theta \text{ and } i \leq b\}$$

*Proof.* We prove the proposition by induction on  $b$ . Let us first show the basis. For any  $\theta \in \mathbb{N}$ , define  $\mathcal{I}_\theta$  as in Lemma 6.5. We infer from Lemma 6.5 that  $\mathcal{I}_\theta \subseteq \mathcal{I}_0$ . We derive from the definition of the algorithm UPIInv that for any iteration  $\theta \in \mathbb{N}$ , there exists  $(q, p) \in \text{Init}_\theta^\sharp$  and  $k \in \mathbb{N}$  such that  $L_0^\theta = \nabla_k(p \cap \{\mathbf{w} \mid (q, \mathbf{w}) \in \text{Init}\})$ , and therefore  $L_0^\theta = \nabla_k(L)$  for some  $L \in \mathcal{I}_\theta$ . Recall that according to Definition 4.3, the set  $\{\nabla_k(L) \mid k \in \mathbb{N}\}$  is finite for any recognizable subset  $L$  of  $(M^*)^n$ . Since  $\mathcal{I}_0$  is finite, we obtain that  $\{\nabla_k(L) \mid L \in \mathcal{I}_0, k \in \mathbb{N}\}$  is finite. Consequently, the set  $\{L_0^\theta \mid \theta \in \mathbb{N}\}$  is finite. Moreover, according to Lemma 6.4, we have  $p \in \Psi(P_0(q) \cup \{L_0^\theta \mid \theta \in \mathbb{N}\})$  for every  $(q, p) \in \text{Reach}_{\bar{\theta}}^{\leq 0}$ . We deduce that  $\bigcup_{\theta \in \mathbb{N}} \text{Reach}_{\bar{\theta}}^{\leq 0}$  is finite.

Let us now show the induction step. Assume that the proposition holds for some bound  $b \in \mathbb{N}$ . Let us define  $\mathcal{H} = \left\{ p \cap L_b^\theta \mid \theta \in \mathbb{N}, b \leq h_\theta, (q, p) \in \text{Reach}_{\bar{\theta}}^{\leq b} \right\}$ . The sets  $\bigcup_{\theta \in \mathbb{N}} \text{Reach}_{\bar{\theta}}^{\leq b}$  and  $\{L_b^\theta \mid \theta \in \mathbb{N}, b \leq h_\theta\}$  are both finite according to the induction hypothesis, and therefore  $\mathcal{H}$  is finite. We derive from the definition of the algorithm UPIInv that for any iteration  $\theta \in \mathbb{N}$  with  $h_\theta \geq b + 1$ , if  $L_{b+1}^\theta$  is non-empty then there exists  $(q, p) \in \text{Reach}_{\bar{\theta}}^{\leq b}$ ,  $l \in \Sigma$  and  $k \in \mathbb{N}$  such that  $L_{b+1}^\theta = \nabla_k(\text{post}(l, p \cap L_b^\theta))$ , and therefore  $L_{b+1}^\theta = \nabla_k(\text{post}(l, L))$  for some  $L \in \mathcal{H}$ . Recall that according to Definition 4.3, the set  $\{\nabla_k(L) \mid k \in \mathbb{N}\}$  is finite for any subset  $L$  of  $(M^*)^n$ . Since  $\mathcal{H}$  and  $\Sigma$  are both finite, we obtain that  $\{\nabla_k(\text{post}(l, L)) \mid l \in \Sigma, L \in \mathcal{H}, k \in \mathbb{N}\}$  is finite. We deduce that the set  $\{L_{b+1}^\theta \mid \theta \in \mathbb{N}, b + 1 \leq h_\theta\}$  is finite, and we get from the induction hypothesis that  $\{L_i^\theta \mid \theta \in \mathbb{N}, i \leq h_\theta, i \leq b + 1\}$  is also finite. Moreover, according to Lemma 6.4, we have  $p \in \Psi(P_0(q) \cup \{L_i^\theta \mid \theta \in \mathbb{N}, i \leq h_\theta, i \leq b + 1\})$  for every  $(q, p) \in \text{Reach}_{\bar{\theta}}^{\leq b+1}$ . We deduce that  $\bigcup_{\theta \in \mathbb{N}} \text{Reach}_{\bar{\theta}}^{\leq b+1}$  is finite.  $\square$

**Proposition 6.7.** *For any breadth-first execution of CEGAR  $(\mathcal{A}, Init, Bad, P_0, \text{UPIInv}(\nabla))$ , if the execution does not terminate then the sequence  $(h_\theta)_{\theta \in \mathbb{N}}$  of lengths of counterexamples picked at line 2 is nondecreasing and diverges.*

*Proof.* Consider a non-terminating breadth-first execution and let us show that the sequence  $(h_\theta)_{\theta \in \mathbb{N}}$  is nondecreasing and diverges. Let  $\eta, \theta \in \mathbb{N}$  such that  $\eta < \theta$ ,

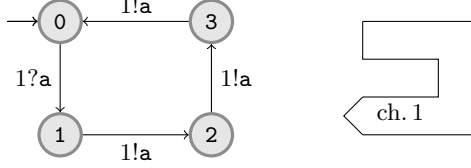

**Fig. 7.** Fifo System of Example 6.9 Showing Non-Termination of CEGAR

and observe that the partition map  $P_\theta$  refines  $P_\eta$ . The “lift” of  $\pi_\theta^\#$  to  $P_\eta$  yields a counterexample in  $\llbracket \mathcal{A} \rrbracket_\eta^\#$ . Since  $\pi_\eta^\#$  is a counterexample in  $\llbracket \mathcal{A} \rrbracket_\eta^\#$  among the shortest ones, we get that its length  $h_\eta$  satisfies  $h_\eta \leq h_\theta$ . This concludes the proof that  $(h_\theta)_{\theta \in \mathbb{N}}$  is nondecreasing.

By contradiction, assume that there exists  $b, \theta_1 \in \mathbb{N}$  such that  $h_\theta = b$  for every  $\theta \geq \theta_1$ . We obtain from Proposition 6.6 that  $\bigcup_{\theta \in \mathbb{N}} \text{Reach}_\theta^{\leq b}$  is finite. Therefore, there exists  $\theta_2 \geq \theta_1$  such that  $\text{Reach}_{\theta_2}^{\leq b} = \text{Reach}_{\theta_2+1}^{\leq b}$ . Let us write  $\pi_{\theta_2}^\#$  as  $\pi_{\theta_2}^\# = (q_0, p_0) \xrightarrow{l_0}^\# \dots \xrightarrow{l_{b-1}}^\# (q_b, p_b)$ . Note that  $(q_i, p_i) \in \text{Reach}_{\theta_2+1}^{\leq b}$  for every  $0 \leq i \leq b$ . We deduce that  $\pi_{\theta_2}^\#$  is also a counterexample in  $\llbracket \mathcal{A} \rrbracket_{\theta_2+1}^\#$ , which contradicts the fact that  $P_{\theta_2+1}$  is a refinement of  $P_{\theta_2}$  that rules out  $\pi_{\theta_2}^\#$ . We conclude that the sequence  $(h_\theta)_{\theta \in \mathbb{N}}$  diverges.  $\square$

**Corollary 6.8.** *If  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -unsafe then any breadth-first execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIV}(\nabla))$  terminates.*

*Proof.* Assume that there exists in  $\llbracket \mathcal{A} \rrbracket$  a path  $\pi$  from  $\text{Init}$  to  $\text{Bad}$  and let  $b$  denote the length of  $\pi$ . Consider any breadth-first execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIV}(\nabla))$ . Observe that for any iteration  $\theta$ ,  $\alpha_\theta(\pi)$  is an abstract counterexample of length  $b$  in  $\llbracket \mathcal{A} \rrbracket_\theta^\#$ . Hence, we have  $h_\theta \leq b$  for every iteration  $\theta \in \mathbb{N}$ , and we conclude with Proposition 6.7 that the execution terminates.  $\square$

#### 6.4 Termination of CEGAR for Finite Fifo Systems with $\text{UPIV}(\nabla)$

It would also be desirable to obtain termination of the CEGAR semi-algorithm when  $\mathcal{A}$  has a finite reachability set from  $\text{Init}$ . However, the following example shows that this condition is not sufficient to guarantee that CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIV}(\nabla))$  has a terminating execution.

*Example 6.9.* Consider the fifo system  $\mathcal{A}$  depicted in Figure 7. This fifo system has a single message  $a$  and a single queue. The safety condition  $(\text{Init}, \text{Bad})$  is defined by the recognizable subsets  $\text{Init} = \{(0, \varepsilon)\}$  and  $\text{Bad} = \{0\} \times (\{a\} \cdot \{aa\}^*)$ . Notice that the reachability set from  $\text{Init}$  is equal to  $\text{Init}$ , which is finite, and hence  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -safe.

Define the initial partition map  $P_0$  by  $P_0(q) = \{\{a\}^*\}$  for all  $q \in \{0, 1, 2, 3\}$ . We consider the extrapolation  $\nabla$  defined by  $\nabla_0(\{\varepsilon\}) = \{\varepsilon, aa\}$  and  $\nabla_k(L) = L$  if  $k > 0$  or  $L \neq \{\varepsilon\}$ . Let us now detail the first iterations of an execution of CEGAR  $(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIV}(\nabla))$ .

- (0)  $\pi_0^\sharp$  is the empty path  $(0, \{a\}^*)$ , and  $\text{UPIInv}(\nabla, \text{Init}, \text{Bad}, \pi_0^\sharp)$  returns the path invariant  $(\{\varepsilon, aa\})$ .
- (1)  $\pi_1^\sharp$  is the path  $(0, \{\varepsilon, aa\}) \xrightarrow{1?a}^\sharp (1, \{a\}^*) \xrightarrow{1!a}^\sharp (2, \{a\}^*) \xrightarrow{1!a}^\sharp (3, \{a\}^*) \xrightarrow{1!a}^\sharp (0, \{\overline{\varepsilon}, aa\})$ , and the path invariant is  $(\{\varepsilon, aa\}, \{a\}, \{aa\}, \{a^3\}, \{a^4\})$ .
- (2)  $\pi_2^\sharp$  is the path  $(0, \{\varepsilon, aa\}) \xrightarrow{1?a}^\sharp (1, \{a\}) \xrightarrow{1!a}^\sharp (2, \{aa\}) \xrightarrow{1!a}^\sharp (3, \{a^3\}) \xrightarrow{1!a}^\sharp (0, \{a^4\}) \xrightarrow{1?a}^\sharp (1, \{\overline{a}\}) \xrightarrow{1!a}^\sharp (2, \{\overline{aa}\}) \xrightarrow{1!a}^\sharp (3, \{\overline{a^3}\}) \xrightarrow{1!a}^\sharp (0, \{\overline{\varepsilon}, aa, a^4\})$ , and the path invariant returned by  $\text{UPIInv}(\nabla, \text{Init}, \text{Bad}, \pi_2^\sharp)$  is the sequence  $(\{\varepsilon, aa\}, \{a\}, \{a^2\}, \{a^3\}, \{a^4\}, \{a^3\}, \{a^4\}, \{a^5\}, \{a^6\})$ .

These first iterations suggest that the execution may not terminate, and we can actually prove that it necessarily does not terminate. Consider any execution of  $\text{CEGAR}(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIInv}(\nabla))$ . For any iteration  $\theta$ , the path invariant  $(L_0^\theta, \dots, L_{h_\theta}^\theta)$  computed by  $\text{UPIInv}(\nabla)$  satisfies  $L_0^\theta = \{\varepsilon, aa\}$  and  $L_{4i}^\theta = \{a^4 \cdot a^{2(i-1)}\}$  for any  $1 \leq i \leq \frac{h_\theta}{4}$ . We deduce that, for each iteration  $\theta$ , there exists a finite subset  $F_\theta$  of  $\{a\}^*$  such that  $\{\{\varepsilon, aa\}, \overline{F_\theta}\} \subseteq P_\theta(0)$ . Observe that  $(0, \{\varepsilon, aa\}) \in \text{Init}_\theta^\sharp$  and  $(0, \overline{F_\theta}) \in \text{Bad}_\theta^\sharp$ . Moreover, for every  $i \geq 1$ , there is a concrete path in  $\llbracket \mathcal{A} \rrbracket$  from  $(0, aa)$  to  $(0, a^{2i})$ . Hence, there is an abstract path in  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$  from  $(0, \{\varepsilon, aa\})$  to  $(0, \overline{F_\theta})$ . We obtain that  $\llbracket \mathcal{A} \rrbracket_\theta^\sharp$  is  $(\text{Init}_\theta^\sharp, \text{Bad}_\theta^\sharp)$ -unsafe for every iteration  $\theta$ , which, combined with Proposition 5.1, implies that the execution does not terminate since  $\llbracket \mathcal{A} \rrbracket$  is  $(\text{Init}, \text{Bad})$ -safe.  $\diamond$

It turns out that termination of the CEGAR semi-algorithm can be guaranteed for fifo systems with a finite reachability set when  $\nabla_k$  has a finite image for every  $k \in \mathbb{N}$ . This apparently strong requirement, formally specified in Definition 6.10, is satisfied by the extrapolations presented in [BHV04] and [LGJJ06], which are based on state equivalences up to a certain depth (see Appendix B).

**Definition 6.10.** *An extrapolation  $\nabla$  is restricted if for every  $k \in \mathbb{N}$ , the set  $\{\nabla_k(L) \mid L \in \text{Rec}((M^*)^n)\}$  is finite.*

Remark that the extrapolation used in Example 6.9 was not restricted. The path invariants obtained in this example only used  $\nabla_0$ , as the **while**-loop of the algorithm  $\text{UPIInv}$  was never repeated. The use of restricted extrapolations prevents this kind of executions. Indeed, as a consequence of Proposition 6.2, we obtain that if  $\nabla$  is restricted then for any execution of  $\text{CEGAR}(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIInv}(\nabla))$ , the execution terminates if and only if the number of iterations of the **while**-loop of the algorithm  $\text{UPIInv}$  is bounded<sup>4</sup>. As shown by the following proposition, if moreover  $\llbracket \mathcal{A} \rrbracket$  has a finite reachability set from  $\text{Init}$  then the execution necessarily terminates.

**Proposition 6.11.** *Assume that  $\nabla$  is restricted. If  $\llbracket \mathcal{A} \rrbracket$  has a finite reachability set from  $\text{Init}$ , then any execution of  $\text{CEGAR}(\mathcal{A}, \text{Init}, \text{Bad}, P_0, \text{UPIInv}(\nabla))$  terminates.*

<sup>4</sup> Remark that this bound is not a bound on the length of abstract counterexamples.

*Proof.* Assume that  $\llbracket \mathcal{A} \rrbracket$  has a finite reachability set from  $Init$ , and consider any execution of  $\text{CEGAR}(\mathcal{A}, Init, Bad, P_0, \text{UPIInv}(\nabla))$ . For each  $q \in Q$ , let us write  $RS(q)$  the finite set of  $\mathbf{w} \in (M^*)^n$  such that there is a path in  $\llbracket \mathcal{A} \rrbracket$  from  $Init$  to  $(q, \mathbf{w})$ . Define  $\mathcal{L} = \bigcup_{q \in Q} RS(q)$  and remark that  $\mathcal{L}$  is finite. Recall that according to Definition 4.3, for any recognizable subset  $L$  of  $(M^*)^n$ , there exists  $k_L \in \mathbb{N}$  such that  $L = \nabla_k(L)$  for every  $k \geq k_L$ . Since  $\mathcal{L}$  is finite, we infer that there exists  $K \in \mathbb{N}$  such that  $L = \nabla_k(L)$  for every  $k \geq K$  and  $L \subseteq \mathcal{L}$ . Let us define  $\mathcal{H} = \wp(\mathcal{L}) \cup \{\nabla_k(L) \mid k < K, L \in \text{Rec}((M^*)^n)\}$ . Observe that  $\mathcal{H}$  is finite since  $\nabla$  is restricted.

We show that  $L_i^\theta \in \mathcal{H}$  for any iteration  $\theta$  and for any  $0 \leq i \leq h_\theta$ . Consider an iteration  $\theta$ , and let us write  $\pi_\theta^\#$  as  $\pi_\theta^\# = (q_0, p_0) \xrightarrow{l_0^\#} \dots \xrightarrow{l_{h-1}^\#} (q_h, p_h)$ , with  $h = h_\theta$ . Notice that  $(q_{i-1}, l_{i-1}, q_i)$  is a transition rule in  $\Delta$  for each  $1 \leq i \leq h$ . Let us define  $R_0 = p_0 \cap \{\mathbf{w} \mid (q_0, \mathbf{w}) \in Init\}$  and  $R_i = \text{post}(l_{i-1}, p_{i-1} \cap L_{i-1}^\theta)$  for every  $1 \leq i \leq h$ . We derive from the definition of the algorithm  $\text{UPIInv}$  that there exists  $k \in \mathbb{N}$  such that:  $L_0^\theta = \nabla_k(R_0)$ , and  $L_i = \emptyset$  or  $L_i = \nabla_k(R_i)$  for every  $1 \leq i \leq h$ . If  $k < K$  then we get that  $L_i^\theta \in \mathcal{H}$  for every  $0 \leq i \leq h$ . Otherwise, we have  $k \geq K$  and therefore  $L_i = R_i$  for every  $0 \leq i \leq h$ . An immediate induction on  $i$  shows that  $R_i \subseteq RS(q_i)$  for every  $0 \leq i \leq h$ . We deduce that  $L_i^\theta \subseteq \mathcal{L}$  and hence  $L_i^\theta \in \mathcal{H}$  for every  $0 \leq i \leq h$ .

We obtain that  $\{L_i^\theta \mid \theta \in \mathbb{N} \text{ and } 0 \leq i \leq h_\theta\} \subseteq \mathcal{H}$ . Since  $\mathcal{H}$  is finite, we conclude with Proposition 6.2 that the execution terminates.  $\square$

*Remark 6.12.* Our notion of restricted extrapolation is related to Jhala and McMillan’s *restricted interpolation*, introduced in [JM06] to derive partial completeness results of CEGAR for predicate abstraction. Indeed, given a restricted extrapolation  $\nabla$ , the finite subsets  $L_k = \{\nabla_i(L) \mid i \leq k, L \in \text{Rec}((M^*)^n)\}$  of  $\text{Rec}((M^*)^n)$  are analogous to the finite languages  $L_k$  of predicates that restrict interpolants in [JM06]. However, in contrast to the CEGAR semi-algorithm of [JM06] where the restricted languages of predicates are enlarged globally, the parameter  $k$  is tailored to each abstract counterexample in our CEGAR semi-algorithm combined with  $\text{UPIInv}(\nabla)$  or  $\text{APIInv}(\nabla)$ .

## 7 Overview of the (Colored) Bisimulation Extrapolation

This section briefly introduces the bisimulation-based extrapolation underlying the widening operator introduced in [LGJJ06]. This extrapolation assumes an automata representation of recognizable subsets of  $(M^*)^n$ , and relies on bounded-depth bisimulation over the states of the automata. For simplicity, we focus in this section on fifo systems with a single queue, i.e.,  $n = 1$ . In this simpler case, recognizable subsets of  $(M^*)^n$  are regular languages contained in  $M^*$ , which can directly be represented by finite automata over  $M$ . The general case of  $n \geq 2$ , which is discussed in detail in Appendices A and B, requires the use of QDDs, that are finite automata accepting recognizable subsets of  $(M^*)^n$  via an encoding of  $n$ -tuples in  $(M^*)^n$  by words over an extended alphabet. Still, the main ingredients rest the same.

In the remainder of this section, we lift our discussion from regular languages in  $M^*$  to finite automata over  $M$ . Consider a finite automaton over  $M$  with a set  $Q$  of states. As in abstract regular model checking [BHV04], we use quotienting under equivalence relations on  $Q$  to obtain over-approximations of the automaton. However, we follow the approach of [LGJJ06], and focus on bounded-depth bisimulation equivalence (other equivalence relations were used in [BHV04]).

Given a priori an equivalence relation  $col$  on  $Q$ , also called “coloring”, and a bound  $k \in \mathbb{N}$ , the (colored) *bisimulation equivalence of depth  $k$*  is the equivalence relation  $\sim_k^{col}$  on  $Q$  defined as expected:  $\sim_0^{col} = col$  and two states are equivalent for  $\sim_{k+1}^{col}$  if (1) they are  $\sim_k^{col}$ -equivalent and (2) they have  $\sim_k^{col}$ -equivalent  $m$ -successors for each letter  $m \in M$ . The ultimately stationary sequence  $\sim_0^{col} \supseteq \sim_1^{col} \supseteq \dots \supseteq \sim_k^{col} \supseteq \sim_{k+1}^{col} \supseteq \dots$  of equivalence relations on  $Q$  leads to the colored bisimulation-based extrapolation.


We define a coloring  $std$ , called *standard coloring*, by  $(q_1, q_2) \in std$  if either  $q_1$  and  $q_2$  are both final states or  $q_1$  and  $q_2$  are both non-final states. The *bisimulation extrapolation* is the function  $\rho$  from  $\mathbb{N}$  to  $\mathcal{Rec}(M^*) \rightarrow \mathcal{Rec}(M^*)$  defined by  $\rho_k(L) = L / \sim_k^{std}$ , where  $L$  is identified to a finite automaton accepting it. Notice that  $\rho$  is a restricted extrapolation.

*Remark 7.1.* We could also choose other colorings or define the sequence of equivalences in a different way. For instance, better results are sometimes obtained in practice with the extrapolation  $\rho'$  that first (for  $k = 0$ ) applies a quotienting with respect to the equivalence relation  $Q \times Q$  (i.e., all states are merged), and then behaves as  $\rho_{k-1}$  (for  $k \geq 1$ ). Analogously, the extrapolation  $\rho''$  defined by  $\rho''_0 = \rho'_0$  and  $\rho''_k = \rho_k$  for  $k \geq 1$  was used in Examples 4.8 and 5.2. The variants  $\rho'$  and  $\rho''$  are also formally defined for the general case of  $n \geq 2$  in Remark B.10 page 39.

*Example 7.2.* Consider the regular language  $L = \{aac, baaa\}$  over the alphabet  $M = \{a, b, c, d, e\}$ , represented by the automaton  $FA_L$  of Figure 8a. The previously defined extrapolation  $\rho$  applies to  $L$  as follows:  $\rho_0$  splits the states of  $FA_L$  according to  $std$ , hence,  $\rho_0(L) = \{a, b\}^* \cdot \{a, c\}$  (viz. Figure 8c). Then  $\rho_1$  merges the states that are bisimulation equivalent up to depth 1, i.e., the states  $\bigcirc$  of  $FA_L$  (Figure 8d). As all states of  $FA_L$  are non equivalent for  $\sim_k^{std}$  with  $k \geq 2$ , we have  $\rho_k(L) = L$  (again Figure 8a). The variants  $\rho'$  and  $\rho''$  mentioned previously would lead to  $\rho'_0(L) = \rho''_0(L) = (alph(L))^* = \{a, b, c\}^*$  (viz. Figure 8b).  $\diamond$

The benefits of the bisimulation extrapolation for the abstraction of fifo systems were already discussed in [LGJJ06]. The following example shows that this extrapolation can, in some common cases, discover *exact* repetitions of message sequences in queues, without the need for acceleration techniques.

*Example 7.3.* Let us continue the running example of the  $c/d$  protocol, considered here as having a single queue by restricting it to operations on the first queue. The application of acceleration techniques on the path  $(00, \varepsilon) \xrightarrow{1!o} \xrightarrow{1!c} (00, oc) \xrightarrow{1!o} \xrightarrow{1!c} (00, ococ) \dots$  would produce the set of queue contents  $(oc)^+$ .

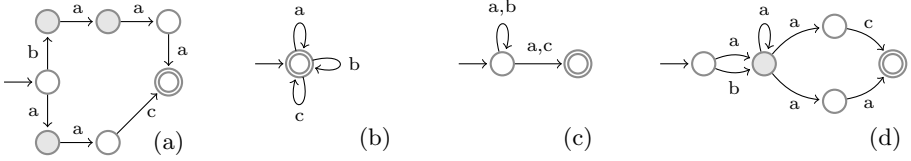

**Fig. 8.** Finite Automata Representations for Extrapolating  $L$  (Example 7.2)

The bisimulation extrapolation  $\rho$  applied to the singleton language  $\{\text{ococ}\}$ , represented by the obvious automaton, produces the following results for the first two parameters:  $\rho_0(\{\text{ococ}\}) = \{\text{o}, \text{c}\}^* \cdot \text{c}$  and  $\rho_1(\{\text{ococ}\}) = (\text{oc})^+$ .  $\diamond$

## 8 Experimental Evaluation

Our prototypical tool `McSCM` that implements the previous algorithms is written in OCAML and relies on a library by Le Gall and Jeannet [Scm] for the classical finite automata and QDD operations, the *fifo post/pre* symbolic computations, as well as the colored bisimulation-based extrapolation. The standard coloring with final and non-final states is used by default in our tool (see Section 7), but several other variants are also available.

We implemented the CEGAR semi-algorithm of Section 5 as a generic OCAML functor, that is parametrized by a symbolic representation of the model to be verified. This should allow us to transfer the ideas of this paper to other classes of infinite-state models such as counter automata, hybrid automata, etc. The initial partition map of the CEGAR semi-algorithm is fixed to the trivial one  $\lambda q. (M^*)^n$ , hence, the initial partition abstraction is “isomorphic” to the “control flow graph” of the input fifo system.

Our implementation includes the two path invariant generation algorithms `UPIInv` and `APIInv` of Section 4. We actually implemented a “single split” backward variant of `APIInv`, reminiscent of the classical CEGAR implementation [CGJ<sup>+</sup>03] (analogous to `APIInv` but applying the split solely to the “failure” abstract configuration). Therefore our implemented variant `APIInv'` leads to more CEGAR loops than would be obtained with `APIInv`, and this explains in part why `UPIInv` globally outperforms `APIInv'` for larger examples. Several pluggable subroutines can be used to search for counterexamples (depth-first or breadth-first exploration). To increase confidence in the results, an independent module, that can perform inductive invariant checking and feasibility checking, verifies the result of the CEGAR implementation.

We tested the prototype on a suite of protocols that includes the classical alternating bit protocol ABP [AJ96], a simplified version of TCP – also in the setting of one server with two clients that interfere on their shared channels, a sliding window protocol, as well as protocols for leader election due to Peterson and token passing in a ring topology. Further, we provide certain touchstones

protocol	states/trans.	refmnt.	time [s]	mem [MiB]	loops	states <sup>#</sup> /trans <sup>#</sup>
ABP	16/64	APIInv'	0.30	1.09	72	87/505
		UPIInv	2.13	1.58	208	274/1443
c/d protocol	5/17	APIInv'	0.02	0.61	8	12/51
		UPIInv	0.01	0.61	6	11/32
nested c/d protocol	6/17	APIInv'	0.68	1.09	80	85/314
		UPIInv	1.15	1.09	93	100/339
non-regular protocol	9/18	APIInv'	0.02	0.61	13	21/47
		UPIInv	0.06	0.61	14	25/39
Peterson	10648/56628	APIInv'	7.05	32.58	299	10946/58536
		UPIInv	2.14	32.09	51	10709/56939
(simplified) TCP	196/588	APIInv'	2.19	3.03	526	721/3013
		UPIInv	1.38	2.06	183	431/1439
server with 2 clients	255/2160	APIInv'	(> 1h)	—	—	—
		UPIInv	9.61	4.97	442	731/7383
token ring	625/4500	APIInv'	85.15	19.50	1720	2344/19596
		UPIInv	4.57	6.42	319	1004/6956
sliding window	225/2010	APIInv'	16.43	9.54	1577	1801/15274
		UPIInv	0.93	2.55	148	388/2367

**Table 1.** Benchmark Results of McscM on a Suite of Example Protocols

for our approach: an enhancement of the c/d protocol with nested loops for the exchange of data, and a protocol with a non-recognizable reachability set. A detailed presentation of the protocols is provided in Appendix C. Except for the c/d protocol, which is unsafe, all other examples are safe.

Table 1 gives a summary of the results obtained by McscM on an off-the-shelf computer (2.4 GHz Intel Core 2 Duo). The second column indicates the size of the input fifo system. The number of CEGAR loops and the size of the partition abstraction at the last CEGAR loop are given in the last two columns. Breadth-first exploration was applied in all examples to search for abstract counterexamples. The bisimulation extrapolation  $\rho$  presented in Section 7 was used except for the server with 2 clients, where we applied the variant  $\rho'$  of  $\rho$  presented in Remark 7.1, as the analysis did not terminate after one hour with  $\rho$ . All examples are analyzed with UPIInv in a few seconds, and memory is not a limitation.

We compared McscM with TRex [Tre], which is, to the best of our knowledge, the sole publicly available and directly usable model-checker for the verification of *unbounded* fifo systems. Note, however, that the comparison is biased as TRex focuses on *lossy* channels. We applied TRex to the first six protocols of Table 1. TRex has an efficient implementation based on *simple regular expressions* (and not general QDDs as we do), and needs in most cases less than 1 second to build the reachability set (the latter allows to decide the reachability of bad configurations by a simple additional look-up). Further, TRex implements communicating timed and counter automata that are – at this stage – beyond the focus of our tool. Nonetheless, TRex assumes a *lossy* fifo semantics, and, therefore, is not able



to verify all *reliable* fifo examples correctly (e.g., when omitting the `disconnect` messages in the `c/d` protocol, TRex is still able to reach *Bad* due to the possible loss of messages, albeit the protocol is safe). Moreover, TRex suffers (as would also a symbolic model-checker based on the LASH library [Las]) from the main drawback of acceleration techniques, which in general cannot cope with nested loops, whereas they seem to have no adverse effect on our tool (viz. nested `c/d` protocol on which TRex did not finish after one hour). McSCM can also handle a simple non-regular protocol (with a counting loop) that is beyond the QDD-based approaches [BG99], as the representation of the reachability set would require recognizable languages equipped with Presburger formulas (CQDDs [BH99]).

To obtain a finer evaluation of our approach, we prototypically implemented the global abstraction refinement scheme of [BHV04] in our tool. While this ARMC implementation seems to be advantageous for some small protocols, larger examples confirm that the local and adaptive refinement approach developed in this paper outperforms a global refinement one in protocols that demand a “highly” precise abstraction only for a few control loops (e.g., Peterson’s leader election and token ring). Further, our ARMC implementation was not able to handle the non-regular protocol nor the server with 2 clients.

## 9 Conclusion and Perspectives

Our prototypical implementation confirms our expectations that the proposed CEGAR framework with extrapolation-based path invariants is a promising alternative approach to the automatic verification of fifo systems.

Our approach relies on partition abstractions where equivalence classes are recognizable languages of queue contents. Our main contribution is the design of generic path invariant generation algorithms based on parametrized extrapolation operators for queue contents. Because of the latter, our CEGAR semi-algorithm enjoys additional partial termination properties.

The framework developed in this paper is not specific to fifo systems, and we intend to investigate its practical relevance to other families of infinite-state models. Future work also includes the safety verification of more complex fifo systems that would allow the exchange of unbounded numerical data over the queues, or include parametrization (e.g., over the number of clients). Several decidable classes of fifo systems have emerged in the literature (in particular lossy fifo systems) and we intend to investigate termination of our CEGAR semi-algorithm (when equipped with the path invariant generation algorithms developed in this paper) for these classes. A fully automatic approach to safety verification would further demand an appropriate heuristics with respect to different classes of communication protocols, in order to choose the appropriate path invariant generation algorithm, graph search method, etc.

**Acknowledgements.** We thank the anonymous reviewers for supporting and guiding the genesis of this publication, and we are especially grateful for the fruitful and challenging discussions with Jérôme Leroux and Anca Muscholl.

## References

- [AJ96] P. A. Abdulla and B. Jonsson. Verifying Programs with Unreliable Channels. *Information and Computation*, 127(2):91–101, 1996.
- [Ans08] Amin Ansari. Verification of Peterson’s Algorithm for Leader Election in a Unidirectional Asynchronous Ring Using NuSMV. *Computing Research Repository at arXiv.org*, abs/0808.0962, 2008.
- [Ber79] J. Berstel. *Transductions and Context-Free Languages*. Teubner, 1979.
- [BG99] B. Boigelot and P. Godefroid. Symbolic Verification of Communication Protocols with Infinite State Spaces using QDDs. *Formal Methods in System Design*, 14(3):237–255, 1999.
- [BGWW97] B. Boigelot, P. Godefroid, B. Willems, and P. Wolper. The Power of QDDs. In *Proc. Static Analysis Symposium 1997*, volume 1302 of *LNCS*, pages 172–186. Springer, 1997.
- [BH99] A. Bouajjani and P. Habermehl. Symbolic Reachability Analysis of FIFO-Channel Systems with Nonregular Sets of Configurations. *Theoretical Computer Science*, 221(1-2):211–250, 1999.
- [BHV04] A. Bouajjani, P. Habermehl, and T. Vojnar. Abstract Regular Model Checking. In *Proc. Computer Aided Verification 2004*, volume 3114 of *LNCS*, pages 372–386. Springer, 2004.
- [BR01] T. Ball and S. K. Rajamani. Automatically Validating Temporal Safety Properties of Interfaces. In *Proc. Model Checking Software, SPIN Workshop 2001*, volume 2057 of *LNCS*, pages 103–122. Springer, 2001.
- [BZ83] D. Brand and P. Zafiropulo. On Communicating Finite-State Machines. *Journal of the ACM*, 30(2):323–342, 1983.
- [CGJ<sup>+</sup>03] E. Clarke, O. Grumberg, S. Jha, Y. Lu, and H. Veith. Counterexample-guided Abstraction Refinement for Symbolic Model Checking. *Journal of the ACM*, 50(5):752–794, 2003.
- [FIS03] A. Finkel, S. P. Iyer, and G. Sutre. Well-Abstracted Transition Systems: Application to FIFO Automata. *Information and Computation*, 181(1):1–31, 2003.
- [GS97] S. Graf and H. Saïdi. Construction of Abstract State Graphs with PVS. In *Proc. Computer Aided Verification 1997*, volume 1245 of *LNCS*, pages 72–83. Springer, 1997.
- [HJMS02] T. A. Henzinger, R. Jhala, R. Majumdar, and G. Sutre. Lazy Abstraction. In *Proc. Symposium on Principles of Programming Languages 2002*, pages 58–70. ACM, 2002.
- [JM06] Ranjit Jhala and Kenneth L. McMillan. A Practical and Complete Approach to Predicate Refinement. In *Proc. Tools and Algorithms for the Construction and Analysis of Systems 2006*, volume 3920 of *LNCS*, pages 459–473. Springer, 2006.
- [JR86] C. Jard and M. Raynal. De la Nécessité de Spécifier des Propriétés pour la Vérification des Algorithmes Distribués. *Rapports de Recherche 590*, IRISA Rennes, December 1986.
- [Las] Liège Automata-based Symbolic Handler Toolset (LASH). Tool Homepage. <http://www.montefiore.ulg.ac.be/~boigelot/research/lash/>.
- [LGJJ06] T. Le Gall, B. Jeannet, and T. Jérón. Verification of Communication Protocols using Abstract Interpretation of FIFO queues. In *Proc. Algebraic Methodology and Software Technology 2006*, volume 4019 of *LNCS*, pages 204–219. Springer, 2006.

- [Mcs] Model Checker for Systems of Communicating Fifo Machines (McScM). Tool Homepage. <http://www.labri.fr/~heussner/mcscm/>.
- [Pet82] G. L. Peterson. An  $O(n \log n)$  Unidirectional Algorithm for the Circular Extrema Problem. *ACM Transactions on Programming Languages and Systems*, 4(4):758–762, 1982.
- [Scm] Tools and Libraries for Static Analysis and Verification. Tool Homepage. <http://gforge.inria.fr/projects/bjeannet/>.
- [Tre] Tool for Reachability Analysis of Complex Systems (Trex). Tool Homepage. <http://www.liafa.jussieu.fr/~sighirea/trex/>.
- [YBCI08] F. Yu, T. Bultan, M. Cova, and O. H. Ibarra. Symbolic String Verification: An Automata-Based Approach. In *Proc. Model Checking Software, SPIN Workshop 2008*, volume 5156 of *LNCS*, pages 306–324. Springer, 2008.

## A Queue Decision Diagrams

Boigelot and Godefroid introduced queue decision diagrams (QDDs) for the symbolic verification of infinite-state communication protocols [BG99], and an implementation of QDDs is provided in the LASH toolset [Las]. We recall in this section the definition and main properties of QDDs. We adapt the original definition of [BG99, BGWW97], which assumed disjoint queue alphabets, to our framework where a single alphabet is used for all queues. Moreover, to simplify the presentation of extrapolations in the next section, we will w.l.o.g. restrict our attention to trim QDDs.

A *finite automaton* is any 5-tuple  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  where  $\langle Q, \Sigma, \rightarrow \rangle$  is a finite labeled transition system whose configurations are called *states*,  $I \subseteq Q$  is a set of *initial states*, and  $F \subseteq Q$  is a set of *final states*. We say that  $FA$  is *trim* when every state  $q \in Q$  occurs on some path from  $I$  to  $F$ . A word  $w = l_0 \cdots l_{h-1} \in \Sigma^*$  is *accepted* by  $FA$  if there is a path  $q_0 \xrightarrow{l_0} \cdots \xrightarrow{l_{h-1}} q_h$  such that  $q_0 \in I$  and  $q_h \in F$ . The *accepted language* of a finite automaton  $FA$ , written  $L(FA)$ , is the set of all words accepted by  $FA$ . Remark that if  $FA$  is trim then:  $L(FA) = \emptyset$  if and only if  $FA$  has an empty set of states. Given an alphabet  $\Sigma$  and a subset  $\Gamma \subseteq \Sigma$ , the *projection* of any word  $w \in \Sigma^*$  on  $\Gamma$ , written  $w|_\Gamma$ , is the word in  $\Gamma^*$  obtained from  $w$  by removing all letters that are not in  $\Gamma$ .

Consider a finite alphabet  $M$  of messages and an integer  $n \geq 1$  denoting the number of queues. We use the classical encoding of  $n$ -tuples  $\mathbf{w} \in (M^*)^n$  by words over  $M \cup \{\bowtie\}$  where  $\bowtie \notin M$  is a new letter used as *separator*. Formally, define the function  $\eta : (M^*)^n \rightarrow (M \cup \{\bowtie\})^*$  by  $\eta(\mathbf{w}) = \mathbf{w}(1) \bowtie \cdots \bowtie \mathbf{w}(n)$ . Let us write  $E(M, n)$  for the set of all words  $w \in (M \cup \{\bowtie\})^*$  whose projection on  $\{\bowtie\}$  is the word  $\bowtie^{n-1}$ . Notice that  $\eta$  is a bijection between  $(M^*)^n$  and  $E(M, n)$ .

**Definition A.1.** *An  $n$ -dim queue decision diagram for  $M$  is any trim finite automaton  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  such that  $L(\mathcal{D}) \subseteq E(M, n)$ .*

We denote by  $\mathcal{Qdd}(M, n)$  the set of all  $n$ -dim queue decision diagrams for  $M$ . For notational convenience, we write  $\llbracket \mathcal{D} \rrbracket$  for the subset of  $(M^*)^n$  represented by a queue decision diagram  $\mathcal{D} \in \mathcal{Qdd}(M, n)$ , defined by  $\llbracket \mathcal{D} \rrbracket = \eta^{-1}(L(\mathcal{D}))$ . The subsets of  $(M^*)^n$  that are representable by queue decision diagrams coincide exactly with the recognizable subsets, formally:

**Theorem A.2 ([BGWW97]).** *For any finite alphabet  $M$  and integer  $n \geq 1$ , the following equality holds:*

$$\text{Rec}((M^*)^n) = \{\llbracket \mathcal{D} \rrbracket \mid \mathcal{D} \in \mathcal{Qdd}(M, n)\}$$

## B Quotient-based Extrapolations

In this section, we show how well-known behavioral equivalences on labeled transition systems can be turned into extrapolations (that satisfy the requirements of Definition 4.3).

Consider a finite alphabet  $M$  and an integer  $n \geq 1$ . Recall that recognizable subsets of  $(M^*)^n$  are in bijection with languages accepted by QDDs. We assume for the remainder of this section a function  $\chi$  from  $\mathcal{R}ec((M^*)^n)$  to  $\mathcal{Q}dd(M, n)$  such that  $L = \llbracket \chi(L) \rrbracket$  for every  $L \in \mathcal{R}ec((M^*)^n)$ . With the help of the function  $\eta$  of Section A, this function  $\chi$  could be defined for instance by mapping each recognizable subset  $L$  of  $(M^*)^n$  to the minimal deterministic finite automaton accepting  $\eta(L)$ . Thanks to the function  $\chi$ , the design of extrapolations for recognizable subsets can be reduced to the design of extrapolations for QDDs.

**Definition B.1.** A (parametrized) QDD-extrapolation is any function  $\nabla$  from  $\mathbb{N}$  to  $\mathcal{Q}dd(M, n) \rightarrow \mathcal{Q}dd(M, n)$  that satisfies, for any  $\mathcal{D} \in \mathcal{Q}dd(M, n)$ , the two following conditions (with  $\nabla(k)$  written as  $\nabla_k$ ):

- (i) we have  $L(\mathcal{D}) \subseteq L(\nabla_k(\mathcal{D}))$  for every  $k \in \mathbb{N}$ ,
- (ii) there exists  $k_{\mathcal{D}} \in \mathbb{N}$  such that  $L(\mathcal{D}) = L(\nabla_k(\mathcal{D}))$  for every  $k \geq k_{\mathcal{D}}$ .

**Definition B.2.** A QDD-extrapolation  $\nabla$  is restricted if for every  $k \in \mathbb{N}$ , the set  $\{\nabla_k(\mathcal{D}) \mid \mathcal{D} \in \mathcal{Q}dd(M, n)\}$  is finite up to automata isomorphism.

For any QDD-extrapolation  $\nabla$ , the function  $\nabla^\times = \lambda k. (\lambda L. \llbracket \nabla_k(\chi(L)) \rrbracket)$  is an extrapolation (in the sense of Definition 4.3). Moreover, if  $\nabla$  is restricted then  $\nabla^\times$  is restricted (in the sense of Definition 6.10). We thus focus on the design of (restricted) QDD-extrapolations for the remainder of this section.

The quotient  $FA/\equiv$  of a finite automaton  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  by an equivalence relation  $\equiv$  on  $Q$  is the finite automaton  $\langle Q^\equiv, \Sigma, \rightarrow^\equiv, I^\equiv, F^\equiv \rangle$  where:

$$\begin{aligned} Q^\equiv &= Q/\equiv & I^\equiv &= \{[q]_\equiv \mid q \in I\} \\ \rightarrow^\equiv &= \left\{ ([q]_\equiv, l, [q']_\equiv) \mid q \xrightarrow{l} q' \right\} & F^\equiv &= \{[q]_\equiv \mid q \in F\} \end{aligned}$$

Notice that the quotient  $FA/\equiv$  is trim whenever  $FA$  is trim. Moreover, it holds that  $L(FA) \subseteq L(FA/\equiv_1) \subseteq L(FA/\equiv_2)$  for any two equivalence relations  $\equiv_1$  and  $\equiv_2$  on  $Q$  such that  $\equiv_1 \subseteq \equiv_2$ .

Given an  $n$ -dim queue decision diagram  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  for  $M$ , since  $\mathcal{D}$  is trim and  $L(\mathcal{D}) \subseteq E(M, n)$  we derive that the four following conditions are equivalent for any  $1 \leq i \leq n$  and  $q \in Q$ :

- (i) there is a path  $q_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q$  with  $q_0 \in I$  and  $(l_0 \dots l_{h-1})|_{\bowtie} = \bowtie^{i-1}$
- (ii) there is a path  $q \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q_h$  with  $q_h \in F$  and  $(l_0 \dots l_{h-1})|_{\bowtie} = \bowtie^{n-i}$
- (iii) we have  $(l_0 \dots l_{h-1})|_{\bowtie} = \bowtie^{i-1}$  for all paths  $q_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q$  with  $q_0 \in I$
- (iv) we have  $(l_0 \dots l_{h-1})|_{\bowtie} = \bowtie^{n-i}$  for all paths  $q \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q_h$  with  $q_h \in F$

For all  $1 \leq i \leq n$ , we denote by  $Q_i$  the set of all states  $q$  satisfying one (or equivalently all) of the above conditions. Remark that if  $Q \neq \emptyset$  then the set  $\{Q_i \mid 1 \leq i \leq n\}$  is a partition of  $Q$ . We define the equivalence relation  $\approx_{\mathcal{D}}$  on  $Q$  as follows: if  $Q = \emptyset$  then  $\approx_{\mathcal{D}} = \emptyset$ , otherwise  $\approx_{\mathcal{D}} = \bigcup_{i=1}^n Q_i \times Q_i$ . The following two propositions show that  $\approx_{\mathcal{D}}$  is the coarsest equivalence relation on  $Q$  under which the quotient of  $\mathcal{D}$  is also a QDD.

**Proposition B.3.** *For any  $n$ -dim queue decision diagram  $\mathcal{D}$  for  $M$ , the quotient  $\mathcal{D}/\approx_{\mathcal{D}}$  is an  $n$ -dim queue decision diagram for  $M$ . Moreover, if  $[\![\mathcal{D}]\!] \neq \emptyset$  then  $[\![\mathcal{D}/\approx_{\mathcal{D}}]\!] = N_1^* \times \cdots \times N_n^*$  where  $N_i = \text{alph}(\{\mathbf{w}(i) \mid \mathbf{w} \in [\![\mathcal{D}]\!]\})$  for all  $1 \leq i \leq n$ .*

*Proof.* Let us write  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$ . Remark that  $[\![\mathcal{D}]\!] \neq \emptyset$  if and only if  $Q \neq \emptyset$ . If  $Q$  is empty then  $\mathcal{D}/\approx_{\mathcal{D}} = \mathcal{D}$  and hence  $\mathcal{D}/\approx_{\mathcal{D}}$  is also in  $\text{Qdd}(M, n)$ . Assume now that  $Q$  is non-empty. We first give an explicit characterization of  $\mathcal{D}/\approx_{\mathcal{D}}$ . Observe that  $I \subseteq Q_1$  and  $F \subseteq Q_n$ .

Consider any two integers  $i, j$  in  $\{1, \dots, n\}$  and assume that there is a transition  $r \xrightarrow{l} r'$  in  $\mathcal{D}$  with  $r \in Q_i$  and  $r' \in Q_j$ . Since  $\mathcal{D}$  is trim, there exists in  $\mathcal{D}$  two paths  $q \xrightarrow{l_0} \cdots \xrightarrow{l_{h-1}} r$  and  $r' \xrightarrow{l'_0} \cdots \xrightarrow{l'_{h'-1}} q'$  such that  $q \in I$  and  $q' \in F$ . Note that  $(l_0 \cdots l_{h-1})|_{\bowtie} = \bowtie^{i-1}$  since  $r \in Q_i$ . Two cases arise:

- if  $l = \bowtie$  then we obtain that  $r' \in Q_{i+1}$  since  $q \xrightarrow{l_0} \cdots \xrightarrow{l_{h-1}} r \xrightarrow{\bowtie} r'$  is a path in  $\mathcal{D}$  and  $(l_0 \cdots l_{h-1} \bowtie)|_{\bowtie} = \bowtie^i$ . We deduce that  $j = i + 1$ .
- if  $l \in M$  then we obtain that  $r' \in Q_i$  since  $q \xrightarrow{l_0} \cdots \xrightarrow{l_{h-1}} r \xrightarrow{l} r'$  is a path in  $\mathcal{D}$  and  $(l_0 \cdots l_{h-1} l)|_{\bowtie} = \bowtie^{i-1}$ . We deduce that  $j = i$ . Moreover, we have  $l \in N_i$  since the  $n$ -tuple  $\mathbf{w} = \eta^{-1}(l_0 \cdots l_{h-1} \cdot l \cdot l'_0 \cdots l'_{h'-1})$  satisfies  $\mathbf{w} \in [\![\mathcal{D}]\!]$  and  $\mathbf{w}(i) \in M^* \cdot l \cdot M^*$ .

Conversely, since  $[\![\mathcal{D}]\!] \neq \emptyset$ , there exists  $w \in L(\mathcal{D})$ . We may write  $w$  as  $w = l_0^1 \cdots l_{h^1-1}^1 \bowtie \cdots \bowtie l_0^n \cdots l_{h^n-1}^n$  with  $l_0^i \cdots l_{h^i-1}^i \in M^*$  for all  $1 \leq i \leq n$ . Therefore, there exists in  $\mathcal{D}$  a path  $q_0^1 \xrightarrow{l_0^1} \cdots \xrightarrow{l_{h^1-1}^1} q_{h^1}^1 \xrightarrow{\bowtie} \cdots \xrightarrow{\bowtie} q_0^n \xrightarrow{l_0^n} \cdots \xrightarrow{l_{h^n-1}^n} q_{h^n}^n$  with  $q_0^1 \in I$  and  $q_{h^n}^n \in F$ . We get that  $q_0^i$  and  $q_{h^i}^i$  are in  $Q_i$  for all  $1 \leq i \leq n$ , and moreover  $q_{h^i}^i \xrightarrow{\bowtie} q_0^{i+1}$  for all  $1 \leq i < n$ . We deduce that for every  $1 \leq i < n$ , there exists in  $\mathcal{D}$  a transition  $q \xrightarrow{\bowtie} q'$  with  $q \in Q_i$  and  $q' \in Q_{i+1}$ .

Consider now any  $i \in \{1, \dots, n\}$  and let  $l \in N_i$ . There exists  $\mathbf{w} \in [\![\mathcal{D}]\!]$  such that  $\mathbf{w}(i) \in M^* \cdot l \cdot M^*$ . Since  $\eta(\mathbf{w}) = \mathbf{w}(1) \bowtie \cdots \bowtie \mathbf{w}(n) \in L(\mathcal{D})$ , there exists in  $\mathcal{D}$  a path  $q_0 \xrightarrow{l_0} \cdots \xrightarrow{l_{h-1}} q_h \xrightarrow{l} q_{h+1}$  with  $q_0 \in I$  and  $(l_0 \cdots l_{h-1})|_{\bowtie} = \bowtie^{i-1}$ . We deduce that there exists in  $\mathcal{D}$  a transition  $q \xrightarrow{l} q'$  with  $q, q' \in Q_i$ .

We have thus shown that the quotient  $\mathcal{D}/\approx_{\mathcal{D}}$  is the trim finite automaton  $\langle Q^{\approx}, \Sigma, \rightarrow^{\approx}, I^{\approx}, F^{\approx} \rangle$  where:

$$\begin{aligned} Q^{\approx} &= \{Q_i \mid 1 \leq i \leq n\} \\ \rightarrow^{\approx} &= \{(Q_i, l, Q_i) \mid 1 \leq i \leq n, l \in N_i\} \cup \{(Q_i, \bowtie, Q_{i+1}) \mid 1 \leq i < n\} \\ I^{\approx} &= \{Q_1\} \\ F^{\approx} &= \{Q_n\} \end{aligned}$$

We derive that  $L(\mathcal{D}/\approx_{\mathcal{D}}) = N_1^* \bowtie \cdots \bowtie N_n^* \subseteq E(M, n)$ , which entails that  $\mathcal{D}/\approx_{\mathcal{D}}$  is an  $n$ -dim queue decision diagram for  $M$ . Moreover, we also get that  $[\![\mathcal{D}/\approx_{\mathcal{D}}]\!] = \eta^{-1}(N_1^* \bowtie \cdots \bowtie N_n^*) = N_1^* \times \cdots \times N_n^*$ .  $\square$

It follows from the previous proposition that for any equivalence relation  $\equiv \subseteq \approx_{\mathcal{D}}$ , the quotient  $\mathcal{D}/\equiv$  is also an  $n$ -dim queue decision diagram for  $M$ . The following proposition shows that the converse also holds.

**Proposition B.4.** *Let  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  be an  $n$ -dim queue decision diagram for  $M$ . For any equivalence relation  $\equiv$  on  $Q$ , if the quotient  $\mathcal{D}/\equiv$  is an  $n$ -dim queue decision diagram for  $M$  then it holds that  $\equiv \subseteq \approx_{\mathcal{D}}$ .*

*Proof.* Assume that  $\equiv \not\subseteq \approx_{\mathcal{D}}$  and let us prove that  $\mathcal{D}/\equiv = \langle Q^{\equiv}, \Sigma, \rightarrow^{\equiv}, I^{\equiv}, F^{\equiv} \rangle$  is not an  $n$ -dim queue decision diagram for  $M$ . Note that  $Q \neq \emptyset$  since otherwise  $\equiv$  and  $\approx_{\mathcal{D}}$  would be empty. Moreover, we deduce from  $\equiv \not\subseteq \approx_{\mathcal{D}}$  that there exists  $1 \leq i < j \leq n$  and  $(r, r') \in Q_i \times Q_j$  such that  $r \equiv r'$ . Since  $\mathcal{D}$  is trim, there exists in  $\mathcal{D}$  two paths  $q \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} r$  and  $r' \xrightarrow{l'_0} \dots \xrightarrow{l'_{h'-1}} q'$  such that  $q \in I$  and  $q' \in F$ . Therefore,  $[q]_{\equiv} \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} [r]_{\equiv} = [r']_{\equiv} \xrightarrow{l'_0} \dots \xrightarrow{l'_{h'-1}} [q']_{\equiv}$  is a path in  $\mathcal{D}/\equiv$  from  $I^{\equiv}$  to  $F^{\equiv}$ . Hence the word  $w = l_0 \dots l_{h-1} l'_0 \dots l'_{h'-1}$  is accepted by  $\mathcal{D}/\equiv$ . Since  $r \in Q_i$  and  $r' \in Q_j$ , we get that  $w|_{\bowtie} = \bowtie^{(i-1)+(n-j)}$ . As  $i \neq j$ , we conclude that  $w \notin E(M, n)$  and hence  $L(\mathcal{D}/\equiv) \not\subseteq E(M, n)$ , which entails that  $\mathcal{D}/\equiv$  is not in  $\text{Qdd}(M, n)$ .  $\square$

Regarding the algorithms  $\text{UPInv}$  and  $\text{APIInv}$  of Section 4, we focus on quotient-based QDD-extrapolations that lead to suitable path invariant generation algorithms for fifo systems. Natural candidates are bounded-depth behavioral equivalences such as trace equivalence and bisimulation equivalence. The former was used in [BHV04] to over-approximate finite automata in abstract regular model checking. The latter was used in [LGJJ06] to derive a widening operator in abstraction interpretation of fifo systems with QDDs.

## B.1 Colored Bisimulation-based Extrapolation

We recall in this subsection the extrapolation underlying the widening operator introduced in [LGJJ06]. This extrapolation relies on bounded-depth bisimulation based on an initial coloring that partitions the set of states. The extrapolation presented in [LGJJ06] relied on minimal deterministic automata. Requiring minimization at each extrapolation step may adversely affect performance in practice. We extend in this subsection the approach of [LGJJ06] to arbitrary automata.

**Definition B.5.** *Let  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  be a finite automaton, and let  $col$  be an equivalence relation on  $Q$ . For every  $k \in \mathbb{N}$ , the bisimulation equivalence of depth  $k$  is the relation  $\sim_k^{col}$  on  $Q$  defined inductively by:*

$$q_1 \sim_0^{col} q_2 \text{ if } (q_1, q_2) \in col$$

$$q_1 \sim_{k+1}^{col} q_2 \text{ if } \begin{cases} q_1 \sim_k^{col} q_2 \\ \forall l \in \Sigma, \forall q'_1 \in Q : q_1 \xrightarrow{l} q'_1 \Rightarrow \left( \exists q'_2 \in Q : q'_1 \sim_k^{col} q'_2 \wedge q_2 \xrightarrow{l} q'_2 \right) \\ \forall l \in \Sigma, \forall q'_2 \in Q : q_2 \xrightarrow{l} q'_2 \Rightarrow \left( \exists q'_1 \in Q : q'_1 \sim_k^{col} q'_2 \wedge q_1 \xrightarrow{l} q'_1 \right) \end{cases}$$

The relations  $\sim_k^{col}$  (for  $k \in \mathbb{N}$ ) are obviously equivalence relations on  $Q$ . The following lemma states well-known facts that are useful for the design of the

bisimulation-based extrapolation. Knuth's up-arrow notation is used in item (iii) to denote iterated exponentials: for any  $a, k \in \mathbb{N}$ ,  $(a \uparrow \uparrow k)$  is the function  $f^k = \underbrace{f \circ \dots \circ f}_{k \text{ times}}$  where  $f : \mathbb{N} \rightarrow \mathbb{N}$  is the function defined by  $f(x) = a^x$ .

**Lemma B.6.** *For any finite automaton  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  and equivalence relation  $col$  on  $Q$ , the three following assertions hold:*

- (i) we have  $\sim_k^{col} = \sim_{|Q|}^{col}$  for every  $k \geq |Q|$ .
- (ii) if  $col$  satisfies  $(q, q') \in col \Rightarrow (q \in F \Leftrightarrow q' \in F)$  then  $L(FA/\sim_{|Q|}^{col}) = L(FA)$ .
- (iii) for every  $k \in \mathbb{N}$ , we have  $|Q/\sim_k^{col}| \leq (2^{|\Sigma|+1} \uparrow \uparrow k)(|Q/col|)$ .

*Proof.* Let us first prove (i). We derive from Definition B.5 that  $\sim_k^{col} \supseteq \sim_{k+1}^{col}$ , hence,  $|Q/\sim_k^{col}| \leq |Q/\sim_{k+1}^{col}|$  for every  $k \in \mathbb{N}$ . Since  $1 \leq |Q/\sim_k^{col}| \leq |Q|$  for all  $k \in \mathbb{N}$ , we obtain that there exists  $k \leq |Q|$  such that  $|Q/\sim_k^{col}| = |Q/\sim_{k+1}^{col}|$ . We arrive at  $\sim_k^{col} \not\supseteq \sim_{k+1}^{col}$  and hence  $\sim_k^{col} = \sim_{k+1}^{col}$ . We deduce from Definition B.5 that  $\sim_k^{col} = \sim_{k'}^{col}$  for all  $k' \geq k$ , which concludes the proof of (i) as  $k \leq |Q|$ .

Let us now prove assertion (ii). Assume that for each  $(q, q') \in col$ , it holds that  $q \in F$  if and only if  $q' \in F$ . Let us shortly write  $\sim$  in place of  $\sim_{|Q|}^{col}$ . Since  $L(FA) \subseteq L(FA/\sim)$ , we only have to show that  $L(FA/\sim) \subseteq L(FA)$ . Consider any word  $l_0 \dots l_{h-1}$  accepted by  $FA/\sim$ . There exists  $q_0, \dots, q_h \in Q$  such that  $[q_0]_{\sim} \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} [q_h]_{\sim}$  is a path in  $FA/\sim$  and such that  $q_0 \in I$  and  $q_h \in F$ . Remark that for any  $q, q' \in Q$  and any  $l \in \Sigma$ , if  $[q]_{\sim} \xrightarrow{l} [q']_{\sim}$  is a transition in  $FA/\sim$  then there exists  $q'' \in [q']_{\sim}$  such that  $q \xrightarrow{l} q''$  is a transition in  $FA$ . Indeed, if  $[q]_{\sim} \xrightarrow{l} [q']_{\sim}$  then we have  $r \xrightarrow{l} r'$  for some  $r \in [q]_{\sim}$  and  $r' \in [q']_{\sim}$ . Since  $\sim = \sim_{|Q|}^{col} = \sim_{|Q|+1}^{col}$ , we get from Definition B.5 that there exists  $q'' \in [q']_{\sim}$  such that  $q \xrightarrow{l} q''$ . An immediate induction along the path  $\pi$  shows that there exists  $q'_0 \in [q_0]_{\sim}, \dots, q'_h \in [q_h]_{\sim}$  such that  $q'_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q'_h$  is a path in  $FA$  with  $q'_0 = q_0$ . Since  $q_h \sim q'_h$ , we get that  $(q_h, q'_h) \in col$  and hence  $q'_h \in F$ . We deduce that  $l_0 \dots l_{h-1}$  is accepted by  $FA$ . We have thus shown that  $L(FA/\sim) \subseteq L(FA)$ .

To prove (iii), we first introduce some additional notations. Define the function  $pre : \Sigma \times \wp(Q) \rightarrow \wp(Q)$  by  $pre(l, U) = \{q \in Q \mid \exists u \in U : q \xrightarrow{l} u\}$ . For any  $\mathcal{U} \subseteq \wp(Q)$ , the equivalence relation  $\sim_{\mathcal{U}}$  on  $Q$  "generated" by  $\mathcal{U}$  is defined by:  $q_1 \sim_{\mathcal{U}} q_2$  if for every  $U \in \mathcal{U}$ , we have  $q_1 \in U$  if and only if  $q_2 \in U$ . It follows from Definition B.5 that, for every  $k \in \mathbb{N}$ , the following equality holds:

$$\sim_{k+1}^{col} = \sim_k^{col} \cap \sim_{\mathcal{U}_k} \quad \text{where } \mathcal{U}_k = \{pre(l, U) \mid l \in \Sigma, U \in Q/\sim_k^{col}\}$$

Let us write  $s_k = |Q/\sim_k^{col}|$  for all  $k \in \mathbb{N}$ . We deduce from the above equality that  $s_{k+1} \leq s_k \cdot |Q/\sim_{\mathcal{U}_k}|$  for every  $k \in \mathbb{N}$ . Since  $|\mathcal{U}_k| \leq \Sigma \cdot s_k$ , we get that  $\sim_{\mathcal{U}_k}$  has at most  $2^{|\Sigma| \cdot s_k}$  equivalence classes, and we derive that  $s_{k+1} \leq s_k \cdot 2^{|\Sigma| \cdot s_k}$ . We obtain that  $s_{k+1} \leq 2^{(|\Sigma|+1) \cdot s_k} = (2^{|\Sigma|+1})^{s_k}$  for every  $k \in \mathbb{N}$ . As  $s_0 = |Q/col|$ , we arrive at  $s_k \leq (2^{|\Sigma|+1} \uparrow \uparrow k)(|Q/col|)$  for all  $k \in \mathbb{N}$ .  $\square$



Remark that for every  $k \in \mathbb{N}$ , the relation  $\sim_k^{col}$  is an equivalence relation on  $Q$  that is contained in  $col$ . It follows from Proposition B.3 that for any  $n$ -dim queue decision diagram  $\mathcal{D}$  for  $M$  and for any equivalence relation  $col$  on  $Q$  with  $col \subseteq \approx_{\mathcal{D}}$ , the quotient  $\mathcal{D}/\sim_k^{col}$  is an  $n$ -dim queue decision diagram for  $M$ .

The last ingredient to obtain an extrapolation is the choice of an adequate equivalence relation  $col$ . Items (i) and (ii) of Lemma B.6 suggest that  $col$  should satisfy  $(q, q') \in col \Rightarrow (q \in F \Leftrightarrow q' \in F)$ . We therefore consider the coloring defined as follows, which will be the standard equivalence relation  $col$  in our discussion. Given an  $n$ -dim queue decision diagram  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  for  $M$ , we define for every  $1 \leq i \leq n$  the sets  $I_i$  and  $F_i$  by:

$$\begin{aligned} I_1 &= I & I_i &= \left\{ q \in Q_i \mid \exists q' \in Q : q' \xrightarrow{\bowtie} q \right\} & (\text{for } i > 1) \\ F_n &= F & F_i &= \left\{ q \in Q_i \mid \exists q' \in Q : q \xrightarrow{\bowtie} q' \right\} & (\text{for } i < n) \end{aligned}$$

Intuitively, the sets  $I_i$  and  $F_i$  are respectively the sets of initial and final states for the queue  $i$ . The *standard coloring* for  $\mathcal{D}$  is the equivalence relation  $std$  “generated” by the sets  $Q_i$  and  $F_i$ , formally defined by:

$$(q, q') \in std \quad \text{if} \quad \forall i \in \{1, \dots, n\} : (q \in Q_i \Leftrightarrow q' \in Q_i) \wedge (q \in F_i \Leftrightarrow q' \in F_i)$$

Our definition of standard coloring is a variant of the one in [LGJJ06], where it was defined as the equivalence relation “generated” by the sets  $Q_i$ ,  $I_i$  and  $F_i$ . Note that the quotient  $\mathcal{D}/\sim_k^{std}$  is in  $\text{Qdd}(M, n)$  for every  $k \in \mathbb{N}$ , since  $std \subseteq \approx_{\mathcal{D}}$ . We arrive at the following definition.

**Definition B.7.** *The bisimulation extrapolation is the function  $\rho$  from  $\mathbb{N}$  to the function set  $\text{Qdd}(M, n) \rightarrow \text{Qdd}(M, n)$  defined by  $\rho_k(\mathcal{D}) = \mathcal{D}/\sim_k^{std}$ .*

**Proposition B.8.** *The function  $\rho$  is a restricted QDD-extrapolation.*

*Proof.* Let  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  be an  $n$ -dim queue decision diagram for  $M$ . For every  $k \in \mathbb{N}$ , the relation  $\sim_k^{std}$  is an equivalence relation on  $Q$ . Therefore, the quotient  $\rho_k(\mathcal{D}) = \mathcal{D}/\sim_k^{std}$  satisfies  $L(\mathcal{D}) \subseteq L(\rho_k(\mathcal{D}))$ , which proves condition (i) of Definition B.1. Observe that the standard coloring  $std$  satisfies  $(q, q') \in std \Rightarrow (q \in F \Leftrightarrow q' \in F)$ . According to Lemma B.6, it holds that  $L(\rho_k(\mathcal{D})) = L(\mathcal{D})$  for all  $k \geq |Q|$ , which proves condition (ii) of Definition B.1. We have thus shown that  $\rho$  is a QDD-extrapolation.

Notice that the standard coloring  $std$  satisfies  $|Q/std| \leq 2n$  for every  $n$ -dim queue decision diagram  $\langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  for  $M$ . For any bound  $b \in \mathbb{N}$ , the set of all finite automata  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  with  $|Q| \leq b$  and  $\Sigma = M \cup \{\bowtie\}$  is finite up to automata isomorphism. We deduce from item (iii) of Lemma B.6 that  $\rho$  is restricted.  $\square$

*Remark B.9.* The proof of the previous proposition only relies on the two following properties of the standard coloring:  $|Q/std|$  is uniformly bounded and  $(q, q') \in std \Rightarrow (q \in F \Leftrightarrow q' \in F)$ . Therefore, any equivalence relation contained in  $\approx_{\mathcal{D}}$  and satisfying these two properties may be used in place of  $std$  (for instance, the standard coloring of [LGJJ06]).

*Remark B.10.* We mentioned in Remark 4.4 page 13 that extrapolations are closed under round-robin combination. Consider in particular the functions  $\rho'$  and  $\rho''$  from  $\mathbb{N}$  to the function set  $\text{Qdd}(M, n) \rightarrow \text{Qdd}(M, n)$  defined by  $\rho'_0(\mathcal{D}) = \rho''_0(\mathcal{D}) = \mathcal{D}/\approx_{\mathcal{D}}$ ,  $\rho'_k = \rho_{k-1}$  and  $\rho''_k = \rho_k$  for all  $k \geq 1$ . The functions  $\rho'$  and  $\rho''$  are also restricted QDD-extrapolations. Compared to the extrapolation  $\rho$  of Definition B.7, the extrapolations  $\rho'$  and  $\rho''$  provide the coarsest quotient-based QDD approximation when the parameter  $k$  is zero.

## B.2 Colored Trace-based Extrapolation

We present in this subsection the extrapolation underlying the automata abstraction function based on finite-length languages introduced in [BHV04]. This extrapolation relies on bounded-depth trace equivalence (with final states). The automata abstractions presented in [BHV04] were designed for minimal deterministic automata and were not tailored to queue decision diagrams. We extend in this subsection the automata abstraction function based on finite-length languages of [BHV04] to arbitrary finite automata and to QDDs.

The presentation of this subsection follows the same layout as the previous subsection. By abuse of notation, we will reuse the symbol  $\sim$  to now denote bounded-depth trace equivalence.

We first introduce some additional notations. Consider a finite automaton  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$ . We write  $|w|$  for the *length* of any word  $w \in \Sigma^*$ . Given a bound  $b \in \mathbb{N}$ , the *accepted language of FA up to b* is the set  $L^{\leq b}(FA)$  of all words  $w \in L(FA)$  of length at most  $b$ , formally  $L^{\leq b}(FA) = \{w \in L(FA) \mid |w| \leq b\}$ . For any state  $q \in Q$  and for any subset  $S \subseteq Q$ , we denote by  $FA[q, S]$  the finite automaton  $FA[q, S] = \langle Q, \Sigma, \rightarrow, \{q\}, S \rangle$ , and we shortly write  $L^{\leq b}(FA, q, S)$  in place of  $L^{\leq b}(FA[q, S])$ .

**Definition B.11.** *Let  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  be a finite automaton, and let  $col$  be an equivalence relation on  $Q$ . For every  $k \in \mathbb{N}$ , the trace equivalence of depth  $k$  is the relation  $\sim_k^{col}$  on  $Q$  defined by:*

$$q_1 \sim_k^{col} q_2 \quad \text{if} \quad L^{\leq k}(FA, q_1, C) = L^{\leq k}(FA, q_2, C) \quad \text{for all } C \in Q/col$$

The relations  $\sim_k^{col}$  (for  $k \in \mathbb{N}$ ) are obviously equivalence relations on  $Q$ . Notice that  $\sim_0^{col} = col$  and  $\sim_{k+1}^{col} \subseteq \sim_k^{col}$  for every  $k \in \mathbb{N}$ . The following two lemmata state well-known properties of trace equivalence that are useful for the design of the trace-based extrapolation.

**Lemma B.12.** *Consider a finite automaton  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  and an equivalence relation  $col$  on  $Q$ . For every  $k \in \mathbb{N}$ ,  $q \in Q$  and  $C \in Q/col$ , it holds that:*

$$L^{\leq k}(FA, q, C) = L^{\leq k}\left(FA/\sim_k^{col}, [q]_{\sim_k^{col}}, \{[c]_{\sim_k^{col}} \mid c \in C\}\right)$$

*Proof.* We assume an arbitrary  $C \in Q/col$ . Let us shortly write  $\sim_k$  and  $\tilde{C}_k$  in place of  $\sim_k^{col}$  and  $\{[c]_{\sim_k} \mid c \in C\}$ , respectively. We proceed by mutual inclusion. The inclusion  $L^{\leq k}(FA, q, C) \subseteq L^{\leq k}(FA/\sim_k, [q]_{\sim_k}, \tilde{C}_k)$  follows from

the fact that  $[q_0]_{\sim_k} \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} [q_h]_{\sim_k}$  is a path in  $FA/\sim_k$  for any path  $q_0 \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} q_h$  in  $FA$ . To prove the reverse inclusion, we show by induction on  $k$  that  $L^{\leq k}(FA, q, C) \supseteq L^{\leq k}(FA/\sim_k, [q]_{\sim_k}, \tilde{C}_k)$  for every  $q \in Q$ .

We first prove the basis, and let  $q \in Q$ . Recall that  $\sim_0 = col$ , hence,  $\tilde{C}_0 = \{C\}$ . If  $q \in C$  then  $[q]_{\sim_0} = C$  and  $L^{\leq 0}(FA, q, C) = \{\varepsilon\} = L^{\leq 0}(FA/\sim_0, C, \{C\})$ . If  $q \notin C$  then  $[q]_{\sim_0} \neq C$  and  $L^{\leq 0}(FA/\sim_0, [q]_{\sim_0}, \{C\}) = \emptyset$ . We have thus shown that the basis holds in both cases.

We now prove the induction step. Consider any  $k \in \mathbb{N}$  and assume that  $L^{\leq k}(FA, q, C) \supseteq L^{\leq k}(FA/\sim_k, [q]_{\sim_k}, \tilde{C}_k)$  for every  $q \in Q$ . Let  $q \in Q$  and let  $w \in L^{\leq k+1}(FA/\sim_{k+1}, [q]_{\sim_{k+1}}, \tilde{C}_{k+1})$ . There exists  $q_0, \dots, q_h \in Q$  such that  $[q_0]_{\sim_{k+1}} \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} [q_h]_{\sim_{k+1}}$  is a path in  $FA/\sim_{k+1}$  and such that  $w = l_0 \dots l_{h-1}$ ,  $q_0 = q$  and  $q_h \in C$ . Since  $\sim_{k+1}^{col} \subseteq \sim_k^{col}$ , we obtain that  $[q_0]_{\sim_k} \xrightarrow{l_0} \dots \xrightarrow{l_{h-1}} [q_h]_{\sim_k}$  is a path in  $FA/\sim_k$ . Therefore, if  $|w| \leq k$  then  $w \in L^{\leq k}(FA/\sim_k, [q]_{\sim_k}, \tilde{C}_k)$ , and we deduce from the induction hypothesis that  $w \in L^{\leq k}(FA, q, C)$ , hence,  $w \in L^{\leq k+1}(FA, q, C)$ . Let us now assume that  $|w| = h = k+1$ . Since  $[q_0]_{\sim_{k+1}} \xrightarrow{l_0} [q_1]_{\sim_{k+1}}$ , there exists  $q'_0 \in [q_0]_{\sim_{k+1}}$  and  $q'_1 \in [q_1]_{\sim_{k+1}}$  such that  $q'_0 \xrightarrow{l_0} q'_1$  is a transition in  $FA$ . Let  $w' = l_1 \dots l_{k+1}$ . Recall that  $[q_1]_{\sim_k} \xrightarrow{l_1} \dots \xrightarrow{l_k} [q_{k+1}]_{\sim_k}$  is a path in  $FA/\sim_k$  with  $q_1 \sim_k q'_1$  and  $q_{k+1} \in C$ . Therefore, we have  $w' \in L^{\leq k}(FA/\sim_k, [q'_1]_{\sim_k}, \tilde{C}_k)$  and it follows from the induction hypothesis that  $w' \in L^{\leq k}(FA, q'_1, C)$ . We deduce that  $w \in L^{\leq k+1}(FA, q'_0, C)$ . Moreover,  $L^{\leq k+1}(FA, q, C) = L^{\leq k+1}(FA, q'_0, C)$  as  $q = q_0 \sim_{k+1} q'_0$ . We conclude that  $w \in L^{\leq k+1}(FA, q, C)$ .  $\square$

**Lemma B.13.** *For any finite automaton  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  and equivalence relation  $col$  on  $Q$ , there exists  $K \in \mathbb{N}$  such that the two following assertions hold:*

- (i) *we have  $\sim_k^{col} = \sim_K^{col}$  for every  $k \geq K$ .*
- (ii) *if  $col$  satisfies  $(q, q') \in col \Rightarrow (q \in F \Leftrightarrow q' \in F)$  then  $L(FA/\sim_K^{col}) = L(FA)$ .*

*Proof.* It follows from Definition B.5 that  $\sim_k^{col} \supseteq \sim_{k+1}^{col}$  for every  $k \in \mathbb{N}$ . Since there are only finitely many equivalence relations on  $Q$ , we get that there is  $K$  in  $\mathbb{N}$  such that  $\sim_k^{col} = \sim_K^{col}$  for every  $k \geq K$ . Now assume that for each  $(q, q') \in col$ , it holds that  $q \in F$  if and only if  $q' \in F$ . Let us shortly write  $\sim$  in place of  $\sim_K^{col}$ . Since  $L(FA) \subseteq L(FA/\sim)$ , we only have to show that  $L(FA/\sim) \subseteq L(FA)$ . Consider any word  $w$  accepted by  $FA/\sim$ . Let  $k = \max(|w|, K)$ . There exists  $q_i \in I$  and  $q_f \in F$  such that  $w \in L^{\leq k}(FA/\sim, [q_i]_{\sim}, [q_f]_{\sim})$ . Let  $C = [q_f]_{col}$  and remark that  $C \subseteq F$ . Note that  $w \in L^{\leq k}(FA/\sim, [q_i]_{\sim}, \{[c]_{\sim} \mid c \in C\})$ . Since  $k \geq K$ , it holds that  $\sim_k^{col} = \sim$  and we deduce from Lemma B.12 that  $w \in L^{\leq k}(FA, q_i, C)$ . As  $q_i \in I$  and  $C \subseteq F$ , we come to  $w \in L(FA)$ .  $\square$

Remark that for every  $k \in \mathbb{N}$ , the relation  $\sim_k^{col}$  is an equivalence relation on  $Q$  that is contained in  $col$ . It follows from Proposition B.3 that for any  $n$ -dim

queue decision diagram  $\mathcal{D}$  for  $M$  and for any equivalence relation  $col$  on  $Q$  with  $col \subseteq \approx_{\mathcal{D}}$ , the quotient  $\mathcal{D}/\sim_k^{col}$  is an  $n$ -dim queue decision diagram for  $M$ . We consider the “standard” coloring  $std$  defined as in subsection B.1, and arrive at the following definition.

**Definition B.14.** *The trace extrapolation is the function  $\xi$  from  $\mathbb{N}$  to the function set  $Qdd(M, n) \rightarrow Qdd(M, n)$  defined by  $\xi_k(\mathcal{D}) = \mathcal{D}/\sim_k^{std}$ .*

**Proposition B.15.** *The function  $\xi$  is a restricted QDD-extrapolation.*

*Proof.* Let  $\mathcal{D} = \langle Q, M \cup \{\bowtie\}, \rightarrow, I, F \rangle$  be an  $n$ -dim queue decision diagram for  $M$ . For every  $k \in \mathbb{N}$ , the relation  $\sim_k^{std}$  is an equivalence relation on  $Q$ . Therefore, the quotient  $\xi_k(\mathcal{D}) = \mathcal{D}/\sim_k^{std}$  satisfies  $L(\mathcal{D}) \subseteq L(\xi_k(\mathcal{D}))$ , which proves condition (i) of Definition B.1. Observe that the standard coloring  $std$  satisfies  $(q, q') \in std \Rightarrow (q \in F \Leftrightarrow q' \in F)$ . According to Lemma B.13, there exists  $K \in \mathbb{N}$  such that  $L(\xi_k(\mathcal{D})) = L(\mathcal{D})$  for all  $k \geq K$ , which proves condition (ii) of Definition B.1. We have thus shown that  $\xi$  is a QDD-extrapolation.

It is easily seen that for any equivalence relation  $col$  on  $Q$  and for any  $k \in \mathbb{N}$ , the bisimulation equivalence of depth  $k$  is a refinement of (i.e., is contained in) the trace equivalence of depth  $k$ . We deduce that item (iii) of Lemma B.6 also applies to the trace equivalence of depth  $k$ , formally  $|Q/\sim_k^{col}| \leq (2^{|\Sigma|+1} \uparrow\uparrow k)(|Q/col|)$  for every  $k \in \mathbb{N}$ . We derive that  $|Q/\sim_k^{std}| \leq (2^{|\Sigma|+1} \uparrow\uparrow k)(2n)$  for every  $k \in \mathbb{N}$ . For any bound  $b \in \mathbb{N}$ , the set of all finite automata  $FA = \langle Q, \Sigma, \rightarrow, I, F \rangle$  with  $|Q| \leq b$  and  $\Sigma = M \cup \{\bowtie\}$  is finite up to automata isomorphism. We conclude that  $\xi$  is restricted.  $\square$

## C Protocols of the Experimental Evaluation (Section 8)

We present in this section the suite of protocols (except for the  $c/d$  protocol which was already introduced in Section 2) on which we tested our prototype McScM. Each protocol is specified as a system of communicating processes. In each case, the resulting fifo system is the asynchronous product of the processes. The queues are initially empty, and each process has a single initial state that is graphically indicated by an arrow with no source state. We provide with each protocol the set of bad configurations used in our experimental evaluation.

### C.1 Alternating Bit Protocol

This is the classical example protocol for automatic verification of communicating fifo systems, in the formalization of [LGJJ06]. The two participating peers exchange control data over the channels 1 and 2 as well as data over channel 3. We checked that the sender and the receiver (left hand-side and right hand-side of Figure 9, respectively) are loosely synchronized. Formally, the safety property is given by the following set of good control states, which should be the only reachable ones:  $\{00, 10, 11, 12, 22, 32, 33, 30\}$ .

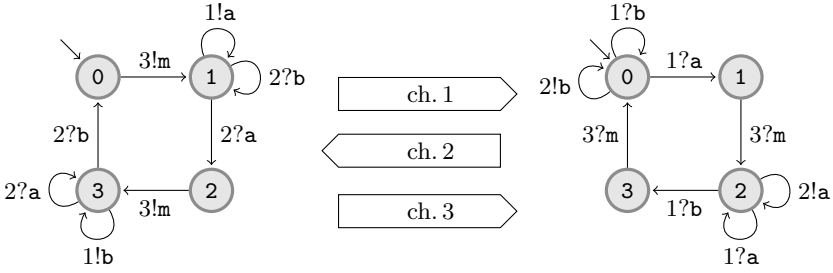


Fig. 9. Alternating Bit Protocol

### C.2 Nested Connection/Disconnection Protocol

Systems with nested loops overburden standard acceleration techniques, which rely on the analysis of simple loops and cannot accelerate nested loops. We have extended the connection/disconnection protocol with simple loops to exchange data (message  $m$ ) from the client to the server. This variant does not have the disconnect transitions, as otherwise the example would be unsafe and, hence, easier to verify with a CEGAR approach. We checked the same safety property as the  $c/d$  protocol, directly specified here by the state  $b$  of the server, which should not be reachable.


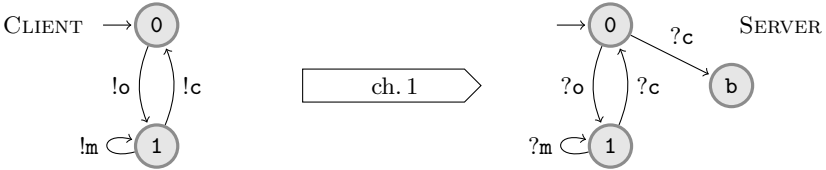


Fig. 10. Extension of the C/D Protocol with Nested Loops for Data

### C.3 Non-Regular Protocol

This is a simple example where the reachability set is non-recognizable. Indeed, the set of reachable queue contents in control state 00 is  $\{(a^m, \varepsilon, b^m, \varepsilon) \mid m \in \mathbb{N}\}$  which is not recognizable. The safety property is given explicitly by the control state 02, which should not be reachable.

*Remark C.1.* Even though we only utilize recognizable subsets to compute invariants, our approach is able to verify the safety property on this non-regular example. Other techniques that are based on recognizable subsets, but that rely

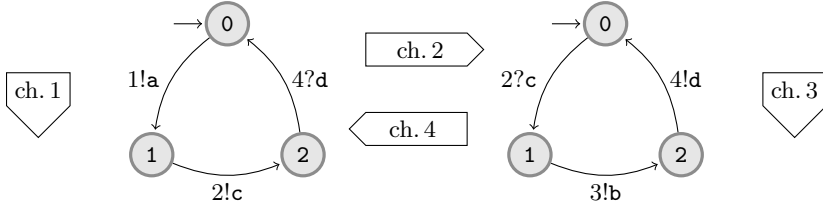


**Fig. 11.** Non-Regular Protocol using Channels 1,3 like Stacks

on an exact computation of the reachability set (e.g., symbolic exhaustive exploration with QDDs and acceleration [BG99]) are not able to handle non-regular fifo systems at all. On the other hand, our technique is limited to safety properties that can be proved with recognizable invariants.

### C.4 Peterson’s Leader Election

This is a translation of Peterson’s leader election algorithm [Pet82] (viz. Figure 12 for pseudocode taken from [Ans08]) into a fifo system. The algorithm is modeled as a set of finite state automata which are executed distributively (and asynchronously) in a ring topology. We check whether more than one process asserts that he is the leader. In our case (Table 1 of Section 8), the number of peers is fixed to 3 (we do not perform parametrized model checking).

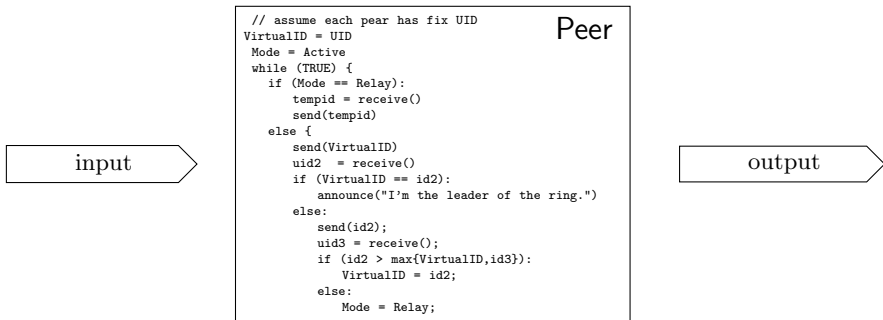


**Fig. 12.** Leader Election in an Asynchronous Ring following Peterson

### C.5 Simplified TCP

Based on the underlying state transition of the TCP protocol and by ignoring all the additional timing constraints as well as the sophisticated data transport (sliding windows etc.), we modeled the three-way handshake of TCP as well as the passive/active close in a simple client/server setting with one bidirectional channel.

The diagram in Figure 13 presents only the client in detail, the server is identical except for exchanging send and receive in the 3-way handshake phase. We further utilize only the messages  $s(yn)$ ,  $a(ck)$ ,  $f(in)$ ,  $d(ata)$  without any additional sequence numbering nor user data.

We verified that the connection establishment and termination work by checking whether one of the peers remains in the *closed* state whereas the other assumes the connection to be *established*.

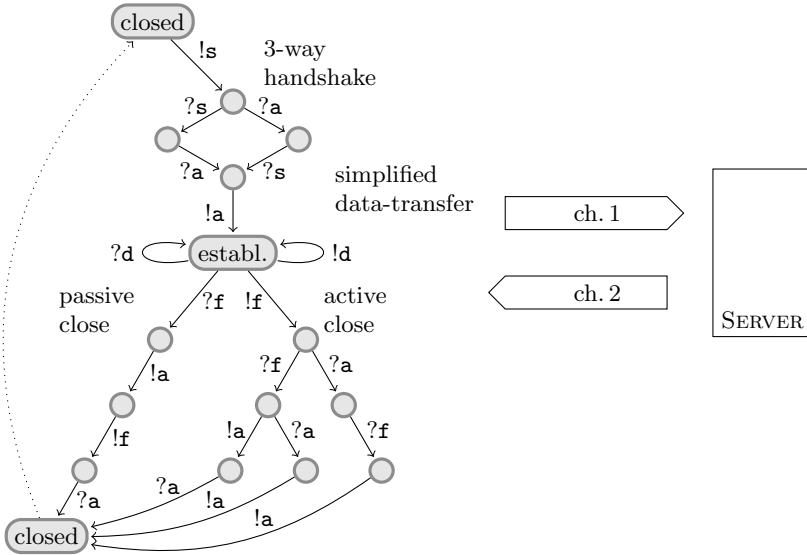

**Fig. 13.** Simplified Transmission Control Protocol


### C.6 Server with Two Clients

This is a simple extension of the (simplified) TCP protocol, where we verify the correctness of connection establishment and termination in the case of a second client that uses the same channels as the original client, but with distinct messages.

### C.7 Token Ring Protocol

This is an example of a token passing protocol, where  $n$  identical processes, set in a ring architecture, can pass some tokens. At the beginning, each process has 0 or 1 token (local states 0 or 1). A process is in a “bad” configuration when it has two tokens (local state  $b$ ). Therefore, it sends an alert message  $a$  before sending a token  $t$ . When a process receives an alert message, it ignores it (if it

has no token) or sends immediately its token to the following process, without an alert message. This is the reason why the only outgoing transition of local state 3 is to send a token. In our case (Table 1 of Section 8), the number of processes is fixed to 4.

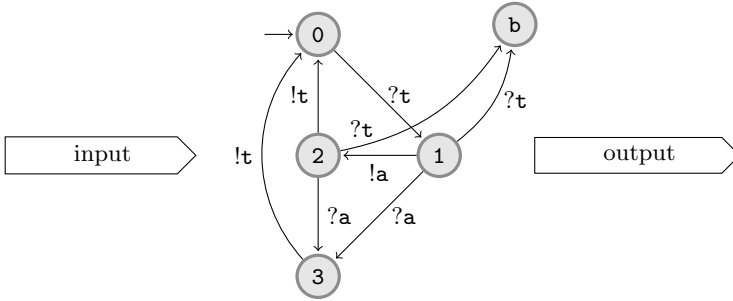

**Fig. 14.** Single Peer of Token Ring Protocol

### C.8 Sliding Window Protocol

The family of sliding window protocols defines a safe way to transfer data over a channel. The size of the sliding window is a priori fixed (as in our case), or adaptively changes dynamically. At each moment, the sender restricts the number of unacknowledged messages in the queue towards the receiver to be smaller than the window size.

The instantiation of the sliding window protocol whose benchmark is presented in Section 8 has a fixed message length of 10 and a window size of 2. If the sender receives an acknowledgement for a packet that was not already sent or that was already acknowledged, our protocol aborts the transfer by entering an error state. Further, receiving acknowledgements not in the order of sent packages also leads to the error state, whose reachability will be checked.