



HAL
open science

Octave spanning supercontinuum in titanium dioxide waveguides

Kamal Hammani, Laurent Markey, Manon Lamy, Bertrand Kibler, Juan Arocas, Julien Fatome, Alain Dereux, Jean-Claude Weeber, Christophe Finot

► **To cite this version:**

Kamal Hammani, Laurent Markey, Manon Lamy, Bertrand Kibler, Juan Arocas, et al.. Octave spanning supercontinuum in titanium dioxide waveguides. 2018. hal-01729370v1

HAL Id: hal-01729370

<https://hal.science/hal-01729370v1>

Preprint submitted on 13 Mar 2018 (v1), last revised 2 Apr 2018 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Octave spanning supercontinuum in titanium dioxide waveguides

Kamal Hammani *, Laurent Markey, Manon Lamy, Bertrand Kibler, Juan Arocas, Julien Fatome, Alain Dereux, Jean-Claude Weeber and Christophe Finot

Laboratoire Interdisciplinaire Carnot de Bourgogne (ICB), UMR 6303 CNRS – Université Bourgogne Franche-Comté, 9 Avenue Alain Savary, BP 47870, 21078 Dijon Cedex, FRANCE

* Correspondence: kamal.hammani@u-bourgogne.fr

Abstract: We report on the experimental generation of an octave-spanning supercontinuum in a 2.2 cm-long titanium dioxide optical waveguide with two zero dispersion wavelengths. The resulting on-chip supercontinuum reaches the visible wavelength range as well as the mid-infrared region by using a femtosecond fiber laser pump at 1.64 μm .

Keywords: Integrated optics; Supercontinuum generation; Titanium dioxide

1. Introduction

Generation of optical supercontinua (SC) is a fundamental topic that has stimulated a tremendous interest since the early works of Alfano *et al.* in the 70's [1]. The development of practical applications as well as the physical understanding of the various processes involved in this nonlinear spectral broadening have strongly benefited from the progress in optical fiber technologies. More especially, the emergence of photonic crystal fibers combining tailored dispersion properties and enhanced nonlinearity has led to record spectral expansion [2,3]. Moreover, advances in soft-glass materials such as tellurite or chalcogenide fibers have also contributed to the extension of SC bandwidth far beyond the silica transmission window and have paved the way toward mid-infrared SC sources [4–7]. The next exciting stage is to reduce the footprint of the component and generate octave spanning supercontinua on an optical chip. To this aim, various platforms have been successfully investigated : Si [8–10], SiGe [11–13], SiN [14–17], diamond-on-insulator [18], chalcogenide waveguides [19] or III-V material based waveguides (InGaP [20], AlGaAs [21]). Each material provides specific advantages but also strong potential limitations including two photon absorption (TPA) and associated free carrier absorption, high level of losses, limiting transparency window, low refractive index, low handling power as well as high cost or complex manufacturing processes.

In this context, we consider here Titanium dioxide (TiO_2) as an alternative platform that remained until now relatively unexplored. TiO_2 is a promising material thanks to a transparency window spanning from the visible to the mid-infrared wavelengths [22], high linear and nonlinear refractive indices (respectively > 2.3 , 30 times larger than silica [23,24]) and a wide bandgap (3.4 eV) allowing a negligible TPA beyond 800 nm. Its thermo-optic properties can also be of great interest for thermal stability [25–27]. Moreover, thin films can be prepared by several techniques such as e-beam evaporation, atomic layer deposition (ALD), plasma-enhanced chemical vapor deposition (PE-CVD) or sol-gel process [28]. Therefore, it has become increasingly desirable to consider this cost-efficient material in different scenarios such as subwavelength optical waveguides [29], integrated optical resonators [26,30,31], infrared high speed transmissions [32] or sensing applications [33]. Quite recently, several studies aimed at taking advantage of the Kerr nonlinearity of TiO_2 and have reported the observation of self-phase modulation induced spectral broadening of a femtosecond pulse [23], the parametric wavelength conversion of a continuous wave [24] as well as the efficient generation of photon triplet [34].

In the present contribution, to the best of our knowledge, we report on the first experimental generation of a supercontinuum covering more than an octave in a TiO₂-based on-chip waveguide. The manuscript is organized as follows. We first describe the properties of the cm-long on-chip waveguides in which SC generation is demonstrated. Next, we detail the experimental set-up based on a femtosecond fiber laser at 1.64 μm , and finally we analyze the main features of the generated supercontinua.

2. TiO₂ waveguide design and fabrication

The fabrication process starts with the deposition of a 450 nm-thick layer of TiO₂ onto a 2'' thermally oxidized Si wafer (SiO₂ thickness = 2.0 μm). TiO₂ deposition is performed by DC magnetron sputtering of a 99.9% pure titanium under an argon oxygen controlled atmosphere. It is well known that different TiO₂ phases can be obtained: rutile [35,36], anatase [37,38] or amorphous [24,38]. In this case, Raman spectroscopy experiments (not shown) reveal that the layers are dominantly in the anatase phase. The 2.2 cm-long waveguides considered in the following are obtained by I-line patterning of the UV sensitive resist AZ MiR 701. The patterned resist is then used as a protective mask during the subsequent reactive ion etching of the TiO₂ layer. After stripping of the residual mask, strip waveguides featuring a typical width of 1.5 μm are obtained as shown by scanning electron microscope (SEM) image displayed in Fig. 1(a). This image shows that the fabrication process leads to asymmetric sidewalls such that the top width ($w_1 = 1.345 \mu\text{m}$) is shorter than the base width ($w_2 = 1.487 \mu\text{m}$), so that the waveguide section is close to a right trapezoid.

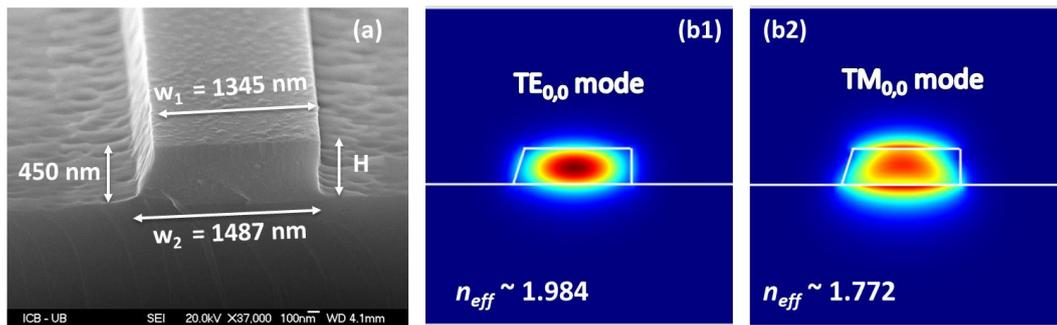


Figure 1: (a) Scanning Electron Microscope image of the cleaved strip TiO₂ waveguide (b1 & b2) Corresponding mode profiles at 1640 nm and associated effective index for the first transverse electric (TE) and transverse magnetic (TM) respectively.

The high contrast between the TiO₂ (the estimated refractive index for the anatase TiO₂ layer at 1.64 μm is 2.35) and the silica layer (refractive index = 1.44) or the surrounding air is highly beneficial for a strong light confinement. The refractive index for anatase phase TiO₂ layer reported in Ref. [38] appears as a good starting point for the numerical investigation of the optical properties of the waveguides. By operating a commercial mode-solver relying on finite element method (COMSOL Multiphysics®), we found that the structure may sustain 4 modes. The modal intensity distributions of the two lowest orders modes are displayed for the transverse electric (TE) and transverse magnetic (TM) in Fig. 1(b1) and 1(b2), respectively. The TE polarized fundamental mode of interest features an effective area [39] of 0.54 μm^2 with 85% of the energy carried out by the mode confined within the TiO₂ core at a wavelength of 1.64 μm . In addition, as detailed in the following, in the spectral region around 1.6 μm , the fundamental mode features an anomalous regime of chromatic dispersion which is a prerequisite for ultra-broad SC generation [30]. Compared to previous works [23,40,41], such an anomalous dispersion is obtained thanks to a thicker layer.

Due to the field enhancement at the top and lower interface of the waveguide (resulting from the continuity of the normal component of the electric displacement vector), the TM_{0,0} mode exhibits a lower confinement and thus an effective area increased by about 30% as compared to the fundamental mode.

3. Experimental setup

The experimental setup is sketched in Fig. 2. The pulse pump is generated from an all-fiber femtosecond laser source delivering fs pulses at a central wavelength of $1.56 \mu\text{m}$ and operating at a repetition rate of 80 MHz (OneFive GmbH, Origami 15-SP). The maximum available peak power is about 16 kW (maximum pulse energy of $\sim 1.5 \text{ nJ}$). Then, the fs-pulses passed through an inline polarization controller (Lefevre loops) in order to optimize the energy launched into the fundamental TE mode of the waveguide. Indeed, given the noticeable difference in the values of effective area between TE and TM modes, the broadest SC can only be achieved for a proper TE linearly polarized wave. The total power injected into the waveguide can be adjusted by means of a set of calibrated fixed optical attenuators (OA). The injection of light into our TiO_2 waveguides is ensured by a butt coupling technique through lensed fibers (Fig. 2(b1)) characterized by a working-distance of $14 \mu\text{m}$. To reduce the insertion losses through such butt-coupling of light, the component design includes 1 mm-long tapers (Figure 2(b2)) at both ends of the waveguide. Note that the nonlinear propagation of the initial pulse, equivalent to a near fundamental soliton pulse ($N \sim 1$) [42], in the length of standard anomalous dispersion SMF 28 fiber between the fs-laser output and the TiO_2 waveguide leads through Raman soliton self-frequency shift to the tuning of the central wavelength of the 90 fs sech^2 pulse towards $1.64 \mu\text{m}$ (see Fig. 2(c)).

The injecting conditions are optimized thanks to a visible camera (providing a top view of the sample) as well as a second infrared camera implemented at the waveguide output in such a way to image the far-field modal profile. The typical injection losses are around 11 dB (per facet) while the propagation losses are estimated to around 5.5 dB/cm, thus leading to an effective length below 1 cm, similar to the results available in the literature [24,38]. As a consequence, we believe that for the present experiment, the finite length of the device is not the main limiting effect. Note that a different process of fabrication avoiding etching could decrease drastically such losses down to around 1 dB/cm [43].

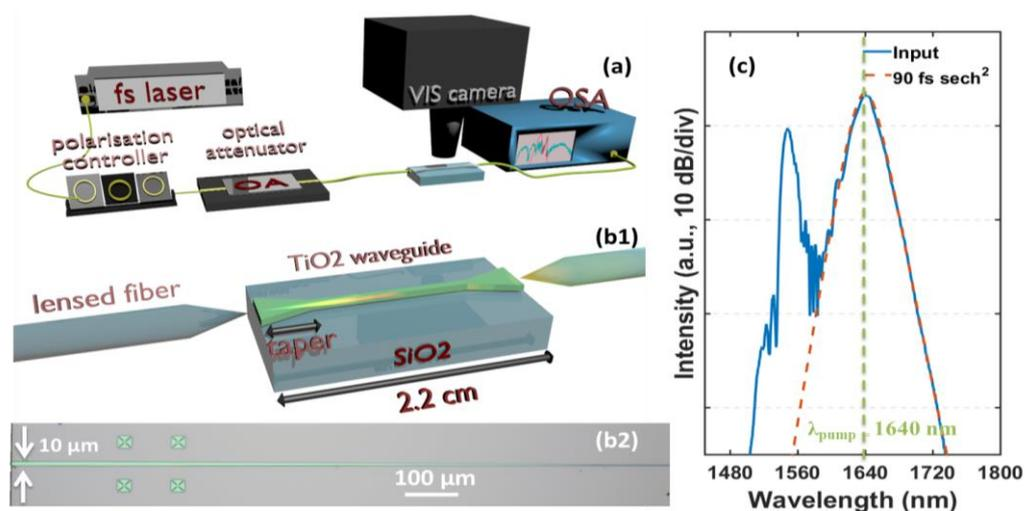


Figure 2: (a) Experimental setup involved for generation of supercontinuum in TiO_2 waveguides. (b1) sketch of the waveguide with the coupling by lensed fiber and (b2) the corresponding optical microscope image of the taper used for the coupling. (c) Spectrum of the input soliton pulse centered at 1640 nm compared with the spectrum of a 90 fs sech^2 pulse (c)

Once the input conditions are properly adjusted, the output camera is replaced by a second single-mode lensed fiber connected to an optical spectrum analyzer operating (OSA) operating in the near-infrared range (Anritsu MS9740A). For analysis beyond $1.7 \mu\text{m}$, the collecting silica fiber is replaced by a fluoride fiber and the OSA is switched to another one operating up to $2.4 \mu\text{m}$ (Yokogawa AQ6375B).

4. Supercontinuum Generation

4.1. Experimental results

Figure 3 summarizes the typical spectral properties of the SC generated in the 1.5- μm wide TiO_2 waveguide. The input peak power of the fs-pulses injected into the waveguide was estimated to almost 1.3 kW (corresponding to a soliton number $N=15$ [2,42]), but given the experimental difficulty to evaluate precisely the energy coupled into the fundamental mode, this value is a rough estimate. By means of a careful adjustment of the input polarization aligned to the fundamental TE mode which is expected to be in anomalous dispersion regime at the pump wavelength, an octave-spanning supercontinuum spectrum is then generated, ranging from 1050 nm up to 2340 nm (-20 dB spectral width in Fig. 3(a)). Compared to the pioneer experiments of spectral broadening leading to tens of nanometers around 1550 nm reported by Evans *et al.* [23], the present results represent a significant improvement by much more than one order of magnitude. A third harmonic signal is also generated into the waveguide [44] so that visible light is also clearly observed by the naked eye in the early stage of propagation as can be seen from the photography taken from the top of the waveguide (Fig. 3(b) and 3(c)). From these pictures, we can also notice that green light is generated first, followed by yellow, orange and then red, which is consistent with the progressive frequency shift of the femtosecond pulse during its propagation within the nonlinear waveguide. The visible light emitted along the waveguide represents therefore an indirect but practical way to track the longitudinal evolution of the central wavelength of the Raman-shifted soliton. However, the level of losses of TiO_2 in the visible region remains slightly too high and, given the sensitivity of our spectral analysis devices, has prevented the detection of the visible part of the generated light at the output of the 2-cm-long waveguide.

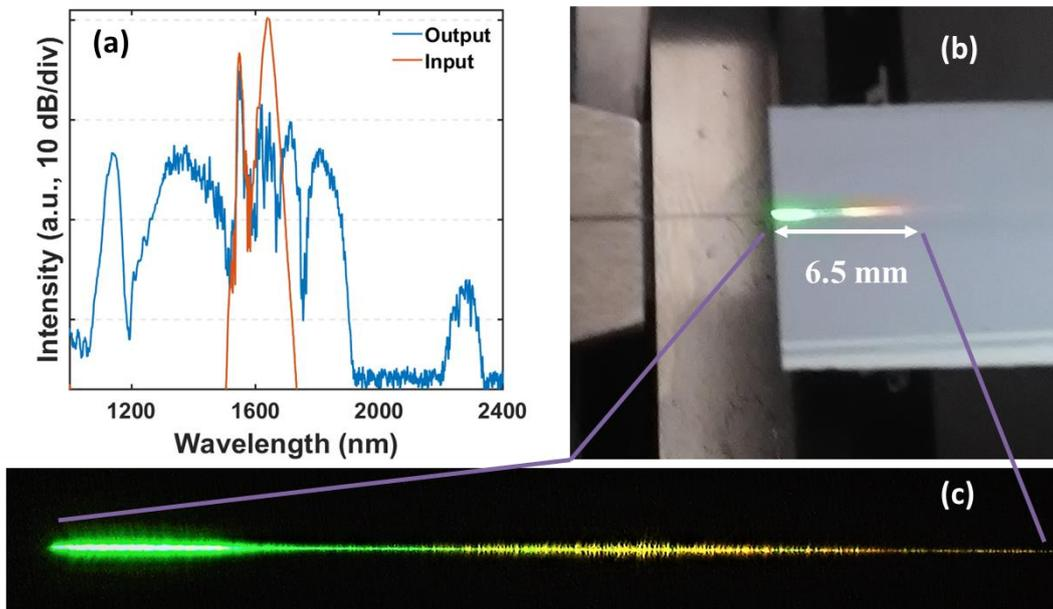


Figure 3: (a) Optical supercontinuum recorded at the output of the 2.2-cm-long 1.5- μm -wide TiO_2 waveguide (blue solid line) compared to the input pulse spectrum (red solid line). The overall spectrum is reconstructed from the overlap of the spectra obtained from both optical spectrum analyzers of our setup. (b) Photography of the visible light emitted from the waveguide. (c) Zoom of the emitted visible light.

Figure 4(a) shows the dispersion curve of the waveguide obtained from finite element simulations and highlights the significant contribution of the waveguide to the overall dispersion that strongly differs from the properties of the TiO_2 material. The TE fundamental mode is expected to be anomalous around the pumping wavelength, therefore enabling a soliton-driven SC

dynamics [3,45]. Moreover, we confirm here that the waveguide presents two zero dispersion wavelengths that ultimately limit the spectral expansion of our supercontinuum [46]. Note also that the TM mode lies in the normal dispersion regime at the pump wavelength and its considerable dispersion value makes that only a negligible broadening can be expected (not presented here because similar to the input pulse). This point therefore further explains the high polarization sensitivity of the input conditions.

In order to better describe the SC dynamics, other spectra in the infrared part of the spectrum are plotted in Fig. 4(b) as a function of the estimated coupled energy into the waveguide. As expected, the input pulse undergoes a strong and rapid self-phase modulation process with increased input energy, then followed by the emission of dispersive waves at wavelengths located in both normal dispersion regimes. Indeed, short- and long-wavelength SC edges are determined through phase-matched dispersive wave generation, namely below 1.3 μm and beyond 2.1 μm . Simultaneously, we observe the Raman self-frequency shift of one soliton, emitted from the initial pulse breakup, until 1.84 μm for the maximum input energy. It is worth mentioning this behavior is also associated to the blue-shift of dispersive waves around 1.2 μm and 2.3 μm .

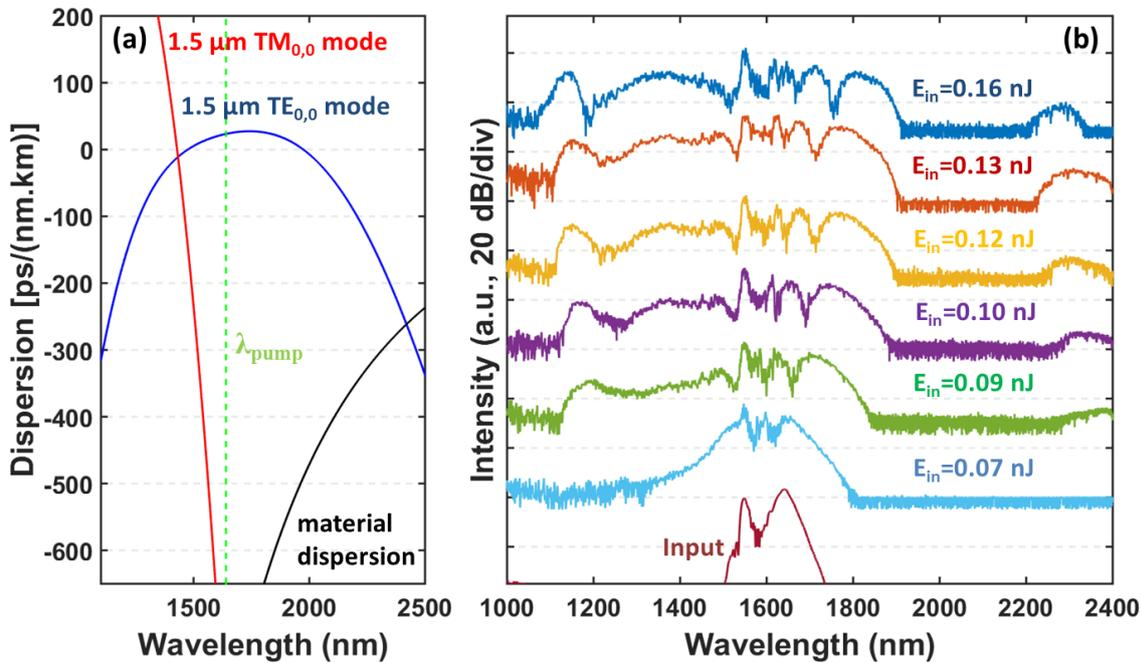


Figure 4: (a) Dispersion profiles of the fundamental TE_{0,0} and TM_{0,0} modes of the 1.5 μm wide waveguide. The material dispersion is plotted with solid black line. (b) Optical supercontinua measured at the output of the TiO₂ waveguide for various coupled energy conditions. For the better reading of the figure, the various spectra were vertically offset.

4.2. Numerical simulations

In order to gain some qualitative insights into the nonlinear dynamics occurring during the spectral broadening process, we have performed simulations based on the generalized nonlinear Schrödinger equation (GNLSE) governing the evolution of the complex envelope of the electrical field $A(z,t)$ [2,11,47] :

$$\frac{\partial A}{\partial z} = -\frac{\alpha}{2} A + \sum_{k \geq 2} i^{k+1} \frac{\beta_k}{k!} \frac{\partial^k A}{\partial z^k} + i\gamma \left(1 + \tau_{shock} \frac{\partial}{\partial t} \right) \left(A(z,t) \int_{-\infty}^{+\infty} R(t') \times |A(z,t-t')|^2 dt' \right) \quad (1)$$

where z and t are the distance and the temporal coordinates respectively. α is the linear loss, γ is the usual nonlinear coefficient, $R(t)$ is the response function that takes into account both instantaneous electronic and delayed Raman contributions defined from the parameters given in Ref. [23]. β_k 's are the dispersion coefficients associated with the Taylor series expansion of the propagation constant β

around the central frequency. Note that we do not include terms based on the two-photon absorption (α_2) and three photon absorption (α_3) since titanium dioxide presents negligible nonlinear absorption in the spectral region of interest. The main limitations of the above GNLSE is related to the fact that visible light obtained through frequency tripling of the input pulse cannot be modelled [48,49] and that it assumes a pure single-mode propagation. However, note that the aim of these numerical simulations is to qualitatively reproduce the observed SC generation. Indeed, several parameters of the TiO₂ waveguide such as its dispersive properties or the exact value of the nonlinear coefficient have not been experimentally assessed yet and would deserve a devoted study that is well beyond the scope of the present letter. The exact physical features of the optical pulse entering into the waveguide are not accurately known but we have considered an initial 90-fs transformed-limited hyperbolic-secant pulse centered at 1.64 μm . For the qualitative discussion, our numerical simulations used a nonlinear index value ($n_2 = 0.16 \times 10^{-18} \text{ m}^2/\text{W}$) and a Raman coefficient inferred from the literature [23] which lead to a nonlinear parameter about $1.2 \text{ W}^{-1} \cdot \text{m}^{-1}$.

The results of the simulations are summarized in Fig. 5 and have to be compared with spectra recorded and depicted in Fig. 4. The main experimental SC features and evolution as a function of input energy can be predicted from the GNLSE. In particular, the soliton frequency shift towards 1.9 μm wavelength as well as the position and the blue-shift of the dispersive waves are indeed well reproduced. The optical signal to noise ratio being much higher in our simulations compared to our experiments, we find spectral features in Fig. 5 that can be only hardly observed in the experimental results. Nevertheless, we conclude that our approach based on the GNLSE captures most of the dominant spectral properties of the SC generated in our TiO₂ waveguides.

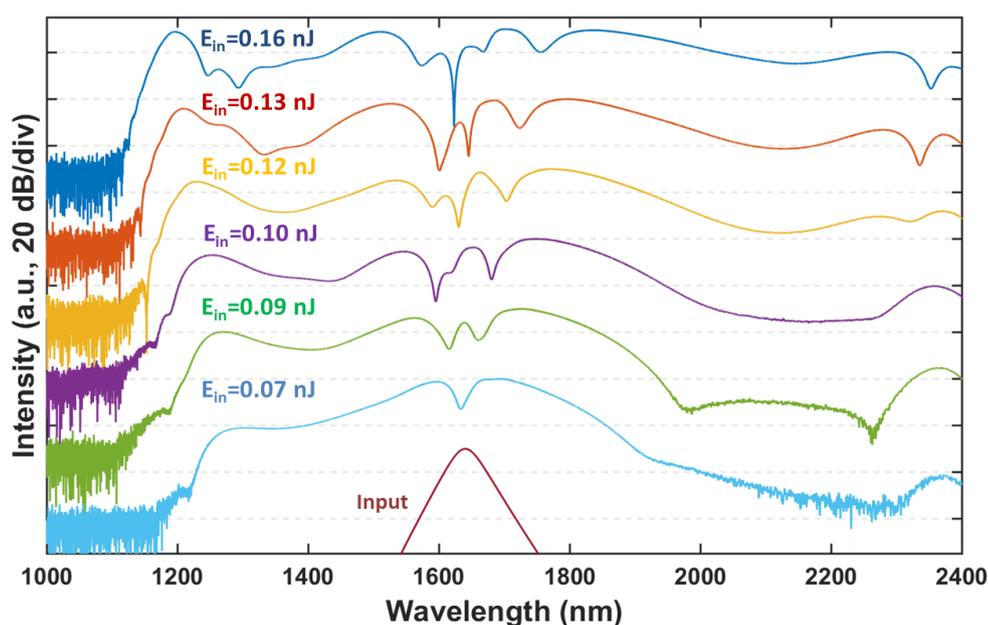


Figure 5: Numerical simulations of supercontinuum generation obtained in a 2.2-cm-long 1.5- μm -wide TiO₂ waveguides for different input energies of the femtosecond pulses. For the clarity of the figure, the various spectra were vertically offset.

4.3 Discussion

Figure 6(a) shows the dispersion curves of the fundamental TE_{0,0} mode for different widths of the waveguide. Figure 6(b) displays the experimental spectrum obtained in two other TiO₂ waveguides with distinct widths as well as the corresponding numerical simulations. Once again, a good agreement is obtained. The broader waveguide (width = 1.8 μm) exhibits an all-normal dispersion regime. Therefore, the self-phase modulation and wave-breaking dynamics are dominant effects governing the spectrum expansion [2,50,51]. On the contrary, the 1.4- μm -wide waveguide exhibits a similar dispersion curve as the 1.5- μm -wide waveguide but the dispersion is now shifted to higher

values, which increases the gap between the two zero-dispersion wavelengths. As a consequence, the dispersive waves are also moved away: the blue edge of the supercontinuum is shifted below 1 μm while the mid-infrared edge is above our OSA limit. Those results (Fig 6(b1)) show that with a dispersion engineered waveguide, a two-octave spanning SC and larger is conceivable.

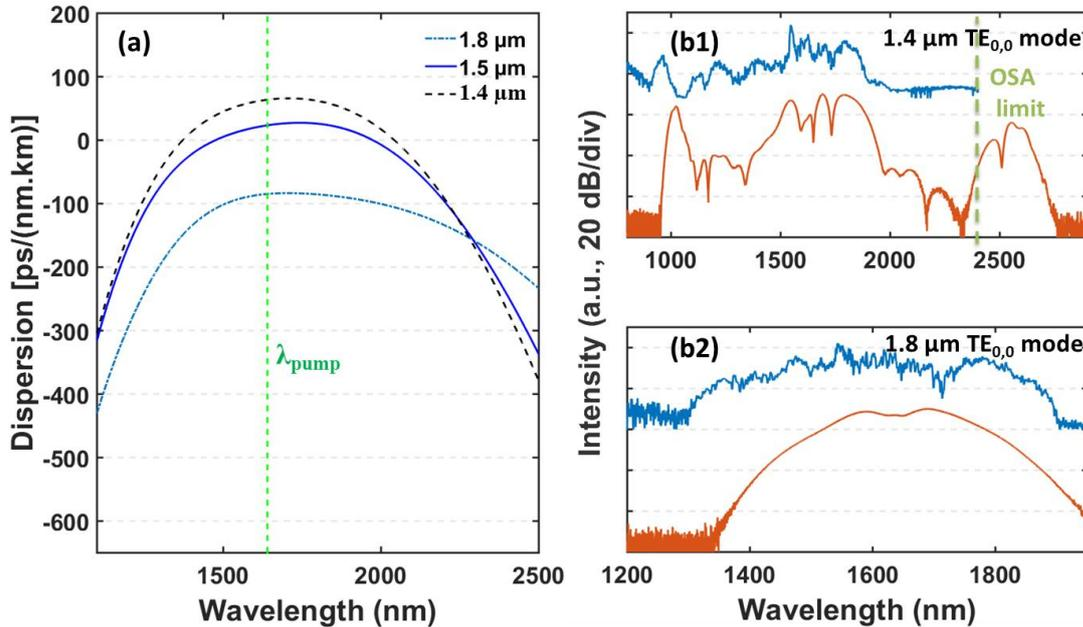


Figure 6: (a) Dispersion profiles of the fundamental TE_{0,0} mode of the waveguide for different widths (1.4, 1.5 and 1.8 μm). (b) Experimental spectra (blue lines) and corresponding numerical simulations (red lines) for (b1) 1.4 μm and (b2) 1.8 μm . For the clarity of the figure, the various spectra were vertically offset.

5. Conclusions

In this work, we have reported the first experimental demonstration of an octave spanning supercontinuum generation in a compact TiO₂ optical waveguide. Following soliton-based nonlinear dynamics, the spectral broadening of femtosecond pulses at 1.64 μm leads to the generation of new wavelengths from the visible up to 2.4 μm , i.e. this involves spectral components covering more than two octaves. Both experiments and simulations also stress the crucial importance of the geometrical parameters of the waveguide structure that governs the dispersion properties and ultimately the supercontinuum extent. This study therefore confirms the strong potential of TiO₂ for nonlinear applications. With further reduction of the propagation losses combined with more advanced dispersion engineering of the waveguide and optimization of the device length, noticeable enhancements of the resulting SC source are expected and decade spanning SC could potentially be reached. The use of wideband coupling grating structures such as reported in [40] that are able to handle femtosecond pulses could also improve the stability of the source and increase the power coupled within the waveguide.

Compared to other widely used materials, its transparency in the visible also makes TiO₂ appealing for pumping with cost-efficient fiber laser sources operating around ytterbium typical wavelength (1.06 μm) as well as the versatile titanium-sapphire ultrashort lasers. Other intrinsic advantages of TiO₂ such as the absence of TPA and its thermal stability are also critical to enable the efficient generation of continuum from sources delivering longer picosecond or nanosecond pulses, which paves the way for future theoretical and experimental investigations.

Acknowledgments: This work is financially supported by PARI PHOTCOM Région Bourgogne, by Carnot Arts Institute (PICASSO 2.0 project), by the Institut Universitaire de France, and by FEDER-FSE Bourgogne

2014/2020. The research work has benefited from the PICASSO experimental platform and the ARCEN-CARNOT nanofabrication facilities of the University of Burgundy.

Author Contributions: KH, CF, JF and BK conceived, designed and performed the experiment of supercontinuum generation; KH, JA, LM and JCW fabricated and took part in the characterization of the optical waveguides. ML, KH and JCW were involved in the numerical modelling and design of the component. All the authors contribute to the analysis of the results and to the writing of the manuscript. KH supervised the project.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. R. R. Alfano, *The Supercontinuum Laser Source : The Ultimate White Light* (n.d.).
2. J. M. Dudley, G. Genty, and S. Coen, "Supercontinuum generation in photonic crystal fiber," *Rev. Mod. Phys.* **78**, 1135–1184 (2006).
3. J. M. Dudley and J. R. (James R. Taylor, *Supercontinuum Generation in Optical Fibers* (Cambridge University Press, 2010).
4. I. Savelli, O. Mouawad, J. Fatome, B. Kibler, F. Désévéday, G. Gadret, J.-C. Jules, P.-Y. Bony, H. Kawashima, W. Gao, T. Kohoutek, T. Suzuki, Y. Ohishi, and F. Smektala, "Mid-infrared 2000-nm bandwidth supercontinuum generation in suspended-core microstructured Sulfide and Tellurite optical fibers," *Opt. Express* **20**, 27083 (2012).
5. U. Møller, Y. Yu, I. Kubat, C. R. Petersen, X. Gai, L. Brilland, D. Méchin, C. Caillaud, J. Troles, B. Luther-Davies, and O. Bang, "Multi-milliwatt mid-infrared supercontinuum generation in a suspended core chalcogenide fiber," *Opt. Express* **23**, 3282 (2015).
6. T. Cheng, K. Nagasaka, T. H. Tuan, X. Xue, M. Matsumoto, H. Tezuka, T. Suzuki, and Y. Ohishi, "Mid-infrared supercontinuum generation spanning 20 to 151 μm in a chalcogenide step-index fiber," *Opt. Lett.* **41**, 2117 (2016).
7. P. Domachuk, N. A. Wolchover, M. Cronin-Golomb, A. Wang, A. K. George, C. M. B. Cordeiro, J. C. Knight, and F. G. Omenetto, "Over 4000 nm bandwidth of mid-IR supercontinuum generation in sub-centimeter segments of highly nonlinear tellurite PCFs," *Opt. Express* **16**, 7161 (2008).
8. I.-W. Hsieh, X. Chen, X. Liu, J. I. Dadap, N. C. Panoiu, C.-Y. Chou, F. Xia, W. M. Green, Y. A. Vlasov, and R. M. Osgood, "Supercontinuum generation in silicon photonic wires," *Opt. Express* **15**, 15242 (2007).
9. B. Kuyken, X. Liu, R. M. Osgood Jr., R. Baets, G. Roelkens, and W. M. J. Green, "Mid-infrared to telecom-band supercontinuum generation in highly nonlinear silicon-on-insulator wire waveguides," *Opt. Express* **19**, 20172 (2011).
10. N. Singh, M. Xin, D. Vermeulen, K. Shtyrkova, N. Li, P. T. Callahan, E. S. Magden, A. Ruocco, N. Fahrenkopf, C. Baiocco, B. P.-P. Kuo, S. Radic, E. Ippen, F. X. Kärtner, and M. R. Watts, "Octave-spanning coherent supercontinuum generation in silicon on insulator from 1.06 μm to beyond 2.4 μm ," *Light Sci. Appl.* **7**, 17131 (2018).
11. M. A. Ettabib, L. Xu, A. Bogris, A. Kapsalis, M. Belal, E. Lorent, P. Labeye, S. Nicoletti, K. Hammani, D. Syvridis, D. P. Shepherd, J. H. V. Price, D. J. Richardson, and P. Petropoulos, "Broadband telecom to mid-infrared supercontinuum generation in a dispersionengineered silicon germanium waveguide," *Opt. Lett.* **40**, (2015).
12. C. Lacava, M. Ettabib, and P. Petropoulos, "Nonlinear Silicon Photonic Signal Processing Devices for Future Optical Networks," *Appl. Sci.* **7**, 103 (2017).
13. K. Hammani, M. A. Ettabib, A. Bogris, A. Kapsalis, D. Syvridis, M. Brun, P. Labeye, S. Nicoletti, and P.

- Petropoulos, "Towards nonlinear conversion from mid- to near-infrared wavelengths using Silicon Germanium waveguides," *Opt. Express* **22**, (2014).
14. X. Liu, M. Pu, B. Zhou, C. J. Krückel, A. Fülöp, V. Torres-Company, and M. Bache, "Octave-spanning supercontinuum generation in a silicon-rich nitride waveguide," *Opt. Express* **41**, 1–4 (2016).
 15. R. Halir, Y. Okawachi, J. S. Levy, M. A. Foster, M. Lipson, and A. L. Gaeta, "Ultrabroadband supercontinuum generation in a CMOS-compatible platform," *Opt. Lett.* **37**, 1685 (2012).
 16. Y. Okawachi, K. Saha, J. S. Levy, Y. H. Wen, M. Lipson, and A. L. Gaeta, "Octave-spanning frequency comb generation in a silicon nitride chip," *Opt. Lett.* **36**, 3398 (2011).
 17. A. R. Johnson, A. S. Mayer, A. Klenner, K. Luke, E. S. Lamb, M. R. E. Lamont, C. Joshi, Y. Okawachi, F. W. Wise, M. Lipson, U. Keller, and A. L. Gaeta, "Octave-spanning coherent supercontinuum generation in a silicon nitride waveguide," *Opt. Lett.* **40**, 5117 (2015).
 18. B. Feigel, D. Castelló-Lurbe, H. Thienpont, and N. Vermeulen, "Opportunities for visible supercontinuum light generation in integrated diamond waveguides," *Opt. Lett.* **42**, 3804 (2017).
 19. M. R. Lamont, B. Luther-Davies, D.-Y. Choi, S. Madden, and B. J. Eggleton, "Supercontinuum generation in dispersion engineered highly nonlinear ($\gamma = 10$ /W/m) As₂S₃ chalcogenide planar waveguide," *Opt. Express* **16**, 14938 (2008).
 20. U. D. Dave, C. Ciret, S.-P. Gorza, S. Combrie, A. De Rossi, F. Raineri, G. Roelkens, and B. Kuyken, "Dispersive-wave-based octave-spanning supercontinuum generation in InGaP membrane waveguides on a silicon substrate," *Opt. Lett.* **40**, 3584 (2015).
 21. M. Pu, L. Ottaviano, E. Semenova, and K. Yvind, "Efficient frequency comb generation in AlGaAs-on-insulator," *Optica* **3**, 823 (2016).
 22. J. Kischkat, S. Peters, B. Gruska, M. Semtsiv, M. Chashnikova, M. Klinkmüller, O. Fedosenko, S. Machulik, a. Aleksandrova, G. Monastyrskyi, Y. Flores, and W. T. Masselink, "Mid-infrared optical properties of thin films of aluminum oxide, titanium dioxide, silicon dioxide, aluminum nitride, and silicon nitride," *Appl. Opt.* **51**, 6789–6798 (2012).
 23. C. C. Evans, K. Shtyrkova, J. D. B. Bradley, O. Reshef, E. Ippen, and E. Mazur, "Spectral broadening in anatase titanium dioxide waveguides at telecommunication and near-visible wavelengths," *Opt. Express* (2013).
 24. X. Guan, H. Hu, L. K. Oxenløwe, and L. H. Frandsen, "Compact titanium dioxide waveguides with high nonlinearity at telecommunication wavelengths," *Opt. Express* **26**, 1055 (2018).
 25. F. Qiu, A. M. Spring, and S. Yokoyama, "Athermal and high-Q hybrid TiO₂-Si₃N₄ ring resonator via an etching-free fabrication technique," *ACS Photonics* **2**, 405–409 (2015).
 26. O. Reshef, K. Shtyrkova, M. G. Moebius, S. Griesse-Nascimento, S. Spector, C. C. Evans, E. Ippen, and E. Mazur, "Polycrystalline anatase titanium dioxide microring resonators with negative thermo-optic coefficient," *J. Opt. Soc. Am. B* **32**, 2288–2293 (2015).
 27. B. Guha, J. Cardenas, and M. Lipson, "Athermal silicon microring resonators with titanium oxide cladding," *Opt. Express* **21**, 26557 (2013).
 28. I. Hadjoub, T. Touam, A. Chelouche, M. Atoui, J. Solard, M. Chakaroun, A. Fischer, A. Boudrioua, and L. H. Peng, "Post-deposition annealing effect on RF-sputtered TiO₂ thin-film properties for photonic applications," *Appl. Phys. A Mater. Sci. Process.* **122**, 1–8 (2016).
 29. R. Quidant, J.-C. Weeber, A. Dereux, D. Peyrade, Y. Chen, and C. Girard, "Near-field observation of evanescent light wave coupling in subwavelength optical waveguides," *Europhys. Lett.* **57**, 191–197 (2002).

30. X. Guan, H. Hu, L. K. Oxenløwe, and L. H. Frandsen, "Compact titanium dioxide waveguides with high nonlinearity at telecommunication wavelengths," *Opt. Express* **26**, 1055 (2018).
31. J. T. Choy, J. D. B. Bradley, P. B. Deotare, I. B. Burgess, C. C. Evans, E. Mazur, and M. Lon, "Integrated TiO₂ resonators for visible photonics," **37**, 539–541 (2012).
32. M. Lamy, C. Finot, J. Fatome, J. Arocas, J.-C. Weeber, and K. Hammani, "Demonstration of high-speed optical transmission at 2 μm in titanium dioxide waveguides," *Appl. Sci.* **7**, (2017).
33. C. C. Evans, C. Liu, and J. Suntivich, "TiO₂ Nanophotonic Sensors for Efficient Integrated Evanescent Raman Spectroscopy," *ACS Photonics* **3**, 1662–1669 (2016).
34. M. G. Moebius, F. Herrera, S. Griesse-Nascimento, O. Reshef, C. C. Evans, G. G. Guerreschi, A. Aspuru-Guzik, and E. Mazur, "Efficient photon triplet generation in integrated nanophotonic waveguides," *Opt. Express* **24**, 9932 (2016).
35. K. Abe, E. Y. Morales Teraoka, T. Kita, and H. Yamada, "Nonlinear optical waveguides with rutile TiO₂," in F. H. Teherani, D. C. Look, and D. J. Rogers, eds. (International Society for Optics and Photonics, 2011), Vol. 7940, p. 79401G.
36. Y.-J. Ma, F. Lu, B.-X. Xiang, J.-L. Zhao, and S.-C. Ruan, "Fabrication of TiO₂ thin films with both anatase and rutile structures together using the ion-implantation method," *Opt. Mater. Express* **8**, 532 (2018).
37. L. Jiang, C. C. Evans, O. Reshef, and E. Mazur, "Optimizing anatase-TiO₂ deposition for low-loss planar waveguides," *Proc. SPIE* **8626**, 86261D (2013).
38. J. D. B. Bradley, C. C. Evans, J. T. Choy, O. Reshef, B. Parag, F. Parsy, K. C. Phillips, M. Lon, and E. Mazur, "Submicrometer-wide amorphous and polycrystalline anatase TiO₂ waveguides for microphotonic devices," *Opt. Express* **20**, 8336–8346 (2012).
39. M. A. Foster, K. D. Moll, and A. L. Gaeta, "Optimal waveguide dimensions for nonlinear interactions," *Opt. Express* **12**, 2880 (2004).
40. M. Lamy, K. Hammani, J. Arocas, C. Finot, and J.-C. Weeber, "Broadband etching-free metal grating couplers embedded in titanium dioxide waveguides," *Opt. Lett.* **42**, (2017).
41. M. Lamy, C. Finot, J. Fatome, J. Arocas, J.-C. Weeber, and K. Hammani, "Demonstration of High-Speed Optical Transmission at 2 μm in Titanium Dioxide Waveguides," *Appl. Sci.* **7**, 631 (2017).
42. G. P. (Govind P. . Agrawal, *Nonlinear Fiber Optics* (Elsevier Science, 2013).
43. C. C. Evans, C. Liu, and J. Suntivich, "Low-loss titanium dioxide waveguides and resonators using a dielectric lift-off fabrication process," *Opt. Express* **23**, 11160–11169 (2015).
44. C. C. Evans, K. Shtyrkova, O. Reshef, M. Moebius, J. D. B. Bradley, S. Griesse-Nascimento, E. Ippen, and E. Mazur, "Multimode phase-matched third-harmonic generation in sub-micrometer-wide anatase TiO₂ waveguides," *Opt. Express* **23**, 7832 (2015).
45. D. V. Skryabin and A. V. Gorbach, "*Colloquium*: Looking at a soliton through the prism of optical supercontinuum," *Rev. Mod. Phys.* **82**, 1287–1299 (2010).
46. A. Mussot, M. Beaugeois, M. Bouazaoui, and T. Sylvestre, "Tailoring CW supercontinuum generation in microstructured fibers with two-zero dispersion wavelengths," *Opt. Express* **15**, 11553 (2007).
47. M. A. G. Porcel, F. Schepers, J. P. Epping, T. Hellwig, M. Hoekman, R. G. Heideman, P. J. M. van der Slot, C. J. Lee, R. Schmidt, R. Bratschitsch, C. Fallnich, and K.-J. Boller, "Two-octave spanning supercontinuum generation in stoichiometric silicon nitride waveguides pumped at telecom wavelengths," *Opt. Express* **25**, 1542 (2017).
48. B. Kibler, R. Fischer, G. Genty, D. N. Neshev, and J. M. Dudley, "Simultaneous fs pulse spectral broadening and third harmonic generation in highly nonlinear fibre: experiments and simulations,"

- Appl. Phys. B **91**, 349–352 (2008).
49. G. Genty, P. Kinsler, B. Kibler, and J. M. Dudley, "Nonlinear envelope equation modeling of sub-cycle dynamics and harmonic generation in nonlinear waveguides," *Opt. Express* **15**, 5382 (2007).
 50. C. Finot, B. Kibler, L. Provost, and S. Wabnitz, "Beneficial impact of wave-breaking for coherent continuum formation in normally dispersive nonlinear fibers," *J. Opt. Soc. Am. B* **25**, 1938 (2008).
 51. A. M. Heidt, "Pulse preserving flat-top supercontinuum generation in all-normal dispersion photonic crystal fibers," *J. Opt. Soc. Am. B* **27**, 550 (2010).

© 2018 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

