



HAL
open science

A Generic Normal Form for ZX-Diagrams and Application to the Rational Angle Completeness

Emmanuel Jeandel, Simon Perdrix, Renaud Vilmart

► **To cite this version:**

Emmanuel Jeandel, Simon Perdrix, Renaud Vilmart. A Generic Normal Form for ZX-Diagrams and Application to the Rational Angle Completeness. LICS 2019 - 34th Annual ACM/IEEE Symposium on Logic in Computer Science, Jun 2019, Vancouver, Canada. 10.1109/LICS.2019.8785754 . hal-01791791

HAL Id: hal-01791791

<https://hal.science/hal-01791791>

Submitted on 14 May 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A Generic Normal Form for ZX-Diagrams and Application to the Rational Angle Completeness

Emmanuel Jeandel, Simon Perdrix, and Renaud Vilmart

emmanuel.jeandel@loria.fr simon.perdrix@loria.fr renaud.vilmart@loria.fr

Université de Lorraine, CNRS, Inria, LORIA, F 54000 Nancy, France

Abstract. Recent completeness results on the ZX-Calculus used a third-party language, namely the ZW-Calculus. As a consequence, these proofs are elegant, but sadly non-constructive. We address this issue in the following. To do so, we first describe a generic normal form for ZX-diagrams in any fragment that contains Clifford+T quantum mechanics. We give sufficient conditions for an axiomatisation to be complete, and an algorithm to reach the normal form. Finally, we apply these results to the Clifford+T fragment and the general ZX-Calculus – for which we already know the completeness –, but also for any fragment of rational angles: we show that the axiomatisation for Clifford+T is also complete for any fragment of dyadic angles, and that a simple new rule (called *cancellation*) is necessary and sufficient otherwise.

1 Introduction

The ZX-Calculus is a powerful graphical calculus devoted to quantum information processing, introduced in 2008 by Coecke and Duncan [8]. The language relies on two fundamental structures in quantum mechanics: the interacting observables and the phase group. Thanks to its flexibility, the language has already been used in several topics such as the foundations of quantum mechanics [3,12], measurement-based quantum computing [15,19,11], quantum error correction [13,14,7,5] ...

Quantum processes are described in the language as diagrams, providing a compact and down-to-earth visualisation. Diagrams can be manipulated through the interactive proof assistant Quantomatic [23,24]. As the quantum circuits, the diagrams are *universal*: whatever the considered quantum operation, there exists a ZX-diagram that describes it. This representation is however not unique: two distinct ZX-diagrams may represent the same evolution. As a consequence the language is equipped with a set of equations. These equations preserve the represented evolution: they are sound. The converse of soundness is *completeness*, and is much harder to get. It is achieved when, whenever two diagrams represent the same evolution, they can be transformed into each other using solely the transformation rules.

The question of the completeness of the ZX-calculus gave rise to a series of results on various fragments of the language. A fragment corresponds to a restriction on the phase group structure: the $\frac{\pi}{n}$ -fragment is made of the diagrams involving angles in $\frac{\pi}{n}\mathbb{Z}$ only. The $\frac{\pi}{2}$ - and the π -fragments – two non universal fragments of the language – have been proved complete [2]; and, more recently, a complete axiomatisation has been provided for the $\frac{\pi}{4}$ -fragment [20], providing the first completeness result for an (approximately) universal fragment since this fragment corresponds to the so-called Clifford+T quantum mechanics. This has been then extended to a complete axiomatisation of the general ZX-calculus [21,25].

All these recent completeness results for (approximately) universal ZX-calculi used different versions of another graphical language called ZW-Calculus [9,17,18]. The language describes the interactions between the only two non-equivalent kinds of entanglement between three qubits, precisely the GHZ and W states [16]. In its last version [18], the ZW-calculus is crucially parametrised by a ring, and as a consequence admits a natural representation of matrices over this ring: the ZW-diagram represent the structure of the matrix where some of the generators are parametrised by the entries of the matrix. This representation of matrices led to a notion of ZW-diagrams in normal forms on which the proof of completeness is built.

The ZX-calculus is instead parametrised by elements of a group, the so-called phase group structure. As a consequence the representation of matrices (over a ring) is more involved. We

introduce in this paper the first normal forms for (approximately) universal fragments of the ZX-calculus. This normal form is generic, depending on the considered fragment of the language. We reprove the two completeness theorems of the ZX-calculus, namely for the $\frac{\pi}{4}$ -fragment and the general calculus, but this time constructively, using the normal form in the ZX-Calculus, and hence without using a third-party language. Moreover, we prove the completeness for any fragment of rational angles: we show that for any fragment of dyadic angles (which allows for instance the exact representation of the Quantum Fourier Transform [27]) is complete; we also show that for any other fragment of rational angles, the following new and simple rule, called *cancellation*, is necessary and sufficient for completeness:

$$\forall \alpha \neq \pi \bmod 2\pi, \quad \text{ZX} \vdash D_1 \otimes \textcircled{\alpha} = D_2 \otimes \textcircled{\alpha} \xRightarrow{\text{(Cancel)}} \text{ZX} \vdash D_1 = D_2$$

Related works. Two completeness results on diagrammatic languages have been established recently [4,10], independently of the present work. In [4], a new language, the ZH-calculus is introduced. The ZH-calculus is intuitively an angle-free ZX-calculus augmented with a generalisation of the H-generator with an arbitrary number of inputs/outputs and parametrised by a complex number. This language allows very nice and simple representation of some useful controlled operations. The authors give a completeness result based on normal forms. Like in the ZW-calculus, the entries of a complex matrix can be directly represented in a ZH-diagram while the representation of the scalars is the cornerstone – and the main technicality – of the normal forms in ZX-diagrams. In [10], the authors show that a simpler axiomatisation of the ZX-calculus is enough to prove the equivalence of 2-qubit Clifford+T circuits. Surprisingly, the proposed axiomatisation is based on the use of diagrams which are not in the $\frac{\pi}{4}$ -fragment whereas all 2-qubit Clifford+T circuits are in this fragment.

Structure of the paper. We first present the ZX-Calculus in Section 2. We then give the general structure of the normal form in Section 3, and sufficient conditions for obtaining the completeness. We apply this for the general ZX-Calculus in Section 4, for rational angles in Section 5 and in the particular case of the dyadic angles in Section 6.

2 The ZX-Calculus

2.1 Diagrams and Standard Interpretation

A ZX-diagram $D : k \rightarrow l$ with k inputs and l outputs is generated by:

$R_Z^{(n,m)}(\alpha) : n \rightarrow m$		$H : 1 \rightarrow 1$		$\mathbb{I} : 1 \rightarrow 1$		$\epsilon : 2 \rightarrow 0$	
$R_X^{(n,m)}(\alpha) : n \rightarrow m$		$e : 0 \rightarrow 0$		$\sigma : 2 \rightarrow 2$		$\eta : 0 \rightarrow 2$	

where $n, m \in \mathbb{N}$, $\alpha \in \mathbb{R}$, and the generator e is the empty diagram.

and the two compositions:

- Spacial Composition: for any $D_1 : a \rightarrow b$ and $D_2 : c \rightarrow d$, $D_1 \otimes D_2 : a + c \rightarrow b + d$ consists in placing D_1 and D_2 side by side, D_2 on the right of D_1 .
- Sequential Composition: for any $D_1 : a \rightarrow b$ and $D_2 : b \rightarrow c$, $D_2 \circ D_1 : a \rightarrow c$ consists in placing D_1 on the top of D_2 , connecting the outputs of D_1 to the inputs of D_2 .

The ZX-Calculus comes with a way of interpreting its diagrams as matrices: The standard interpretation of the ZX-diagrams associates to any diagram $D : n \rightarrow m$ a linear map $\llbracket D \rrbracket : \mathbb{C}^{2^n} \rightarrow \mathbb{C}^{2^m}$

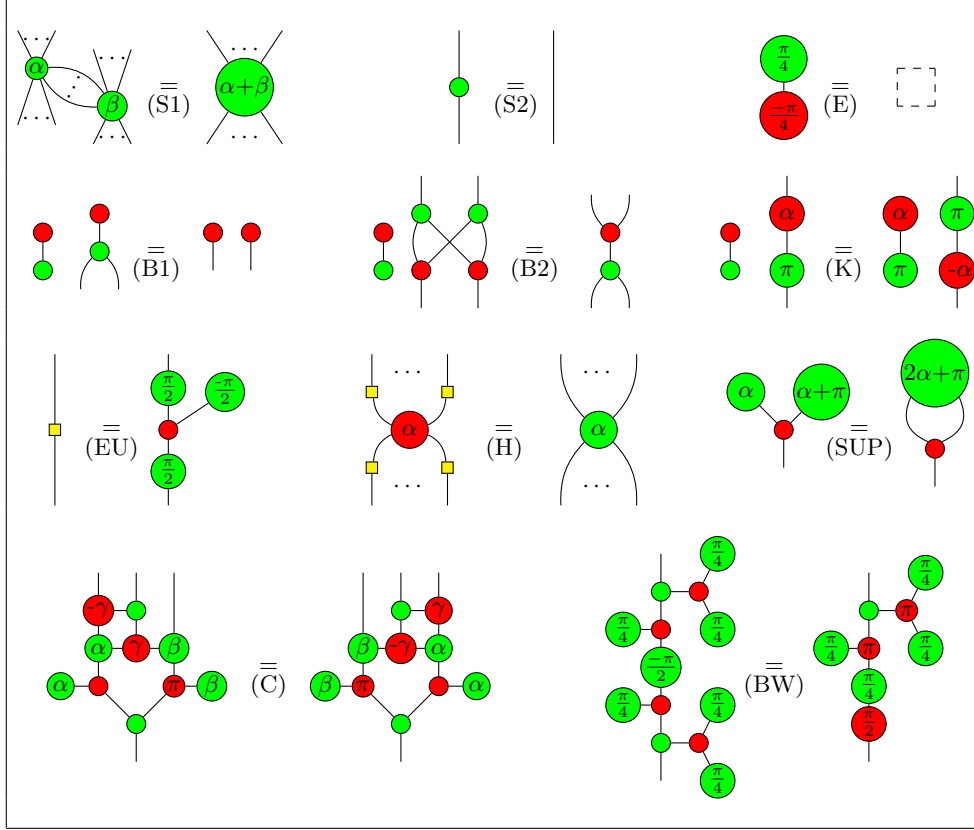


Fig. 1. Set of rules ZX for the ZX-Calculus with scalars. All of these rules also hold when flipped upside-down, or with the colours red and green swapped. The right-hand side of (E) is an empty diagram. (...) denote zero or more wires, while (...) denote one or more wires. ZX_G is obtained when constraining the angles $\alpha, \beta, \gamma \in G$.

When one can transform one diagram D_1 into another D_2 using only the rules of the ZX-Calculus, we write $ZX \vdash D_1 = D_2$, which can be done by applying axioms locally. Indeed, for any diagrams D, D_1 and D_2 , if $ZX \vdash D_1 = D_2$ then:

- $ZX \vdash D_1 \circ D = D_2 \circ D$
- $ZX \vdash D \circ D_1 = D \circ D_2$
- $ZX \vdash D_1 \otimes D = D_2 \otimes D$
- $ZX \vdash D \otimes D_1 = D \otimes D_2$

The local application of axioms is *sound*: it preserves the represented matrix. The converse of soundness is *completeness*. The language is complete if we can transform two diagrams into one another as long as they represent the same matrix. In other words, the language is complete if it captures all the power of quantum mechanics.

We call $\frac{\pi}{q}$ -*fragment* the restriction of the language where angle α can only be a multiple of $\frac{\pi}{q}$ in R_Z and R_X , and we write the resulting set of axioms with subscript $(\cdot)_{\frac{\pi}{q}}$. More generally, if G is an additive subgroup of $\mathbb{R}/2\pi\mathbb{Z}$, then we denote the resulting set of axioms $(\cdot)_G$. By convention, when there is no subscript, we refer to the general ZX-Calculus, e.g. $ZX := ZX_{\mathbb{R}}$.

The set of axioms given in Figure 1 is known to be complete for the $\frac{\pi}{4}$ -fragment, the first approximately universal fragment of the ZX-Calculus [20]. It is also known that one only has to add the axiom (A) (Figure 2) to make the ZX-Calculus complete in general [21]. When considering a set of rules augmented with an additional axiom, we use the superscript notation. For instance, the complete set of rules for the general ZX-Calculus is denoted ZX^A .

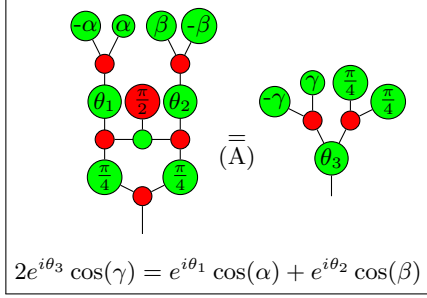


Fig. 2. Additional axiom for the completeness of the ZX-Calculus in general.

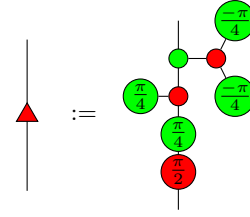


Fig. 3. Triangle node


Introduced in [20] as a syntactic sugar and used as a generator in [25,26,28] is the so-called *triangle*: \blacktriangle . It stands for a ZX-diagram of the $\frac{\pi}{4}$ -fragment (Figure 3), and is used in numerous lemmas as it represents a non-trivial quantum process with integer coefficients: $|0\rangle\langle 0| + |1\rangle\langle 1| + |0\rangle\langle 1|$.

3 Controlled States and Normal Form


3.1 The Transistor and its Algebra


We first define another syntactic sugar, which will be used in the normal form:

Definition 2. We define the transistor as the three legged diagram:

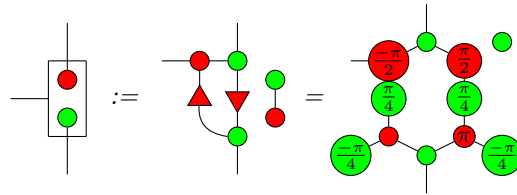


Thanks to Lemmas 45 and 46, one can check that:

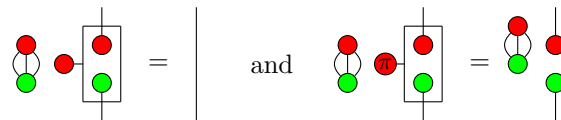


It can be seen as a control of a switch: if $|0\rangle$ is plugged on the left, the right wire is intact, but if $|1\rangle$ is plugged on the left, the right wire is “opened” by the operation. A classical transistor  has a similar mechanics: if some electrical current is applied on the control side, it allows for current to pass through the vertical wire, otherwise it acts as an open switch. If we want to assimilate $|0\rangle$ to “no current” and $|1\rangle$ to “current”, we actually have to apply NOT on the control wire.

Proposition 1. $\left(\begin{array}{c} | \\ \text{red node} \\ \text{green node} \\ | \end{array} \right), \left(\begin{array}{c} \text{red node} \\ | \\ \text{green node} \\ | \end{array} \right)$ forms a commutative monoid:

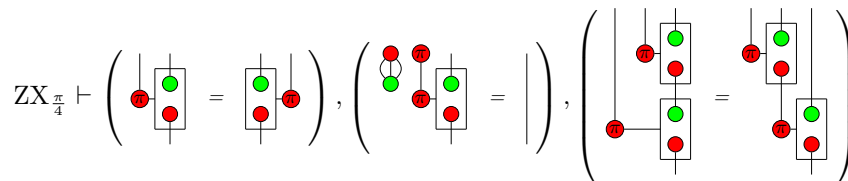

Whereas it is not obvious in the ZX-calculus to add two given diagrams, a fundamental property of controlled states is that they can be freely added and multiplied (according to the entrywise product a.k.a. the Hadamard product or Schur product) as follows:

Lemma 2 (Sum and Product). *For any controlled states $D_0, D_1 : 1 \rightarrow n$,*

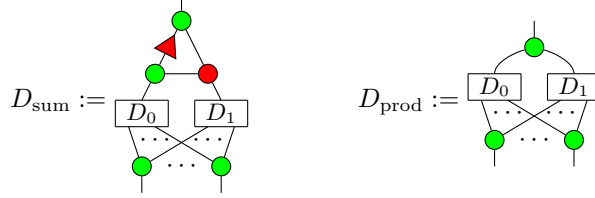

are controlled states such that $\llbracket D_{\text{sum}} \rrbracket |1\rangle = \llbracket D_0 \rrbracket |1\rangle + \llbracket D_1 \rrbracket |1\rangle$ and $\llbracket D_{\text{prod}} \rrbracket |1\rangle = (\llbracket D_0 \rrbracket |1\rangle) \bullet (\llbracket D_1 \rrbracket |1\rangle)$, where \bullet is the entrywise product.

3.3 Normal forms

Among the family of controlled state diagrams, we define those which are in normal form. Our definition of normal form is *generic* in the sense that it is defined with respect to a given set of controlled scalars. Intuitively the choice of these controlled scalars depends on the considered fragment of the language, as detailed in the next sections.

Definition 6 (Controlled Normal Form). *Given a set S of controlled scalars, the diagrams in normal controlled form with respect to S (S -CNF) are inductively defined as follows:*

- $\forall D \in S$, D is in S -CNF;
- $\forall D_0, D_1$ in S -CNF, is in S -CNF.

A diagram D in S -CNF is depicted .

One can double check that diagrams in controlled normal form are actually controlled states: if $D : 1 \rightarrow n$ is in S -CNF, $\llbracket D \rrbracket |0\rangle = \sum_{x \in \{0,1\}^n} |x\rangle$ (Lemma 85 in appendix).

We are now ready to give a definition of diagrams in normal form, based on the diagrams in controlled normal forms:

Definition 7 (Normal Form). *Given a set S of controlled scalars, for any $n, m \in \mathbb{N}$, and any*

$D : 1 \rightarrow n + m$ in S -CNF, is in normal form with respect to S (S -NF).


3.4 Universality

While the main application of the notion of normal form is to prove completeness results (in the next sections), our first application is to prove the universality of ZX_G for any $G \in \mathcal{G}$. First notice that the universality of ZX_G can be reduced to the existence of an appropriate set of controlled scalars:

Lemma 3 (Sufficient condition for universality). *Given $G \in \mathcal{G}$, if $\exists S \subseteq ZX_G$ a set of controlled scalars such that the map $\eta : S \rightarrow \mathcal{R}_G = D \mapsto \llbracket D \rrbracket |1\rangle$ is surjective, then ZX_G is universal.*

Theorem 1. For any $G \in \mathcal{G}$, ZX_G is universal:


$$\forall n, m \in \mathbb{N}, \forall M \in \mathcal{R}_G^{2^n \times 2^m}, \exists D \in ZX_G, \llbracket D \rrbracket = M$$

Proof. Let $S \subseteq ZX_G$ be the set of all controlled scalars. According to Lemma 3 it suffices to show that $\eta : S \rightarrow \mathcal{R}_G$ is onto. Let $x \in \mathcal{R}_G$, there exist $p \in \mathbb{N}$, $\alpha_0, \dots, \alpha_k \in G$, and $P_0 \dots P_k \in \mathbb{Z}[X]$ such that $x = \frac{1}{2^p} \sum_{j=0}^k P_j(e^{i\alpha_j})$. Since $\Gamma_{\alpha_j}(P_j)$ encodes $P_j(e^{i\alpha_j})$,  encodes $\frac{1}{2}$ and they can be added and multiplied according to Lemma 2, there exists a diagram $D \in S$ such that $\llbracket D \rrbracket |1\rangle = x$. \square

3.5 A sufficient condition for completeness

The *controlled states* give a generic internal structure for a diagram in normal form, by separating the coefficients of the process – related to the considered fragment – from the way they are combined – which is done in the $\frac{\pi}{4}$ -fragment. Hence, all the sound operations on the *structure* of the normal forms should be doable using the set of rules ZX by [20]. The completeness for broader fragments is then reduced to the capacity to apply elementary operations on coefficients:

Theorem 2 (Sufficient condition for completeness). Given $G \in \mathcal{G}$, ZX_G is complete if $\exists S \subseteq ZX_G$ a set of controlled scalars such that $\eta : S \rightarrow \mathcal{R}_G = D \mapsto \llbracket D \rrbracket |1\rangle$ is bijective, and the following equations hold: $\forall \alpha \in G, \forall x, y \in \mathcal{R}_G$,

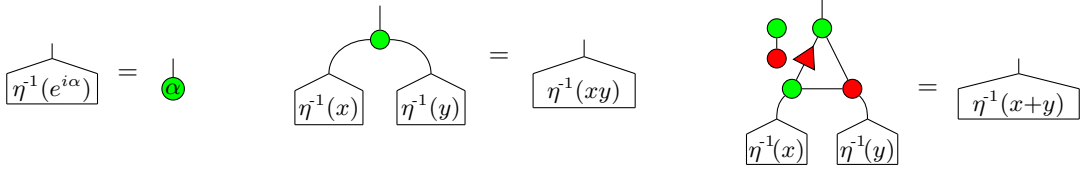


Before proving Theorem 2, notice that all the above equations are involving diagrams with a single input and no output, thus for any fragment the completeness reduces to the completeness for diagrams with 1 input and no output, or equivalently to diagrams representing 1-qubit state preparations which have no input and a single output:

Corollary 1. For any $G \in \mathcal{G}$, ZX_G is complete if and only if it is complete for 1-qubit state preparations, i.e. for all diagrams with no input and a single output.

Notice that thanks to the hypothesis of Theorem 2, one can associate to any state $|\varphi\rangle \in \mathcal{R}_G^{2^n}$ a diagram $\Lambda(|\varphi\rangle)$ in S -CNF, and to any evolution $M \in \mathcal{R}_G^{2^n \times 2^m}$, a diagram $\lambda(M)$ in S -NF:

Definition 8. With the hypothesis of Theorem 2, let $\Lambda : \bigcup_{n \in \mathbb{N}} \mathcal{R}_G^{2^n} \rightarrow S\text{-CNF}$ and $\lambda : \bigcup_{n, m \in \mathbb{N}} \mathcal{R}_G^{2^n \times 2^m} \rightarrow S\text{-NF}$ be defined as follows:

$$- \Lambda(x) := \eta^{-1}(x) \text{ if } x \in \mathcal{R}_G,$$

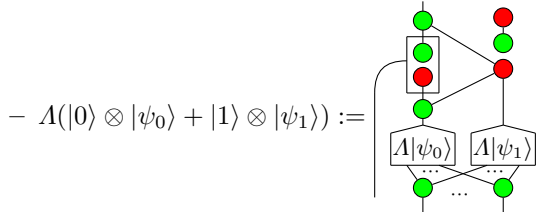

$$- \lambda \left(\sum_{\substack{x \in \{0,1\}^n \\ y \in \{0,1\}^m}} \alpha_{x,y} |y\rangle \langle x| \right) :=$$

$$, \text{ where } D = \Lambda \left(\sum_{\substack{x \in \{0,1\}^n \\ y \in \{0,1\}^m}} \alpha_{x,y} |x\rangle |y\rangle \right)$$

The proof of Theorem 2 consists in showing that any diagram can be transformed into a diagram in S -normal form. The proof is inductive: every generator of the language can be set in S -normal form, moreover both the parallel and sequential compositions of S -normal forms can be transformed into diagrams in S -normal form.

Lemma 4. *With the hypothesis of Theorem 2, for any D_0, D_1 in $S\text{-NF}$, $D_0 \otimes D_1$ can be transformed into a diagram in $S\text{-NF}$.*

Lemma 5. *With the hypothesis of Theorem 2, for any $D_0 : n \rightarrow m$ and $D_1 : m \rightarrow k$ in $S\text{-NF}$, $D_1 \circ D_0 : n \rightarrow k$ can be transformed into a diagram in $S\text{-NF}$.*

Lemma 6. *With the hypothesis of Theorem 2, each generator can be transformed into a diagram in $S\text{-NF}$.*

The Lemmas are proven in appendix.

In the next sections, we will consider several fragments of the ZX-calculus for which we will exhibit a diagrammatic representation of controlled states. For some fragments, the above equations are provable, implying the completeness of the ZX-calculus for these fragments. For other fragments, we will need the help of some additional axioms to prove the above equations, implying the completeness of a ZX-calculus augmented with these additional axioms.

4 Normal Forms with Arbitrary Angles

In the case of the general ZX-Calculus, we know [21] that the language is complete with the set of rules in Figure 1 enriched with the axiom (A). Hence, we choose our set of rules to be precisely this set, denoted ZX^A .

Definition 9. *Let $A_{\mathbb{R}} : \mathbb{C} \rightarrow \text{ZX}[1, 0]$ be the map defined as:*

$$\begin{aligned}
 - A_{\mathbb{R}}(0) &= \text{diagram with two red nodes and one green node} \\
 - \forall \rho > 0, \forall \theta \in [0, 2\pi), A_{\mathbb{R}}(\rho e^{i\theta}) &:= \text{diagram with nodes labeled } \theta, \gamma, \beta, \beta, \gamma \text{ and } (\text{diagram})^{\otimes n}
 \end{aligned}
 \left(\begin{array}{l} n := \max(0, \lceil \log_2(\rho) \rceil) \\ \beta := \arccos(\frac{\rho}{2^n}) \\ \gamma := \arccos(\frac{1}{2^n}) \end{array} \right)$$

and $S_{\mathbb{R}} := \{A_{\mathbb{R}}(x) \mid x \in \mathbb{C}\}$.

Lemma 7. *For any $x \in \mathbb{C}$, $A_{\mathbb{R}}(x)$ is a controlled scalar, and $\llbracket A_{\mathbb{R}}(x) \rrbracket |1\rangle = x$.*

Lemma 8. *The map $\eta_{\mathbb{R}} : S_{\mathbb{R}} \rightarrow \mathcal{R}_G = D \rightarrow \llbracket D \rrbracket |1\rangle$ is bijective, and $A_{\mathbb{R}} = \eta_{\mathbb{R}}^{-1}$. Moreover:*

$$\text{ZX}^A \vdash \left(\text{diagram with } A_{\mathbb{R}}(e^{i\alpha}) \text{ and a green node} = \text{diagram with a green node} \right), \left(\text{diagram with } A_{\mathbb{R}}(x) \text{ and } A_{\mathbb{R}}(y) \text{ under a green node} = \text{diagram with } A_{\mathbb{R}}(xy) \right), \left(\text{diagram with } A_{\mathbb{R}}(x) \text{ and } A_{\mathbb{R}}(y) \text{ under a red node} = \text{diagram with } A_{\mathbb{R}}(x+y) \right)$$

Theorem 3. *The general ZX-Calculus with set of rules ZX^A is complete, and any ZX-diagram can be put into a normal form with respect to $S_{\mathbb{R}}$.*

5 Completeness and Normal Forms with Rational Angles

In this section, we consider the case where the angles are rational multiples of π , i.e. fragments $G \in \mathcal{G}_{\mathbb{Q}} := \{G \in \mathcal{G} \mid G \subseteq \mathbb{Q}\pi\}$. Among the rational angles, dyadic angles, i.e. $\mathcal{G}_{\mathbb{D}} := \{G \in \mathcal{G} \mid G \subseteq \mathbb{D}\pi\}$, where $\mathbb{D} := \{\frac{p}{2^q} \mid p, q \in \mathbb{N}\}$ enjoys some particular properties, and are considered in details in the next section.

This representation is not ideal. First of all, we can factor the powers of $\frac{1}{2}$ and write P as $\frac{1}{2^p}Q$ where $Q \in \mathbb{Z}[X]$. The power p can be uniquely chosen if we ensure that Q is not a multiple of 2 if $p > 0$ i.e. $\forall Q' \in \mathbb{Z}[X], p > 0 \implies Q \neq 2Q'$.

This expression is still not unique, because the evaluation of two different polynomials in $e^{i\frac{\pi}{4n}}$ can yield the same value (e.g. $(e^{i\frac{\pi}{4n}})^{8n} = 1$). To palliate this problem, we need to work in $\mathbb{Z}[X]/\phi_{8n}(X)$ where ϕ_{8n} is the $8n^{\text{th}}$ cyclotomic polynomial. Indeed, ϕ_{8n} is the unique irreducible polynomial with $e^{\frac{2i\pi}{8n}}$ as root. Then, applying the Euclidean division of Q by ϕ_{8n} :

$$Q = Q' \phi_{8n} + R \quad (\text{DIV})$$

where R and Q' are uniquely chosen so that $\deg(R) < \deg(\phi_{8n}) = \varphi(8n)$. Then, $Q(e^{i\frac{\pi}{4n}}) = R(e^{i\frac{\pi}{4n}})$.

Definition 11. Let $\Lambda_{\frac{\pi}{4n}} : \mathbb{N} \times \mathbb{Z}[X] \rightarrow \text{ZX}[1 \rightarrow 0]$ be the map such that

$$\Lambda_{\frac{\pi}{4n}}(p, P) := \begin{array}{c} \left\{ \begin{array}{c} \text{Diagram with } p \text{ green circles and } P \text{ red circles} \\ \vdots \\ \text{Diagram with } p \text{ green circles and } P \text{ red circles} \end{array} \right\} \\ \Gamma_{\frac{\pi}{4n}} P \end{array}$$

$$\text{We then define } S_{\frac{\pi}{4n}} := \left\{ \Lambda_{\frac{\pi}{4n}}(p, P) \mid \begin{array}{l} P \in \mathbb{Z}[X], p \in \mathbb{N}, \\ \deg(P) < \varphi(8n), \\ \forall Q \in \mathbb{Z}[X], p > 0 \implies P \neq 2Q \end{array} \right\}$$

Remark 2. Notice that if $P = 0$, only $\Lambda_{\frac{\pi}{4n}}(0, 0)$ is part of $S_{\frac{\pi}{4n}}$. Indeed, if $P = 0$, then $P = 2 \times 0 = 2P$, so the last constraint imposes that $p = 0$.

Lemma 11. $[[\Lambda_{\frac{\pi}{4n}}(p, P)]] |1\rangle = \frac{1}{2^p} P(e^{i\frac{\pi}{4n}})$

Since every element of \mathcal{R}_G is uniquely defined as $\frac{1}{2^p} P(e^{i\frac{\pi}{4n}})$ where $\deg(P) < \varphi(8n)$, and $\forall Q \in \mathbb{Z}[X], p > 0 \implies P \neq 2Q$:

Lemma 12. The map $\eta_{\frac{\pi}{4n}} : S_{\frac{\pi}{4n}} \rightarrow \mathcal{R}_G = D \rightarrow [[D]] |1\rangle$ is bijective.

We now need to meet the conditions of Theorem 2. First we notice that we can operate the sum and the product on controlled polynomials:

Lemma 13. For any polynomials P and Q in $\mathbb{Z}[X]$:

$$\text{ZX}_{\frac{\pi}{4n}} \vdash \left(\begin{array}{c} \text{Diagram with } P \text{ and } Q \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} P \quad \Gamma_{\frac{\pi}{4n}} Q \end{array} \right) = \left(\begin{array}{c} \text{Diagram with } P+Q \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} P+Q \end{array} \right), \left(\begin{array}{c} \text{Diagram with } P \text{ and } Q \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} P \quad \Gamma_{\frac{\pi}{4n}} Q \end{array} \right) = \left(\begin{array}{c} \text{Diagram with } PQ \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} PQ \end{array} \right)$$

Two problems arise when trying to do the same with diagrams of $S_{\frac{\pi}{4n}}$. First of all, the sum of two diagrams in normal form can have a parity issue. For instance $\frac{1}{2}(2 + X) + \frac{1}{2}(X + 2X^2) = \frac{1}{2}(2 + 2X + 2X^2)$ which shall be reduced to $1 + X + X^2$. This is dealt with thanks to the following lemma:

Lemma 14.

$$\text{ZX}_{\frac{\pi}{4n}} \vdash \begin{array}{c} \text{Diagram with } 2P \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} 2P \end{array} = \begin{array}{c} \text{Diagram with } P \text{ circles} \\ \Gamma_{\frac{\pi}{4n}} P \end{array}$$

Secondly, the product of two polynomials may well end up with a degree larger than $\varphi(8n)$. However, since we can operate the sum and product of controlled polynomials thanks to Lemma

13, we can derive the controlled version of the Euclidean division (DIV). Combined with Lemma 10, we get, assuming $P = Q\phi_{8n} + R$:

$$\text{ZX}_{\frac{\pi}{4n}}^{\text{cancel}} \vdash \Gamma_{\frac{\pi}{4n}} P \stackrel{\text{13 (DIV)}}{=} \begin{array}{c} \text{Diagram with nodes and arrows} \\ \Gamma_{\frac{\pi}{4n}} Q \quad \Gamma_{\frac{\pi}{4n}} \phi_{8n} \quad \Gamma_{\frac{\pi}{4n}} R \end{array} \stackrel{\text{10}}{=} \begin{array}{c} \text{Diagram with nodes and arrows} \\ \Gamma_{\frac{\pi}{4n}} Q \quad \Gamma_{\frac{\pi}{4n}} R \end{array} = \dots = \Gamma_{\frac{\pi}{4n}} R$$

All in all, any controlled scalar in the form $\Lambda_{\frac{\pi}{4n}} P$ can be reduced to a diagram in $S_{\frac{\pi}{4n}}$.

Lemma 15.

$$\text{ZX}_{\frac{\pi}{4n}}^{\text{cancel}} \vdash \left(\text{Diagram with } \eta_{\frac{\pi}{4n}}^{-1}(e^{i\alpha}) \right) = \left(\text{Diagram with } \eta_{\frac{\pi}{4n}}^{-1}(x) \text{ and } \eta_{\frac{\pi}{4n}}^{-1}(y) \right) = \left(\text{Diagram with } \eta_{\frac{\pi}{4n}}^{-1}(xy) \right), \left(\text{Diagram with } \eta_{\frac{\pi}{4n}}^{-1}(x+y) \right)$$

Theorem 4. The $\frac{\pi}{4n}$ -fragment of the ZX-Calculus with set of rules $\text{ZX}_{\frac{\pi}{4n}}^{\text{cancel}}$ is complete, and any ZX-diagram can be put into a normal form with respect to $S_{\frac{\pi}{4n}}$.

Corollary 2. For any $G \in \mathcal{G}_{\mathbb{Q}}$ (finite or not), the fragment G with set of rules $\text{ZX}_G^{\text{cancel}}$ is complete, and any ZX-diagram can be put into a normal form with respect to $S_G := \bigcup_{\frac{\pi}{4n} \in G} S_{\frac{\pi}{4n}}$.

6 Normal Forms with dyadic angles

In this section we focus on a particular case of dyadic angles, i.e. a subgroup of $\mathbb{D}\pi$ which contains $\frac{\pi}{4}$ (i.e. $G \in \mathcal{G}_{\mathbb{D}}$). In the previous section, we introduced the cancellation rule which makes the ZX-calculus complete for rational angles.

Notice that, given a fragment $G \in \mathcal{G}$, the cancellation rule can be derived from the other rules if for every $\alpha \in G$, $\alpha \neq 0 \pmod{\pi}$, there exists an inverse of $\textcircled{\alpha}$, i.e. a diagram $D \in \text{ZX}_G[0 \rightarrow 0]$ s.t. $\llbracket D \otimes \textcircled{\alpha} \rrbracket = 1$, and moreover this equation is provable: $\text{ZX}_G \vdash D \otimes \textcircled{\alpha} = \llbracket \cdot \rrbracket$. This is the case in any fragment of dyadic angles:

Lemma 16. For any $n \geq 1$, and any $k \in \{-2^n + 1, \dots, 2^{n+1} - 1\}$, $\textcircled{\frac{k\pi}{2^n}}$ has an inverse. There exist $0 \leq m < n$ and $p \in \mathbb{Z}$ such that:

$$\textcircled{\frac{k\pi}{2^n}} \otimes \left(\textcircled{\frac{2p-1}{2^{n-m}}\pi} + \pi \right) \otimes \left(\textcircled{\frac{(2p-1)\pi}{2^{n-m-1}}} \otimes \textcircled{\frac{(2p-1)\pi}{2^{n-m-2}}} \otimes \dots \otimes \textcircled{\frac{2p-1}{2}\pi} \right) = \llbracket \cdot \rrbracket$$

Theorem 5. For $n \geq 2$, the $\frac{\pi}{2^n}$ -fragment of the ZX-Calculus with set of rules $\text{ZX}_{\frac{\pi}{2^n}}$ is complete, and any ZX-diagram can be put into a normal form with respect to $S_{\frac{\pi}{2^n}} = S_{\frac{\pi}{4 \times 2^{n-2}}}$.

Corollary 3. For any $G \in \mathcal{G}_{\mathbb{D}}$ (finite or not), the fragment G with set of rules ZX_G is complete, and any ZX-diagram can be put into a normal form with respect to $S_G := \bigcup_{\frac{\pi}{2^n} \in G} S_{\frac{\pi}{2^n}}$.

9. Bob Coecke & Aleks Kissinger (2010): *The Compositional Structure of Multipartite Quantum Entanglement*, pp. 297–308. Springer Berlin Heidelberg, Berlin, Heidelberg, doi:10.1007/978-3-642-14162-1_25. Available at http://dx.doi.org/10.1007/978-3-642-14162-1_25.
10. Bob Coecke & Quanlong Wang (2018): *ZX-Rules for 2-qubit Clifford+T Quantum Circuits*.
11. Ross Duncan (2013): *A graphical approach to measurement-based quantum computing*. doi:10.1093/acprof:oso/9780199646296.003.0003.
12. Ross Duncan & Kevin Dunne (2016): *Interacting Frobenius Algebras Are Hopf*. In: *Proceedings of the 31st Annual ACM/IEEE Symposium on Logic in Computer Science, LICS 2016*, ACM, New York, NY, USA, pp. 535–544, doi:10.1145/2933575.2934550. Available at <http://doi.acm.org/10.1145/2933575.2934550>.
13. Ross Duncan & Liam Garvie (2017): *Verifying the Smallest Interesting Colour Code with Quantomatic*. Available at <https://arxiv.org/abs/1706.02717>.
14. Ross Duncan & Maxime Lucas (2014): *Verifying the Steane code with Quantomatic*. *Electronic Proceedings in Theoretical Computer Science* 171, pp. 33–49, doi:10.4204/EPTCS.171.4.
15. Ross Duncan & Simon Perdrix (2010): *Rewriting measurement-based quantum computations with generalised flow*. *Lecture Notes in Computer Science* 6199, pp. 285–296, doi:10.1007/978-3-642-14162-1_24. Available at <http://personal.strath.ac.uk/ross.duncan/papers/gflow.pdf>.
16. W. Dür, G. Vidal & J. I. Cirac (2000): *Three qubits can be entangled in two inequivalent ways*. *Phys. Rev. A* 62, p. 062314, doi:10.1103/PhysRevA.62.062314.
17. Amar Hadzihasanovic (2015): *A Diagrammatic Axiomatisation for Qubit Entanglement*. In: *2015 30th Annual ACM/IEEE Symposium on Logic in Computer Science*, pp. 573–584, doi:10.1109/LICS.2015.59.
18. Amar Hadzihasanovic (2017): *The algebra of entanglement and the geometry of composition*. Ph.D. thesis, University of Oxford. Available at <https://arxiv.org/abs/1709.08086>.
19. Clare Horsman (2011): *Quantum pictorialism for topological cluster-state computing*. *New Journal of Physics* 13(9), p. 095011. Available at <http://stacks.iop.org/1367-2630/13/i=9/a=095011>.
20. Emmanuel Jeandel, Simon Perdrix & Renaud Vilmart (2017): *A Complete Axiomatisation of the ZX-Calculus for Clifford+T Quantum Mechanics*. Available at <https://hal.archives-ouvertes.fr/hal-01529623>. ArXiv:1705.11151.
21. Emmanuel Jeandel, Simon Perdrix & Renaud Vilmart (2018): *Diagrammatic Reasoning beyond Clifford+T Quantum Mechanics*. Available at <https://arxiv.org/abs/1801.10142>.
22. Emmanuel Jeandel, Simon Perdrix, Renaud Vilmart & Quanlong Wang (2017): *ZX-Calculus: Cyclo-tomic Supplementarity and Incompleteness for Clifford+T Quantum Mechanics*. In Kim G. Larsen, Hans L. Bodlaender & Jean-Francois Raskin, editors: *42nd International Symposium on Mathematical Foundations of Computer Science (MFCS 2017), Leibniz International Proceedings in Informatics (LIPIcs)* 83, Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, pp. 11:1–11:13, doi:10.4230/LIPIcs.MFCS.2017.11. Available at <http://drops.dagstuhl.de/opus/volltexte/2017/8117>.
23. A. Kissinger, L. Dixon, R. Duncan, B. Frot, A. Merry, D. Quick, M. Soloviev & V. Zamdzhiev (2011): *Quantomatic*. Available at <https://sites.google.com/site/quantomatic/>.
24. Aleks Kissinger & Vladimir Zamdzhiev (2015): *Quantomatic: A Proof Assistant for Diagrammatic Reasoning*. In Amy P. Felty & Aart Middeldorp, editors: *Automated Deduction - CADE-25*, Springer International Publishing, Cham, pp. 326–336, doi:10.1007/978-3-319-21401-6_22.
25. Kang Feng Ng & Quanlong Wang (2017): *A universal completion of the ZX-calculus*. Available at <https://arxiv.org/abs/1706.09877>.
26. Kang Feng Ng & Quanlong Wang (2018): *Completeness of the ZX-calculus for Pure Qubit Clifford+T Quantum Mechanics*. Available at <https://arxiv.org/abs/1801.07993>.
27. Michael A. Nielsen & Isaac L. Chuang (2010): *Quantum Computation and Quantum Information: 10th Anniversary Edition*. Cambridge University Press, doi:10.1017/CBO9780511976667.
28. Renaud Vilmart (2018): *A ZX-Calculus with Triangles for Toffoli-Hadamard, Clifford+T, and Beyond*. Available at <https://arxiv.org/abs/1804.03084>.

A Appendix

A.1 Dirac Notation and the Choi-Jamiołkowski Isomorphism

The state of a qubit is a vector in the 2 dimensional Hilbert space \mathbb{C}^{2^n} . $|0\rangle := \begin{pmatrix} 1 \\ 0 \end{pmatrix}$ and $|1\rangle := \begin{pmatrix} 0 \\ 1 \end{pmatrix}$ form the so-called standard basis of \mathbb{C}^{2^n} . We use the notation $|+\rangle := \frac{|0\rangle+|1\rangle}{\sqrt{2}}$ and $|-\rangle := \frac{|0\rangle-|1\rangle}{\sqrt{2}}$.

The two states $|+\rangle, |-\rangle$ also form a basis, the so-called diagonal basis. Any qubit state $|\phi\rangle \in \mathbb{C}^2$ can be decomposed in the standard basis:

$$|\phi\rangle = \alpha|0\rangle + \beta|1\rangle$$

A valid quantum state is normalised, i.e. $|\alpha|^2 + |\beta|^2 = 1$. Notice that in the present paper we consider normalised but also unnormalised quantum states.

More generally, the state of a register of n qubits is a vector $|\phi\rangle \in \mathbb{C}^{2^n}$. For any $x = x_0 \dots x_{n-1} \in \{0, 1\}^n$, let $|x\rangle := |x_0\rangle \otimes \dots \otimes |x_{n-1}\rangle$ where $\cdot \otimes \cdot$ is the Kronecker product, in other words $|x\rangle$ is a vector in which all entries are 0 except the entry number $\sum_{i=0}^{n-1} x_i 2^{n-1-i}$, which is 1. Similarly, $|+^n\rangle := |+\rangle \otimes \dots \otimes |+\rangle$ and $| -^n\rangle = |-\rangle \otimes \dots \otimes |-\rangle$. The set of states $\{|x\rangle \mid x \in \{0, 1\}^n\}$ forms a basis, thus any n -qubit state $|\phi\rangle \in \mathbb{C}^{2^n}$ can be described as

$$|\phi\rangle = \sum_{x \in \{0, 1\}^n} \alpha_x |x\rangle$$

Notice that a zero-qubit state (when $n = 0$) is a scalar i.e. an element of \mathbb{C} . We define $|\epsilon\rangle = 1$, where ϵ denotes the empty word.

The adjoint of a state $|\phi\rangle = \sum_{x \in \{0, 1\}^n} \alpha_x |x\rangle \in \mathbb{C}^{2^n}$ is $\langle\phi| := (|\phi\rangle)^\dagger = \sum_{x \in \{0, 1\}^n} \alpha_x^* \langle x| \in \mathbb{C}^{2^n} \rightarrow 1$, where $\forall x \in \{0, 1\}^n$ $\langle x|$ is the unique linear map such that $\forall y \in \{0, 1\}^n, \langle x|y\rangle = \delta_{x,y}$.

Given a linear map $M : \mathbb{C}^{2^n} \rightarrow \mathbb{C}^{2^m}$, for any $x \in \{0, 1\}^n$, M maps $|x\rangle$ to $M|x\rangle = \sum_{y \in \{0, 1\}^m} \alpha_{x,y} |y\rangle$. Using the Dirac notation, M can be represented as follows:


$$M = \sum_{x \in \{0, 1\}^n, y \in \{0, 1\}^m} \alpha_{x,y} |y\rangle \langle x|$$

The Choi-Jamiołkowski isomorphism, or state/map duality is the following isomorphism between linear maps and quantum states:


$$\sum_{x \in \{0, 1\}^n, y \in \{0, 1\}^m} \alpha_{x,y} |y\rangle \langle x| \quad \mapsto \quad \sum_{x \in \{0, 1\}^n, y \in \{0, 1\}^m} \alpha_{x,y} |xy\rangle$$

A.2 Already Proven Lemmas


Lemma 17.




Lemma 18.




Lemma 19.




Lemma 20.




Lemma 21.




Lemma 22.




Lemma 23.

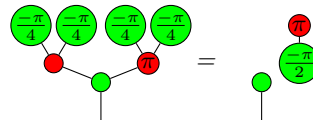


Lemma 24.




Lemma 25.




Lemma 26.




Lemma 27.




Lemma 28.




Lemma 29.




Lemma 30.




Lemma 31.




Lemma 32.




Lemma 33.




Lemma 34.




Lemma 35.




Lemma 36.




Lemma 37.




Lemma 38.




Lemma 39.




Lemma 40.




and



Lemma 41.




Lemma 42.

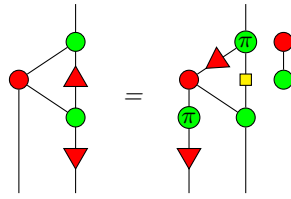


A.3 New Lemmas with ZX


Lemma 43.




Lemma 50.

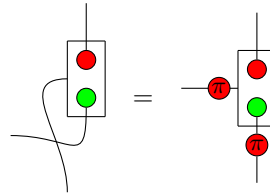


Lemma 44.




Lemma 51.




Lemma 45.




Lemma 52.

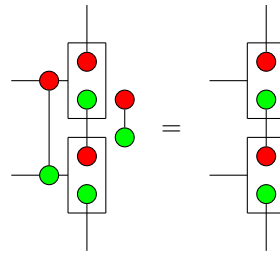


Lemma 46.




Lemma 53.




Lemma 47.

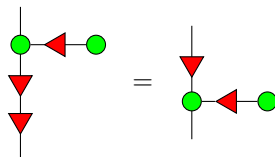


Lemma 54.




Lemma 48.

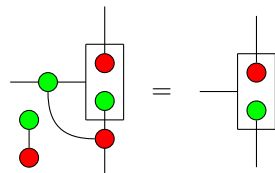


and




Lemma 49.




Lemma 55.

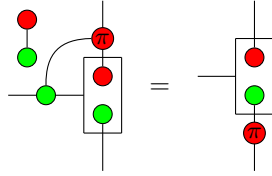


Lemma 59.




Lemma 56.




Lemma 60.




Lemma 57.

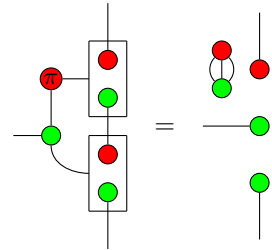


Lemma 61.

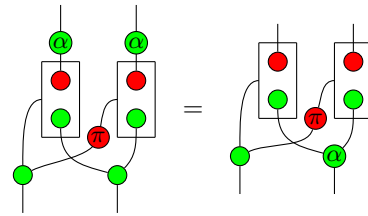


Lemma 58.




Lemma 62.




Lemma 63.

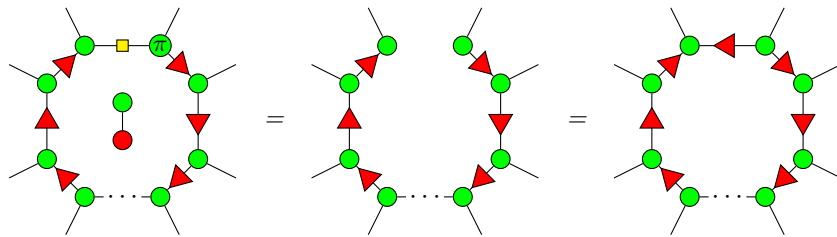


and

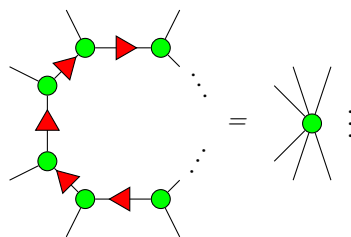


Lemma 74.

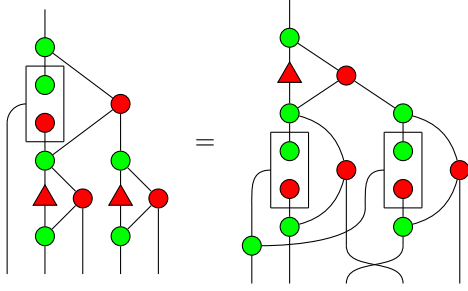


Lemma 75.



Lemma 76.

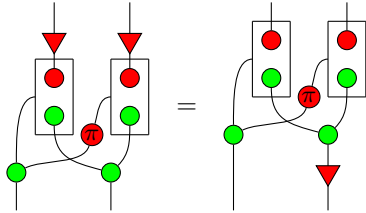


Lemma 77.




A.4 Lemmas with ZX^A

Lemma 81.




with $2e^{i\theta_3} \cos(\gamma) = e^{i\theta_1} \cos(\alpha) + e^{i\theta_2} \cos(\beta)$.


Lemma 82.




Lemma 78. *The following result is not only true for any $\Gamma_\alpha P$ but for any finite sum of them. Hence we extend the previously defined Γ as:*




where $\alpha = \alpha_0, \dots, \alpha_k$, $\alpha' = \alpha_0, \dots, \alpha_{k-1}$, $P = P_0, \dots, P_k$, $P' = P_0, \dots, P_{k-1}$. Then:



Lemma 79.




Lemma 80.

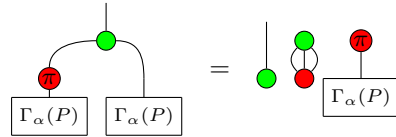

with $\cos(\gamma) = \cos(\alpha) \cos(\beta)$.


Lemma 83. *We can deduce an equality similar to the rule (A):*

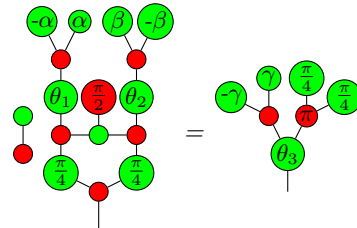

$e^{i\theta_3} \cos(\gamma) = e^{i\theta_1} \cos(\alpha) + e^{i\theta_2} \cos(\beta)$


Lemma 84. Let $\rho \in \mathbb{R}_+$. Then, for any $n_1, n_2 \geq \max(0, \lceil \log_2(\rho) \rceil)$:

Corollary 4. For any $n \in \mathbb{N}$, with $\gamma = \arccos \frac{1}{2^n}$:

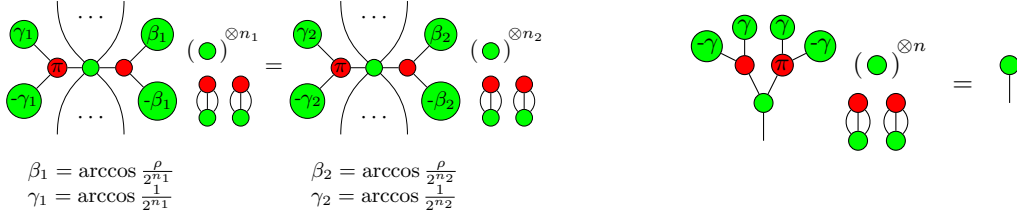


A.5 Proof of the New Lemmas

Proof (Lemma 43).

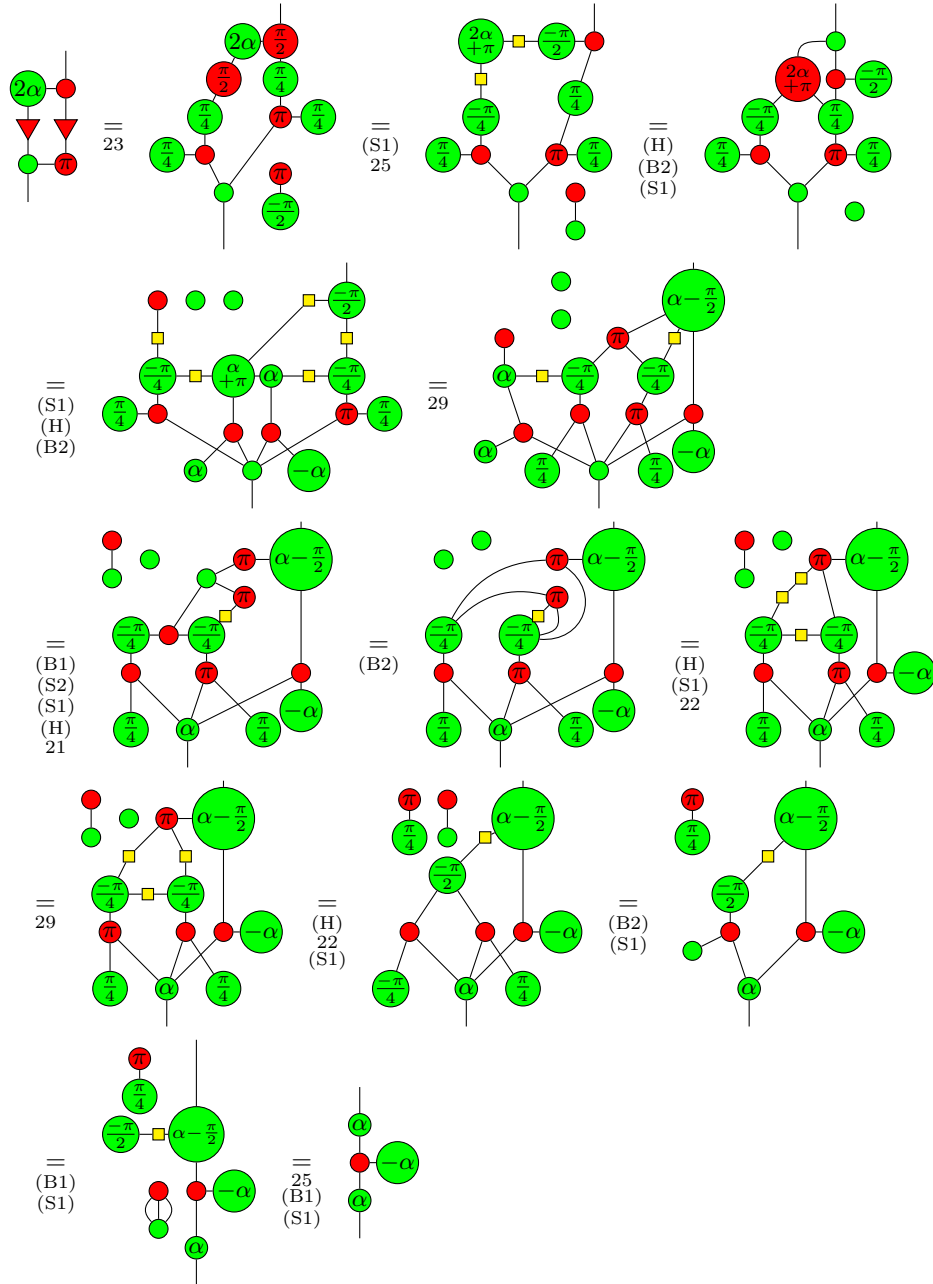


□

Proof (Lemma 44).

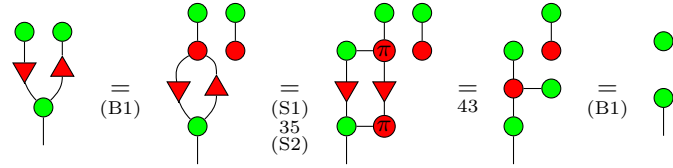


□

Proof (Lemma 45).

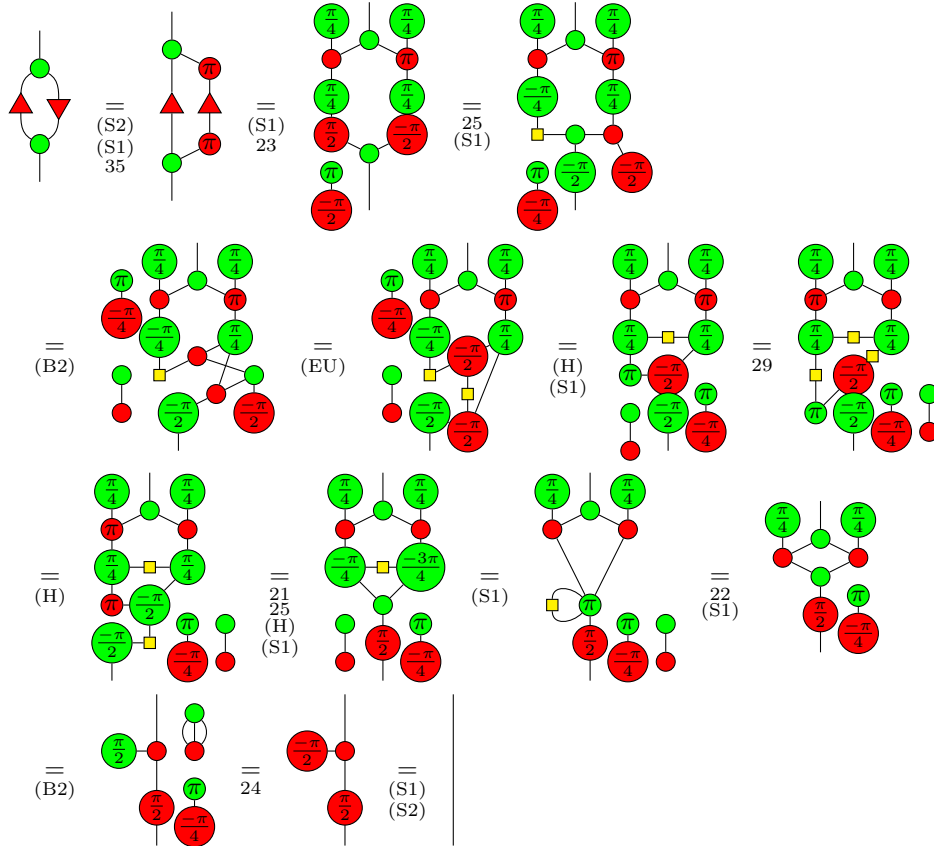


□

Proof (Lemma 46).

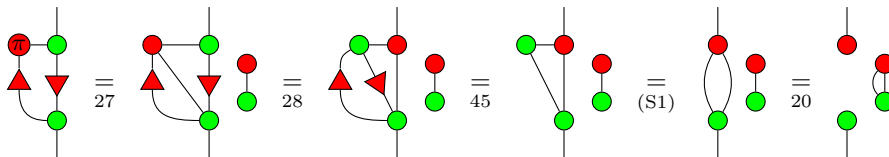


□

Proof (Lemma 47).

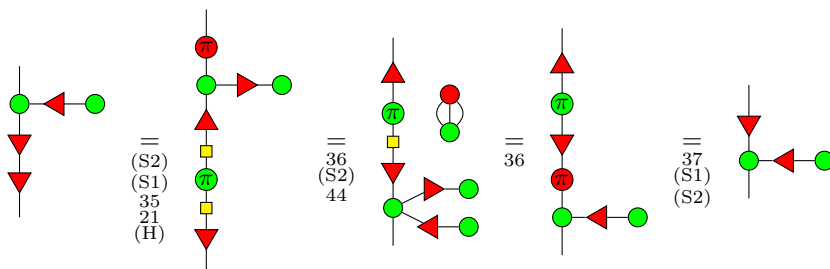


□

Proof (Lemma 48).

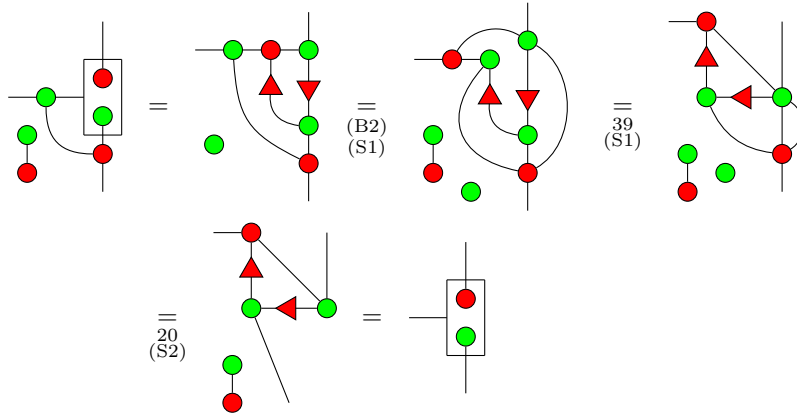


□

Proof (Lemma 49).

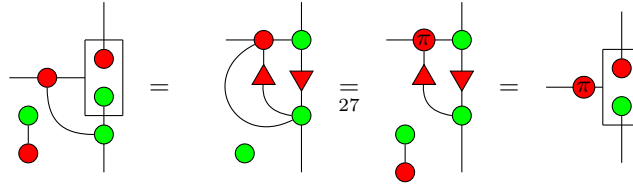


□

Proof (Lemma 50).

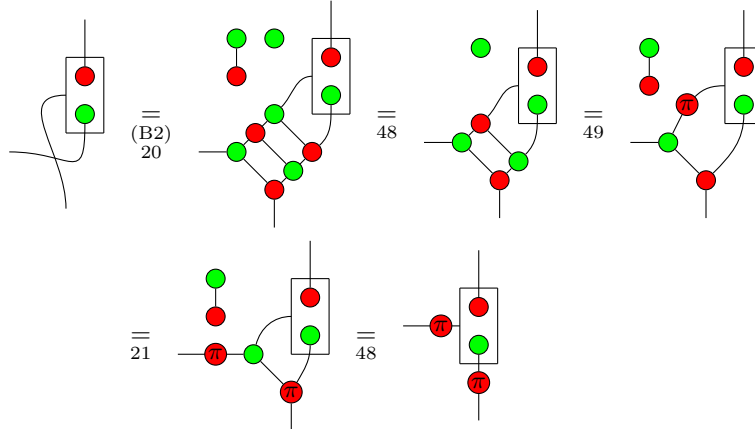


□

Proof (Lemma 51).

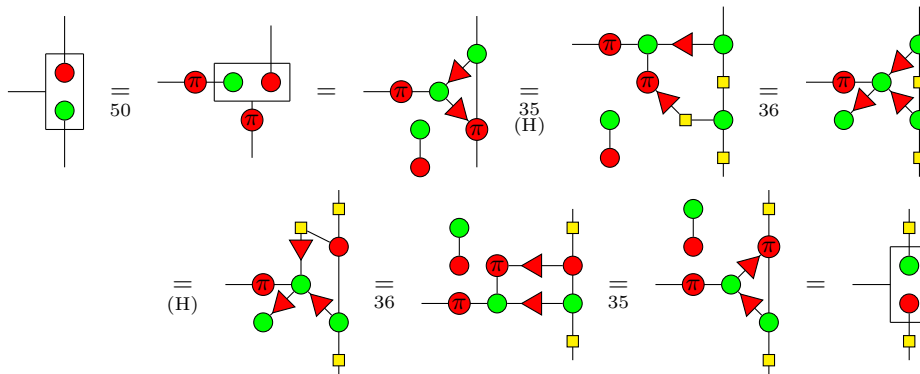


□

Proof (Lemma 52).

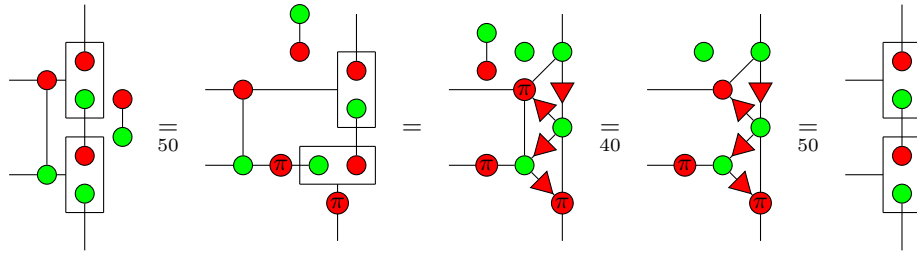


□

Proof (Lemma 53).

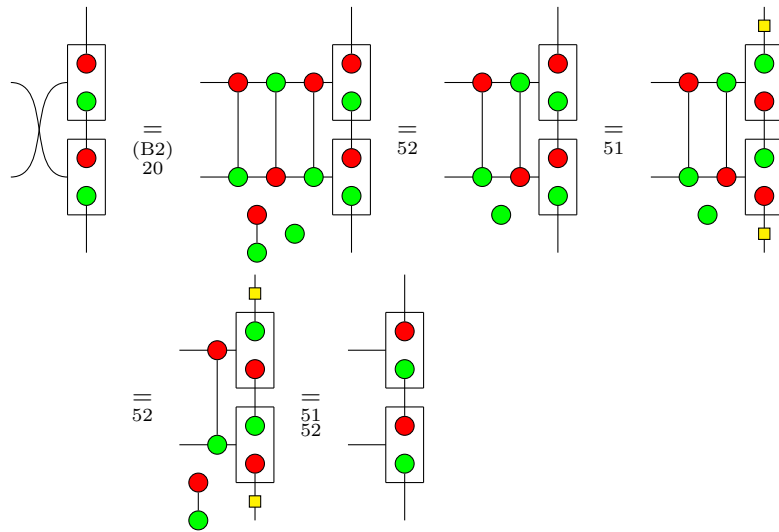


□

Proof (Lemma 54). First:

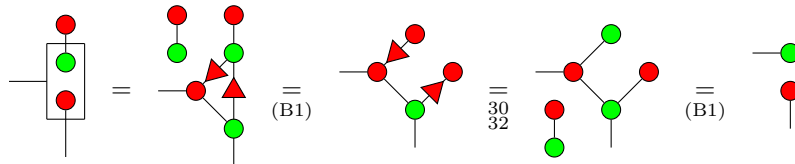


Then:

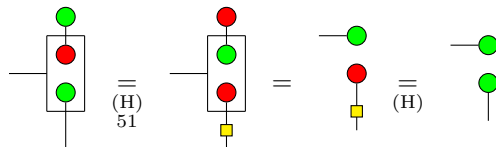


□

Proof (Lemma 55).

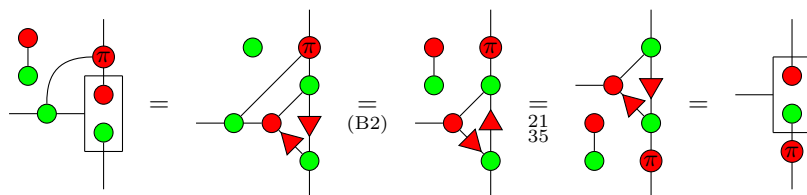


□

Proof (Lemma 56).

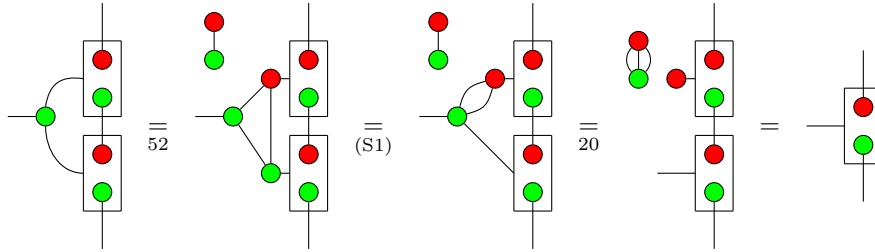


□

Proof (Lemma 57).

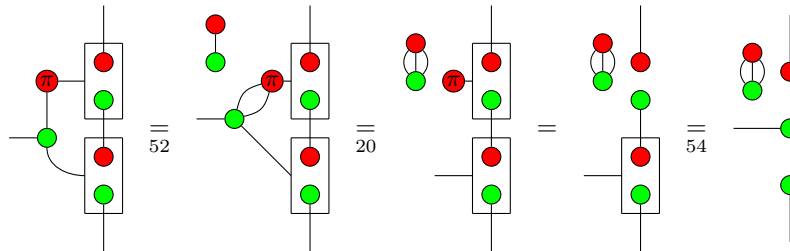


□

Proof (Lemma 58).

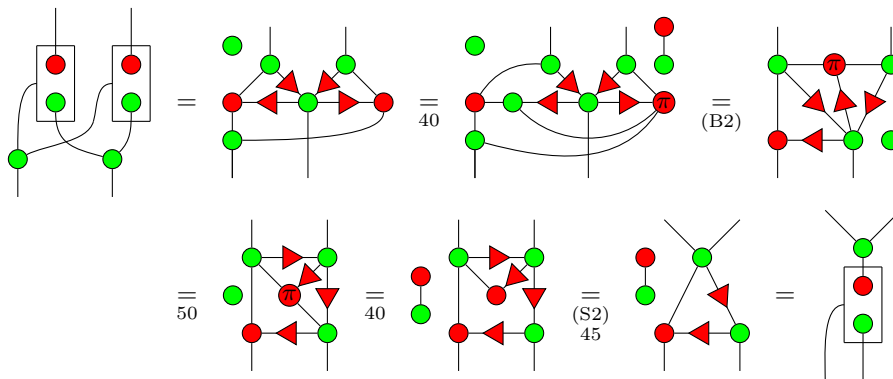


□


Proof (Lemma 59).

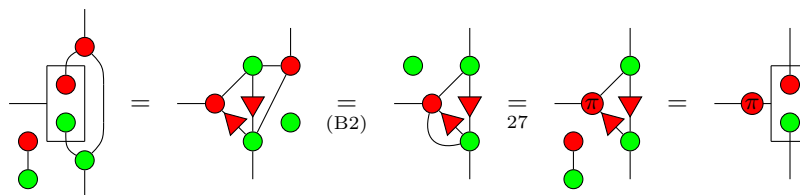

□


Proof (Lemma 60).

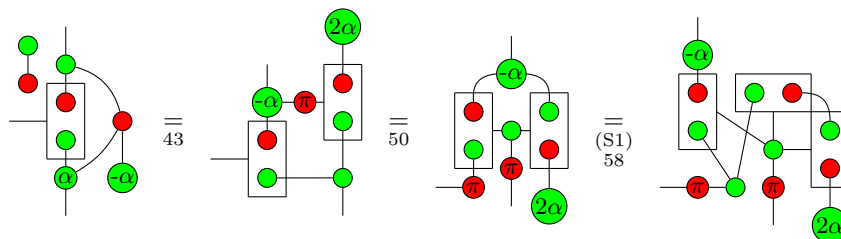

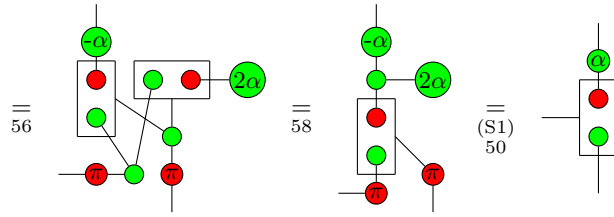


□

Proof (Lemma 61).

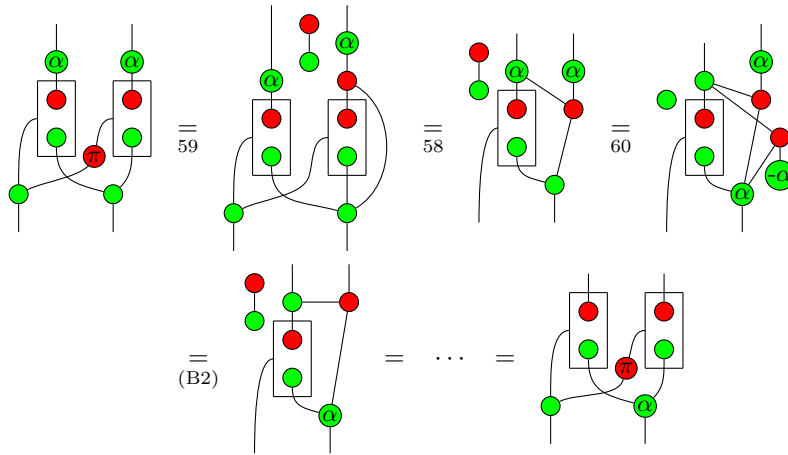

□


Proof (Lemma 62).

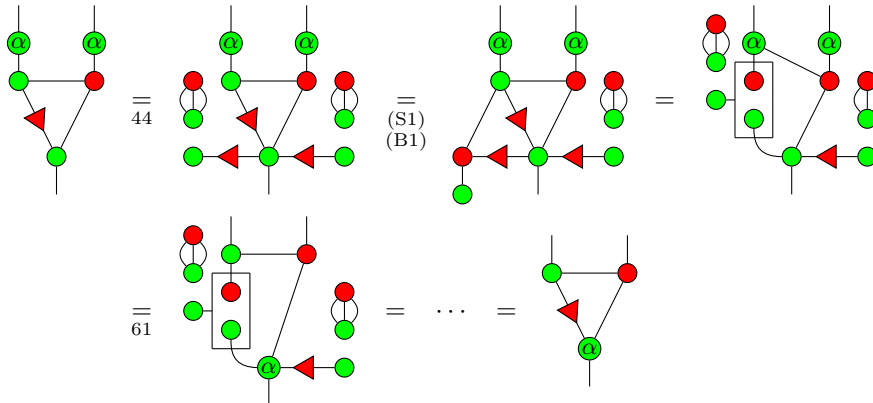


□

Proof (Lemma 63). Let n be the number of triangles in the first two diagrams.


- $n = 0$: The first equality is 22, the second is equivalent to the third, and easily derivable:

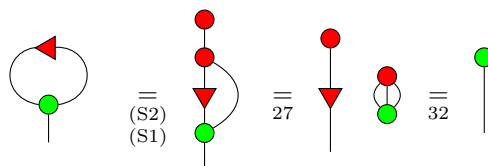


- $n = 1$: The first equality is 26, the second is 41 and the third is 45.
- $n = 2$: First,

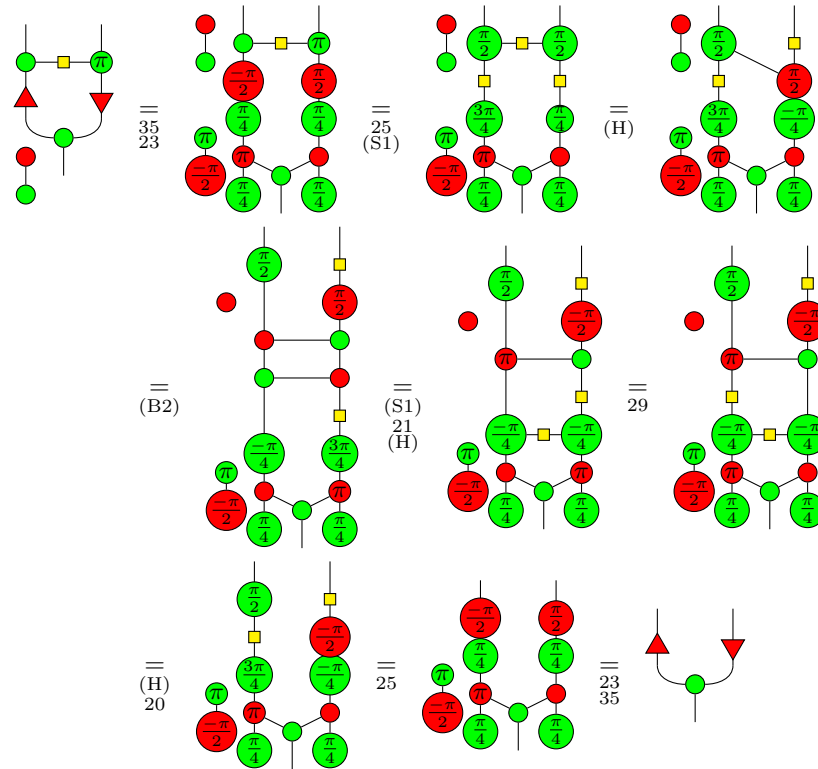


Then:

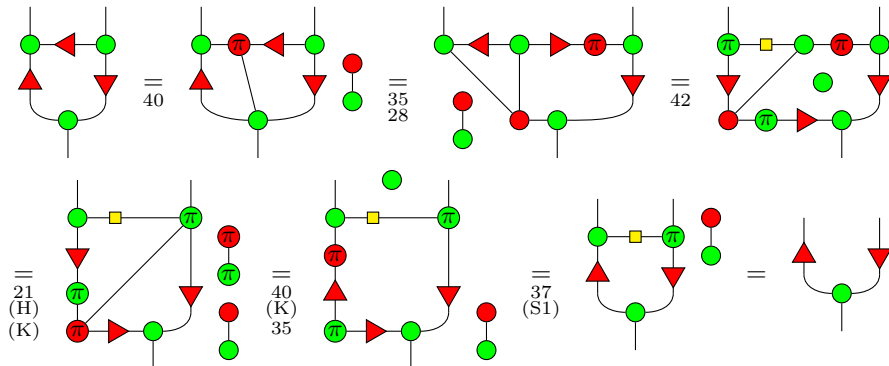


Finally:

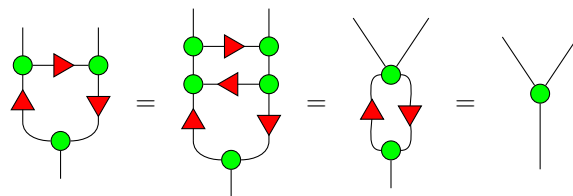


- n : Suppose we have the result for $n - 1$ and $n = 2$. Then:

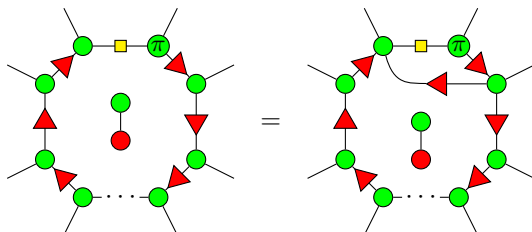

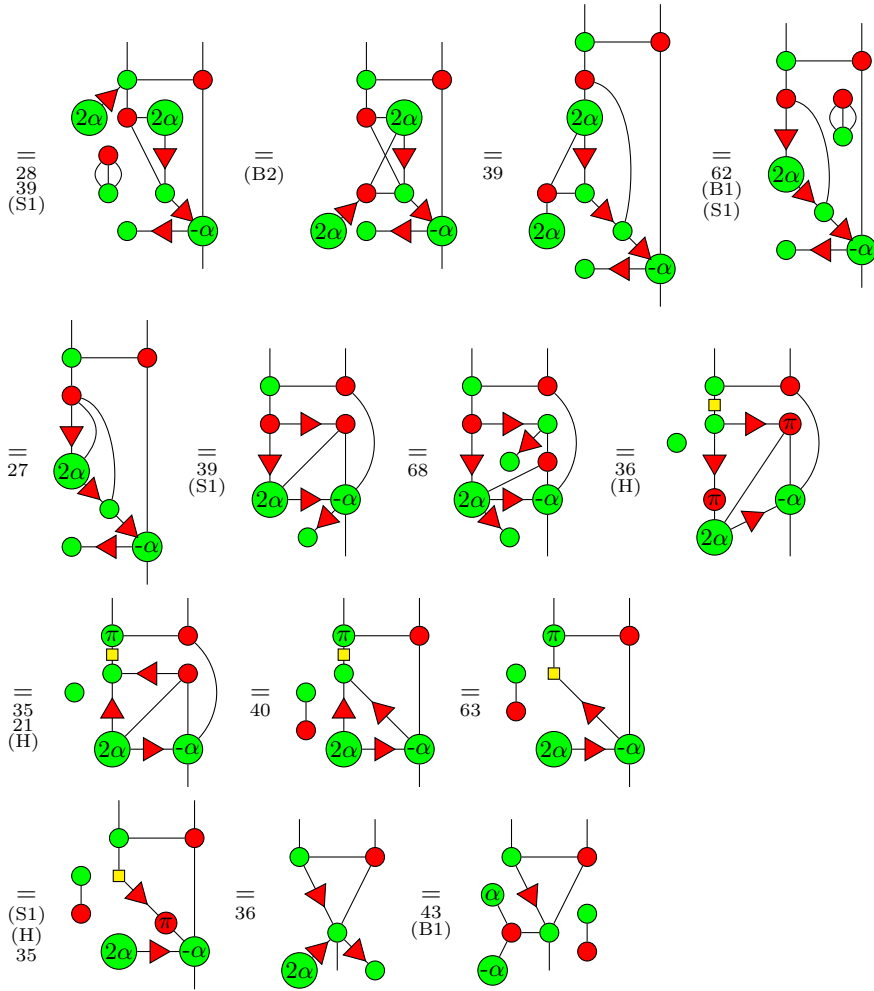


□

Proof (Lemma 70).

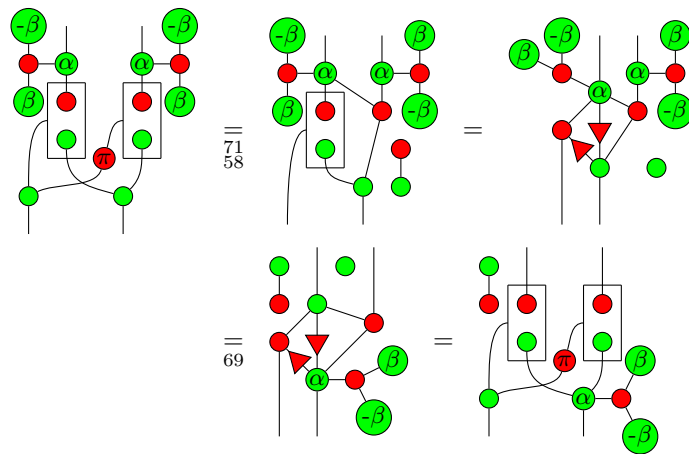


□

Proof (Lemma 64).

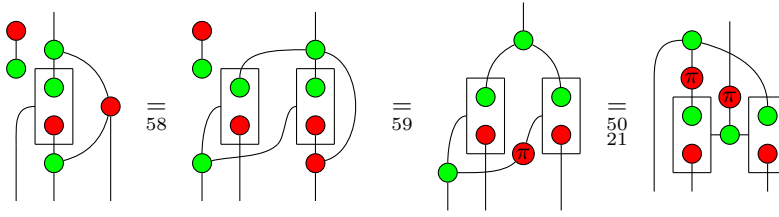


□

Proof (Lemma 65).

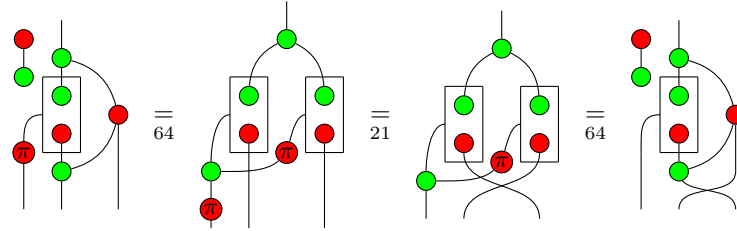


□

Proof (Lemma 66).

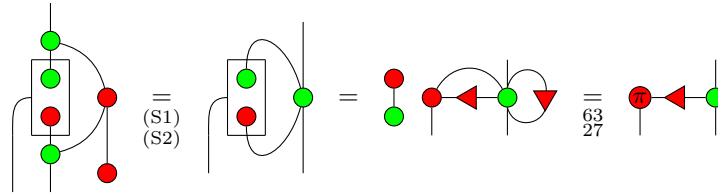


□

Proof (Lemma 67).

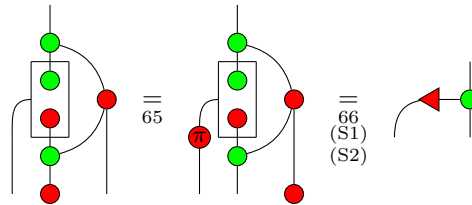


□

Proof (Lemma 71).

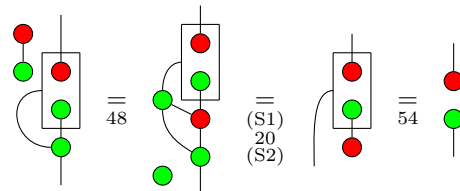


and

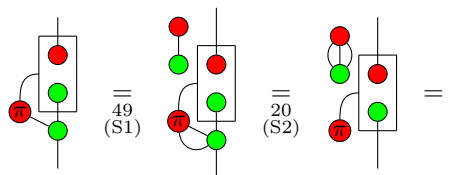


□


Proof (Lemma 72).

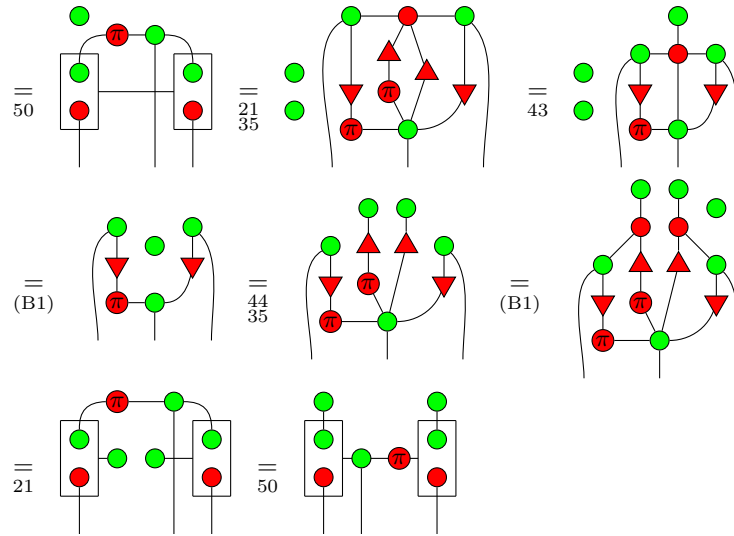

□


Proof (Lemma 73).

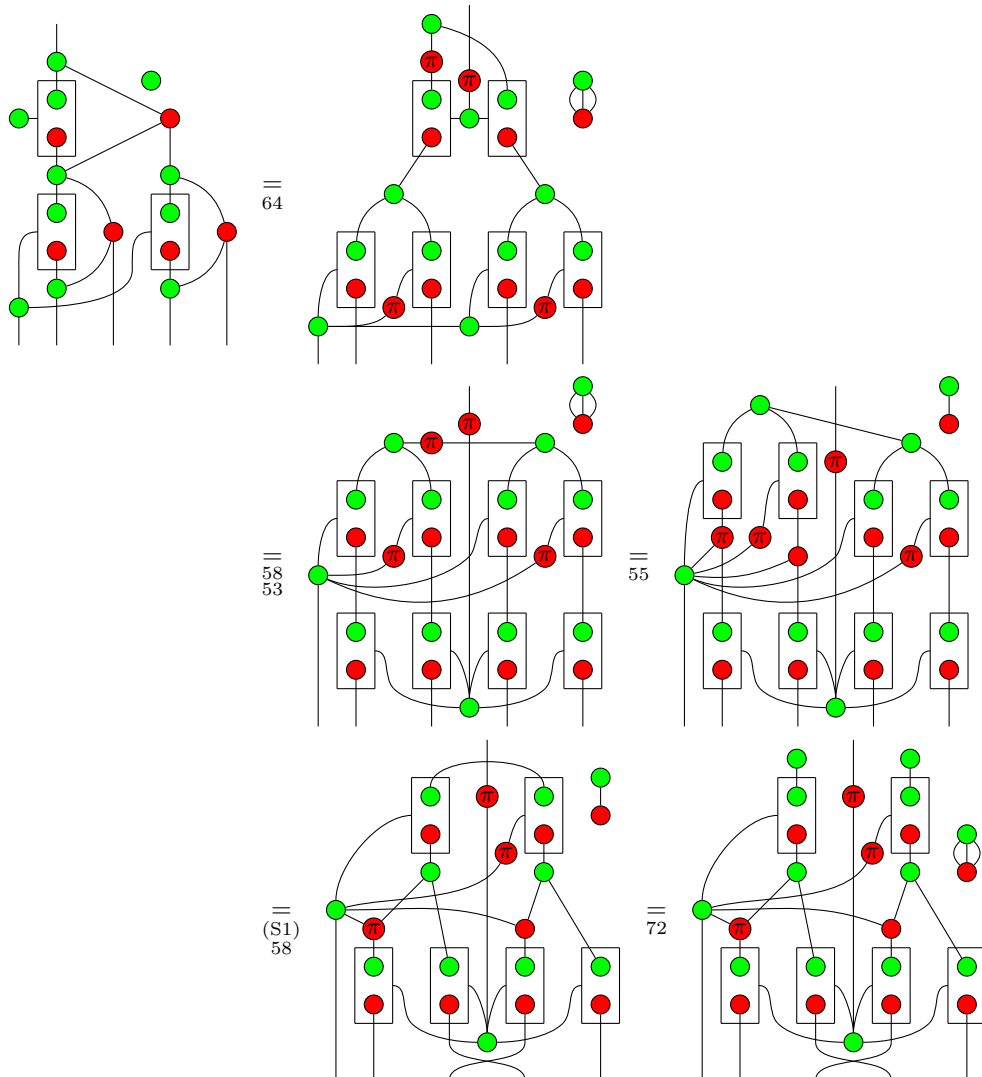

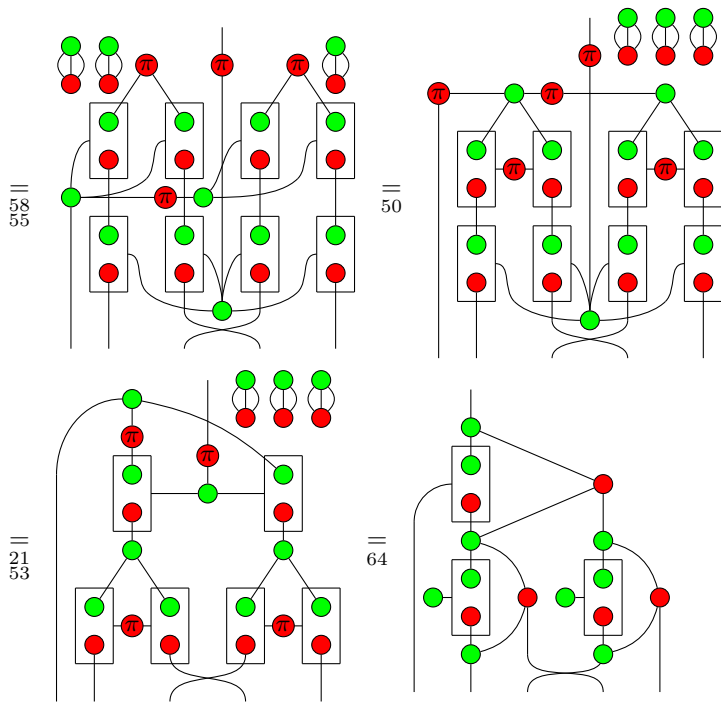


□

Proof (Lemma 74).

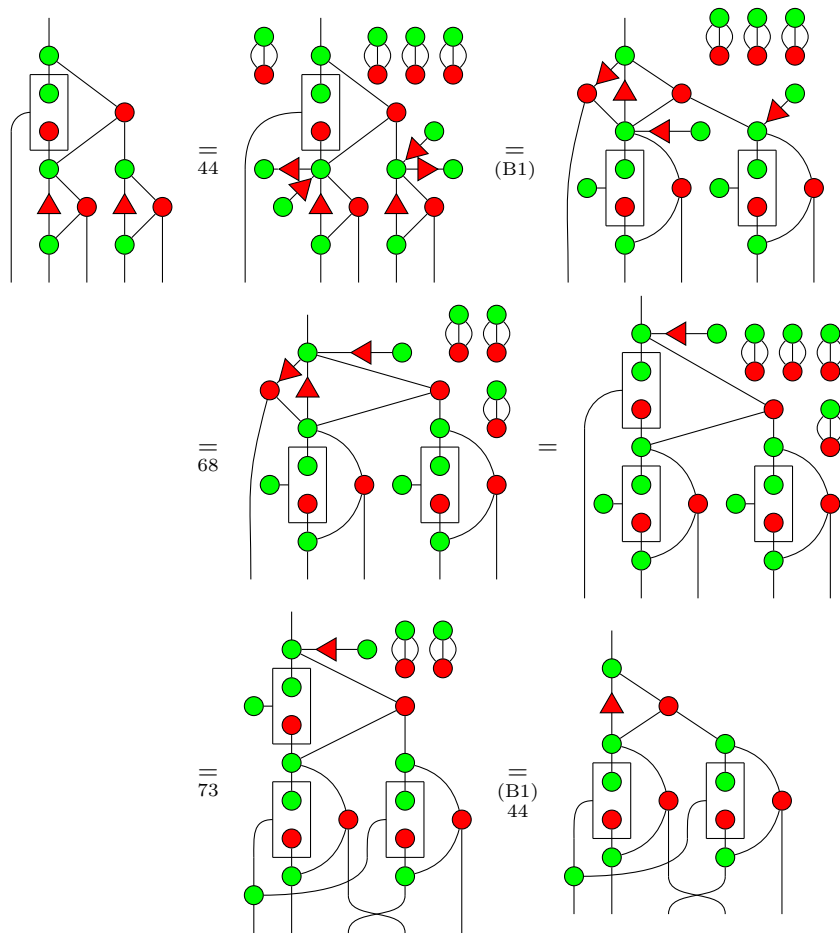


□

Proof (Lemma 75).

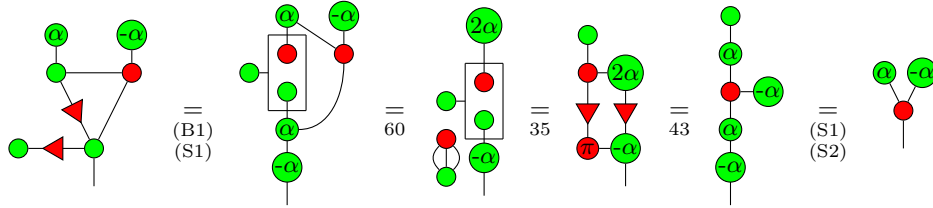


□

Proof (Lemma 76).

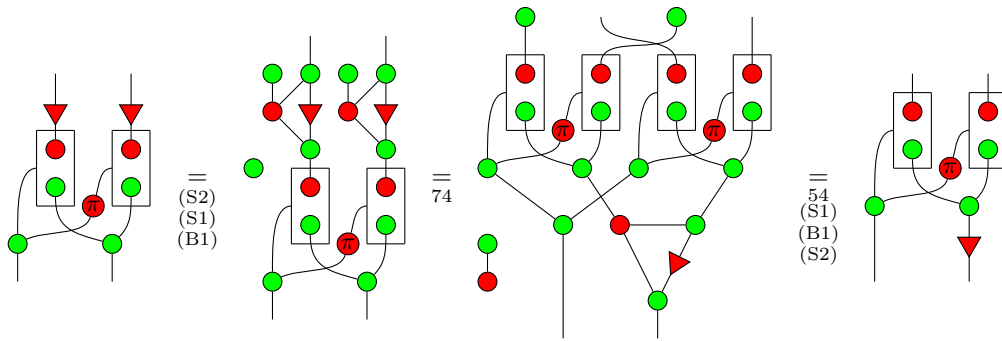


□

Proof (Lemma 77). First, if $a = 1 = b$:

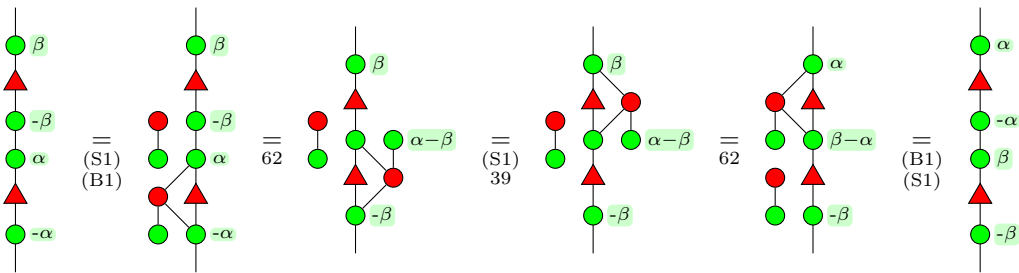



Then:

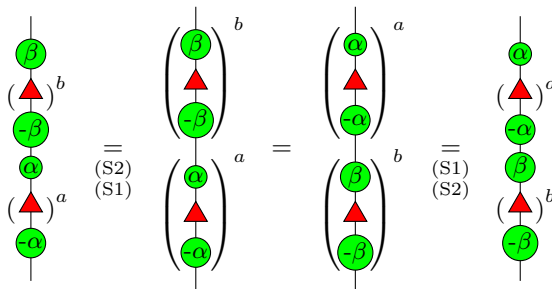

□


Proof (Lemma 78).

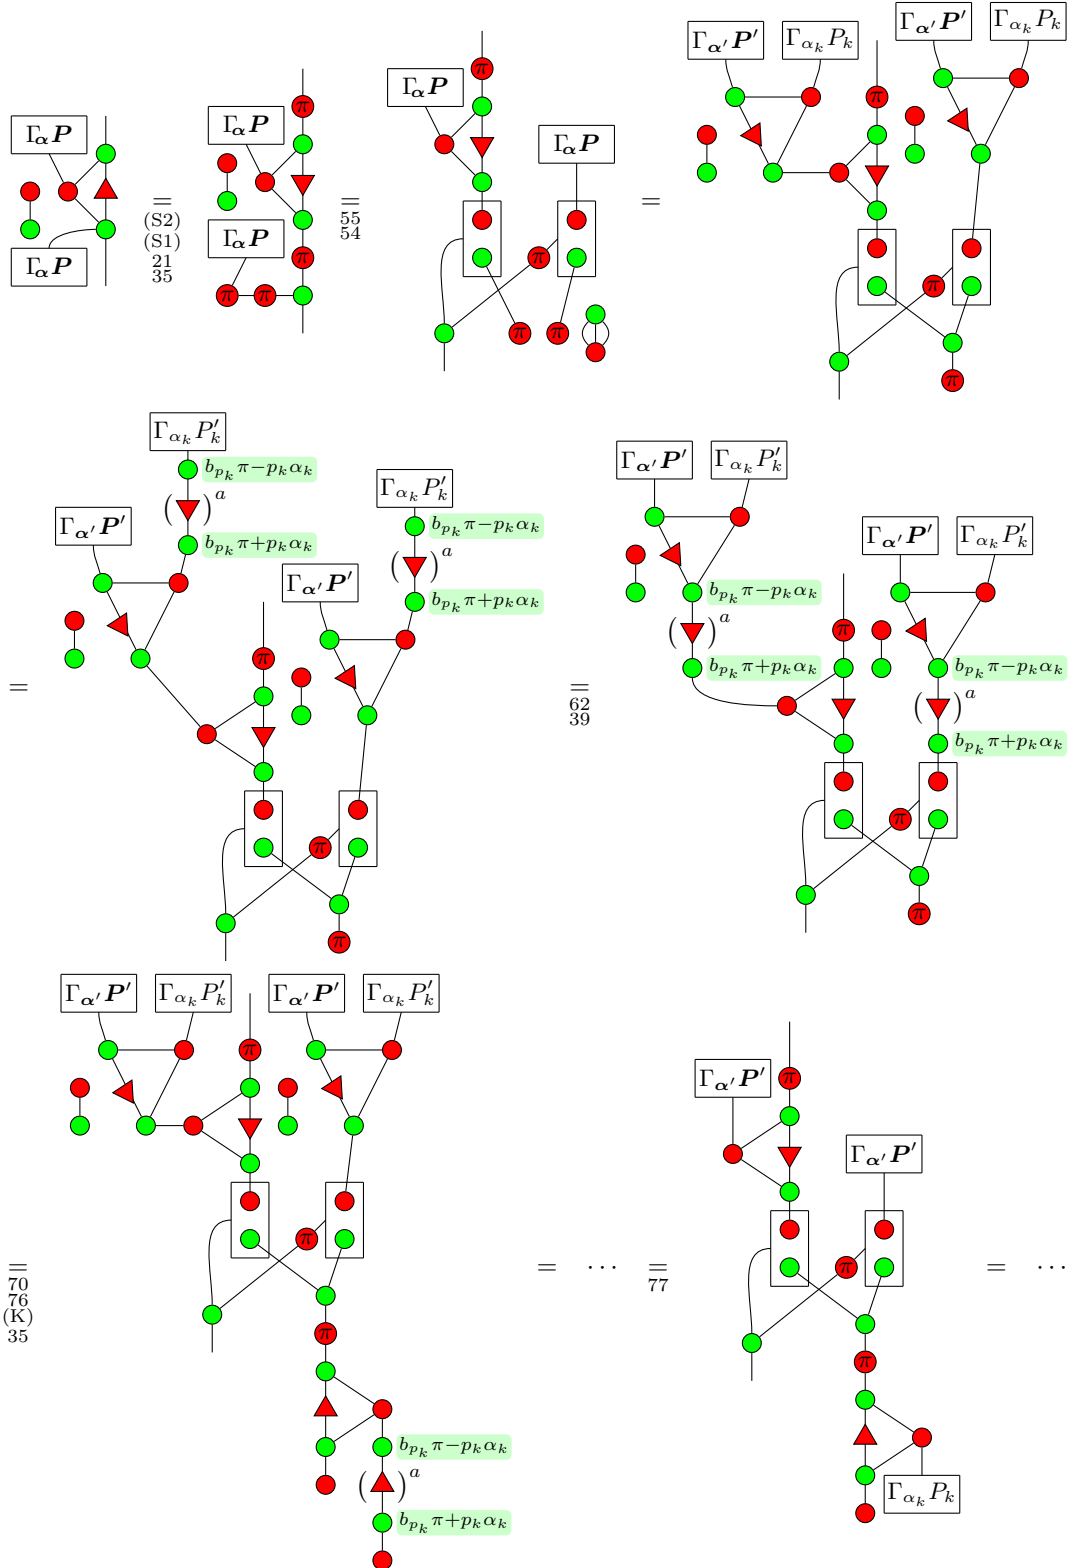

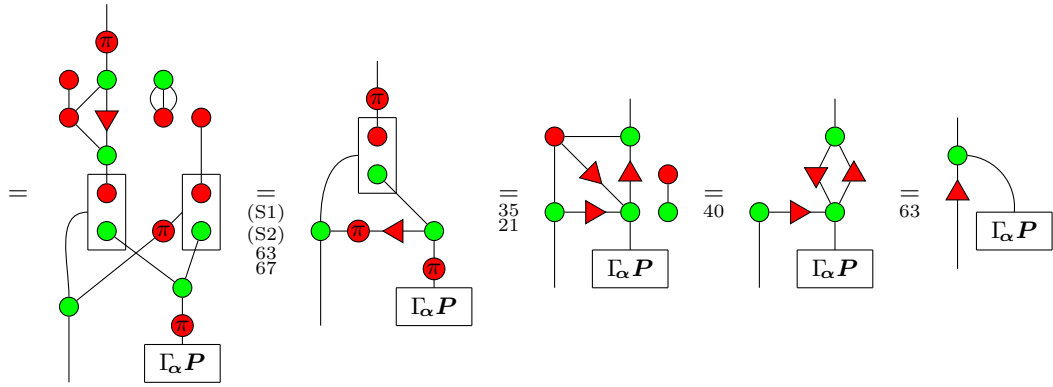


□

Proof (Lemma 79). First if $P = 0$:




Then, if $P(X) = P'(X) + (-1)^b a X^k$:

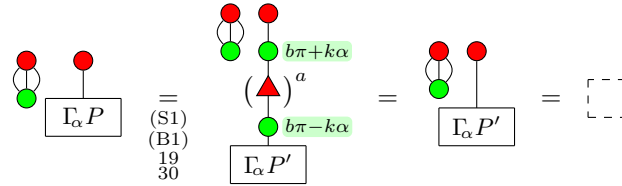


□


Proof (Lemma 80).

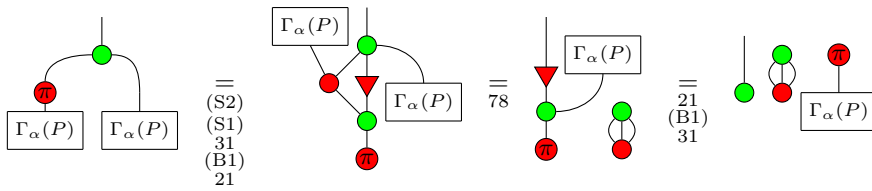

□


Proof (Lemma 81).

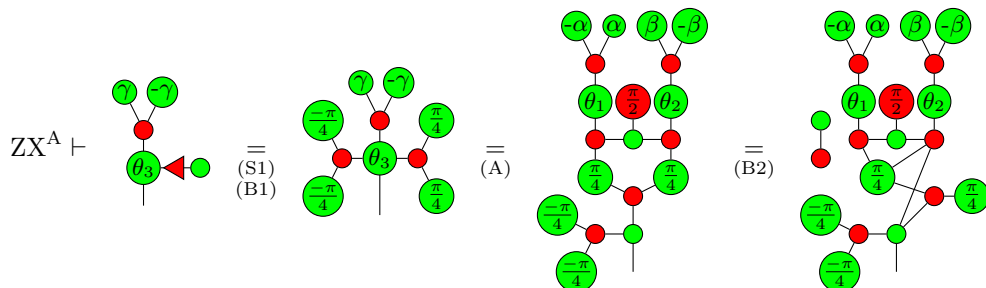

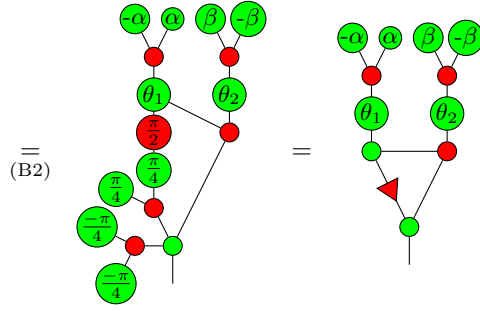

□

Proof (Lemma 82).

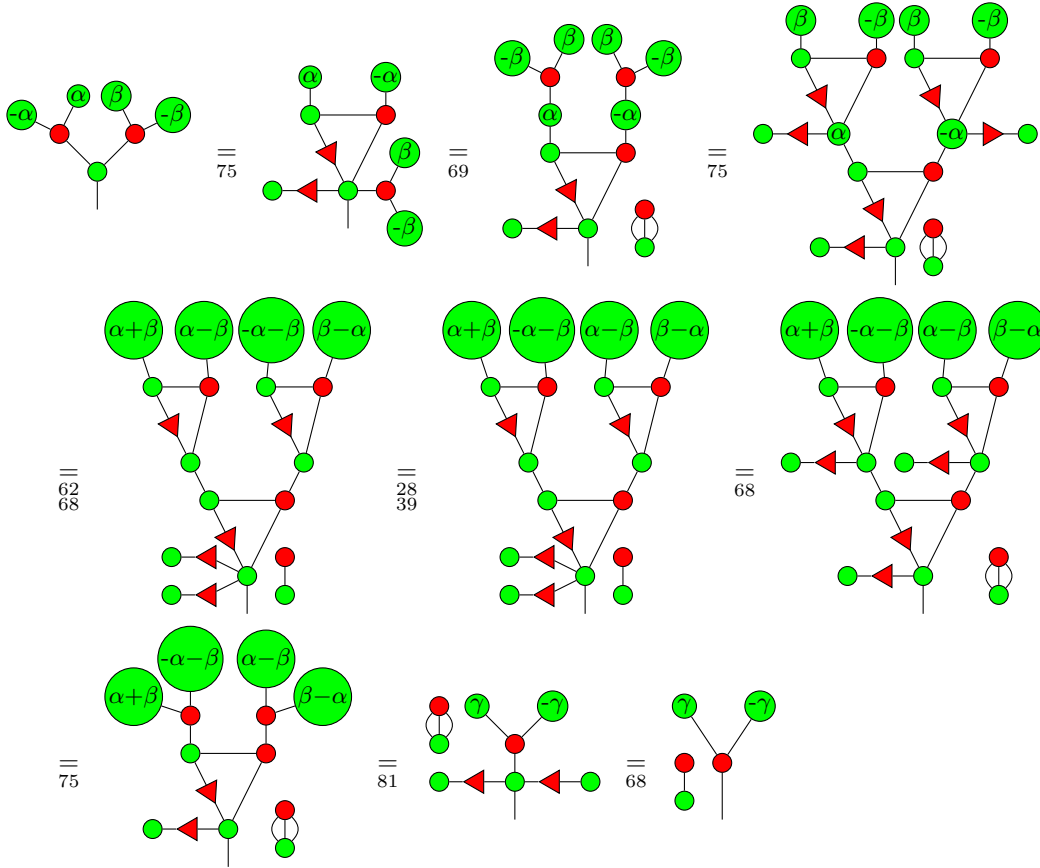

with $\cos(\gamma) = \frac{1}{2}(\cos(\alpha - \beta) + \cos(\alpha + \beta)) = \cos(\alpha) \cos(\beta)$.

□

Proof (Lemmas 83, 84 and Corollary 4). These lemmas were already proven in [21], but now the proofs are constructive since 82 has a constructive proof.

□

A.6 Monoid and Bialgebra


Proof (Proposition 1).

- Commutativity: Lemma 50
- Unit: (S1), Lemma 45
- Associativity: Lemma 53


□

Proof (Proposition 2).


Lemma 86.

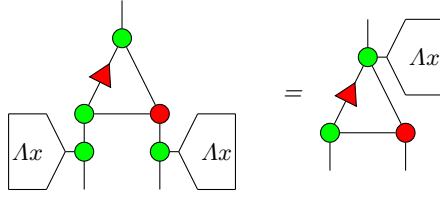

Proof. Let x be in \mathcal{R}_G for some fragment G . Then there exist p , $\alpha = (\alpha_k)_k$ and $P = (P_k)_k$ such that $x = \frac{1}{2^p} \sum_k P(e^{i\alpha_k})$. The conditions for Theorem 2 imply that:

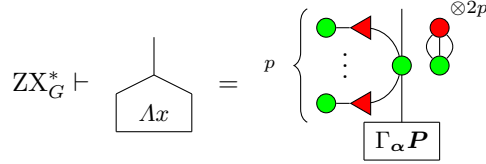


Then:

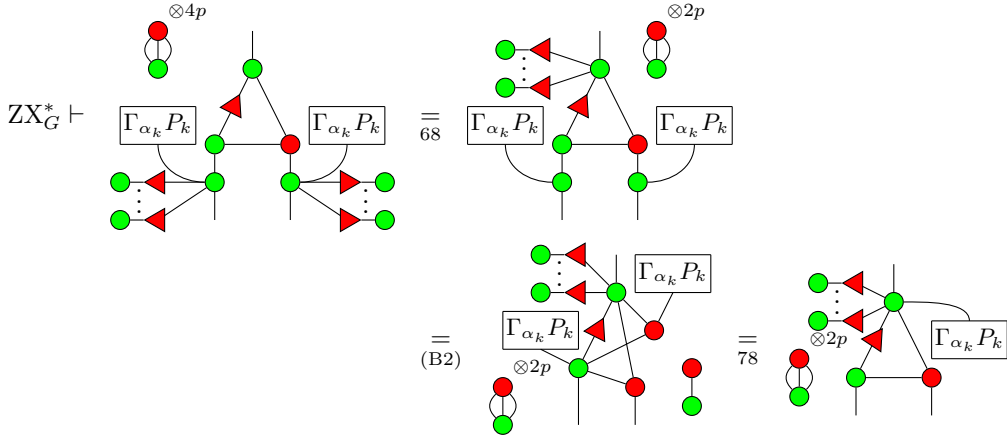


□

Lemma 87. With ZX_G^* a set of axioms that verifies the conditions in Theorem 2:

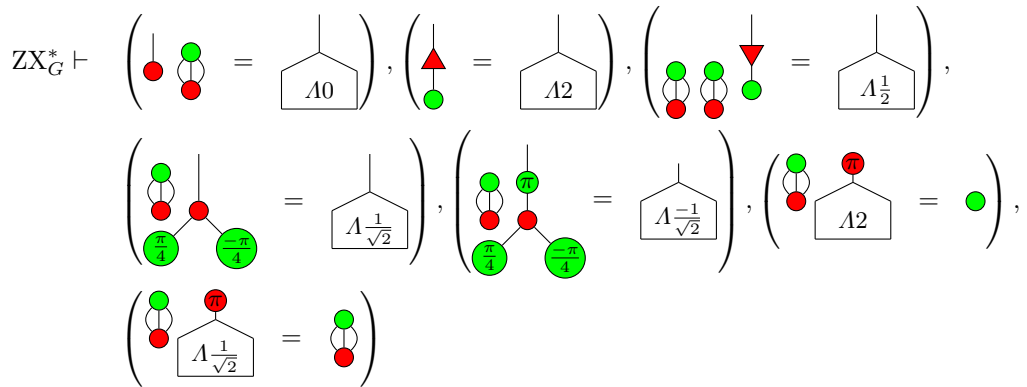

Proof (Lemma 87). Since $ZX_G^* \vdash ZX_{\frac{\pi}{4}}$:

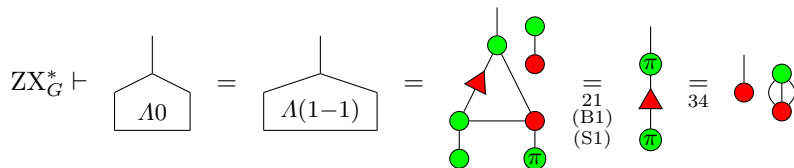

$$\begin{aligned}
& \text{ZX}_G^* \vdash \Lambda_2 = \Lambda(1+1) = \begin{array}{c} \text{triangle with 3 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{\substack{(B1) \\ (S1) \\ (S2)}}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \\
& \text{ZX}_G^* \vdash \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} = \begin{array}{c} \Lambda_{\frac{1}{2}} \\ \Lambda_2 \end{array} = \begin{array}{c} \Lambda_{\frac{1}{2}} \end{array} \stackrel{44}{=} \Lambda_{\frac{1}{2}} \\
& \text{ZX}_G^* \vdash \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{75}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} = \begin{array}{c} \Lambda_{\frac{1}{2}} \\ \Lambda e^{i\frac{\pi}{4}} \\ \Lambda e^{-i\frac{\pi}{4}} \end{array} = \begin{array}{c} \Lambda \frac{e^{i\frac{\pi}{4}} + e^{-i\frac{\pi}{4}}}{2} \end{array} = \Lambda \frac{1}{\sqrt{2}} \\
& \text{ZX}_G^* \vdash \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} = \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{31}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{17}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{(S1)}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \\
& \text{ZX}_G^* \vdash \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} = \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{(S1)}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{(K)}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{24}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{18}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array} \stackrel{17}{=} \begin{array}{c} \text{triangle with 2 green nodes} \\ \text{with red nodes and arrows} \end{array}
\end{aligned}$$


□

A.8 Necessary Propositions for Theorem 2

In this section, we consider a set of diagrams S such that the map $\eta : S \rightarrow \mathcal{R}_G = D \mapsto \llbracket D \rrbracket |1\rangle$ is bijective, and a set of axioms ZX_G^* that meets the conditions of Theorem 2.

Let us try to derive the results on the composition of diagrams in S -NF, and see what it requires from diagrams in S -CNF. Let D_1 and D_2 be two diagrams in S -NF. First for the spacial composition:

$$\begin{aligned}
& \begin{array}{c} \dots \\ \vdots \\ D_1 \\ \vdots \\ \dots \end{array} \begin{array}{c} \dots \\ \vdots \\ D_2 \\ \vdots \\ \dots \end{array} = \begin{array}{c} \dots \\ \vdots \\ \Lambda[D_1] \\ \vdots \\ \dots \end{array} \begin{array}{c} \dots \\ \vdots \\ \Lambda[D_1] \\ \vdots \\ \dots \end{array} \\
& \stackrel{(B1)}{=} \begin{array}{c} \dots \\ \vdots \\ \Lambda[D_1] \\ \vdots \\ \dots \end{array} \begin{array}{c} \dots \\ \vdots \\ \Lambda[D_1] \\ \vdots \\ \dots \end{array} \stackrel{ii)}{=} \begin{array}{c} \dots \\ \vdots \\ \Lambda|\psi\rangle \\ \vdots \\ \dots \end{array}
\end{aligned}$$

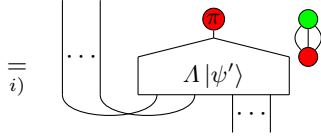

This proof requires that, *i*) a diagram in *S*-CNF with a permutation on the output wires can be set in *S*-CNF:

Proposition 3 (Permutation). For any $|\psi\rangle \in \mathcal{R}^{2^n}$, and any permutation σ on n wires:


$$\text{ZX}_G \vdash \begin{array}{c} \Lambda|\psi\rangle \\ \dots \\ \sigma \\ \dots \end{array} = \begin{array}{c} \Lambda[\sigma]|\psi\rangle \\ \dots \end{array}$$

ii) that two diagrams in *S*-CNF joint by their control wire by a green node can be set *S*-CNF:

Proposition 4 (Tensor Product). For any $(|\psi_0\rangle, |\psi_1\rangle) \in \mathcal{R}^{2^n} \times \mathcal{R}^{2^m}$:

$$\text{ZX}_G^* \vdash \begin{array}{c} \Lambda|\psi_0\rangle \\ \dots \end{array} \begin{array}{c} \Lambda|\psi_1\rangle \\ \dots \end{array} = \begin{array}{c} \Lambda(|\psi_0\rangle \otimes |\psi_1\rangle) \\ \dots \end{array}$$

Then, for the sequential composition:

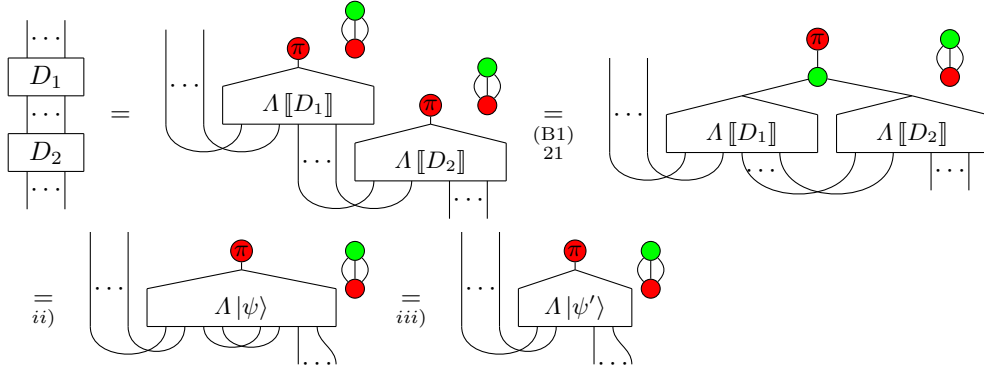

Here, we need again Proposition 4, but we also seem to need that a diagram in *S*-CNF with a cup ϵ applied on two of its outputs can be set in *S*-CNF. It is actually true only if controlled by $|1\rangle$:

Proposition 5 (Trace). For any diagram $D : 0 \rightarrow n + 1$:


$$\text{ZX}_G^* \vdash \begin{array}{c} \Lambda[D] \\ \dots \end{array} = \begin{array}{c} \Lambda \left[\begin{array}{c} D \\ \dots \end{array} \right] \end{array}$$

To do so, we decompose the cup as: $\cup = \begin{array}{c} \bullet \\ \cup \\ \bullet \end{array}$, so that we can prove:

Proposition 6 ($R_Z^{(2,1)}$). For any $D : 0 \rightarrow n + 2$:


$$\text{ZX}_G^* \vdash \begin{array}{c} \Lambda[D] \\ \dots \end{array} = \begin{array}{c} \Lambda \left[\begin{array}{c} D \\ \dots \end{array} \right] \end{array}$$

Proposition 7 ($R_Z^{(1,0)}$). For any diagram $D : 0 \rightarrow n + 1$:

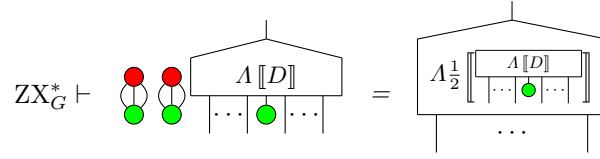



Then, Lemmas 4 and 5 derive from Propositions 3, 4 and 5.

Proof (Proposition 3). Any permutation can be decomposed in a sequence of adjacent transpositions, which in ZX translates as swaps σ . If $|\psi\rangle$ is a state on 0 or 1 qubit, the only permutation allowed is the identity. Otherwise, let $|\psi\rangle = |0\rangle|\psi_0\rangle + |1\rangle|\psi_1\rangle = |00\rangle|\psi_{00}\rangle + |01\rangle|\psi_{01}\rangle + |10\rangle|\psi_{10}\rangle + |11\rangle|\psi_{11}\rangle$. If the first wire is not affected by the swap:

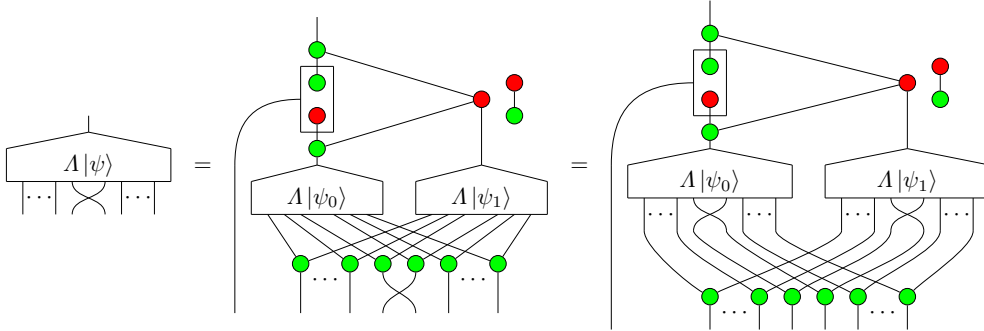


which can be set in normal form by induction. If a swap occurs on the two first outputs:

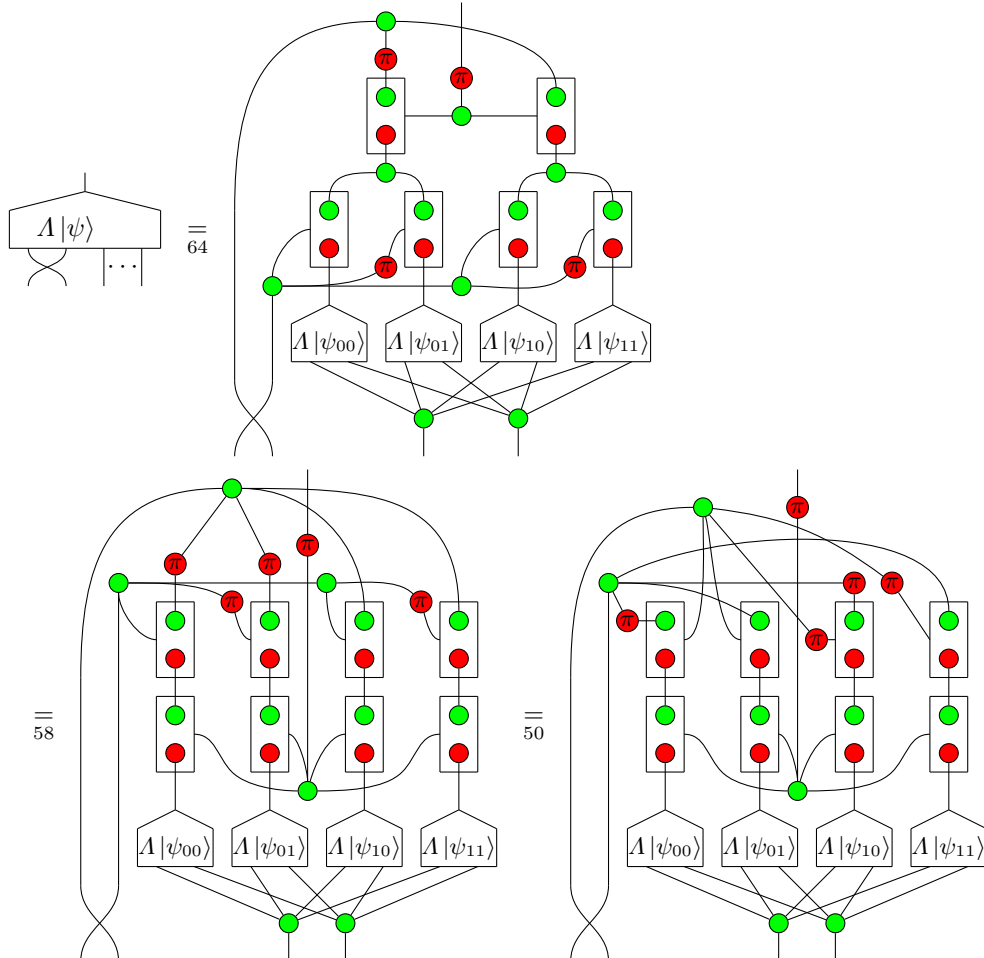

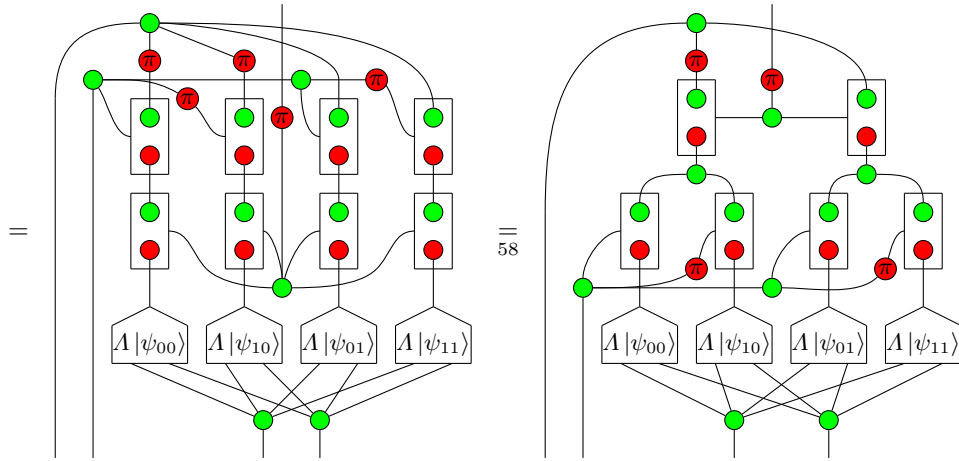


□

Lemma 88.

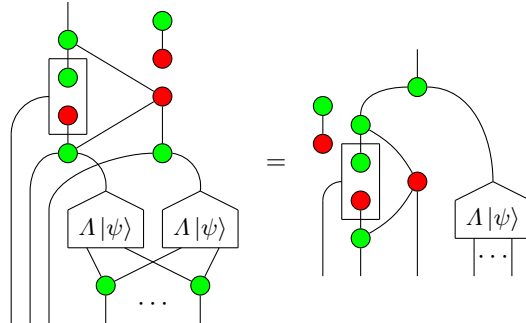



Proof (Lemma 88). By induction on the number n of outputs of $|\psi\rangle$:

• $n = 0$:

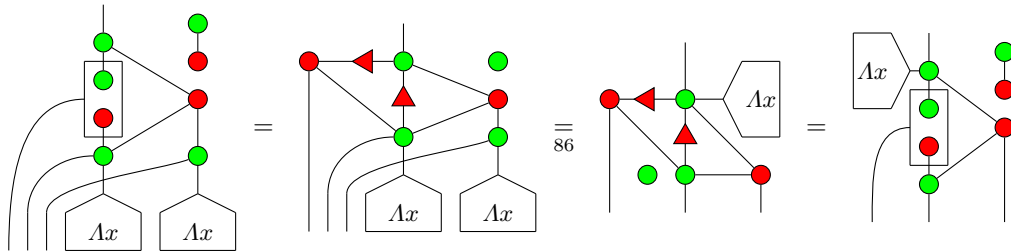

• $n \geq 1$: In this case, let $|\psi\rangle = |0\rangle|\psi_0\rangle + |1\rangle|\psi_1\rangle$, and

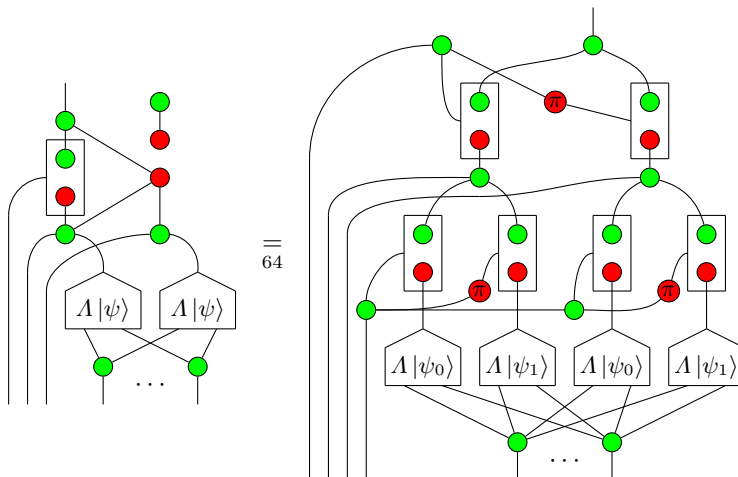

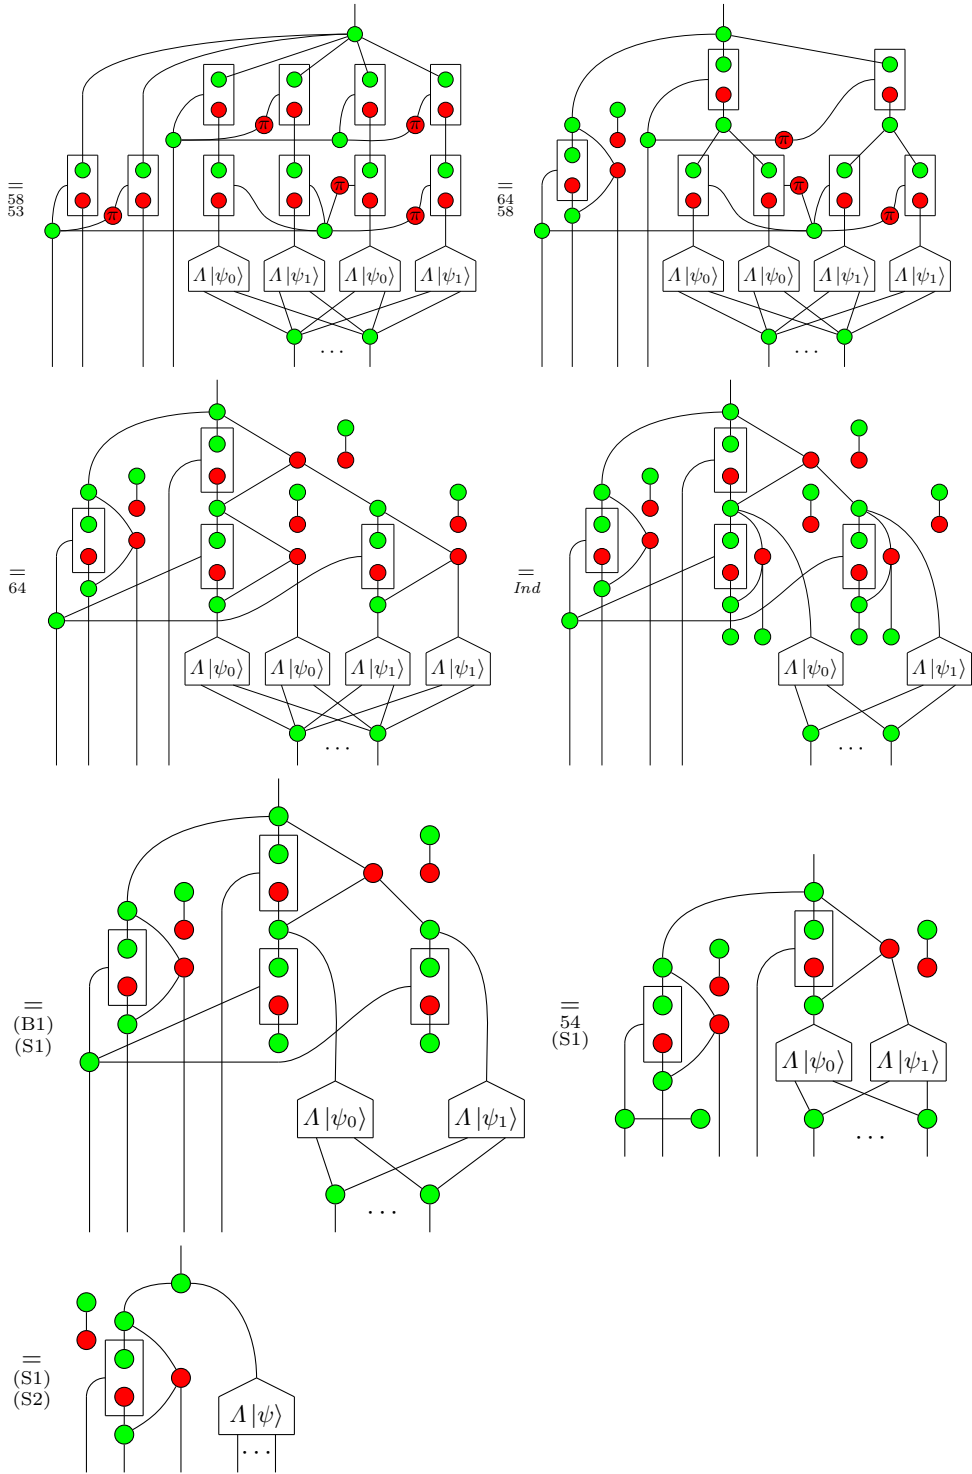


□

Proof (Proposition 4). By induction on the number of outputs of $|\psi_0\rangle$ and $|\psi_1\rangle$:

- If both states are scalars, this case is handled by the condition in Theorem 2.


- If one of the two states has at least one output – say $|\psi_0\rangle = |0\rangle|\psi_{00}\rangle + |1\rangle|\psi_{01}\rangle$:

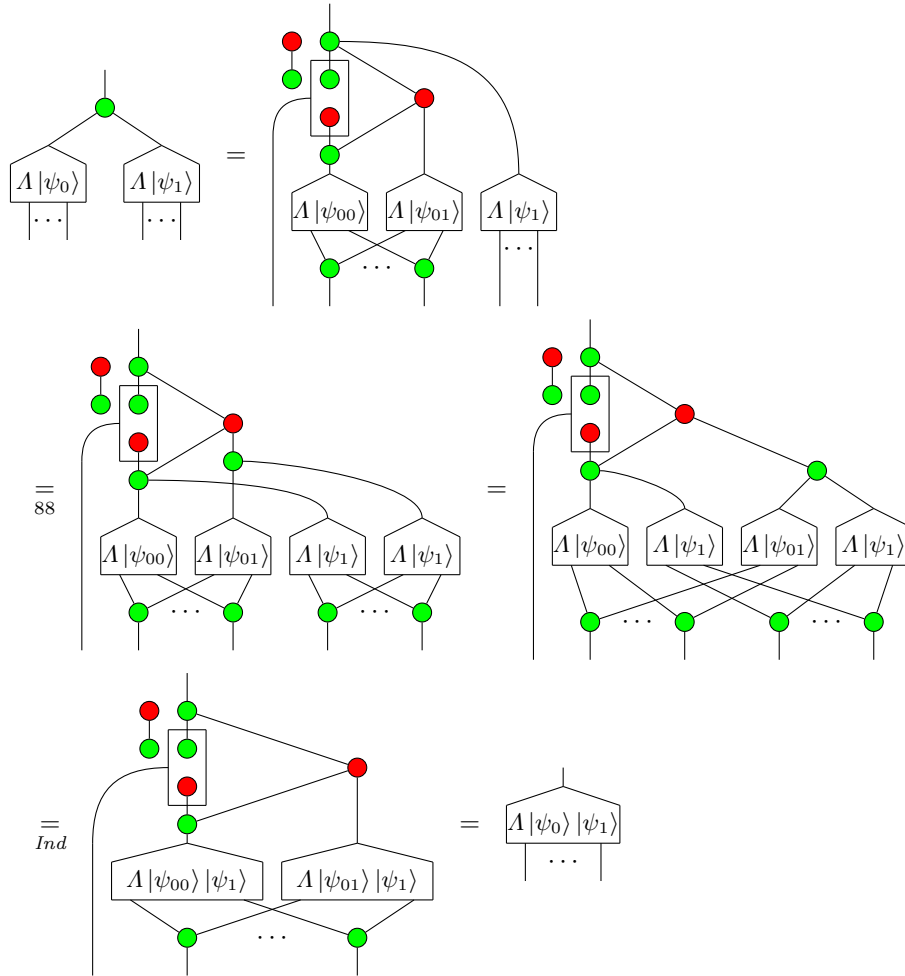


□

Proof (Proposition 6). By induction on the number n of outputs of $|\psi\rangle$.


- $n = 2$: First notice:

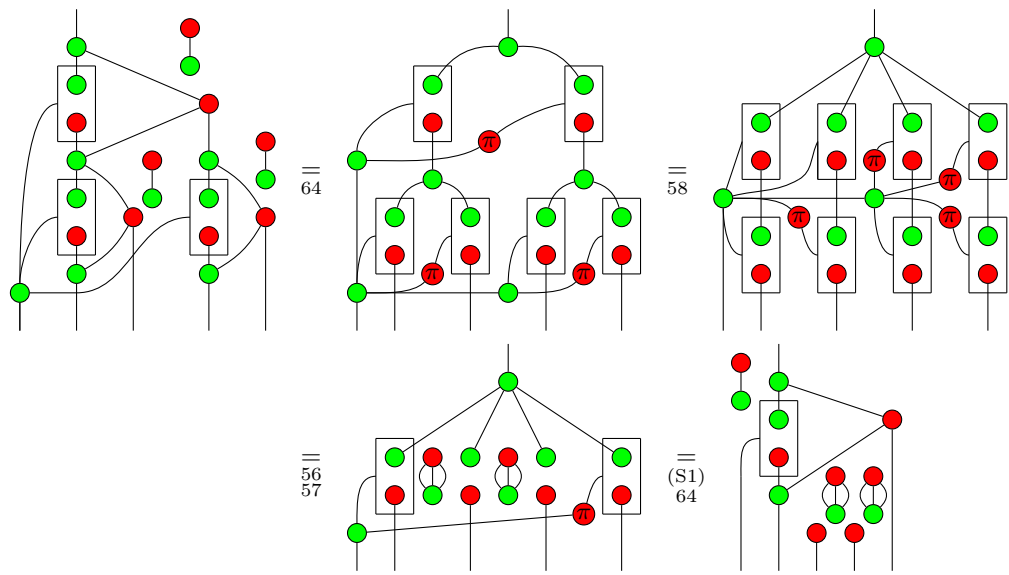


Then, if $|\psi\rangle = a|00\rangle + b|01\rangle + c|10\rangle + |11\rangle$:

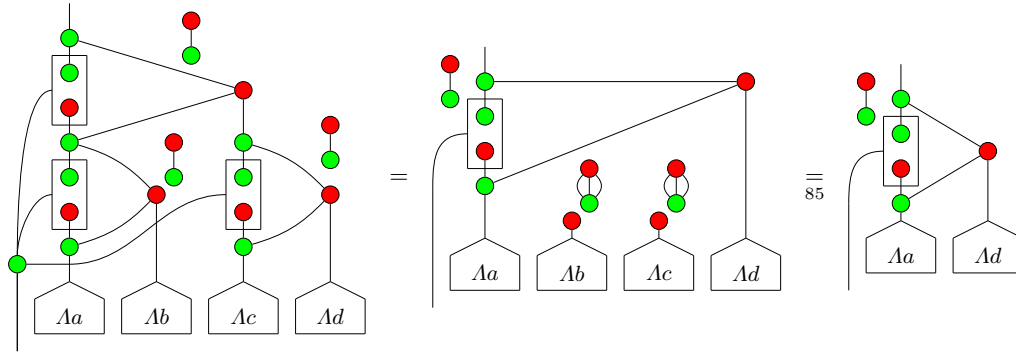

which is in normal form.


• $n \geq 3$: Using Proposition 3, we can impose  to be applied on the two last wires. Then:

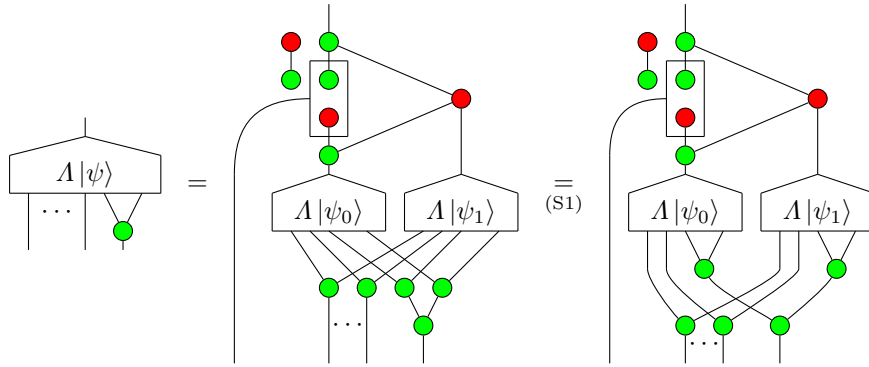


□

Proof (Proposition 7). By induction of the number n of wires of $|\psi\rangle$:


• $n = 1$: Let $|\psi\rangle = a|0\rangle + b|1\rangle$. Then:

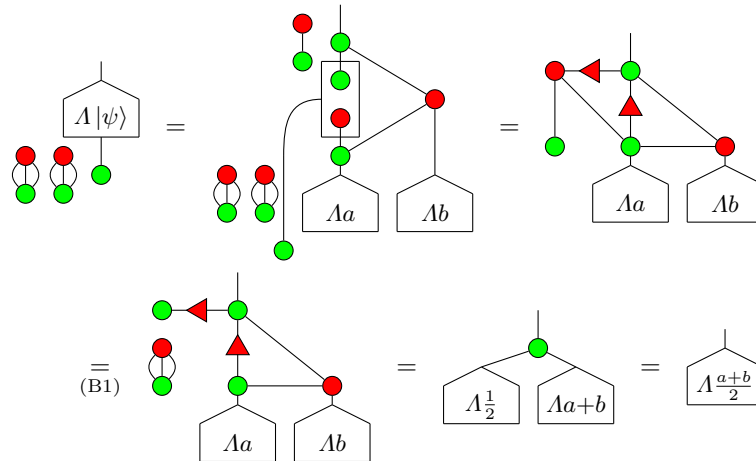

• $n \geq 2$: First, using Proposition 3 if needs be,

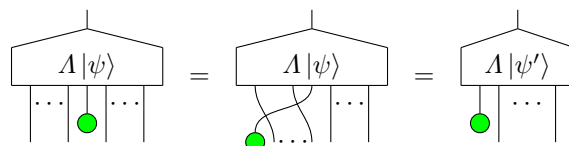


then,

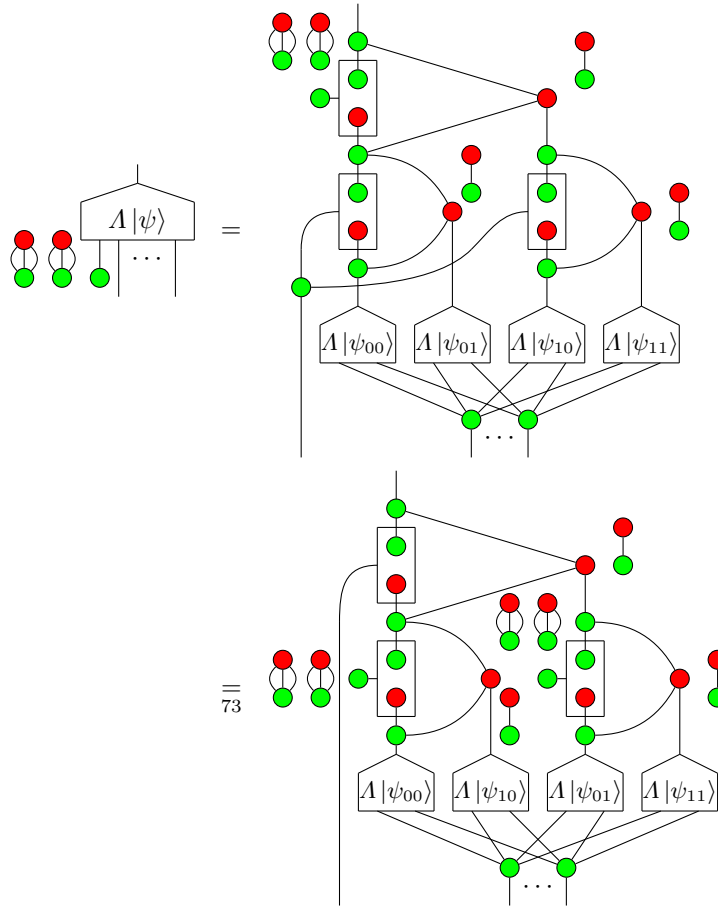

□


Proof (Proposition 5).

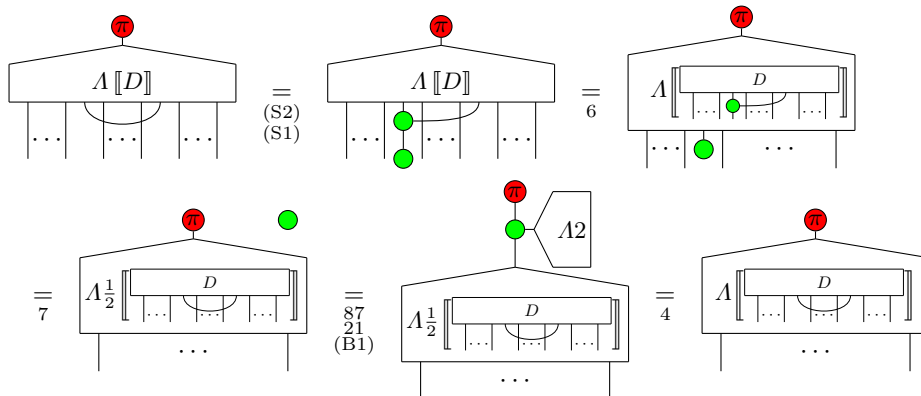


□

Proof (Lemma 6). We will prove the result for states, for the three-legged green dot, the Hadamard node and the empty diagram. All the other generators can be built from them and the Propositions


3, 4, 6,5 and 7: First, notice that:

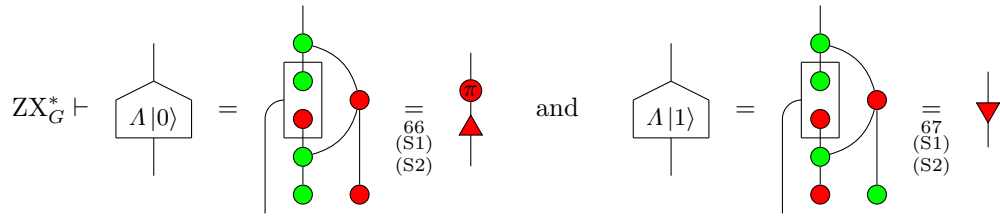

Then:

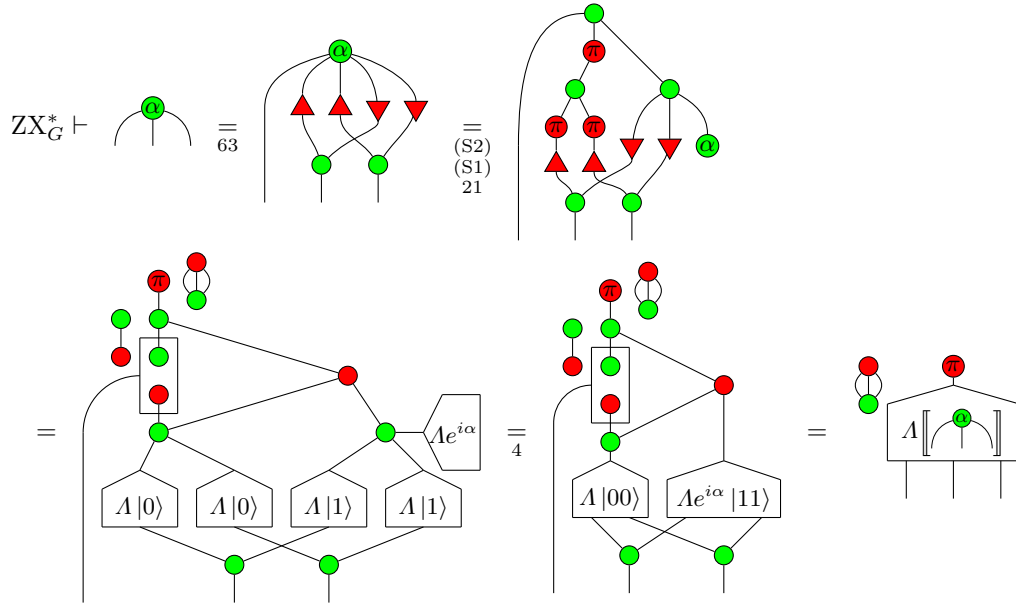

and:

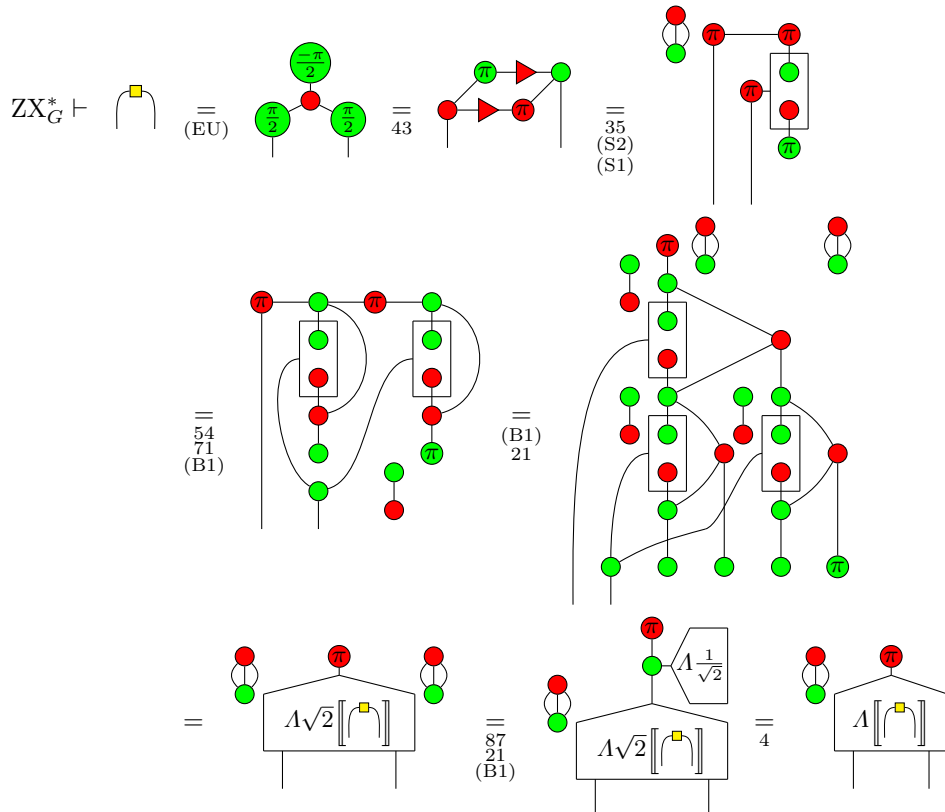

$$= \frac{1}{4} \begin{array}{c} \bullet \\ \bullet \end{array} \begin{array}{c} \bullet \\ \bullet \end{array} \equiv \frac{1}{17} \boxed{} \quad \text{and:}$$

$$\begin{aligned} \left[\begin{array}{c} \bullet \\ \bullet \end{array} \right] \Lambda x &= \left[\begin{array}{c} \bullet \\ \bullet \end{array} \right] \begin{array}{c} \theta \\ \pi \\ \gamma \\ \beta \end{array} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^n \begin{array}{c} \bullet \\ \bullet \end{array} \\ &\stackrel{\substack{(S1) \\ (B1) \\ (S2) \\ 21}}{=} \left[\begin{array}{c} \theta \\ \pi \\ \gamma \\ \beta \end{array} \begin{array}{c} \bullet \\ \bullet \end{array} \right] \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^n \begin{array}{c} \bullet \\ \bullet \end{array} \\ &\stackrel{\substack{(K) \\ 18 \\ (S1)}}{=} \left[\begin{array}{c} \theta - \beta \\ 2\beta \end{array} \begin{array}{c} \bullet \\ \bullet \end{array} \right] \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^n \begin{array}{c} \bullet \\ \bullet \end{array} \\ &= e^{i(\theta-\beta)} \frac{2^n}{2} (1 + e^{2i\beta}) = 2^n \cos(\beta) e^{i\theta} = \rho e^{i\theta} = x \end{aligned}$$

If $x = 0$, these results are obvious. **The conditions for applying Theorem 2 are respected:**

- If either $x = 0$ or $y = 0$, the sum and product are obvious. Otherwise, let $x = \rho_1 e^{i\theta_1}$ and $y = \rho_2 e^{i\theta_2}$:

$$\begin{aligned} \begin{array}{c} \bullet \\ \bullet \end{array} \Lambda x \quad \begin{array}{c} \bullet \\ \bullet \end{array} \Lambda y &= \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_2} \begin{array}{c} \theta_1 \\ \theta_2 \\ \gamma_1 \\ \gamma_2 \\ \beta_1 \\ \beta_2 \end{array} \\ &\stackrel{84}{=} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \theta_1 \\ \theta_2 \\ \gamma_1 \\ \gamma_1 \\ \beta_1 \\ \beta_2' \end{array} \\ &\stackrel{\substack{21 \\ 35 \\ 69}}{=} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \theta_1 \\ \theta_2 \\ \gamma_1 \\ \gamma_1 \\ \beta_1 \\ \beta_2 \end{array} \\ &\stackrel{4}{=} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \theta_1 \\ \theta_2 \\ \beta_1' \\ \beta_2' \end{array} \\ &\stackrel{83}{=} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \theta_3 \\ \beta_3 \end{array} = \Lambda(x+y) \end{aligned}$$


with

$$\begin{aligned} \forall k \in \{1, 2\}, \beta_k &= \arccos\left(\frac{\rho_k}{2^{n_k}}\right) & \gamma_k &= \arccos\left(\frac{1}{2^{n_k}}\right) & \beta_2' &= \arccos\left(\frac{\rho_2}{2^{n_1}}\right) \\ \theta_3 &= \arg(\rho_1 e^{i\theta_1} + \rho_2 e^{i\theta_2}) \\ \beta_3 &= \arccos(e^{i\theta_1 - \theta_3} \cos \beta_1 + e^{i\theta_2 - \theta_3} \cos \beta_2) = \arccos\left(\frac{\rho_1 e^{i\theta_1} + \rho_2 e^{i\theta_2}}{e^{i\theta_3} 2^n}\right) \end{aligned}$$


•

$$\begin{aligned} \begin{array}{c} \bullet \\ \bullet \end{array} \Lambda x \quad \begin{array}{c} \bullet \\ \bullet \end{array} \Lambda y &= \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_2} \begin{array}{c} \theta_1 \\ \theta_2 \\ \gamma_1 \\ \gamma_2 \\ \beta_1 \\ \beta_2 \end{array} \\ &\stackrel{\substack{(S1) \\ 21}}{=} \begin{array}{c} \bullet \\ \bullet \end{array} \otimes^{n_1+n_2} \begin{array}{c} \theta_1 + \theta_2 \\ \beta_1 \\ \beta_2 \\ \gamma_1 \\ \gamma_2 \end{array} \end{aligned}$$


Proof (Lemma 13). First, if $x, y \in \mathbb{N}$:

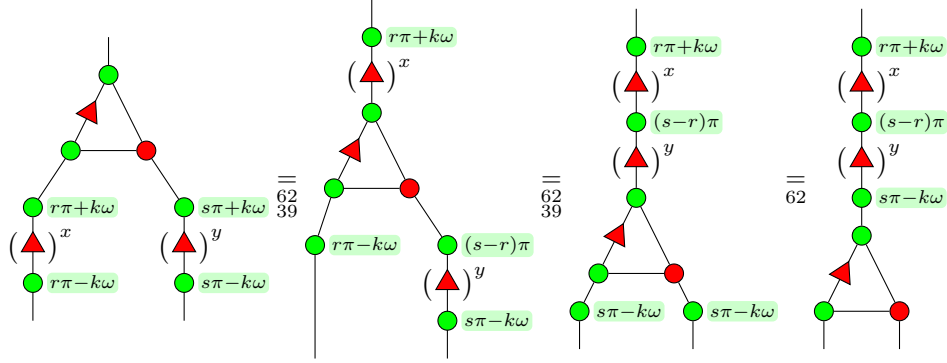


If $r = s$:

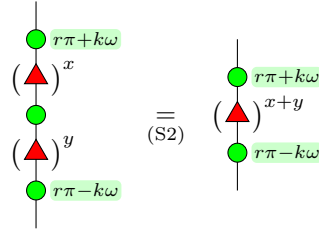


Otherwise, if $r \neq s$ and $x \geq y$:

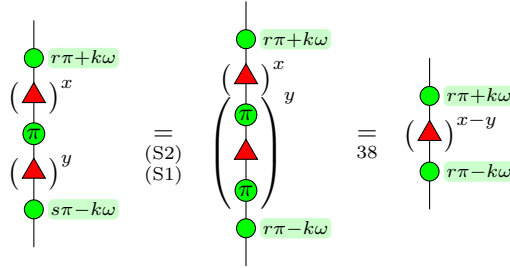


The case $r \neq s$ and $x \leq y$ is similar. In the end:

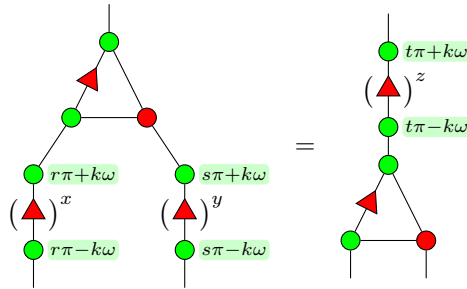

with $(-1)^t z = (-1)^r x + (-1)^s y$. The result for the sum immediately follows by induction (if 0 is involved, the result is obvious). For the product, first, if $P(X) = P'(X) + (-1)^b a X^k$:

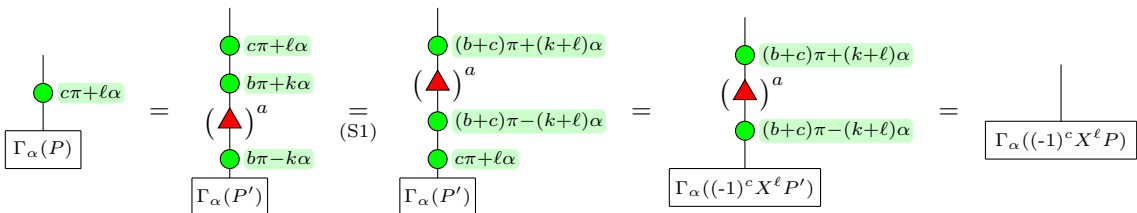


and . Then, if Q is non-null:

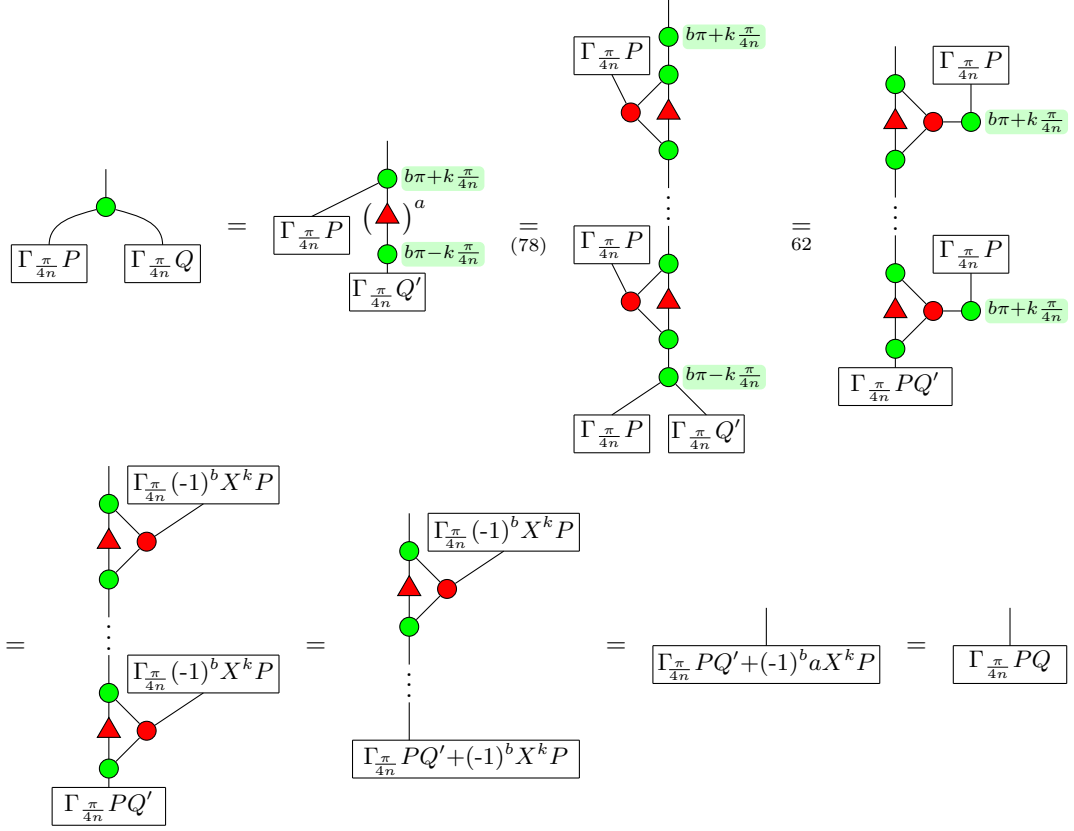



and if $Q = 0$, the result is obvious. □

Proof (Proposition 10). First of all, we can easily derive for any N :

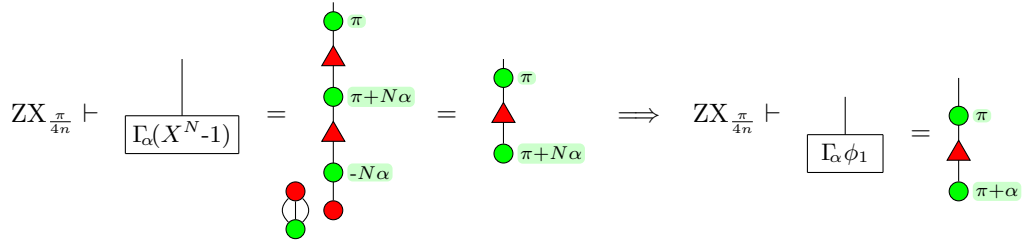


Now, assume p is prime. Then, $\phi_1(X)\phi_d(X) = \prod_{d|p} \phi_d(X) = X^p - 1$. Since sums and products of control polynomials are derivable in ZX, it means:

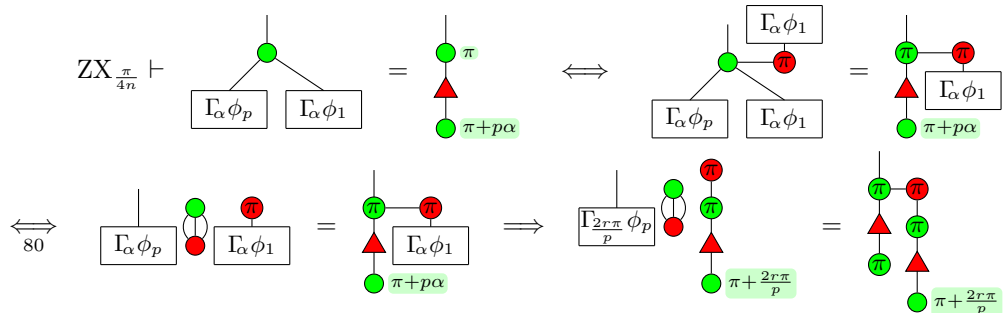

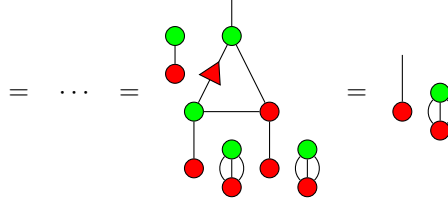

□


Proof (Theorem 4). The product is obvious when we have Lemmas 13 and 10. For the sum, let $x = \frac{1}{2^p}P(e^{i\frac{\pi}{4n}})$, $y = \frac{1}{2^q}Q(e^{i\frac{\pi}{4n}})$. W.l.o.g., assume $p \leq q$. Then:

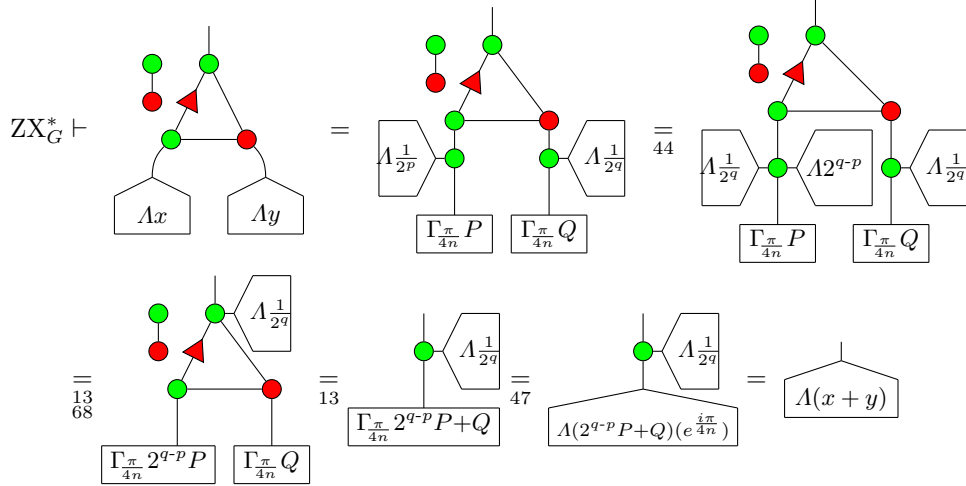

The ante-penultimate diagram may not directly be in normal form, for there may be S such that $2^{q-p}P + Q = 2S$, but this is dealt with with Lemma 47. □

A.11 Completeness for the $\frac{\pi}{2^n}$ -fragment

Proof (Lemma 16). If $k \in \{-2^n + 1, \dots, 2^{n+1} - 1\}$, then there exist $0 \leq m < n$ and $p \in \mathbb{Z}$ such that $k = 2^m(2p - 1)$ i.e. $\frac{k\pi}{2^n} = \frac{2p-1}{2^{n-m}}\pi$ where $2^{n-m} \geq 2$. Then:

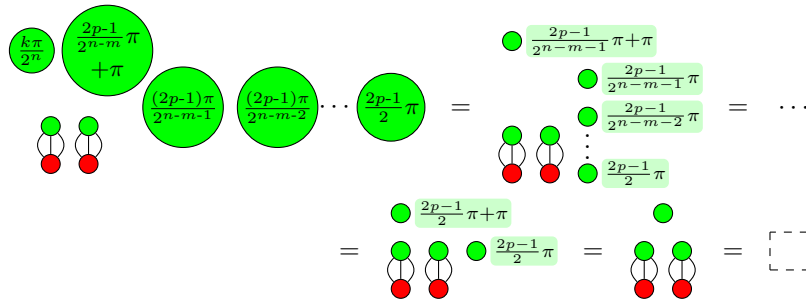

□

Proof (Corollaries 2 and 3). Let G be a subgroup of $\mathbb{Q}\pi$, and D_1 and D_2 be two diagrams of the fragment G , such that $\llbracket D_1 \rrbracket = \llbracket D_2 \rrbracket$. If G is finite, Theorem 4 directly gives the result. Otherwise, there exists $n \in \mathbb{N}$ such that $\frac{\pi}{4n} \in G$ and both diagrams are in the $\frac{\pi}{4n}$ -fragment of the ZX-Calculus. By completeness (Theorem 4): $\text{ZX}_{4n}^{\text{cancel}} \vdash D_1 = D_2$, and since $\text{ZX}_G^{\text{cancel}} \vdash \text{ZX}_{4n}^{\text{cancel}}$, $\text{ZX}_G^{\text{cancel}} \vdash D_1 = D_2$.

The proof for the $\mathbb{D}\pi$ fragment is similar, except we use the completeness of $\frac{\pi}{2^n}$ -fragment (Theorem 5), and the set of axioms ZX. □