



**HAL**  
open science

# Plasmon amplification by strong coupling in a layered structure

Aurore Castanié, Brahim Guizal, Mauro Antezza, Didier Felbacq

► **To cite this version:**

Aurore Castanié, Brahim Guizal, Mauro Antezza, Didier Felbacq. Plasmon amplification by strong coupling in a layered structure. NanoScience Engineering 2013 - Part of SPIE Optics Photonics, Aug 2013, San Diego (California), United States. pp.88081K, 10.1117/12.2029606 . hal-02964425

**HAL Id: hal-02964425**

**<https://hal.science/hal-02964425v1>**

Submitted on 12 Oct 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Plasmon amplification in a layered structure

Aurore Castanié, Brahim Guizal, Mauro Antezza and Didier Felbacq

<sup>a</sup>Université de Montpellier 2, Laboratoire Charles Coulomb  
Unité Mixte de Recherche du Centre National de la Recherche Scientifique 5221  
34095 Montpellier, France;

## ABSTRACT

A layered waveguide supported hybrid modes between a surface plasmon and a confined guided mode is studied. The condition for the strong coupling regime are described. The Green function is obtained and decomposed along the continuous and discrete spectrum.

**Keywords:** plasmonics, PT-symmetry, spacers, strong coupling, planar waveguides, integrated optics

## 1. HYBRIDIZATION OF THE MODES

In this work we consider a layered structure such as that depicted in fig.1. The high index planar waveguide

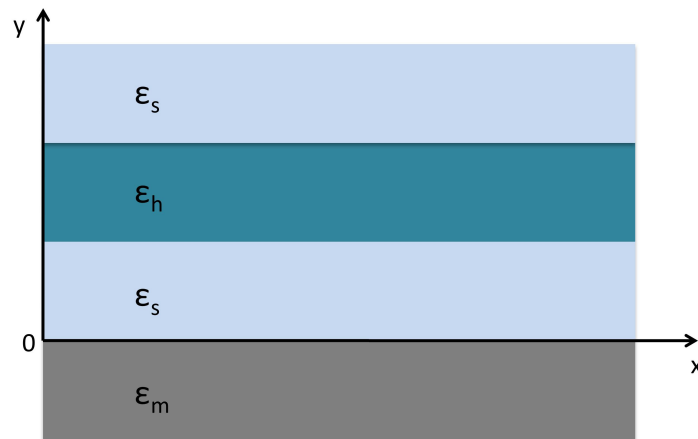


Figure 1. A layered structure supporting confined modes.

can support guided modes with dispersion curves given in fig. 2 (its width is taken to be 500nm). The layer of metal can support guided surface plasmon, whose dispersion curves are given in fig. 3 (its width is taken to be 100nm). When both layers are near each other the modes hybridize, resulting in the anti-crossing of the dispersion curves as shown in fig. 4.

The hybridization depends upon the coupling between the dielectric waveguide and the slab of metal. Let  $h$  denote this distance. When  $h$  is larger than the extinction length of the guided mode and the surface plasmon, no coupling can occur, this happens here for  $h > 400nm$  and for the frequencies lying in the visible to infrared region. This situation is depicted in fig. 4. In fig. 5, the value of  $h$  is 100nm and the regime is that of the strong coupling<sup>1,2</sup> with an overlap of the evanescent part of the modes, leading to an anti crossing of the dispersion curves. Note however that for larger propagation constant the coupling can remain weak. Finally for  $h = 30nm$  one enters the regime of ultra strong coupling where the dispersion curves of the waveguide and that of the plasmon cannot be tell apart. There are only hybrid modes that can be classified along their spatial repartition only (fig. 6).

---

Further author information: (Send correspondence to D. Felbacq)  
D. Felbacq: E-mail: Didier.Felbacq@univ-montp2.fr

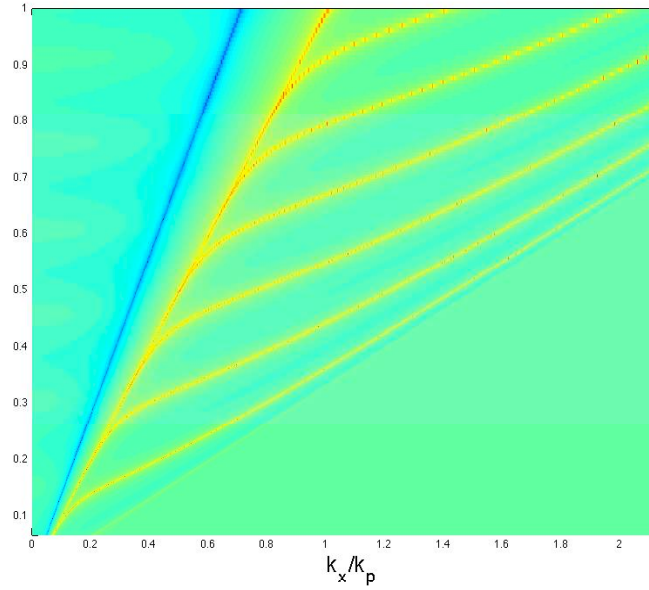


Figure 2. Dispersion curve for the dielectric slab.

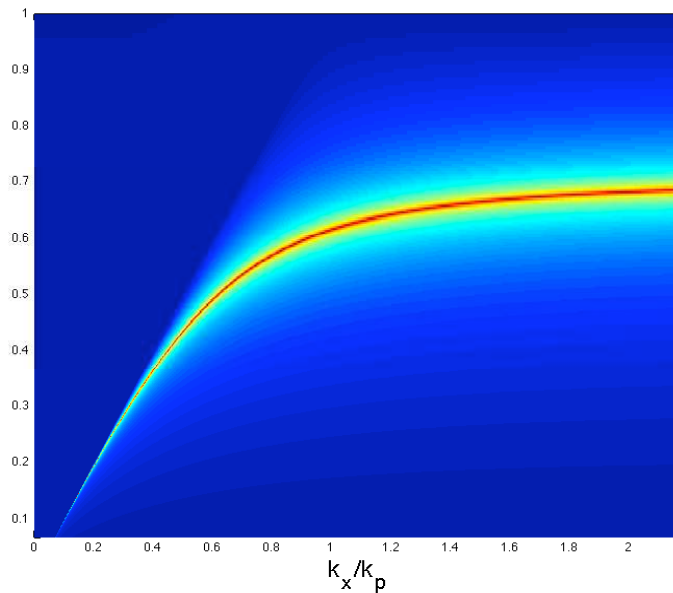


Figure 3. Dispersion curve for the metal layer.

## 2. THE GREEN FUNCTION

In view of describing the emission of a source embedded in the waveguide,<sup>3,4</sup> with give here a short derivation of the Green function of the system. To do so, we solve the Helmholtz equation:

$$\nabla \cdot (\epsilon^{-1} \nabla G) + k_0^2 G = \delta_{x_0} \otimes \delta_{y_0} \quad (1)$$

upon performing a Fourier transform in the  $x$  direction, we obtain:

$$G(x - x_0, y, y_0) = \int g(y, y_0; \gamma) e^{i\gamma(x-x_0)} d\gamma \quad (2)$$

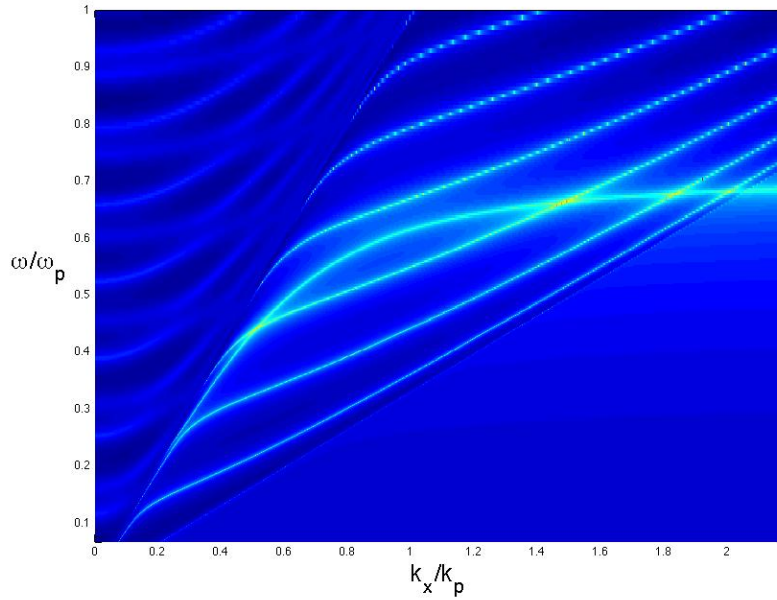


Figure 4. Dispersion curves for the hybrid structure.

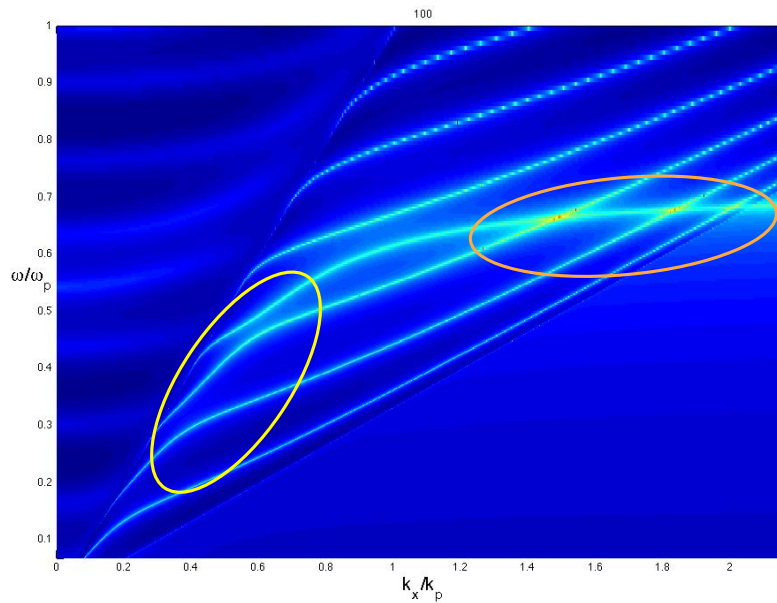


Figure 5. Hybridization in the strong coupling regime. The yellow ellipsis corresponds to a region of strong overlap whereas the orange one corresponds to a weak coupling.

From translational invariance, we may take  $x_0 = 0$ . The Fourier transform  $g(y, y_0; \gamma)$  satisfies:

$$\frac{d}{dy} \left( \varepsilon^{-1} \frac{d}{dy} g \right) + \left( k_0^2 - \frac{\gamma^2}{\varepsilon} \right) g = \delta_{y_0} \quad (3)$$

It can be expressed as a linear combination of the modes described in fig. 7 and 8.

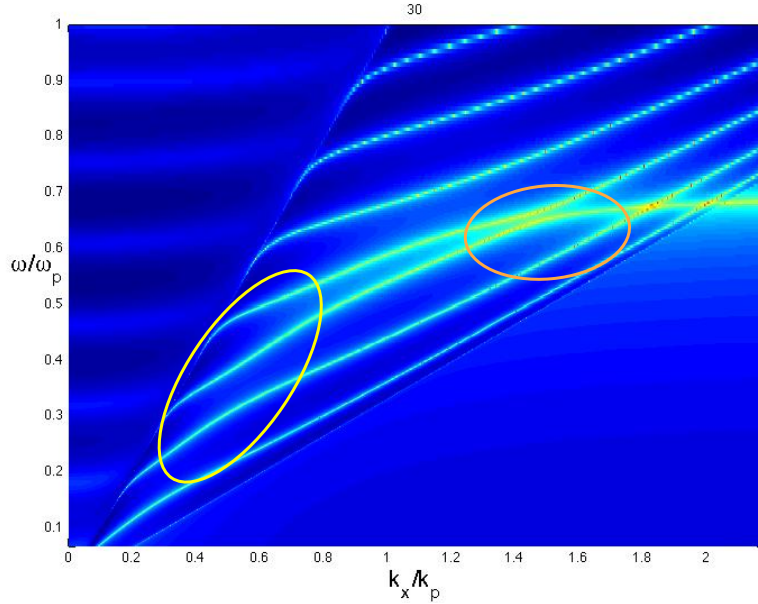


Figure 6. Hybridization in the ultrastrong coupling regime. There is a strong anti crossing for both the yellow and orange ellipsis. The region of larger propagation constants still exhibit a weak coupling.

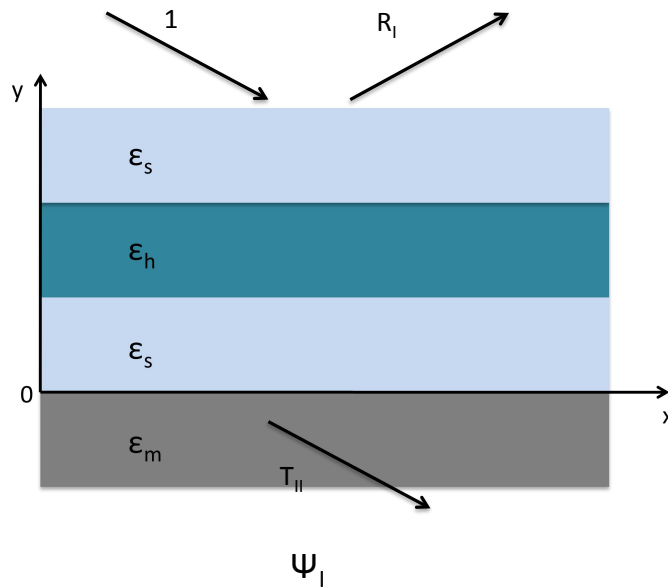


Figure 7. Scattering mode  $\Psi_I$ .

A direct calculation shows that the  $g(y, y_0, \gamma)$  has the following expression:

$$g(y, y_0, \gamma) = \begin{cases} \frac{1}{W(\Psi_I, \Psi_{II})} \Psi_I(y) \Psi_{II}(y_0) & \text{if } y < y_0 \\ \frac{1}{W(\Psi_I, \Psi_{II})} \Psi_I(y_0) \Psi_{II}(y) & \text{if } y > y_0 \end{cases} \quad (4)$$

### 3. NUMERICAL RESULTS

We plot in fig. 9 and 10 the map of the field  $|g|$  generated by a point source situated at the middle of the dielectric waveguide. It is the local density of states.<sup>5,6</sup> Physically a point source can be considered as a quantum emitter

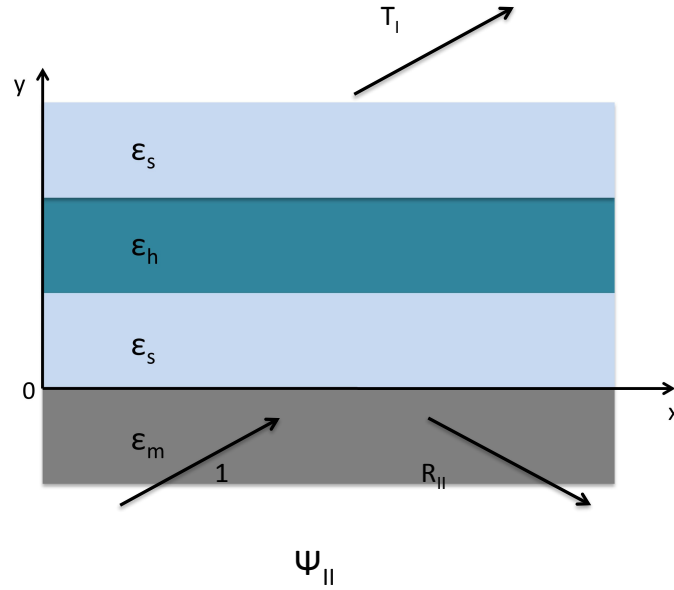


Figure 8. Scattering mode  $\Psi_{II}$  .

that be de-excited into different modes. Specifically, it can couple to hybrid (discrete) modes or in the continuum of scattering modes. A representation reads as follows:

$$G(x, y; y_0) = \sum_p c_p \psi_n(y) \psi_n(y_0) e^{i\gamma_n x} + \int_{C_I} c_I(\gamma) \psi_I(y) \psi_I(y_0) e^{i\gamma x} d\gamma + \int_{C_{II}} c_{II}(\gamma) \psi_{II}(y) \psi_{II}(y_0) e^{i\gamma x} d\gamma \quad (5)$$

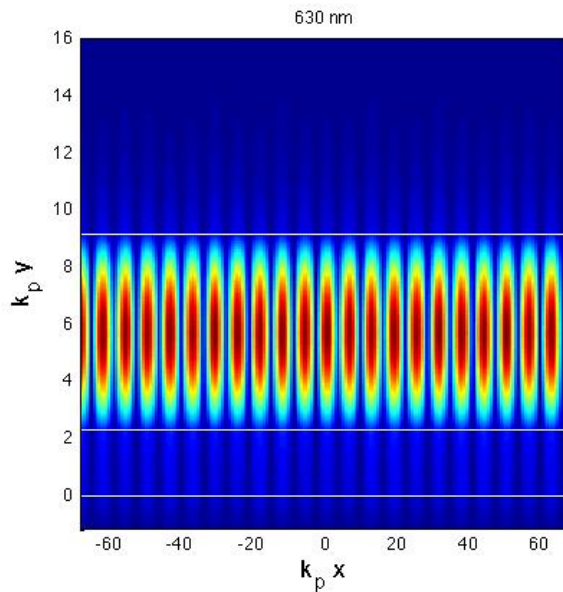


Figure 9. Local density of states for a source located in the middle of the dielectric waveguide. The wavelength is  $\lambda = 630\text{nm}$  and the regime is that of strong coupling.

The coefficients  $c_p, c_I, c_{II}$  can serve to quantify the coupling into the different modes. More precisely, the

part of the field projected on the guided modes is  $\sum_p |c_p|^2$ . In fig. 9 and 10, we have plotted the local density of states for two different wavelengths (630nm and 1500nm). It can be seen that, despite the fact that the regime is that of strong coupling, the hybrid mode is not necessarily coupled by a point source.<sup>7-10</sup> Rather, in fig. 9, it is clearly seen that it is mainly the confined part that is excited. However, in fig. 10 the hybrid mode is completely coupled and the surface plasmon is clearly excited.

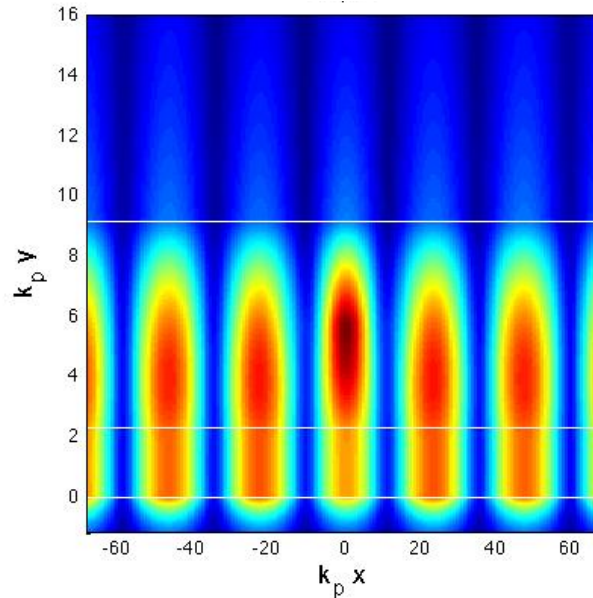


Figure 10. Local density of states for a source located in the middle of the dielectric waveguide. The wavelength is  $\lambda = 1550nm$  and the regime is that of strong coupling.

## ACKNOWLEDGMENTS

This work was done under the financial support of the Agence Nationale de la Recherche (contract N° 060954 OPTRANS) and the Institut Universitaire de France.

## REFERENCES

1. Iwase H. et al., "Analysis of the Purcell effect in photonic and plasmonic crystals with losses," *Opt. Express* **18**, 16546 (2010).
2. Bellessa J. et al., "Strong Coupling between Surface Plasmons and Excitons in an Organic Semiconductor," *Phys. Rev. Lett.* **93**, 036404 (2004).
3. Tanaka K. et al., "Multifold Enhancement of Quantum Dot Luminescence in Plasmonic Metamaterials," *Phys. Rev. Lett.* **105**, 227403 (2010).
4. Bergman D. J. and Stockman M. I., "Surface Plasmon Amplification by Stimulated Emission of Radiation: Quantum Generation of Coherent Surface Plasmons in Nanosystems," *Phys. Rev. Lett.* **90**, 027402 (2003).
5. Chang D. E. et al., "Quantum optics with surface plasmons," *Phys. Rev. Lett.* **97**, 053002 (2006).
6. Dionne J. A. et al., "Planar metal plasmon waveguides: frequency-dependent dispersion, propagation, localization, and loss beyond the free electron model," *Phys. Rev. B* **72**, 075405 (2005).
7. Granet G. and Guizal B., "Analysis of strip gratings using a parametric modal method by Fourier expansions," *Opt. Comm.* **255**, 1-11 (2005).
8. Edee K. et al., "Beam implementation in a nonorthogonal coordinate system: Application to the scattering from random rough surfaces," *J. Opt. Soc. Am. A* **25**, 796-804 (2008).

9. Centeno E. and Felbacq D., "Characterization of defect modes in finite bidimensional photonic crystals," J. Opt. Soc. Am. A **16**, 2705-2712 (1999).
10. Zolla F., Felbacq D. and Guizal B., "A remarkable diffractive property of photonic quasi-crystals," Opt. Comm. **148**, 6-10 (1998).