



**HAL**  
open science

## Mid-Infrared High Q Factor Silicon-Germanium Ring Resonator

Marko Perestjuk, Rémi Armand, Alberto Della Torre, Milan Sinobad, Arnan Mitchell, Andreas Boes, Jean- Michel Hartmann, Jean-Marc Fedeli, Vincent Reboud, Christelle Monat, et al.

► **To cite this version:**

Marko Perestjuk, Rémi Armand, Alberto Della Torre, Milan Sinobad, Arnan Mitchell, et al.. Mid-Infrared High Q Factor Silicon-Germanium Ring Resonator. European Conference on Integrated Optics 2022, May 2022, Milano, Italy. hal-03749753

**HAL Id: hal-03749753**

**<https://hal.science/hal-03749753>**

Submitted on 11 Aug 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Mid-Infrared High Q Factor Silicon-Germanium Ring Resonator

(Student paper)

Marko Perestjuk<sup>1,2,\*</sup>, Rémi Armand<sup>1</sup>, Alberto Della Torre<sup>1</sup>, Milan Sinobad<sup>1</sup>, Arnan Mitchell<sup>2</sup>, Andreas Boes<sup>2</sup>, Jean-Michel Hartmann<sup>3</sup>, Jean-Marc Fedeli<sup>3</sup>, Vincent Reboud<sup>3</sup>, Christelle Monat<sup>1</sup> and Christian Grillet<sup>1</sup>

<sup>1</sup>Université de Lyon, Institut des Nanotechnologies de Lyon (INL, UMR-CNRS 5270), Ecole Centrale de Lyon, 69130 Ecully, France

<sup>2</sup>School of Engineering, RMIT University, Melbourne, VIC 3001, Australia

<sup>3</sup>Université Grenoble Alpes, CEA-Leti, 38054 Grenoble Cedex 9, France

\*email: marko.perestjuk@ec-lyon.fr

**We demonstrate a ring resonator with high Q-factor in the mid-infrared in a silicon-germanium on silicon chip-based platform. The side-coupled ring exhibits a loaded Q-factor of 90,000 at the operating wavelength around 4.18  $\mu\text{m}$ . This is the highest Q-factor achieved on this material platform.**

**Keywords:** Mid-infrared, Cavities, Ring Resonators, Silicon Germanium

## INTRODUCTION

The mid-infrared (MIR) wavelength range (between 3 and 13  $\mu\text{m}$ ) has shown a large potential for sensing applications, as many molecules have strong fundamental absorption lines in this range [1]. However, the high cost and bulky MIR technology has prevented a real breakthrough so far. The integration of MIR components on-chip can provide a crucial step towards large scale applications.

Several on-chip devices were implemented in the MIR [2-4], especially ring (and racetrack) resonators are expected to play a crucial role in on-chip integrated sensing schemes. As was first demonstrated in the near-IR, they can be used to generate frequency combs [5], and could thus provide a broadband MIR light source, a key element of sensing devices that can operate in a wide spectral range. Resonators with a high Q-factor can also enhance the interaction between light and molecules and hence boost the sensitivity [4, 6]. Several ring resonators have been demonstrated in the MIR [7-12]. High Q-factors have been achieved predominantly on silicon-on-insulator (SOI, [7]) and silicon-on-sapphire (SOS, [8]) platforms, which, however, have high losses beyond  $\sim 3.5 \mu\text{m}$  and  $\sim 6.5 \mu\text{m}$ , respectively [1]. They were also used to demonstrate frequency combs at this wavelength range [13-15], for example one state-of-the-art demonstration at 2.4-4.3  $\mu\text{m}$  in a silicon microring was shown in [13]. At the long wavelength end the power was quite low though due to the absorption. High-Q ring resonators in the MIR have been realized also with chalcogenide glass [16], although the material photosensitivity could translate in a low temporal device stability. In addition, group IV materials are preferable for cost-effective large scale fabrication. Silicon-germanium (SiGe) is a promising material, thanks to its CMOS compatibility and transparency window up to 15  $\mu\text{m}$  [1]. Low-loss SiGe waveguides operating in the MIR have been already demonstrated [17], and their nonlinear properties were exploited for supercontinuum generation [18]. So far, however, only one SiGe ring resonator demonstration has been reported, with a moderate 3,200 Q-factor around 8  $\mu\text{m}$  wavelength [9]. Here, we report a SiGe ring resonator coupled to a bus waveguide, which exhibits a loaded Q-factor of 90,000 at 4.18  $\mu\text{m}$ .

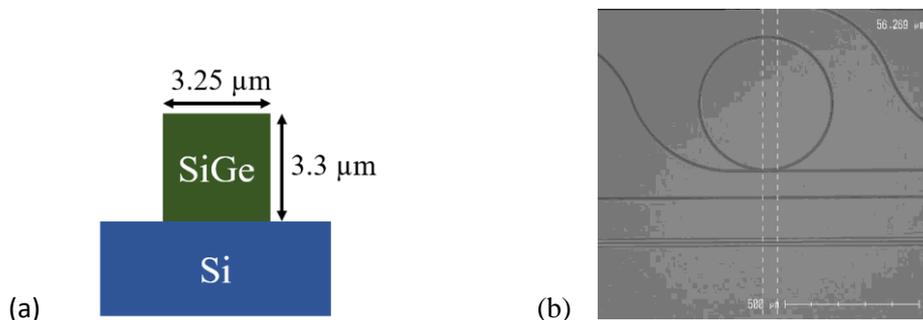


Fig. 1. (a) SiGe platform used for the ring resonator. (b) SEM picture of the ring resonator.

## FABRICATION AND RING RESONANCE MEASUREMENT

Our platform consists of an air-cladded  $3.3\ \mu\text{m}$  thick and  $3.25\ \mu\text{m}$  wide  $\text{Si}_{0.6}\text{Ge}_{0.4}$  core waveguide on a silicon substrate (Fig. 1a). The resonators were fabricated on a 200 mm CMOS pilot line at CEA-Leti using deep ultraviolet photolithography and deep reactive ion etching. A ring radius of  $R = 250\ \mu\text{m}$  (Fig. 1b) was chosen to target a free spectral range (FSR) of 53 GHz. The coupling gap between ring and bus waveguide is  $250\ \text{nm}$ .

Fig. 2 shows a scheme of our measurement setup. The ring resonance characterization was done using an Adtech  $4.18\ \mu\text{m}$  distributed feedback quantum cascade laser (QCL) providing cw light. The out-coupled light was recorded by a Thorlabs Fourier transform optical spectrum analyzer (OSA). We did not utilize the spectral mode of the OSA but rather used it as a photodetector through the interferometry between the two delay beams to have less noise than with a normal photodetector. The emission wavelength of the QCL was modulated between  $4177.27\ \text{nm}$  and  $4177.89\ \text{nm}$  by applying a periodic triangular current modulation. The optical pump power was  $20\ \text{mW}$  (measured directly before the input coupling lens).

Fig. 3a shows one period of the modulation recorded by the interferogram mode of the OSA. Over the whole wavelength range there are pronounced Fabry-Perot resonances, which result from the cavity formed by the two end-facets of the access bus waveguide. Nonetheless, the ring resonance can be clearly distinguished on this plot: it manifests as an additional dip occurring twice, during the wavelength ramp up and the ramp down, respectively. Fig 3b shows a zoom-in of the ring resonance. From this resonance we could retrieve a total (loaded) quality factor of  $Q = 90,000$ . We did not determine yet if we are at critical coupling. In any case, for the intrinsic quality factor a value much higher than 105 is expected.

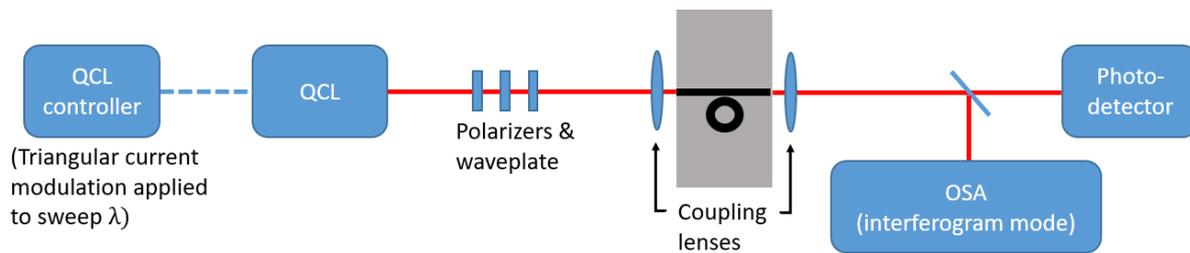


Fig. 2. Measurement setup.

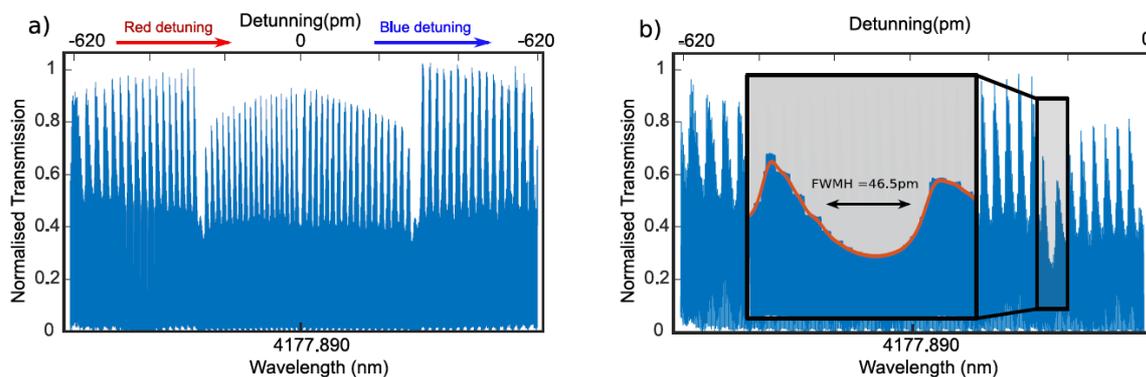


Fig. 3. (a) Wavelength scan (ramp up and ramp down) of the ring resonance with a cw QCL. The ring resonance at one specific wavelength can be clearly distinguished from the Fabry-Perot resonances, which occur due to the waveguide facet at input and output coupling. (b) Zoom-in on the ring resonance.

## CONCLUSION

To conclude, we have reported a SiGe ring resonator operating around 4.18  $\mu\text{m}$ , with a loaded Q-factor of 90,000. This is the highest Q-factor achieved on this material platform and among the highest achieved around this wavelength range on a CMOS-compatible platform in general. These results set the basis for generating frequency combs in the MIR spectral range. The operation at 4.18  $\mu\text{m}$  was only limited by the availability of the QCL while SiGe allows for much longer wavelengths, so we expect to be able to demonstrate similar Q-factors deeper into the MIR.

Acknowledgements: We acknowledge the support of the International Associated Laboratory in Photonics between France and Australia (LIA ALPhFA) and the Agence Nationale de la Recherche (MIRSIComb, ANR-17-CE24-0028). The ECLAUSion project has received funding from the European Union's Horizon 2020 research and innovation program under the Marie Skłodowska-Curie grant agreement No 801512.

## References

- [1] R. Soref, *Mid-infrared photonics in silicon and germanium*, Nature photonics, vol. 4, no. 8, pp. 495-497, 2010
- [2] Y. Zou, *et al.*, *Mid-infrared silicon photonic waveguides and devices [Invited]*, Photonics Research, vol. 6, no. 4, pp. 2018
- [3] H. Lin, *et al.*, *Mid-infrared integrated photonics on silicon: a perspective*, Nanophotonics, vol. 7, no. 2, pp. 393-420, 2017
- [4] T. Hu, *et al.*, *Silicon photonic platforms for mid-infrared applications [Invited]*, Photonics Research, vol. 5, no. 5, pp. 2017
- [5] T. J. Kippenberg, *et al.*, *Microresonator-based optical frequency combs*, Science, vol. 332, no. 6029, pp. 555-559, 2011
- [6] P. Ma, *et al.*, *High Q factor chalcogenide ring resonators for cavity-enhanced MIR spectroscopic sensing*, Opt Express, vol. 23, no. 15, pp. 19969-19979, 2015
- [7] S. A. Miller, *et al.*, *Low-loss silicon platform for broadband mid-infrared photonics*, Optica, vol. 4, no. 7, pp. 2017
- [8] R. Shankar, *et al.*, *Integrated high-quality factor silicon-on-sapphire ring resonators for the mid-infrared*, Applied Physics Letters, vol. 102, no. 5, pp. 051108, 2013
- [9] J. M. Ramirez, *et al.*, *Broadband integrated racetrack ring resonators for long-wave infrared photonics*, Opt Lett, vol. 44, no. 2, pp. 407-410, 2019
- [10] D. A. Kozak, *et al.*, *Germanium-on-silicon waveguides for long-wave integrated photonics: ring resonance and thermo-optics*, Opt Express, vol. 29, no. 10, pp. 15443-15451, 2021
- [11] B. Troia, *et al.*, *Germanium-on-silicon Vernier-effect photonic microcavities for the mid-infrared*, Opt Lett, vol. 41, no. 3, pp. 610-613, 2016
- [12] S. Radosavljevic, *et al.*, *Mid-infrared Vernier racetrack resonator tunable filter implemented on a germanium on SOI waveguide platform [Invited]*, Optical Materials Express, vol. 8, no. 4, pp. 2018
- [13] M. Yu, *et al.*, *Mode-locked mid-infrared frequency combs in a silicon microresonator*, Optica, vol. 3, no. 8, pp. 2016
- [14] K. Luke, *et al.*, *Broadband mid-infrared frequency comb generation in a Si(3)N(4) microresonator*, Opt Lett, vol. 40, no. 21, pp. 4823-4826, 2015
- [15] A. G. Griffith, *et al.*, *Silicon-chip mid-infrared frequency comb generation*, Nat Commun, vol. 6, no. 6299, 2015
- [16] H. Lin, *et al.*, *Demonstration of high-Q mid-infrared chalcogenide glass-on-silicon resonators*, Opt Lett, vol. 38, no. 9, pp. 1470-1472, 2013
- [17] L. Carletti, *et al.*, *Nonlinear optical response of low loss silicon germanium waveguides in the mid-infrared*, Opt Express, vol. 23, no. 7, pp. 8261-8271, 2015
- [18] M. Sinobad, *et al.*, *Mid-infrared octave spanning supercontinuum generation to 85  $\mu\text{m}$  in silicon-germanium waveguides*, Optica, vol. 5, no. 4, pp. 2018