



HAL
open science

Ground referencing GRACE satellite estimates of groundwater storage changes in the California Central Valley, USA

B. R. Scanlon, L. Longuevergne, D. Long

► **To cite this version:**

B. R. Scanlon, L. Longuevergne, D. Long. Ground referencing GRACE satellite estimates of groundwater storage changes in the California Central Valley, USA. *Water Resources Research*, 2012, 48, pp.04520. 10.1029/2011WR011312 . hal-00710434

HAL Id: hal-00710434

<https://hal.science/hal-00710434>

Submitted on 20 Jun 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1 **Ground Referencing GRACE Satellite Estimates of Groundwater Storage Changes in the**
2 **California Central Valley, US**

3

4

5 **Scanlon, B.R.¹, Longuevergne, L.² and Long, D.²**

6

7

8 ¹Bureau of Economic Geology, Jackson School of Geosciences, University of Texas at Austin,
9 Austin, Texas 78758, United States

10 ²Géosciences Rennes - UMR CNRS 6118, Université de Rennes 1, 35042 Rennes Cedex,
11 France

12

13 **Abstract**

14 There is increasing interest in using GRACE (Gravity Recovery and Climate Experiment)
15 satellite data to remotely monitor groundwater storage variations; however, comparisons with
16 ground-based well data are limited but necessary to validate satellite data processing,
17 especially when the study area is close to or below the GRACE footprint. The Central Valley is a
18 heavily irrigated region with large-scale groundwater depletion during droughts. Here we
19 compare updated estimates of groundwater storage changes in the California Central Valley
20 using GRACE satellites with storage changes from groundwater level data. A new processing
21 approach was applied that optimally uses available GRACE and water balance component data
22 to extract changes in groundwater storage. GRACE satellites show that groundwater depletion
23 totaled $\sim 31.0 \pm 3.0 \text{ km}^3$ for GRGS (Groupe de Recherche de Geodesie Spatiale) satellite data
24 during the drought from Oct 2006 through Mar 2010. Groundwater storage changes from
25 GRACE agreed with those from well data for the overlap period (Apr 2006 through Sep 2009)
26 (27 km^3 for both). General correspondence between GRACE and groundwater level data
27 validates the methodology and increases confidence in use of GRACE satellites to monitor
28 groundwater storage changes.

29 **Introduction**

30 Water scarcity is a critical issue globally with an estimated 1.1 billion people lacking access
31 to safe drinking water globally (UN Development Program, 2006). Groundwater is increasingly
32 being used for drinking water and serves an estimated 1.5 – 2.8 billion people globally and up to
33 98% of rural populations (Morris et al., 2003). There has been a rising trend in groundwater use
34 for irrigation since the 1940s and 1950s and groundwater now accounts for $\sim 40\%$ of irrigation
35 water globally (Siebert and Döll, 2010). Increasing reliance on groundwater for drinking water
36 and irrigation is attributed to ubiquity of groundwater resources, ease of development with
37 minimal capital costs, generally good water quality because of filtering during recharge, and
38 greater resilience to drought relative to surface water (Giordano, 2009). The importance of
39 groundwater to water resources should continue to increase with projected reductions in
40 reliability of surface water and soil moisture associated with climate extremes related to climate
41 change (Kundzewicz and Döll, 2009).

42 Groundwater is often referred to as the invisible resource and our understanding of the
43 dynamics of groundwater resources is generally much less than that of surface water.
44 Monitoring networks for groundwater are more limited than those of surface water. Even when
45 monitoring networks are available, access to data is often restricted. Because of the general

46 lack of monitoring data, there has been great interest in use of remote sensing to monitor
47 changes in groundwater storage, specifically in use of GRACE satellites. GRACE consists of
48 two satellites that track each other at a distance of ~220 km and are ~450 km above the land
49 surface. A rule of thumb for estimating GRACE footprint is to use the elevation of the satellites
50 ($450 \times 450 \text{ km} = \sim 200,000 \text{ km}^2$ basin area). Measurements of the distance between the
51 satellites to within micron scale resolution are used to derive a global map of changes in the
52 Earth's gravity field at 10-day to monthly intervals. Gravity variations at monthly to annual
53 timescales may be interpreted as changes in water distribution on the continents after correction
54 for impacts of tidal, atmospheric, and oceanic contributions (Bettadpur, 2007; Bruinsma et al.,
55 2010).

56 GRACE data provide vertically integrated estimates of changes in total water storage
57 (TWS), which include changes in snow water equivalent storage (SWES), surface water
58 reservoir storage (RESS), soil moisture storage (SMS), and groundwater storage (GWS). Using
59 a priori monitoring or model-based estimates of SWES, RESS, and SMS, changes in GWS can
60 be calculated as a residual from the disaggregation equation: $\Delta\text{GWS} = \Delta\text{TWS} - \Delta\text{SWES} -$
61 $\Delta\text{RESS} - \Delta\text{SMS}$.

62 GRACE satellites provide continuous monitoring of TWS changes globally. GRACE has
63 been used to monitor GWS changes in global hotspots of depletion (Wada et al., 2010) in NW
64 India (Rodell et al., 2009; Tiwari et al., 2009), US High Plains (Strassberg et al., 2007;
65 Longuevergne et al., 2010), and in the California Central Valley (Famiglietti et al., 2011).
66 However, with the exception of the High Plains, where detailed groundwater level monitoring
67 has been conducted since the 1980s in ~ 9000 wells annually (McGuire, 2009), GRACE-based
68 estimates of GWS have not been compared with ground-based data in NW India or in the
69 Central Valley. Other studies that have compared GRACE data with groundwater level
70 monitoring data have generally focused on seasonal signals rather than long-term trends and
71 groundwater level data have generally been limited to ≤ 100 wells (Yeh et al., 2006; Moiwo et al.,
72 2009; Rodell et al., 2007).

73 GRACE satellites provide a spatially filtered image of real TWS that needs to be processed
74 to produce information on changes in TWS over a space-limited area or basin (Swenson and
75 Wahr, 2002; Klees et al., 2007; Longuevergne et al., 2010). A large number of processing steps
76 and uncertainties in other water balance components used to estimate changes in GWS from
77 TWS make it imperative to compare GRACE GWS changes with ground-based data to assess
78 their validity, especially when the size of the area of interest is close to or below GRACE
79 footprint ($\sim 200,000 \text{ km}^2$) (Yeh et al., 2006). Ground-based estimates of GWS changes are

80 generally derived from water table or potentiometric surface fluctuations and require information
81 on aquifer storage coefficients to translate water level fluctuations to water storage (Domenico
82 and Schwartz, 1998).

83 The primary objective of this study was to compare GRACE-based estimates of GWS
84 changes in the Central Valley of California with ground-based estimates from water-level data
85 from wells to assess reliability of GRACE-based estimates of groundwater depletion. Secondary
86 objectives include use of an updated processing approach for GRACE data that considers
87 spatial variability in water balance components and should reduce uncertainties in GWS and
88 evaluation of different temporal filters for estimation of long-term trends in storage. for GRACE
89 data The area of the Central Valley (52,000 km²) is below the limit of GRACE footprint
90 (~200,000 km²); however, large mass changes in the aquifer as a result of irrigation pumpage
91 allow storage changes to be detected by GRACE. The Central Valley is an extremely important
92 region for agricultural productivity in California and in the US with an economic value of ~ 20
93 billion dollars in 2007 (NASS, 2007; <http://www.nass.usda.gov/>, accessed in 2010). Because
94 this region plays a large role in table food production in the US it is critical to understand the
95 dynamics of the groundwater system which is essential for irrigated agriculture, particularly in
96 the Tulare Basin in the south. Previous groundwater modeling shows large-scale depletion
97 during droughts (Faunt, 2009); therefore, the recent drought from ~ 2006 – 2009 should provide
98 a large signal for GRACE analysis. This study expands on the recent analysis of GRACE data
99 for the Central Valley described in Famiglietti et al. (2011) by comparing results from GRACE-
100 based estimates of GWS changes with those from groundwater level data and using a different
101 processing approach

102 **Methods**

103 **GRACE Data**

104 Water storage changes were estimated for the Sacramento and San Joaquin River Basins
105 (154,000 km² area), which include the Central Valley (52,000 km² area) (Fig. 1). GRACE data
106 from CSR (Center for Space Research, Univ. of Texas at Austin) and GRGS analysis centers
107 were used because they represent two different processing strategies: one of the least
108 constrained solutions, CSR RL04 (Bettadpur, 2007) and one of the most constrained, GRGS
109 RL02 (Bruinsma et al., 2010). Comparison of these two products allows estimation of the
110 confidence in GRACE-derived water storage changes. CSR provides data at monthly intervals
111 and GRGS at 10 day intervals. The GRACE processing approach was updated in this study

112 relative to the regular processing approach applied in most studies. The following sections
113 describe the regular processing approach which provides context for the updated approach.

114 **Regular GRACE Processing**

115 The regular processing approach estimates changes in TWS from GRACE data by filtering
116 the data, applying corrections for bias and leakage (Swenson et al., 2002, Klees et al., 2007,
117 Longuevergne et al., 2010) and solving the disaggregation equation to calculate changes in
118 GWS as shown in Fig. 2. This processing is described in detail in Auxiliary Material (Section 1).

119 Changes in TWS are estimated from GRACE data by recombining spherical harmonics up
120 to degree 50 (truncation to degree 50) for GRGS and to degree 60 for CSR. Further filtering was
121 applied to CSR data to remove north-south stripes (Swenson and Wahr, 2006) and to reduce
122 high frequency noise (300 km Gaussian smoother). No further filtering beyond truncation at
123 degree 50 was applied to GRGS data because there are no north-south stripes and the
124 regularization process used on GRGS precludes the need for additional filtering. In the
125 following, filtering will refer to both truncation and filtering.

126 Because filtering removes TWS signal at small spatial scales, in addition to high frequency
127 noise, the amplitude of the TWS signal has to be restored. Most studies calculate a rescaling or
128 multiplicative factor to restore the signal amplitude by applying the same filtering as applied to
129 GRACE data to a synthetic mass distribution and calculating the ratio between filtered and
130 unfiltered data. Applying filtering to a synthetic mass distribution is sometimes referred to as
131 “forward modeling” and generates a mass distribution similar to what GRACE sees. Ideally the
132 synthetic mass distribution should match the actual mass distribution as closely as possible. For
133 TWS, this mass distribution should include all components of the water budget. The synthetic
134 mass distribution is generally derived from Global Land Data Assimilation System (GLDAS) land
135 surface models (LSMs), such as CLM, MOSAIC, NOAH, and VIC. Output from the LSMs is
136 generally used as a proxy for the true water mass distribution. The reliability of LSM outputs
137 depends on the ability of the LSM to approximate the true water mass distribution in the system.
138 LSMs are simplifications of the natural system with limited resolution and most simulate snow
139 and soil moisture storage but generally do not include surface water or groundwater storage.
140 Runoff is simulated but is not routed, and cold processes are not simulated accurately
141 (especially glaciated areas). Water redistribution from groundwater to soils through irrigation is
142 also not simulated in most LSMs. The signal restoration process uses spatial variability from
143 LSMs which may or may not be realistic and could lead to biased estimates in TWS
144 (Longuevergne et al., 2010). Once the TWS signal is restored, the various water balance

145 components, including SWES, RESS, and SMS basin averages, are then subtracted from TWS
146 to calculate GWS as a residual (Fig. 2). Therefore, this regular processing approach does not
147 consider spatial variability of masses in a basin and uses a rescaling factor based on a priori
148 LSM masses that ignore GWS.

149 **Updated GRACE Processing**

150 GRACE processing was updated in this study to provide more reliable estimates of GWS
151 changes with optimal use of available information. The new processing approach differs from
152 the regular approach in calculating GWS from TWS using filtered data at GRACE resolution
153 before any rescaling is applied (Fig. 2). In this updated approach, GRACE data were
154 recombined and filtered to provide filtered TWS as previously described. The various water
155 balance components (SWES, SMS, and RESS) were then filtered in the same way as GRACE
156 data, i.e. projection of model grids on spherical harmonics, recombination to maximum degree
157 50 for comparison with GRGS data or degree 60 for comparison with CSR data and application
158 of a 300 km Gaussian filter for comparison with CSR data. Gridded SWES and SMS data and
159 point RESS data were used, allowing spatial variability in these different storage components to
160 be incorporated in the processing, in contrast to the regular processing approach which uses
161 basin means. Restoring the amplitude of the filtered GWS signal only requires bias correction
162 (simple rescaling) and no leakage correction (no external groundwater masses leaking into the
163 area of interest) because GWS changes are assumed to be concentrated inside the aquifer;
164 therefore, errors associated with leakage corrections should be minimized. Bias correction was
165 done using a multiplicative factor that was calculated from the ratio of unfiltered to filtered GWS
166 changes from output from the USGS Central Valley hydrologic model. This is important because
167 GWS changes are highly variable spatially, i.e. ~ 10 times greater in the Tulare Basin in the
168 south than elsewhere in the Central Valley (Faunt, 2009). This updated processing approach
169 minimizes reliance on a-priori information and allows GRACE to be used as independent
170 observational data as much as possible. However, this updated approach requires knowledge of
171 changes in SWES, SMS, and RESS inside and outside the basin and the quality of the GWS
172 changes still depends on the quality of the models for these water balance components.
173 Computation of GWS is independent of the TWS calculation at basin scale.

174 Spatial distribution of water masses may differ among storage components and may have
175 different signatures at GRACE resolution (i.e. filtered). For example, SMS is more or less
176 distributed uniformly over the area of interest; however, SWE is concentrated in the mountains,
177 generally at the edge of the basins, while GWS may be focused in on one part of the basin. The

178 importance of considering spatial variability in mass variations within the different storage
179 components on GRACE GWS changes is shown by comparing the different multiplicative
180 factors for converting filtered storages to true storages calculated separately for each
181 component of the water budget. The equivalent multiplicative factor to restore the GRACE
182 signal for GRGS (CSR) varies by up to 15% depending on spatial variability in water mass
183 distribution (2.69 for GRGS (4.94 for CSR)) multiplicative factor for SWES, i.e. unfiltered SWES
184 divided by filtered SWES, 2.30 (4.29) for RESS, 2.58 (4.74) for SMS, and 2.37 (4.28) for GWS).
185 The more concentrated the mass distribution, the lower the multiplicative factor. Therefore, use
186 of a single multiplicative factor applied to TWS in the regular processing approach ignores
187 spatial variability in water storage in each of the components and increases propagation of
188 uncertainties in GRACE GWS estimates.

189 **Water Storage Components and Uncertainties**

190 The following describes each of the water storage components and estimation of
191 uncertainties. Changes in TWS over the Central Valley river basins were estimated from CSR
192 and GRGS data as described previously and also in more detail in Auxiliary Material (Section 1).
193 TWS was not used directly to calculate GWS but was only estimated to evaluate temporal
194 variability in TWS in the system. Uncertainties in TWS changes were estimated from GRACE
195 measurement uncertainties derived from residuals over the Pacific Ocean at the same latitude
196 as the Sacramento and San Joaquin River Basins (Chen et al. 2009) with a magnitude 18 mm
197 for GRGS and 22 mm for CSR. While GRACE is corrected from Glacial Isostatic Adjustment
198 (GIA) using the ICE5G PGR model from Paulson et al. (2007), impacts of GIA in the Central
199 Valley are minimal.

200 Uncertainties in GWS were estimated from propagating errors in SWE, RESS, and SMS
201 from LSMs into GWS changes, resulting in 10 d (for GRGS) and monthly (for CSR) errors in
202 GWS with a magnitude of 55 mm for GRGS and 67 mm for CSR. As the rescaling or
203 multiplicative factor has a direct impact on the amplitude of GWS changes, we also computed
204 an error estimate on the bias correction for GWS. Sources of uncertainty in the multiplicative
205 factor are twofold: (1) numerical calculation in the integration process, estimated to be $\leq 1\%$
206 when integrating on a 0.25 degree grid (Longuevergne et al., 2010), and (2) uncertainty in mass
207 distribution within the area of interest. For the latter uncertainty, the multiplicative factor was
208 calculated with different realistic mass distributions: USGS Central Valley hydrologic model,
209 considering simulated mass depletion in the different subbasins during the previous droughts
210 and well analysis (see later), considering spatial variability in water level variations, variability in

211 specific yield, or multiplication of both. Variability among computed multiplicative factors is ~
212 6%.

213 Water storage changes from snow cover were based on snow data assimilation system
214 (SNODAS). Because SNODAS assimilates ground-based snow water equivalent (SWE)
215 estimates in California (Barret, 2003), it is considered the most reliable model for this study. As
216 SNODAS output is only available after October 2003, the time series was supplemented with
217 SWE output from the National Land Data Assimilation System (NLDAS) MOSAIC land surface
218 model, LSM rescaled with SNODAS data. The scaling factor was calculated by comparing
219 standard deviations from SNODAS and NLDAS MOSAIC SWE for overlapping times.
220 Uncertainties in SWES were estimated from variability between SNODAS and scaled NLDAS
221 MOSAIC model. Calculated monthly uncertainties in SWES are 28 mm based on differences
222 between the models; however, calculated uncertainties do not include potential model bias.

223 Variations in surface water reservoir storage were estimated from changes in water storage
224 in the 26 largest reservoirs in the Sacramento-San Joaquin basins (California Department of
225 Water Resources (<http://cdec.water.ca.gov/>) (Auxiliary Material, Section 2, Table S1). Because
226 information on uncertainties in reservoir storage volumes is not available (only uncertainties in
227 water level changes of ~3 mm from California Department of Water Resources), a conservative
228 estimate of 10% reservoir volume error was assumed. To estimate changes in soil moisture
229 storage, output from GLDAS LSMs (MOSAIC and VIC at 1° resolution and NOAH at 0.25°
230 resolution) and NLDAS (MOSAIC at 0.125° resolution) were averaged. Uncertainties in SMS
231 were estimated from variability among the LSMs (~ 3 mm/yr). Kato et al. (2007) showed that the
232 variability among GLDAS models is greater than variability among forcing datasets and that the
233 root mean square (RMS) error of SMS from the LSMs can be used as a conservative estimate
234 of SMS uncertainty.

235 Trends in each of the water budget components were calculated to estimate storage
236 depletion in response to the drought. Various temporal filters were applied to assess their
237 impact on calculated water storage changes. Some suggest that the raw data should be used to
238 estimate trends; however, most studies apply a temporal filter to remove seasonal fluctuations
239 and high frequency noise to estimate long-term trends. One filtering approach was to remove
240 seasonal components of the data series using a six-term harmonic series (sine and cosine
241 periodic waves with annual, semiannual, and 3-month periods). A centered 12 month moving
242 average was also applied. A fourth order Butterworth low-pass filter was finally tested. Trends in
243 water storage changes and associated standard errors were estimated using weighted linear
244 least squares regression, considering the inverse of squared errors in the weighting process.

245 **Groundwater Level Data**

246 Groundwater data were obtained from the California Department of Water Resources
247 (www.water.ca.gov/waterdatalibrary) to estimate GWS changes for comparison with GRACE-
248 based estimates (Fig. 1). The Central Valley includes a shallow unconfined aquifer and deeper
249 confined aquifers (Faunt, 2009). The unconfined aquifer provides water through drainable
250 porosity related to water table decline times aquifer storage coefficient, termed specific yield. In
251 contrast, the confined aquifer provides water through compressibility of water and the skeletal
252 matrix and the aquifer storage coefficients are orders of magnitude less than those in the
253 unconfined aquifer. In this analysis we focused on water storage changes in the unconfined
254 aquifer because they are generally greater than those in the confined aquifer and many wells
255 penetrate both aquifers, increasing hydraulic connectivity between the unconfined and confined
256 systems (Faunt, 2009). Changes in GWS were computed from water-level time series from
257 wells using the Karhunen-Loève transform which extracts the temporal signal in the regional
258 groundwater behavior from a set of well observations with local representativity [Longuevergne
259 et al., 2007]. Other terms used to describe KLT analysis in different fields include singular value
260 decomposition (SVD) and empirical orthogonal functions (EOFs). Linear interpolation was used
261 to recompute seasonal variations because KLT requires monitoring data for the same dates.
262 The first three eigenvectors were considered which account for ~ 80% of the total variance.
263 Kriging was used for analysis of spatial variability in water level data.

264 To evaluate results of the KLT well analysis, we compared GWS changes from well data
265 with storage changes estimated from a groundwater model of the Central Valley that simulated
266 flow from 1962 – 2003 (Faunt, 2009). While this comparison is not a true test of the KLT well
267 analysis approach because the water level data were used in the groundwater model
268 calibration, the Central Valley hydrologic model provides a much more comprehensive
269 description of the groundwater system and this comparison provides a check on the well
270 analysis technique. While data from 2,256 wells are available, this analysis requires temporally
271 continuous data; therefore, only 670 wells were used from 1982 through 2010. Selected wells
272 are generally sampled twice a year, during high and low water times, allowing general
273 reconstruction of seasonal variations. Mean groundwater level changes over the aquifer were
274 then computed using kriging and GWS changes were derived considering distributed specific
275 yield data from Faunt (2009). A 10% uncertainty in specific yield data was also included
276 because there are no published estimates on uncertainties in specific yield. Relative errors from
277 the two sources of uncertainties were added up (10% specific yield, 2% kriging).

278

279 **Results and Discussion**

280 Changes in precipitation are one of the primary drivers of water storage variations.
281 Precipitation anomalies from 2002 through 2010 ranged from -11 to -69 mm during 2002
282 through 2004 but were high (surplus) during 2005 (227 mm) and 2006 (110 mm) (Fig. 3).
283 Negative precipitation anomalies (deficit) were recorded during the drought with the lowest
284 values in 2007 (-259 mm) with lesser deficits in 2008 (-155 mm) and 2009 (-81 mm). The
285 drought ended in 2010 with a positive precipitation anomaly of 290 mm.

286 Monthly TWS changes from GRGS and CSR TWS are highly correlated ($r^2=0.93$) and
287 amplitude ratios are close to one, even after removal of seasonal variations (Fig. 3). Moreover,
288 the difference between CSR and GRGS TWS time series (~ 26 mm) is slightly larger but very
289 similar to estimated monthly RMS errors (18 mm for GRGS and 22 mm for CSR). Similarity in
290 TWS changes from GRGS and CSR increases confidence in GRACE output from different
291 processing centers. TWS changes are highest in spring (Feb/Mar) and lowest in fall (Sept/Oct)
292 with amplitudes ranging from 15 to 30 km³ at different times. TWS changes were relatively
293 uniform during 2002 to 2004 and increased by ~ 15 km³ (Apr 2004 – Mar 2006, GRGS and CSR)
294 in response to increased precipitation. Depletion in TWS during the drought was greatest during
295 the beginning of the drought, when precipitation was lowest in 2007 (-259 mm). The drought has
296 been documented to persist during water years 2007 through 2009 (i.e. Oct 2006 through Sept
297 2009) (Jones, 2010). The maximum depletion in TWS occurred from Jan 2006 through Jul 2009
298 and ranged from 39.0 ± 2.5 km³ (CSR) to 40.8 ± 0.9 km³ (GRGS) based on a Butterworth filter to
299 remove seasonal signals and high frequency noise. Different filters were evaluated; however,
300 errors in the Butterworth filter were among the lowest (Auxiliary Material, Section 3, Fig. S1).

301 The largest reductions in snow water equivalent and soil moisture storage occurred during
302 winter of 2006 – 2007 because this was the driest period of the drought (Fig. 4). The snowpack
303 reservoir decreased markedly during the winter of 2006 – 2007 but increased after that resulting
304 in essentially zero overall change in storage during the drought. Surface water reservoir storage
305 from the 26 largest reservoirs decreased by 7.3 ± 0.6 km³ from Oct 2006 through Sep 2009. The
306 largest reductions in simulated SMS from the various LSMs also occurred during the first year of
307 the drought with recovery after that time. Simulated changes in SMS may not be highly reliable
308 because the LSMs do not simulate redistribution of water from the aquifer to the soil zone from
309 irrigation.

310

311 **GRACE Estimates of GWS Changes and Comparison with Groundwater Level Data**

312 While the GWS change signal varies around that of TWS (standard deviation TWS [CSR &
313 GRGS] 20 km³, GWS CSR 21 km³; GWS GRGS 13 km³), uncertainties in GWS changes are
314 about a factor of three higher than those in TWS (RMS errors: CSR: GWS 10.2 km³; TWS 3.3
315 km³; GRGS GWS 8.4 km³; TWS 2.8 km³). The following discussion focuses on GWS changes
316 from GRGS data because they are less noisy than those from CSR data (Fig. 5; Auxiliary
317 Material, Section 4, Fig. S3). The temporally filtered GWS data show that GWS increased
318 slightly from Apr 2004 through Mar 2006 (2.7 ± 0.5 km³) when precipitation was high. However,
319 GWS decreased sharply during the drought by 31.0 ± 3.0 km³ from Oct 2006 through March 2010
320 (Table 1). Use of raw data resulted in depletion of only 5.1 km³, showing the importance of
321 temporally filtering the data to remove seasonal signals and high frequency noise. The
322 Butterworth and centered 12 month moving average filters provided similar results whereas the
323 seasonal sine/cosine function did not smooth the data and resulted in the largest errors (± 5 km³)
324 (Auxiliary Material, Section 3, Fig. S2). Mean GWS depletions from this study are 16%
325 (27.7 ± 5.2 km³ CSR) and 44% (34.4 ± 3.2 km³ GRGS) higher than that based on analysis by
326 Famiglietti et al. (2011) for CSR (23.9 ± 5.8 km³) for the same time period (Apr 2006 through Mar
327 2010). Therefore GWS depletions during the drought in this study are within the error bars for
328 CSR data and slightly higher for GRGS data relative to the estimate from Famiglietti et al.
329 (2011).

330 Although there is a seasonal component to the GRACE based GWS changes (~30 mm) for
331 GRGS, ~47 mm for CSR, which is below the 10 d to monthly error estimate (GRGS 55 mm;
332 CSR 67 mm), it is not considered reliable because it is the residual of seasonal fluctuations in
333 other water balance components, including SWES, RESS, and SMS, and reflects uncertainties
334 in seasonal storage changes in these components with associated phase lags that can result in
335 large differences after subtraction.

336 GWS changes were also calculated from well data by converting water level changes to
337 water volumes using spatially distributed specific yield (Fig. 6). Typical well hydrographs for the
338 different basins indicate minimal water level declines in the north and all declines focused in the
339 Tulare Basin in the south (Fig. 1). GWS changes using KLT for time series analysis and kriging
340 for spatial variability in this study compared favorably with simulated GWS changes from the
341 Central Valley hydrologic model for the overlap period of the groundwater model ($r^2 = 0.98$; Fig.
342 7). Well analysis for the 1987 – 1992 drought yielded a GWS decline of 8.2 km³/yr, similar to the
343 simulated GWS decline from the model of 8.2 km³/yr. This comparison gives confidence in the

344 KLT/kriging approach used to analyze the well data. Although the Central Valley model also
345 used the well data for calibration, the model represents a much more comprehensive evaluation
346 of the groundwater system.

347 To compare GWS changes from the well data with those from the GRACE data,
348 groundwater depletion from the well data was forward modeled to determine what GRACE can
349 see (Auxiliary Material, Section 5, Fig. S4). The same spatial filtering was applied to the well
350 data as is applied to GRACE products (Fig. 2). Although there is 10 times more depletion in the
351 Tulare Basin in the southern part of the Central Valley, it is not possible to determine this at
352 GRACE resolution (Figs. S4a and S4b). The GWS anomaly is spread above the CV aquifer,
353 shifted towards the south. Spatial trends in GWS depletion from CSR and GRGS data (Figs.
354 S4c and S4d) generally correspond to the modeled impact of depletion on groundwater (Figs.
355 S4a and b), with equivalent amplitude and position. In addition to using standard errors in trend
356 estimates of GWS from GRACE and well data, we also estimated the GWS signal in the oceans
357 for the same area as the Central Valley. The signal in the ocean should be zero if all
358 background models for mass disaggregation were perfect (oceanic & atmospheric model in
359 GRACE processing, SWES, SMS, and RESS for GWS extraction); therefore, nonzero values
360 suggest errors in GWS of ~ 30% of groundwater depletion after integration over an area as
361 large as the Central Valley river basins. These error estimates may be more reliable than the
362 standard errors in trends and in multiplicative factors, which probably underestimate total error.
363 While the main negative GWS anomaly is located above the Central Valley aquifer, it is shifted
364 towards the mountains for both GRGS and CSR solutions. The north-south trending anomaly,
365 along the mountain range, suggests that snow water equivalent was not properly corrected for
366 when extracting the GWS contribution.

367 Because the well data only extend to December 2009, GWS changes from the well data
368 were compared with GRACE-based estimates for the period Apr 2006 through Sep 2009 to
369 avoid problems with filtering toward the end of the data record (Table 1). Groundwater depletion
370 from the well data is the same as that from GRACE GRGS data (both ~27 km³) for the 3.5 yr
371 period (Table 1). These comparisons indicate that the GRACE based estimates of GWS
372 changes are generally consistent with those from well data.

373 Reduction in GWS from GRACE during the recent drought (8.9 km³/yr) is similar to GWS
374 reductions from previous droughts from the Central Valley hydrologic model (1976 – 1977; 12.3
375 km³/yr; 1987 – 1992; 8.2 km³/yr). Although precipitation during the recent drought was not as
376 low as the 1976 – 1977 drought or the length of the recent drought was much shorter than the
377 six year drought from 1987 – 1992, the impact of the recent drought on GWS was as large or

378 larger than that of previous droughts because surface water diversions from north to south were
379 reduced to 10% by the third year of the drought to protect the endangered delta smelt species in
380 response to the Central Valley Improvement Act of 1992 (California Dept. of Water Resources,
381 2010). Reductions in surface water diversions resulted in large increases in groundwater
382 pumpage and amplified the impact of the drought on GWS changes.

383 **Future Work**

384 There are many areas of potential future work that would improve application of GRACE
385 data for monitoring water storage changes in the Central Valley region. Updating the Central
386 Valley hydrologic model to include the time period evaluated by GRACE would provide another
387 estimate of GWS changes for comparison with GRACE-based estimates. This work is currently
388 being conducted by the U.S. Geological Survey (Faunt, pers. comm. 2011). Improving the
389 ground-based well monitoring network would greatly enhance estimates of GWS changes from
390 this dataset. Basic information on wells, such as length and depth of screened intervals and
391 whether wells penetrate only unconfined aquifers or unconfined/confined aquifers would be very
392 helpful. Additional information on storage coefficients for converting water level data to water
393 volumes is extremely important in this type of analysis. Expanding the well network, particularly
394 in the Tulare Basin in the south, where most of the depletion has occurred, and including more
395 continuous monitoring of water levels would provide improved information for estimating GWS
396 changes. Information on soil moisture currently relies on output from LSMs; however, these
397 models do not simulate irrigation. Developing a ground-based network of soil moisture sensors
398 would be very beneficial for application to GRACE studies and would also provide a comparison
399 of output from LSMs. Because LSMs play an integral role in GRACE processing, reliable water
400 storage change estimates from GRACE depends on accurate LSMs. Improving LSMs to
401 simulate soil moisture, groundwater, and irrigation is very important for applications of GRACE
402 to groundwater depletion studies related to irrigated agriculture. The study of Famiglietti et al.
403 (2011) used unconstrained CSR GRACE data whereas this study also used constrained or
404 regularized GRGS GRACE data. The next GRACE CSR release will include some type of
405 regularization or constraint (Save et al., 2010); therefore, filtering beyond truncation may no
406 longer be required and spatial resolution may be improved.

407 **Conclusions**

408 While the area of the CV aquifer is less than the GRACE footprint (~ 200,000 km²),
409 extensive groundwater depletion caused by irrigation results in a large signal that can be

410 detected by GRACE. A new processing approach was applied to GRACE data that calculates
411 changes in GWS from TWS by subtracting SWES, RESS, and SMS using filtered data at
412 GRACE spatial resolution minimizing uncertainties associated with LSMs for bias and leakage
413 corrections. Moreover, this method takes into account the specific spatial distribution of each
414 water storage component (including SWES, SMS, and RESS) resulting in different signatures
415 on GRACE. In the case of the Central Valley, availability of high-resolution validated models
416 (SNODAS, NLDAS) and accurate ground measurements for surface water storage reservoirs,
417 greatly improved the ability to resolve GWS changes for this relatively small basin.

418 TWS changes from GRGS and CSR processing centers were similar ($r^2 = 0.93$). Reductions
419 in TWS during the drought ranged from $39.0 \pm 2.5 \text{ km}^3$ (CSR) to $40.8 \pm 0.9 \text{ km}^3$ (GRGS)
420 (Butterworth filter) (Jan 2006 through July 2009). SWES and SMS decreased markedly in the
421 early phase of the drought (2006 – 2007) but partially recovered after that resulting in overall
422 negligible to low water storage changes. Reservoir storage decreased continuously during the
423 drought by $7.3 \pm 0.6 \text{ km}^3$ (Oct 2006 through Sep 2009).

424 Analysis of GWS changes focused on GRGS data because CSR data are noisier. GWS
425 declined by $31.0 \pm 3.0 \text{ km}^3$ based on maximum depletion from Oct 2006 through Mar 2010.
426 Annual decline rates ($8.9 \text{ km}^3/\text{yr}$) are consistent with typical decline rates from previous
427 droughts (1976 – 1977; $12.3 \text{ km}^3/\text{yr}$; 1987 – 1992; $8.2 \text{ km}^3/\text{yr}$). GRACE based estimates of
428 groundwater depletion during the drought are similar to those from well data based on the
429 uppermost unconfined aquifer for the overlap period (Apr 06 – Jul 09; both 27 km^3). The general
430 consistency of GWS changes from GRACE and ground-based estimates increases confidence
431 in application of GRACE for monitoring groundwater depletion.

432 **Acknowledgments**

433 This study was funded by NASA Grant NNX08AJ84G. We would also like to acknowledge
434 additional support from the Jackson School of Geosciences, University of Texas at Austin. The
435 authors benefited greatly from discussions with Dr. Clark Wilson (Jackson School of
436 Geosciences) and Dr. Claudia Faunt (USGS).

437

438

439 **References**

- 440 Barret, A. (2003), National Operational Hydrologic Remote Sensing Center SNOw Data
441 Assimilation System (SNODAS) Products at NSIDC., *NSIDC Special Report 11. Boulder,*
442 *CO, USA: National Snow and Ice Data Center. Digital media.*
- 443 Bettadpur, S. (2007), Level-2 Gravity Field Product User Handbook, GRACE 327-734, *The*
444 *GRACE Project, Center for Space Research, University of Texas at Austin.*
- 445 Bruinsma, S., J. M. Lemoine, R. Biancale, and N. Vales (2010), CNES/GRGS 10-day gravity
446 field models (release 2) and their evaluation, *Advances in Space Research, 45(4), 587-601.*
- 447 Chen, J. L., C. R. Wilson, B. D. Tapley, Z. L. Yang, and G. Y. Niu (2009), 2005 drought event in
448 the Amazon River basin as measured by GRACE and estimated by climate models, *Journal*
449 *of Geophysical Research-Solid Earth, 114.*
- 450 Daly, C., D. R. Conklin, and M. H. Unsworth (2010), Local atmospheric decoupling in complex
451 topography alters climate change impacts, *International Journal of Climatology, 30(12),*
452 *1857-1864.*
- 453 Domenico, P. A., and F. W. Schwartz (1998), Physical and Chemical Hydrogeology Second
454 Edition, Wiley. — Good book for consultants, it has many real-world examples and covers
455 additional topics (e.g. heat flow, multi-phase and unsaturated flow). .
- 456 Famiglietti, J. S., M. Lo, S. L. Ho, J. Bethune, K. J. Anderson, T. H. Syed, S. C. Swenson, C. R.
457 de Linage, and M. Rodell (2011), Satellites measure recent rates of groundwater depletion
458 in California's Central Valley, *Geophysical Research Letters, 38.*
- 459 Faunt, C. C. (Ed.) (2009), *Groundwater availability of the Central Valley Aquifer, California; US*
460 *Geological Survey Prof. Paper 1766, 173 p.*
- 461 Giordano, M. (2009), Global groundwater? Issues and solutions, *Annual Review of Environment*
462 *and Resources, 34, 153-178.*
- 463 Jones, J. (2010), California's drought of 2007-2009: An overview, *California Department of*
464 *Water Resources, 116 p.*
- 465 Kato, H., M. Rodell, F. Beyrich, H. Cleugh, E. van Gorsel, H. Z. Liu, and T. P. Meyers (2007),
466 Sensitivity of land surface simulations to model physics, land characteristics, and forcings, at
467 four CEOP sites, *Journal of the Meteorological Society of Japan, 85A, 187-204.*
- 468 Klees, R., X. Liu, T. Wittwer, B. C. Gunter, E. A. Revtova, R. Tenzer, P. Ditmar, H. C.
469 Winsemius, and H. H. G. Savenije (2008), A comparison of global and regional GRACE
470 models for land hydrology, *Surveys in Geophysics, 29(4-5), 335-359.*

471 Kundzewicz, Z. W., and P. Döll (2009), Will groundwater ease freshwater stress under climate
472 change?, *Hydrological Sciences Journal-Journal Des Sciences Hydrologiques*, 54(4), 665-
473 675.

474 Leblanc, M. J., P. Tregoning, G. Ramillien, S. O. Tweed, and A. Fakes (2009), Basin-scale,
475 integrated observations of the early 21st century multiyear drought in southeast Australia,
476 *Water Resour. Res.*, 45, W04408, doi:10.1029/2008WR007333.

477 Longuevergne, L., N. Florsch, and P. Elsass (2007), Extracting coherent regional information
478 from local measurements with Karhunen-Loeve transform: Case study of an alluvial aquifer
479 (Rhine valley, France and Germany), *Water Resources Research*, 43(4).

480 Longuevergne, L., B. R. Scanlon, and C. R. Wilson (2010), GRACE Hydrological estimates for
481 small basins: Evaluating processing approaches on the High Plains Aquifer, USA, *Water*
482 *Resources Research*, 46.

483 McGuire, V. L. (2009), Water level changes in the High Plains Aquifer, Predevelopment to 2007,
484 2005-06, and 2006-2007, *Scientific Investigations Report 2009-5019*, variably paginated.

485 Moiwo, J. P., Y. H. Yang, H. L. Li, S. M. Han, and Y. K. Hu (2009), Comparison of GRACE with
486 in situ hydrological measurement data shows storage depletion in Hai River basin, Northern
487 China, *Water Sa*, 35(5), 663-670.

488 Morris, B. L., A. R. L. Lawrence, P. J. C. Chilton, B. Adams, R. C. Calow, and B. A. Klinck
489 (2003), Groundwater and its Susceptibility to Degradation: A Global Assessment of hte
490 Problema nd Options for Management *Early Warning and Assessmnet Report Series*, RS.
491 03-3, *United Nations Environemt Programme, Nairobi, Kenya*, 126 p.

492 Paulson, A., S. J. Zhong, and J. Wahr (2007), Inference of mantle viscosity from GRACE and
493 relative sea level data, *Geophysical Journal International*, 171(2), 497-508.

494 Rodell, M., I. Velicogna, and J. S. Famiglietti (2009), Satellite-based estimates of groundwater
495 depletion in India, *Nature*, 460(7258), 999-U980.

496 Rodell, M., J. L. Chen, H. Kato, J. S. Famiglietti, J. Nigro, and C. R. Wilson (2007), Estimating
497 groundwater storage changes in the Mississippi River basin (USA) using GRACE,
498 *Hydrogeology Journal*, 15(1), 159-166.

499 Rodell, M., et al. (2004), The global land data assimilation system, *Bull. Am. Meteor. Soc.*,
500 85(3), 381-394.

501 Save, H. V., S. V. Bettadpur, and P. B. Nagel (2010), Use of background de-aliasing models
502 and error correlations to improve the regularized gravity solutions from GRACE, *Abstract*
503 *G51C-0682 presented at 2010 Fall Meeting, AGU, San Francisco, Calif., 13-17 Dec.*

504 Siebert, S., and P. Doll (2010), Quantifying blue and green virtual water contents in global crop
505 production as well as potential production losses without irrigation, *Journal of Hydrology*,
506 384(3-4), 198-217.

507 Strassberg, G., B. R. Scanlon, and M. Rodell (2007), Comparison of seasonal terrestrial water
508 storage variations from GRACE with groundwater-level measurements from the High Plains
509 Aquifer (USA), *Geophysical Research Letters*, 34(14), 5.

510 Swenson, S., and J. Wahr (2002), Methods for inferring regional surface-mass anomalies from
511 Gravity Recovery and Climate Experiment (GRACE) measurements of time-variable gravity,
512 *Journal of Geophysical Research-Solid Earth*, 107(B9).

513 Swenson, S. and J. Wahr (2006). Post-processing removal of correlated errors in GRACE data,
514 *Geophys. Res. Lett.*, 33, L08 402, doi: 10.1029/2005GL025285


515 Tiwari, V. M., J. Wahr, and S. Swenson (2009), Dwindling groundwater resources in northern
516 India, from satellite gravity observations, *Geophysical Research Letters*, 36.

517 UN Development Program (2006), Beyond scarcity: Power, poverty and the global water crisis,
518 *United Nations Human Development Report*, 422 p.

519 Wada, Y., L. P. H. van Beek, C. M. van Kempen, J. Reckman, S. Vasak, and M. F. P. Bierkens
520 (2010), Global depletion of groundwater resources, *Geophysical Research Letters*, 37.

521 Yeh, P. J. F., S. C. Swenson, J. S. Famiglietti, and M. Rodell (2006), Remote sensing of
522 groundwater storage changes in Illinois using the Gravity Recovery and Climate Experiment
523 (GRACE), *Water Resources Research*, 42(12).


524

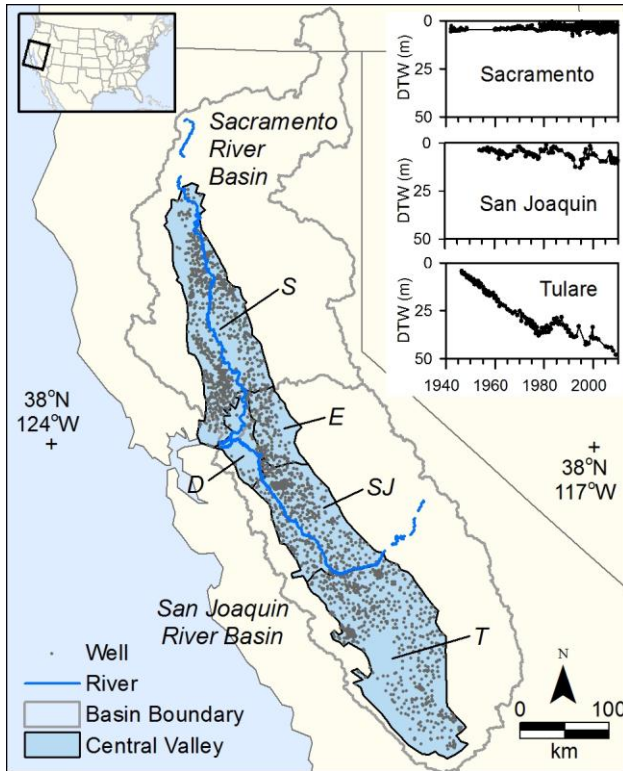

526


527 Figure 1. Central Valley aquifer subdivided into Sacramento, Delta, Eastside, San Joaquin, and
528 Tulare basins and enclosed in the Sacramento River Basin in the north and San Joaquin River
529 Basin in the south. Distribution of monitoring wells (~2,300 wells) is also shown. Well data were
530 obtained from the California Department of Water Resources. Typical well hydrographs are
531 shown for the Sacramento, San Joaquin, and Tulare basins. Note large groundwater depletion
532 typical of the Tulare Basin.

533

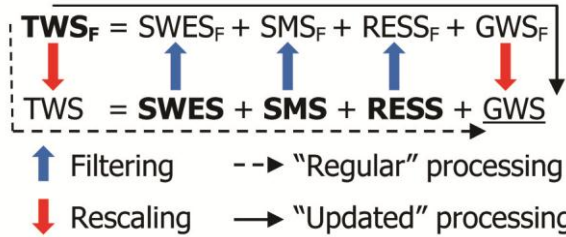

534

535 Figure 2: Synthesis of regular and updated method for processing GRACE data to extract
 536 changes in GWS. Subscript F represents spatial filtering, applied equivalently to GRACE and
 537 water budget data (SWES, SMS, and RESS), i.e. truncation to degree 50 (GRGS) and degree
 538 60 (CSR), removal of north-south stripes (for GRACE data only), and 300 km Gaussian filtering
 539 (CSR). Regular processing involves filtering GRACE data to estimate TWS, rescaling TWS
 540 using bias and leakage correction based on LSMs, and subtraction of changes in SWES, SMS,
 541 and RESS to calculate changes in GWS. Updated processing calculates changes in GWS from
 542 TWS using filtered models and data at GRACE resolution and rescaling GWS_F to GWS using
 543 bias correction, no leakage correction required. The updated approach also uses spatial
 544 variability of SWES, SMS, and RESS within the area of interest rather than mean values as in
 545 the regular approach. Bolded text refers to available data from GRACE or models.
 546

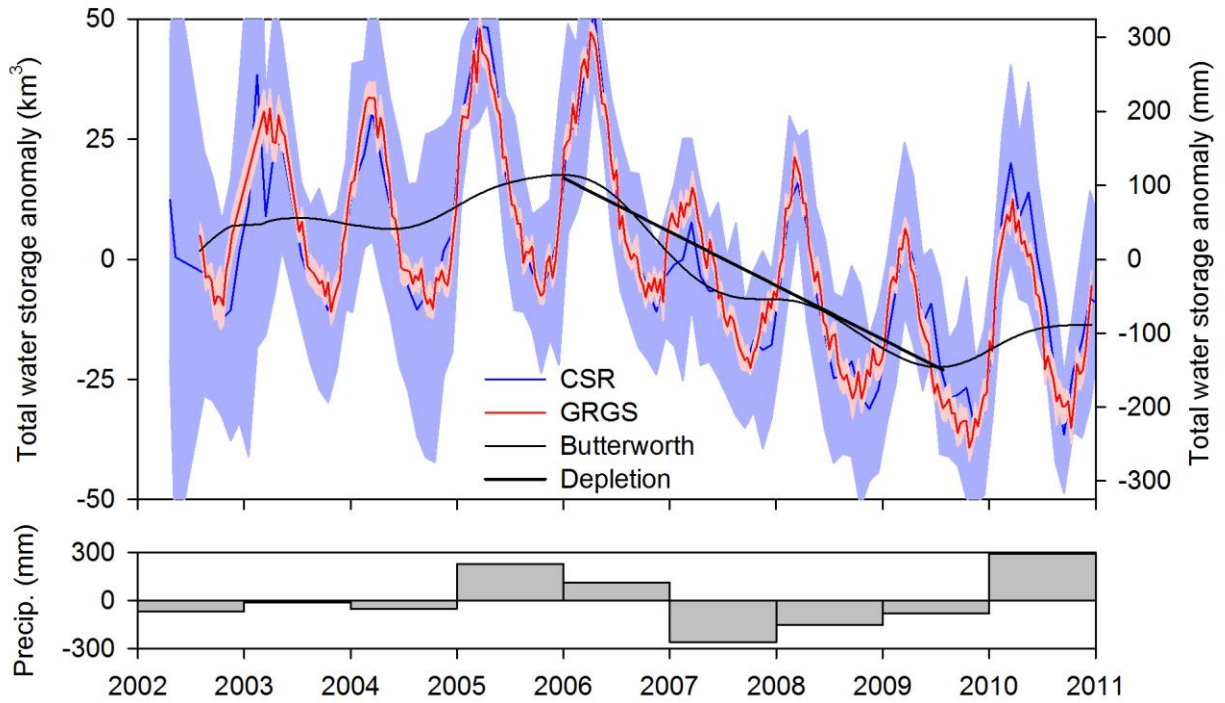


547

548 Figure 3. Total water storage (TWS) change anomaly (in km^3 and mm of water) from CSR
 549 monthly data and GRGS 10 d data for the Sacramento and San Joaquin River Basins. Shaded
 550 areas represent monthly errors. Estimation of TWS is described in Auxiliary Material (Section 1).
 551 A Butterworth filter was applied to the GRGS data to remove the seasonal signal and high
 552 frequency noise. The depletion trend during the drought is shown (40.8 km^3 from January 2006
 553 through July, 2009). The precipitation anomaly is based on gridded data from PRISM (Daly et
 554 al., 2009).

555


556

557

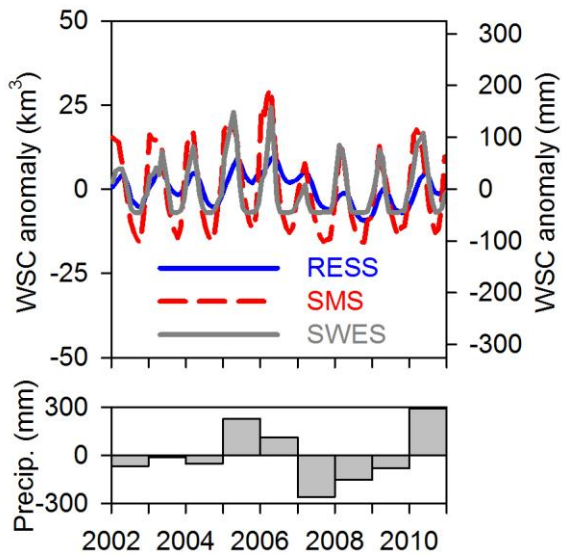


558

559 Figure 4. Surface water reservoir storage (RESS), snow water equivalent storage (SWES), and
 560 soil moisture storage (SMS) change anomalies for the Sacramento and San Joaquin River
 561 basins. Note large reduction in water storages in response to the 2006 through 2009 drought,
 562 particularly in the first year of the drought. The precipitation anomaly is based on gridded data
 563 from PRISM (Daly et al., 2009).
 564

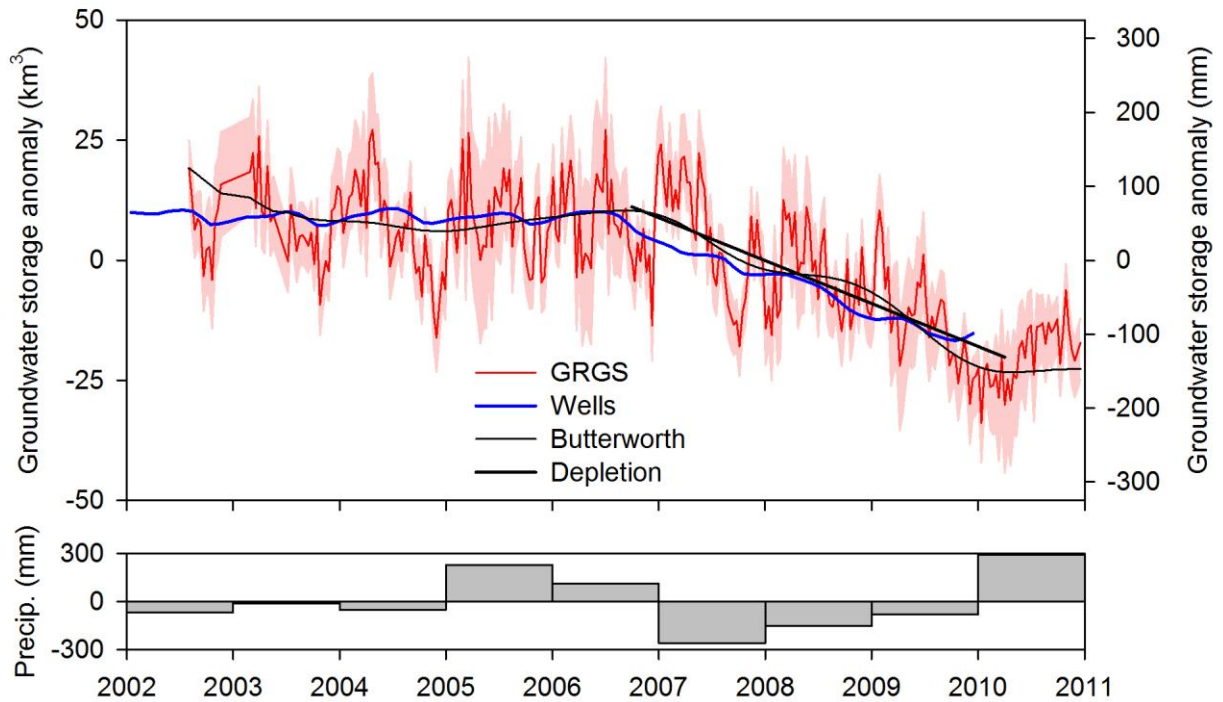

566

567 Figure 5. Groundwater storage (GWS) change anomaly from GRGS data and monthly changes
 568 GWS from well data from the upper unconfined aquifer. GWS change anomalies for CSR and
 569 GRGS data are shown in Auxiliary Material, Section 4, Fig. S3. A Butterworth filter for removal
 570 of seasonal trends and high frequency noise is shown. Application of other filters is shown in
 571 Auxiliary Material, Section 3, Fig. S2. Depletion during the drought ($31.0 \pm 3.0 \text{ km}^3$) is shown from
 572 Oct. 2006 through March 2010. The precipitation anomaly is based on gridded data from PRISM
 573 (Daly et al., 2009).

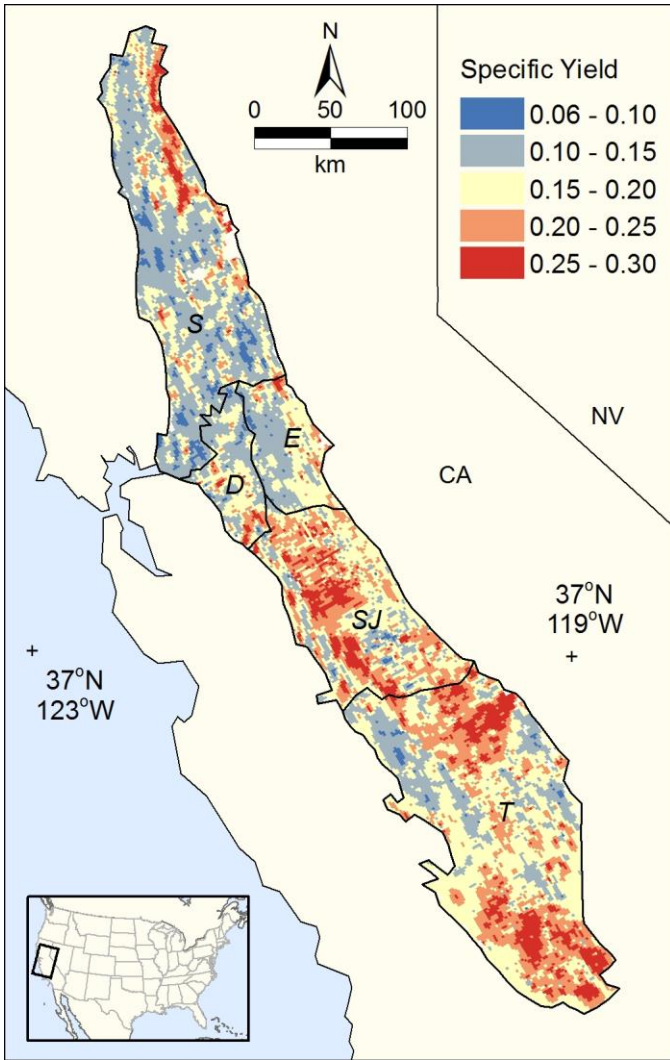


574

575 Figure 6 . Variations in specific yield from Faunt (2009).

576

577

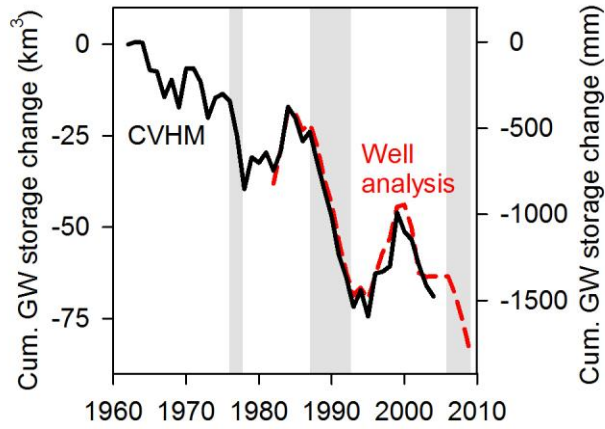

578

579 Figure 7. Comparison of GWS changes from well analysis relative to simulated GWS changes
 580 from the Central Valley hydrologic model (CVHM; Faunt, 2009). Drought periods are shaded
 581 (1976 – 1977; 1987 – 1992; and 2006 – 2009).

582

583 Table 1. Trends in groundwater storage (GWS) changes during the drought in mm/yr, km³/yr,
584 and in total km³ for the different time periods shown based on GRGS and CSR GRACE data
585 and well data (920 wells from the monitoring network). Depletion trends for different time
586 periods and associated standard errors were estimated using weighted linear least squares
587 regression, considering the inverse of squared errors (monthly for CSR and 10 d for GRGS) in
588 the weighting process. Oct 1 2006 through Mar 31, 2010 represents the maximum depletion of
589 GWS during the drought (Fig.). Trends from Apr 1 2006 – Mar 31 2010 were calculated for
590 comparison with depletion estimates from Famiglietti et al. (2011). Trends from Apr 1 2006 –
591 Sep 30 2009 were calculated to compare depletion estimates from GRACE with those from
592 analysis of 920 wells (Fig. 5). Results from application of different filters to remove seasonal
593 fluctuations and high frequency noise are provided, including Butterworth, centered 12 month
594 moving average (MA), a six-term harmonic series (sine and cosine periodic waves with annual,
595 semiannual, and 3-month periods) (Seas.), and no temporal filter (trend from raw data).

<i>Time Interval</i>	<i>Model</i>	<i>Filter</i>	<i>Trend (mm/a)</i>	<i>Error (mm/a)</i>	<i>Trend (km³/a)</i>	<i>Error (km³/a)</i>	<i>Volume (km³)</i>	<i>Error (km³)</i>
Oct 1, 2006 to Mar 31, 2010	GRGS	Butterworth	57.6	5.5	8.9	0.8	31.0	3.0
		Moving average	58.1	5.6	8.9	0.9	31.3	3.0
		Seasonal	57.8	9.2	8.9	1.4	31.2	5.0
		None	9.4	-	1.4	-	5.1	-
Apr 1, 2006 to Mar 31, 2010	GRGS	Butterworth	55.9	5.3	8.6	0.8	34.4	3.3
	CSR	Butterworth	44.9	8.5	6.9	1.3	27.7	5.2
Apr 1, 2006 to Sep 30, 2009	GRGS	Butterworth	49.9	4.8	7.7	0.7	26.9	2.6
	Wells	Butterworth	49.7	0.5	7.7	0.1	26.8	0.3

596

597