



**HAL**  
open science

## High wave vector non-reciprocal spin wave beams

Loic Temdie, V. Castel, C. Dubs, G. Pradhan, J. Solano, H. Majjad, R. Bernard, Y. Henry, M. Bailleul, V. Vlaminck

► **To cite this version:**

Loic Temdie, V. Castel, C. Dubs, G. Pradhan, J. Solano, et al.. High wave vector non-reciprocal spin wave beams. AIP Advances, 2023, 13 (2), pp.025207. 10.1063/9.0000535 . hal-04014628v2

**HAL Id: hal-04014628**

**<https://hal.science/hal-04014628v2>**

Submitted on 13 Mar 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# High wave vector non-reciprocal spin wave beams

Cite as: AIP Advances **13**, 025207 (2023); <https://doi.org/10.1063/9.0000535>

Submitted: 03 October 2022 • Accepted: 12 November 2022 • Published Online: 02 February 2023

 L. Temdie,  V. Castel,  C. Dubs, et al.

## COLLECTIONS

Paper published as part of the special topic on [67th Annual Conference on Magnetism and Magnetic Materials](#)



View Online



Export Citation



CrossMark

## ARTICLES YOU MAY BE INTERESTED IN

[Spin wave diffraction model for perpendicularly magnetized films](#)


Journal of Applied Physics **133**, 053903 (2023); <https://doi.org/10.1063/5.0128666>

[Micromagnetic frequency-domain simulation methods for magnonic systems](#)

Journal of Applied Physics **133**, 033902 (2023); <https://doi.org/10.1063/5.0131922>

[The design and verification of MuMax3](#)

AIP Advances **4**, 107133 (2014); <https://doi.org/10.1063/1.4899186>



## APL Machine Learning

Machine Learning for Applied Physics  
Applied Physics for Machine Learning

**First Articles  
Now Online!**

# High wave vector non-reciprocal spin wave beams

Cite as: AIP Advances 13, 025207 (2023); doi: 10.1063/9.0000535

Submitted: 3 October 2022 • Accepted: 12 November 2022 •

Published Online: 2 February 2023



View Online



Export Citation



CrossMark

L. Temdie,<sup>1,a)</sup> V. Castel,<sup>1,a)</sup> C. Dubs,<sup>2</sup> G. Pradhan,<sup>3</sup> J. Solano,<sup>3</sup> H. Majjad,<sup>3</sup> R. Bernard,<sup>3</sup> Y. Henry,<sup>3</sup> M. Bailleul,<sup>3</sup> and V. Vlaminck<sup>1,b)</sup>

## AFFILIATIONS

<sup>1</sup>IMT- Atlantique, Dpt. MO, Technopole Brest-Iroise, CS83818, 29238 Brest Cedex 03, France

<sup>2</sup>INNOVENT e.V. Technologieentwicklung, Pruessingstrasse 27B, 07745 Jena, Germany

<sup>3</sup>IPCMS - UMR 7504 CNRS Institut de Physique et Chimie des Matériaux de Strasbourg France, 67200 Strasbourg, France

**Note:** This paper was presented at the 67th Annual Conference on Magnetism and Magnetic Materials.

<sup>a)</sup>Also at Lab-STICC - UMR 6285 CNRS, Technopole Brest-Iroise CS83818, 29238 Brest Cedex 03, France.

<sup>b)</sup>Author to whom correspondence should be addressed: [vincent.vlaminck@imt-atlantique.fr](mailto:vincent.vlaminck@imt-atlantique.fr)

## ABSTRACT

We report unidirectional transmission of micron-wide spin waves beams in a 55 nm thin YIG. We downscaled a chiral coupling technique implementing Ni<sub>80</sub>Fe<sub>20</sub> nanowires arrays with different widths and lattice spacing to study the non-reciprocal transmission of exchange spin waves down to  $\lambda \approx 80$  nm. A full spin wave spectroscopy analysis of these high wavevector coupled-modes shows some difficulties to characterize their propagation properties, due to both the non-monotonous field dependence of the coupling efficiency, and also the inhomogeneous stray field from the nanowires.

© 2023 Author(s). All article content, except where otherwise noted, is licensed under a Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>). <https://doi.org/10.1063/9.0000535>

## I. INTRODUCTION

Non-reciprocity is an essential properties of today's information systems.<sup>1</sup> The ability to inhibit signal flow in one direction while allowing it in the reverse direction is crucial to either protect devices from reflection, isolate transmitters and receivers in radar architecture, or even shield qubits from its environment in quantum computers. Most of the current non-reciprocal functionalities rely on the gyrotropic nature of the magnetization dynamics in field-based ferrimagnetic systems (namely Yttrium Iron Garnet - YIG), which tend to be large, and costly to assemble.<sup>2</sup> Future progress in communication systems, and most critically in quantum technologies, rely heavily on the possibility to miniaturize and integrate these non-reciprocal devices.<sup>3</sup>

The field of magnonics, which implements magnetic excitation called spin waves -or their quanta magnons-, is actively involved in the search of non-reciprocal scalable solutions.<sup>4</sup> Extensive research in the last decade revealed the possibility to engineer both amplitude and frequency non-reciprocity of spin waves in many different

ways.<sup>5</sup> Firstly, the well-known Damon-Eshbach (DE) configuration, where the equilibrium magnetization of a thin film lies in the plane of the film and perpendicular to the wavevector,<sup>6</sup> displays non-reciprocal dynamic amplitude across the thickness for oppositely traveling waves, which couple chirally to an excitation antenna.<sup>7</sup> Moreover, this non-reciprocity was recently proven to be strongly enhanced in the presence of magnetic nanostructures, where unidirectional transmission of spin waves was achieved using the chiral coupling between the FMR of Co nanowires and exchange spin waves in a thin YIG film.<sup>8,9</sup> Secondly, small frequency non-reciprocity (namely  $f(k) \neq f(-k)$ ) was demonstrated more recently in various systems, either with asymmetrical surface anisotropies between top and bottom surfaces,<sup>10</sup> or with the coupled dynamics of ferromagnetic multilayers,<sup>11</sup> or also with the interfacial Dzyaloshinskii-Moriya interaction (DMI) of a ferromagnetic layer coupled to a high spin-orbit material.<sup>12-14</sup> Additionally, asymmetric spin-wave dispersion was recently predicted in non-planar geometries due to a topographically induced dynamic dipolar effect.<sup>15</sup> Nevertheless, all these frequency non-reciprocity effects only becomes

significant when the magnons wavelength reaches sub micrometric sizes. Finally, non-reciprocal functionalities have also been predicted very recently using an innovative inverse design approach.<sup>16,17</sup>


In this communication, we further miniaturized the method of Chen *et al.*<sup>8</sup> and demonstrate the possibility of shaping non-reciprocal spin wave beams in a continuous thin YIG film. This paper is organized as follows: In Sec. II, we present the sample design and the experimental protocol used to measure broadband multi-modes spin waves transmission. In Sec. III, we present the non-reciprocal spin wave beams spectra, and address through a spin wave spectroscopy study the peculiarities encountered in shaping narrow spin wave beams via this method.

## II. EXPERIMENTAL SET-UP

### A. Sample design and fabrication

The chiral excitation of propagating spin waves is achieved by coupling the ferromagnetic resonance (FMR) of magnetic nanowires array (NWA) to a low damping continuous film such as YIG. As illustrated in Fig. 1(a), the phase profile of a propagating spin wave excited by the dynamic dipolar field of nanowires, all precessing in phase, only matches for a single propagation direction. The degree of chirality depends strongly on the ellipticity of the dynamic dipolar field of the NWA.<sup>18</sup> Typically, the elliptical polarization of the Kittel mode in flat rectangular nanowires breaks the perfect chirality. For this reason we made the nanowires 60 nm thick to come as close as possible to an aspect ratio  $t/w = 1$  which produces circularly polarized dipolar field. Moreover, the Kittel mode frequency of the nanowires can be tuned up with decreasing their width  $w$ , therefore the NWA can excite propagating modes ( $k_{NW}$ ) with much higher wavevector than the one directly coupled by the microwave field of the antenna ( $k_{CPW}$ ). In the case of an extended array of NWA, these high vector ( $k_{NW}$ ) correspond simply to integer values of  $\frac{2\pi}{a}$  accordingly with the periodic boundary conditions of the phase precession,<sup>19,20</sup> minus some possible extinction related to the ratio of  $w/a$ . In order to study the dependence of the NWA array density on the excitation efficiency of the spin wave beam, we designed two devices with different width  $w$  and lattice constant  $a$ . Namely, for device I,  $w = 300$  nm and  $a = 500$  nm; and for device II,  $w = 200$  nm and  $a = 400$  nm. The NWA length of  $10 \mu\text{m}$  was kept the same for both devices. Such a localized distribution of excitation field produces a focused emission of spin waves in a similar fashion to the spin wave beam excited from a constricted CPW.<sup>21,22</sup> In the present geometry, the distance of propagation is well within the near-field region defined as the ratio  $L^2/\lambda_{NW}$ , with  $L$  being the antenna length and  $\lambda_{NW}$  the magnon wavelength, so that the near-field diffraction pattern from such a localized excitation follows very closely its shape. For this reason, the emission of  $k_{NW}$  magnons remains confined within the length of the NW, thus forming a spin wave beam of width closely equal to  $10 \mu\text{m}$  as sketched in Fig. 1(b).

Fig. 1(b) shows a SEM image of device I. The sample fabrication required two steps of e-beam lithography followed by e-beam evaporation lift-off process on a 55 nm thick liquid phase epitaxy YIG film.<sup>23</sup> To circumvent the insulating nature of the substrate, we resorted to an extra layer of conductive resist AR Electra 92<sup>24</sup> on top of PMMA. In the first step, we structured the 60 nm thick Ni<sub>80</sub>Fe<sub>20</sub> (permalloy) using a 3 nm thin Ti adhesion layer, and a 8 nm Au capping layer via e-beam evaporation. In the second step, we aligned

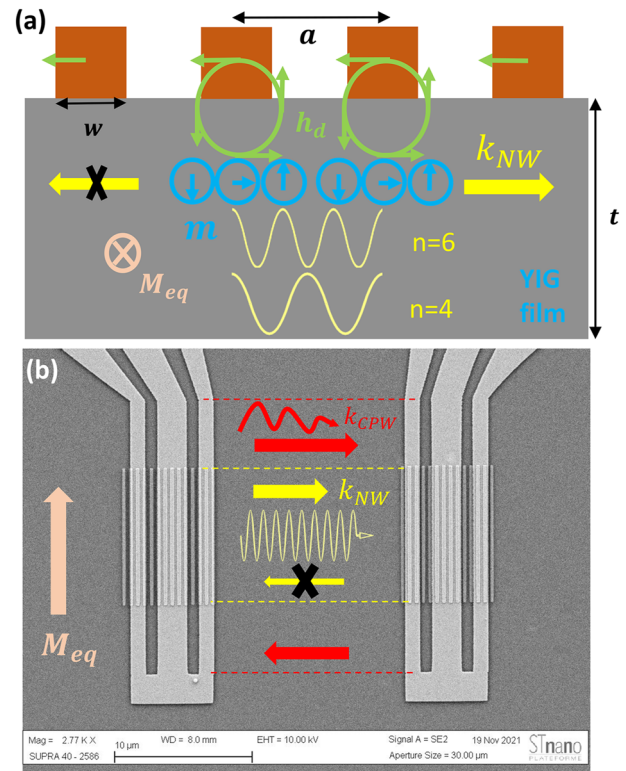

**FIG. 1.** (a) Sketch of the NWA-FMR mediated chiral coupling mechanism. (b) SEM image of device I,  $w = 300$  nm width and  $a = 500$  nm lattice constant of Ni<sub>80</sub>Fe<sub>20</sub> NWA grown on top of 55 nm thick YIG film, 80 nm Au-antennas grown on top of YIG|Ni<sub>80</sub>Fe<sub>20</sub>. Red and Yellow color represent respectively antenna ( $k_{CPW}$ ) and Ni<sub>80</sub>Fe<sub>20</sub> NWA ( $k_{NW}$ ) excite mode.

for both devices the same  $20 \mu\text{m}$  long coplanar wave guides (CPW) with the following lateral dimensions:  $2 \mu\text{m}$  wide central line and  $1 \mu\text{m}$  wide ground lines each spaced by  $1 \mu\text{m}$  with the central line. These pairs of spin wave antenna made of 4 nm Ti + 80 nm Au also via ebeam evaporation. The center-to-center distance  $D$  between the two CPW are respectively  $20 \mu\text{m}$  for device I, and  $15 \mu\text{m}$  for device II.

### B. Broadband spin wave spectroscopy

We incorporated an home-made confined electromagnet onto a PM8 probe station to perform VNA spin wave spectroscopy using a Rohde & Schwarz ZNA43GHz Vector Network Analyzer, calibrated via a SOLT procedure with  $150 \mu\text{m}$  pitch picoprobes. The sample is carefully placed within the 11 mm gap of the electromagnet, whose poles are 15 mm in diameter, and produce an homogeneous in-plane field along the poles axis (namely less than 0.3% variation at most) up to 500 mT at 3 A. Due to the small hysteresis of the electromagnet, we always initialize a measurement with a high current of 5 A in order to be consistent with the calibration of our magnet.

We performed broadband frequency sweep in the  $[0.5;20]$  GHz range at constant applied field acquiring 3201 points with

a resolution bandwidth of 100 Hz in order to resolve widely spread-out multi-modes transmission spectra. We measure 2-ports S-parameters for several field values, which we translate into the corresponding  $Z_{ij}$  impedance matrices. Furthermore, due to the small area of NWA (namely  $10 \times 5 \mu\text{m}^2$ ), the typical range of  $S_{ij}$  signal amplitudes are of the order of  $10^{-4}$  in linear scale (or  $-80$  dB in log scale), while the noise floor lays at  $10^{-6}$ . We retrieve a flat base line by subtracting the measurement at given field with a reference measurement at another field value  $H_{ref}$  far enough that there are no dynamic feature in the frequency span. Finally, as the coupling of the spin wave to an antenna is of inductive nature, we chose to represent our relative measurements in units of inductance defined as:<sup>21,25,26</sup>

$$\Delta L_{ij}(f, H) = \frac{1}{i2\pi f} (Z_{ij}(f, H) - Z_{ij}(f, H_{ref})) \quad (1)$$

where the subscripts  $(i, j) = 1$  or  $2$  denote either a transmission measurement between two antennas ( $i \neq j$ ), or a reflection measurement done on the same port ( $i = j$ ).

### III. EXPERIMENTAL RESULTS AND DISCUSSION


#### A. Perfect non-reciprocal transmission

We present in Fig. 2 a mapping in the  $(f, H)$  plane of the spectra  $\Delta L_{11}$ ,  $\Delta L_{21}$ , and  $\Delta L_{12}$  acquired with device I for field gradually changing from  $+46$  mT to  $-46$  mT. We observe a myriad of modes that we can separated into two main regions. The first region at lower frequencies corresponds to all the  $k_{CPW}$  modes coupled directly by the microwave field of the antenna, and which range typically from  $k \approx 0$  (namely the section of the CPW around the picroprobes) to  $k \approx 15 \text{ rad } \mu\text{m}^{-1}$  (the 8th satellites peak of the antenna). As shown in Fig. 2(e) with the spectra measured at  $\mu_0 H_{ext} = +15$  mT, some partial

non-reciprocity occurs between  $\Delta L_{21}$  and  $\Delta L_{12}$  due to the ellipticity of the microwave field of the antenna as mentioned above. The second region above 8 GHz corresponds to the higher  $k_{NW}$  modes mediated by the FMR of the permalloy NWA. In this frequency region, Figs. 2(b) and 2(c) show a perfect 100% non-reciprocal transmission of spin waves. Namely, at positive field values,  $\Delta L_{21}$  shows large oscillations, while no transmission occurs from port 2 to port 1. Conversely at negative fields, the non-reciprocity is reversed, and no transmission occurs from port 1 to port 2. We emphasize that the dynamic range employed for our measurements (iBW = 100 Hz, P =  $-10$  dBm) gives a noise floor of about 5 fH, while typical transmission amplitude are of the order of 100 fH. Besides, one notices between 0 and  $-15$  mT that the transmission for  $\Delta L_{12}$  is somewhat dispersed, indicating that the magnetization of the permalloy NWA do not conserve an anti-parallel orientation with the YIG magnetization, and that a gradual switching of the Py NWA is likely occurring. Furthermore, as shown with the spectra at  $+15$  mT of Fig. 2(f), a closer look in this region shows an additional perfectly non-reciprocal mode around 8.4 GHz on top of the more pronounced mode at 9.4 GHz. Nevertheless, the frequency spacing between these two modes is much smaller than expected, as the wavevector difference between two adjacent modes,  $k_{n+1} - k_n = \frac{2\pi}{a}$  would result in a frequency difference of about 3 GHz, as can be deduced from Fig. 2(g). We investigate further the nature of these  $k_{NW}$  multimodes in Sec. III B.

#### B. High- $k$ spin wave beam characterization

We make use of several distinct peaks to characterize the propagation of high  $k$ -vector magnons on both devices I and II. To begin with, we use the Kittel mode to fit the lower branch of the reflection spectra in Fig. 2(a), which corresponds to the quasi

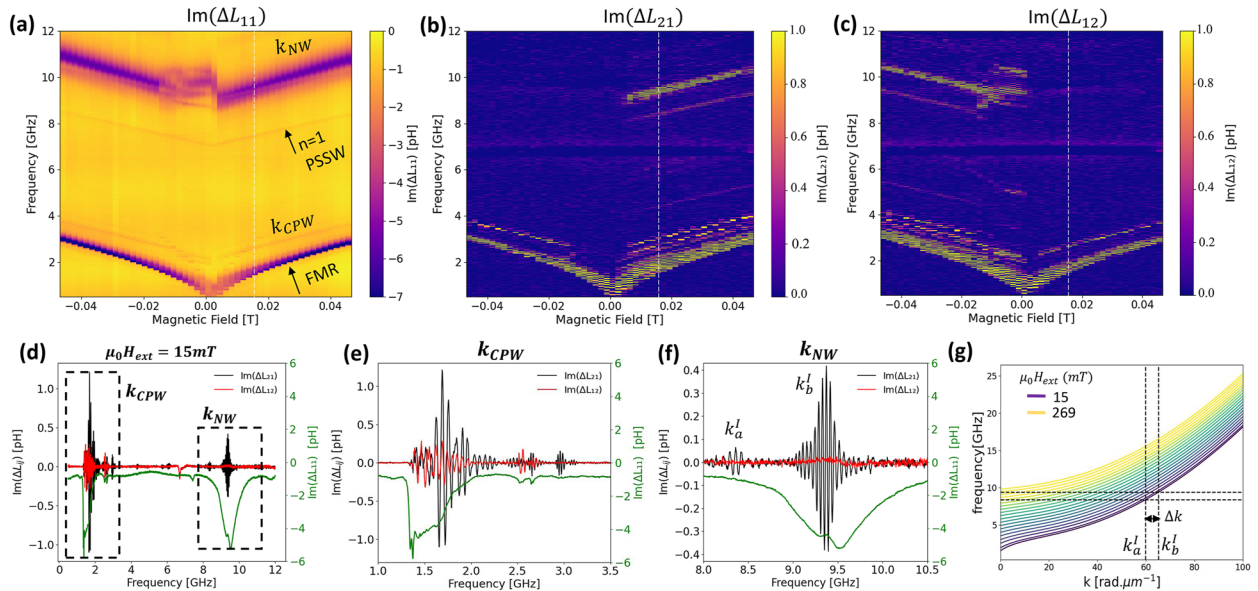

**FIG. 2.**  $(f, H)$  mapping of the spin wave spectra obtained for device I for (a)  $\Delta L_{11}$ , (b)  $\Delta L_{21}$ , and (c)  $\Delta L_{12}$ . (d) Spectra obtained at  $\mu_0 H_{ext} = +15$  mT from (b) and (d). (e) Zoom of (d) on the  $k_{CPW}$  region, and (f) on the  $k_{NW}$  region. (g) Dispersion relation for field ranging from 50 to 269 mT.

$k = 0$  FMR resonance of the YIG happening in the larger portion of the CPW close by the picoprobe and far from the NWA. From this analysis, we extract a value of the gyromagnetic ratio of  $\gamma/2\pi = 27.7 \pm 0.2 \text{ GHz T}^{-1}$  and an effective magnetization  $\mu_0 M_{\text{eff}} = 185 \pm 1 \text{ mT}$ , which is identical to the saturation magnetization  $M_s$ ,<sup>23</sup> suggesting no in-plane anisotropy. Then, we track the small reflection peak visible in between the two regions [e.g., the peak at 7.4 GHz in Fig. 2(d)], which corresponds to the first perpendicular standing spin wave (PSSW) mode, and we fit the difference of the square of the frequencies between the PSSW and the Kittel modes:<sup>27</sup>

$$f_{\text{PSSW}}^2 - f_{\text{FMR}}^2 = \left(\frac{\gamma}{2\pi}\mu_0\right)^2 \left[ 2M_s\Lambda^2 \frac{\pi^2}{t^2} H_{\text{ext}} + M_s^2 \Lambda^2 \frac{\pi^2}{t^2} \left(1 + \Lambda^2 \frac{\pi^2}{t^2}\right) \right] \quad (2)$$


where  $\Lambda = \sqrt{\frac{2A_{\text{ex}}}{\mu_0 M_s^2}}$  is the exchange length. In doing so, we obtain the following exchange constant  $A_{\text{exch}} = 3.85 \pm 0.1 \text{ pJ m}^{-1}$ . At last, we study the field dependence of the several  $k_{\text{NW}}$  modes features. For this purpose, we use a simple Gaussian function multiplied by a cosine to fit the oscillations of each transmission peak [see colored fit in Figs. 3(a) and 3(c)], which gives us the peak position, its amplitude, and the period of oscillation. This leaves us fitting the field

dependence of the frequency of each mode with only the wavevector as fitting parameter.

We show in Fig. 3 the results of this methodology. For device I with a lattice constant  $a = 500 \text{ nm}$ , we followed three modes which correspond to  $k_a^I = 61.3 \text{ rad } \mu\text{m}^{-1}$ ,  $k_b^I = 66.7 \text{ rad } \mu\text{m}^{-1}$ , and  $k_c^I = 74 \text{ rad } \mu\text{m}^{-1}$ ; and for device II with  $a = 400 \text{ nm}$ , we tracked two modes  $k_a^{II} = 72 \text{ rad } \mu\text{m}^{-1}$ , and  $k_b^{II} = 77 \text{ rad } \mu\text{m}^{-1}$ .

It may seem curious at first that none of these wavevectors corresponds to an integer value of  $\frac{2\pi}{a}$ . However, the Fourier transform of the NWA dynamic dipolar field distribution, which gives the spectral efficiency of the excitation,<sup>25</sup> is rather complex to depict as it consists of the modulation of the NWA periodicity with the field distribution of the CPW. We therefore perceive these  $k_{\text{NW}}$  modes to be neighboring ripples of a convoluted spectral distribution that depends on the lattice periodicity, the width of the nanowire, and the antenna field distribution.

We also reported the field dependence of the mode amplitudes in Fig. 3(e), which shows non-monotonous behavior. As one can see in the spectra of Figs. 3(a) and 3(c), the efficiency of the coupling to a particular mode will be all the stronger that its frequency matches with the one of the NWA FMR. As the gyromagnetic ratio of YIG is smaller than the one of Permalloy ( $\gamma_{\text{py}}/2\pi = 29.5 \text{ GHz T}^{-1}$ ), the NWA dispersion will gradually cross the  $k_{\text{NW}}$  multimodes dispersion across the field range. Unfortunately, this non-monotonous field dependence of the excitation efficiency makes it arduous to

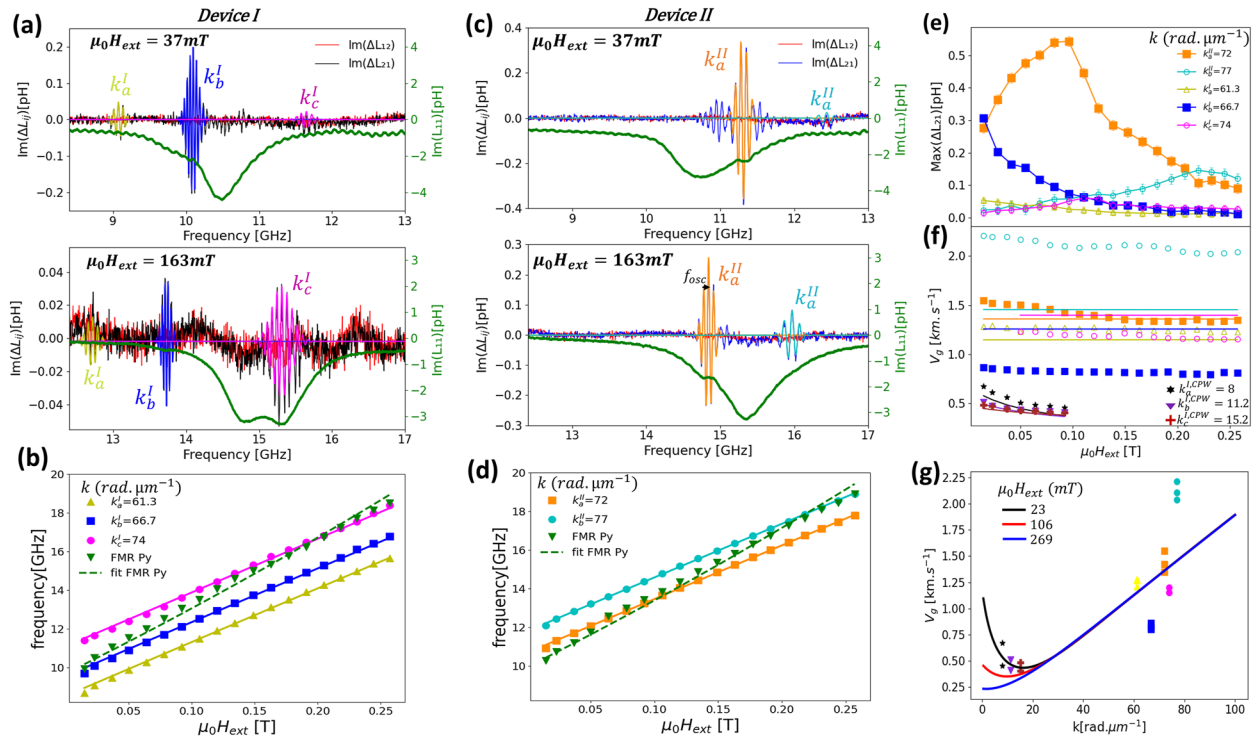

**FIG. 3.** Transmission spectra at 37 mT and 163 mT for (a) device I and (c) device II, blue and red line represent respectively transmission spectra  $\Delta L_{21}$  and  $\Delta L_{12}$ . Field dependence of the frequency for the several mode of (b) device I and (d) device II. (e) Field dependence of all the mode amplitudes. (f) and (g) Comparison of the measured group velocity with theoretical expression.

characterize the attenuation of these high k-vector with just one kind of device. A series of devices with different distance  $D$  would be more suited for determining the attenuation length of these high-k SWB.

Finally, from the period of oscillation  $f_{osc}$  of the transmission spectra, we estimate the group velocity according to  $v_g = f_{osc} * D$ .<sup>21</sup> We compare our measurement of  $v_g$  with the theoretical expression in Figs. 3(f) and 3(g). Although the agreement at lower wavevector is fair, we observe some significant discrepancies in the group velocity among the  $k_{NW}$  modes. We foresee that an additional phase delay must occur through the propagation path. Namely, considering that the length of NWA is comparable to the propagation distance  $D$ , one can expect the static stray field of the wires to cause some inhomogeneities in the static field distribution between the two antennas.

#### IV. CONCLUSION

We carried out a spin wave spectroscopy study on two different  $50 \mu\text{m}^2 \text{Ni}_{80}\text{Fe}_{20}$  nanowire arrays resonantly coupled to a continuous 55 nm thin YIG film. We demonstrated unidirectional transmission of  $10 \mu\text{m}$  wide spin wave beams up to  $77 \text{ rad } \mu\text{m}^{-1}$  in the [8;20] GHz frequency range. An attempt to characterize the propagation properties of these high k-vector spin wave beams reveals several peculiarities regarding the modes selection, their coupling efficiency, and possible additional phase lag due to inhomogeneous stray field from the nanowires. These findings serve as a guideline for future miniaturization of nonreciprocal magnonic devices.

#### ACKNOWLEDGMENTS

The authors acknowledge the financial support from the French National research agency (ANR) under the project *MagFunc*, the Region Bretagne with the *CPER-Hypermag* project, and the Département du Finistère through the project *SOSMAG*. We also want to thank Bernard Abiven for the implementation of the electromagnet and Guillaume Bourcin for fruitful discussions. CD acknowledges funding by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) - 271741898.

#### AUTHOR DECLARATIONS

##### Conflict of Interest

The authors have no conflicts to disclose.

##### Author Contributions

**L. Temdie:** Conceptualization (equal); Data curation (lead); Formal analysis (lead); Investigation (lead); Methodology (lead); Validation (lead); Writing – review & editing (equal). **V. Castel:** Validation (supporting); Writing – review & editing (supporting). **C. Dubs:** Resources (supporting). **G. Pradhan:** Conceptualization (supporting); Investigation (supporting); Methodology (supporting). **J. Solano:** Conceptualization (supporting); Investigation (supporting); Methodology (supporting); Writing – review & editing (equal). **H. Majjad:** Investigation (supporting); Methodology (equal); Resources (equal); Supervision (supporting); Validation (supporting). **R. Bernard:** Methodology (supporting); Resources (supporting); Supervision (supporting). **Y. Henry:** Funding acquisition (supporting); Investigation (supporting); Methodology (sup-

porting); Resources (equal); Supervision (supporting); Validation (supporting). **M. Bailleul:** Conceptualization (supporting); Funding acquisition (equal); Investigation (equal); Methodology (equal); Project administration (equal); Resources (equal); Supervision (supporting); Validation (equal); Visualization (equal). **V. Vlaminc:** Conceptualization (lead); Data curation (equal); Formal analysis (equal); Funding acquisition (lead); Investigation (lead); Methodology (lead); Project administration (lead); Supervision (lead); Validation (lead); Visualization (equal); Writing – original draft (lead).

#### DATA AVAILABILITY STATEMENT

The data that support the findings of this study are available from the corresponding author upon reasonable request.

#### REFERENCES

- W. Palmer *et al.*, *IEEE Micr. Magazine* **20**, 36 (2019).
- V. G. Harris, "Modern microwave ferrites," *IEEE Trans. Magn.* **48**, 3 (2012).
- M. H. Devoret and R. J. Schoelkopf, "Superconducting circuits for quantum information," *Science* **339**, 1169 (2013).
- A. V. Chumak *et al.*, *IEEE Trans. Magn.* **58**, 6 (2022).
- A. Barman *et al.*, *J. Phys.: Condens. Matter* **33**, 413001 (2021).
- R. W. Damon and J. R. Eshbach, *J. Phys. Chem. Solids* **19**, 308 (1961).
- R. E. Camley, *Surf. Sci. Rep.* **7**, 103 (1987).
- J. Chen, T. Yu, C. Liu, T. Liu, M. Madami, K. Shen, J. Zhang, S. Tu, M. S. Alam, K. Xia, M. Wu, G. Gubbiotti, Y. M. Blanter, G. E. W. Bauer, and H. Yu, *Phys. Rev. B* **100**, 104427 (2019).
- H. Wang *et al.*, *Nano Res.* **14**, 2133–2138 (2021).
- O. Gladii, M. Haidar, Y. Henry, M. Kostylev, and M. Bailleul, *Phys. Rev. B* **93**, 054430 (2016).
- M. Grassi, M. Geilen, D. Louis, M. Mohseni, T. Brächer, M. Hehn, D. Stoeffler, M. Bailleul, P. Pirro, and Y. Henry, *Phys. Rev. Appl.* **14**, 024047 (2020).
- J.-H. Moon, S.-M. Seo, K.-J. Lee, K.-W. Kim, J. Ryu, H.-W. Lee, R. D. McMichael, and M. D. Stiles, "Spin-wave propagation in the presence of interfacial Dzyaloshinskii-Moriya interaction," *Phys. Rev. B* **88**, 184404 (2013).
- T. Brächer, O. Boule, G. Gaudin, and P. Pirro, "Creation of unidirectional spin-wave emitters by utilizing interfacial Dzyaloshinskii-Moriya interaction," *Phys. Rev. B* **95**, 064429 (2017).
- K. Di, V. L. Zhang, H. S. Lim, S. C. Ng, M. H. Kuo, J. Yu, J. Yoon, X. Qiu, and H. Yang, *Phys. Rev. Lett.* **114**, 047201 (2015).
- J. A. Otálora, M. Yan, H. Schultheiss, R. Hertel, and A. Kákay, "Curvature-induced asymmetric spin-wave dispersion," *Phys. Rev. Lett.* **117**, 227203 (2016).
- Q. Wang, A. V. Chumak, and P. Pirro, *Nature Commun.* **12**, 2636 (2021).
- Á. Papp, W. Porod, and G. Csaba, *Nature Commun.* **12**, 6422 (2021).
- T. Yu and G. E. W. Bauer, "Chiral coupling to magnetodipolar radiation," in *Topics in Applied Physics Springer Book Series*, vol. **138** (2021).
- C. Liu *et al.*, *Nat. Commun.* **9**, 738 (2018).
- J. Chen, C. Liu, T. Liu, Y. Xiao, K. Xia, G. E. W. Bauer, M. Wu, and H. Yu, *Phys. Rev. Lett.* **120**, 217202 (2018).
- N. Loayza, M. B. Jungfleisch, A. Hoffmann, M. Bailleul, and V. Vlaminc, *Phys. Rev. B* **98**, 144430 (2018).
- H. S. Körner, J. Stigloher, and C. H. Back, *Phys. Rev. B* **96**, 100401(R) (2017).
- C. Dubs, O. Surzhenko, R. Thomas, J. Osten, T. Schneider, K. Lenz, J. Grenzer, R. Hübner, and E. Wendler, *Phys. Rev. Materials* **4**, 024416 (2020).
- See <https://www.allresist.com/portfolio-item/protective-coating-ar-pc-5091-02-electra-92/> for Protective Coating AR-PC 5091.02 (Electra 92).
- V. Vlaminc and M. Bailleul, *Phys. Rev. B* **81**, 14425 (2010).
- O. Gladii, M. Collet, K. Garcia-Hernandez, C. Cheng, S. Xavier, P. Bortolotti, V. Cros, Y. Henry, J.-V. Kim, A. Anane, and M. Bailleul, *Appl. Phys. Lett.* **108**, 202407 (2016).
- B. A. Kalinikos and A. N. Slavin, *J. Phys. C: Solid State Phys.* **19**, 7013 (1986).