



**HAL**  
open science

# On a Bubble algorithm for the cubic Nonlinear Schrödinger equation

Erwan Faou, Yoann Le Henaff, Pierre Raphaël

► **To cite this version:**

Erwan Faou, Yoann Le Henaff, Pierre Raphaël. On a Bubble algorithm for the cubic Nonlinear Schrödinger equation. 2023. hal-04041787v2

**HAL Id: hal-04041787**

**<https://hal.science/hal-04041787v2>**

Preprint submitted on 28 Apr 2023 (v2), last revised 2 Oct 2023 (v3)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# On a Bubble algorithm for the cubic Nonlinear Schrödinger equation

Erwan Faou<sup>\*1</sup>, Yoann Le Hénaff<sup>†1</sup>, and Pierre Raphaël<sup>‡2</sup>

<sup>1</sup>Rennes University, IRMAR UMR 6625, INRIA centre at Rennes University (MINGuS project-team), Rennes, France

<sup>2</sup>Department of Pure Mathematics and Mathematical Statistics, University of Cambridge, Cambridge, U.K.

## Abstract

Based on very recent and promising ideas, stemming from the use of *bubbles*, we discuss an algorithm for the numerical simulation of the cubic nonlinear Schrödinger equation with harmonic potential (cNLS) in any dimension, that could easily be extended to other polynomial nonlinearities. This algorithm consists in discretizing the initial function as a sum of modulated complex gaussian functions (the bubbles), each one having its own set of parameters, and then updating the parameters according to cNLS. Numerically, we solve exactly the linear part of the equation and use the Dirac-Frenkel-MacLachlan principle to approximate the nonlinear part. We then obtain a grid-free algorithm in any dimension, and it is compared to a spectral method on numerical examples.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>The Harmonic Oscillator</b>	<b>5</b>
2.1	General case: $v = v(s, y)$	5
2.1.1	Conservation Laws	5
2.1.2	Renormalized flow	9
2.1.3	Hamiltonian formulation for the free bubble	11
2.2	A particular case: $v(s, y) = e^{-\frac{1}{2} y ^2}$	17
<b>3</b>	<b>The Dirac-Frenkel-MacLachlan principle</b>	<b>22</b>
3.1	Computing coefficients of the linear system (3.9)	26
3.2	Hamiltonian and norm conservation for the interactions	28
3.3	Recovering the Harmonic Oscillator equations	29

---

\*erwan.faou@inria.fr

†yoann.lehenauff@univ-rennes.fr

‡pr463@dpms.cam.ac.uk

<b>4</b>	<b>Numerical examples</b>	<b>30</b>
4.1	Spectral scheme	30
4.2	Discretization into a sum of Bubbles	32
4.3	Observables	32
4.4	Results	33
4.4.1	Test case 1: Zero phase initial data	33
4.4.2	Test case 2: Weak interactions	34
4.4.3	Test case 3: Strong interactions	34
<b>5</b>	<b>Conclusion</b>	<b>35</b>
	<b>Acknowledgements</b>	<b>37</b>
<b>A</b>	<b>Computing the coefficients of the linear system (3.9)</b>	<b>37</b>
A.1	Coefficients of the matrix $\mathbf{A}$	37
A.2	Coefficients of the vector of interactions $S$	39
<b>B</b>	<b>Fourier transforms of Gaussians</b>	<b>41</b>
<b>C</b>	<b>Miscellaneous computations</b>	<b>45</b>
C.1	Conservative quantities in dimension $d = 2$	45

# 1 Introduction

We are interested in approximating numerically the solution  $\psi(t, x)$  to the cubic nonlinear Schrödinger equation with harmonic potential,

$$i\partial_t\psi + \Delta_x\psi - |x|^2\psi = \psi|\psi|^2, \quad x \in \mathbb{R}^d, \quad (\text{cNLS})$$

where  $d \geq 1$ ,  $|\cdot|$  denotes the usual Euclidian norm over  $\mathbb{R}^d$ , and  $\Delta_x$  denotes the Laplace operator over  $\mathbb{R}^d$ :  $\Delta_x = \sum_{i=1}^d \partial_{x_i}^2$ . This equation is also sometimes called *time-dependent Gross-Pitaevskii equation* [CCP<sup>+</sup>00, BJM03, Wan17, TTK22]. We focus on a cubic non-linearity for the sake of clarity, but we emphasize the fact that everything we present is also applicable to other types of polynomial nonlinearities, *mutatis mudandis*. The Schrödinger equation (cNLS) can be split into two parts, namely the linear and nonlinear parts:

$$i\partial_t\psi + \Delta_x\psi - |x|^2\psi = 0, \quad (\text{HO})$$

and

$$i\partial_t\psi = \psi|\psi|^2. \quad (\text{cNLS-nonLin.})$$

The linear equation (HO) is also called the Harmonic Oscillator. Traditional well known numerical schemes are based on this abstract decomposition and it is easy to determine high order splitting methods obtained by solving alternately the linear and nonlinear part, like Lie, Strang Splitting or triple jump composition, see for instance [MQ02, HLW06, CCFM17]. However, the discretization of each of these two parts remains to be done using time and space discretization.

Very recent works [MR18, FR20] suggest to discretize the solution  $\psi$  of (cNLS) as a sum of  $N$  modulated functions, which write as:

$$\psi(t, x) \approx u(t, x) := \sum_{j=1}^N u_j(t, x), \quad (1.1)$$

where

$$u_j(t, x) := \frac{A_j}{L_j} e^{i\gamma_j + iL_j\beta_j \cdot y_j - i\frac{B_j}{4}|y_j|^2} v_j(s_j, y_j), \quad \text{with} \quad \left\{ \begin{array}{l} \frac{ds_j}{dt} := \frac{1}{L_j^2}, \\ y_j := \frac{x - X_j}{L_j}, \end{array} \right. \quad (1.2)$$

and  $N \in \mathbb{N}^*$ . We shall call each modulated function  $u_j$  a *bubble*.

The time dependence of the parameters  $A_j, L_j, B_j, X_j, \beta_j, \gamma_j$  has not been written in (1.2) for the sake of clarity, but it is one of the main ingredients of the approach. More precisely, the core idea is to plug the ansatz (1.1) into (cNLS) in order to obtain ODEs for the parameters. The idea of relying on time-dependent parameters to represent the solution, or an approximation, is not new and was formerly called *Variational Gaussian wave packets* by Lasser and Lubich [LL20], where they applied the Dirac-Frenkel-MacLachlan principle (DFMP) to (HO). The Dirac-Frenkel-MacLachlan is the name given to the Dirac-Frenkel principle, or the MacLachlan principle, because in this case they are equivalent.

This method is widely used in the field of Chemical Physics [Hel76, HH87, CK90, WRB04, AKLP22]. The different methods used are variations of the same idea, and possess many names: superposition of Gaussian Wavepackets, Gaussian beams, Thawed Gaussians, Frozen Gaussian... All of these algorithms simply consist in applying a Dirac-Frenkel-MacLachlan principle to (HO), the difference lying in the way the parameters are updated and how. For example, the Thawed Gaussian method allows the width matrix to be time-dependent while the Frozen Gaussian does not. However, they all produce an approximate solution, even in the linear case. In general, the chemists' setting of Gaussian beams involve correlated components, hence the width matrix. In the present paper we make the simplifying assumption that our gaussians are not correlated, and that their width is parametrized by a real positive scalar.

Let us explain the main ideas underlying the full modulation (1.2), and developed in various works, see for instance [MR18, FR20] and the references therein.

Consider for instance the case of one bubble, *i.e.*  $N = 1$ . When plugging the Ansatz (1.2) into (cNLS), we obtain an equation of the form

$$i\partial_s v + \Delta_y v - |y|^2 v - |v|^2 v + P(s; y, \partial_y) v = 0$$

where  $P(s; y, \partial_y)$  is a quadratic operator in  $y$  and  $\partial_y$  depending on the time through the parameters  $(A, L, B, X, \beta, \gamma)$  and their time derivatives with respect to  $s$ , see (2.7) for more precise detail. It is then possible to choose the parameters in such a way that  $P(s; y, \partial_y)v = -\lambda v$  for some  $\lambda \in \mathbb{R}$ , and to take  $v$  as a soliton solution of the stationary equation

$$-\Delta_y v + |y|^2 v + |v|^2 v = \lambda v. \quad (1.3)$$

This yields to a differential system to be solved by the parameters  $(A, L, B, X, \beta, \gamma)$  which is given below by the equations (2.8). It turns out that these equations form a *completely*

*integrable Poisson system* that can be solved, and the solution for a single bubble can be thus taken as a *modulated soliton*.

This kind of approach has been used successfully in various situations from a theoretical point of view, see [MR05, MR18, FR20, MRRS20] and the references therein. Typically, when several modulated solitons  $N \geq 2$  are in interactions, this can produce finite time blow-up of growth of Sobolev norm phenomena, and a large part of the analysis relies on the ability of calculating nonlinear interactions between two modulated solitons. This can be done for instance in an integrable situation, e.g. the Szegő equation [GLPR18].

Another byproduct of these modulation technics in 2D is to make a link between (cNLS) on a finite time interval and the Schrödinger equation without harmonic potential

$$i\partial_s\psi + \Delta_x\psi = \psi|\psi|^2, \quad x \in \mathbb{R}^d$$

on an unbounded time interval. In this case, the modulation equations generate the so called *lens* transform, see for instance [Car21] (note that our algorithms could be also applied to the latter equation but we will restrict our analysis to the Harmonic case). Let us also note that such modulation technics can also be related with the families of exact splitting introduced in [Ber20] where the time coefficients can be seen as specific time changes  $s$  in the modulation equations.

Inspired by these successful theoretical works, we retain the idea of approximate solutions to the equations (HO) and (cNLS) by modulating the parameters  $A_j, L_j, B_j, X_j, \beta_j, \gamma_j$  in such a way that  $v_j(s_j, x)$  satisfies a *smoother in time* equation - typically a stationary soliton equation. From the numerical point of view, however, choosing the  $v_j$  as stationary solitons would require first to solve explicitly the nonlinear equation (1.3) and more problematically, to estimate numerically the nonlinear interactions between the modulated solitons by using the Dirac-Frenkel-MacLachlan principle. The latter consists essentially in a projection on the manifold of modulated solitons, which is in practice very difficult to evaluate numerically.

Moreover, one is naturally interested in using a splitting strategy between the linear and nonlinear part which would typically destroy the soliton structure in the equation.

This is why we decide here to use Gaussians for the functions  $v_j$ . Let us remark that in the case of small nonlinearities, ground states solitons are close to gaussians which makes the approximation relevant.

This Gaussian choice has the main following advantages : First we can solve exactly the linear part by using the classical modulation equations. Second, we can calculate explicitly the nonlinear interactions obtained by applying the Dirac-Frenkel-MacLachlan principle on the manifold of modulated gaussians to polynomial interactions. In the end, we thus obtain a algorithm for modulated Gaussians that can be easily implemented numerically, grid free, and able to capture high oscillations of the solution.

The paper is organized as follows. Section 2 is devoted to (HO) and can be seen as a specialization of [LL20] for a quadratic potential. We recall some conservation laws and growth estimates when considering *bubbles* in (cNLS), as well as exhibit *modulation equations* which turn to have a completely integrable Hamiltonian structure. Those equations allow us to obtain an analytical formula for most of the modulation parameters. By choosing a shape for those bubbles – in our case gaussian – all of the modulation parameters can be obtained exactly.

The second part of this work takes into account cubic interactions, which were not accounted for in [LL20]. We focus in Section 3 on (cNLS-nonLin.). The nonlinearity that is introduced is the core of difficulties arising in the Schrödinger equation, and it is hopeless to look for exact solutions in the general case. The proposed approach uses the Dirac-Frenkel-MacLachlan principle to obtain modulation equations. This allows us to take into account as many bubbles as one desires at the cost of a computational complexity of order  $\mathcal{O}(N^4d + d^3N^3)$ . Here,  $N$  is the total number of bubbles. The fourth power of  $N$  is due to polynomial interactions of order three. This complexity almost does not suffer from the well-known “curse of dimensionality” since it is at most polynomial with respect to the dimension  $d$ . This relies on the exact computations of all of the integrals involved, hence we do not need to use numerical integration.

Finally, Section 4 is dedicated to illustrating numerically the fine details that are obtainable with the Dirac-Frenkel-MacLachlan principle (abbreviated DFMP), as well as the long-time behavior, compared to a FFT-based spectral scheme. Our experiments show that, if the initial data is discretized “nicely”, the DFMP yields satisfying results.

## 2 The Harmonic Oscillator

In this section we focus onto the linear part of the cubic Non Linear Schrödinger equation, namely the Harmonic Oscillator (HO).

### 2.1 General case: $v = v(s, y)$

#### 2.1.1 Conservation Laws

We recall classical laws for the Harmonic oscillator equation (see for instance [KV13, Tao06]). Let  $\psi$  be the solution to (HO). We will need the following result, known as the Pohozaev identity.

**Lemma 2.1** (Pohozaev Identity). *Let  $x \in \mathbb{R}^d$ , and  $f \in H^1(\mathbb{R}^d)$  such that  $xf \in \mathbb{L}^2(\mathbb{R}^d)$ . Then*

$$\int \Delta f \overline{\left(\frac{d}{2}f + x \cdot \nabla f\right)} dx = - \int |\nabla f|^2 dx. \quad (2.1)$$

*Proof.* By density, we only need to prove equation (2.1) for  $f \in \mathcal{C}_c^\infty(\mathbb{R}^d)$ , where  $\mathcal{C}_c^\infty(\mathbb{R}^d)$  denotes the space of infinitely smooth functions with compact support in  $\mathbb{R}^d$ . Let

$$f_\lambda(x) := \lambda^{\frac{d}{2}} f(\lambda x),$$

then

$$\int |\nabla f_\lambda|^2 dx = \lambda^2 \int |\nabla f|^2 dx.$$

Differentiating this identity with respect to  $\lambda$  and evaluating the result at  $\lambda = 1$  yields

$$\int \nabla f \cdot \nabla \overline{\left(\frac{d}{2}f + x \cdot \nabla f\right)} dx = \int |\nabla f|^2 dx.$$

We integrate by parts the LHS, and obtain (2.1). □

**Lemma 2.2** (Conserved quantities in dimension  $d = 2$ ). *We consider a two-parameter family of equations containing (HO) and (cNLS):*

$$i\partial_t\psi + \mu(\Delta\psi - |x|^2\psi) = \lambda|\psi|^2\psi, \quad \mu, \lambda \in \mathbb{R}.$$

The (radial) conservation laws are mass  $\|\psi\|_{\mathbb{L}^2}$ , energy

$$E_{\mu,\lambda} = \frac{\mu}{2} \langle H\psi, \psi \rangle + \frac{\lambda}{4} \langle |\psi|^2\psi, \psi \rangle,$$

where  $H = -\Delta + |x|^2$  and  $\langle f, g \rangle := \int_{\mathbb{R}^d} f\bar{g}$ , and momentum

$$M_{\mu,\lambda} = \left(E_{\mu,\lambda} - \mu\|x\psi\|_{\mathbb{L}^2}^2\right)^2 + \mu^2 \left(\Im \int x \cdot \nabla\psi\bar{\psi}\right)^2,$$

and the same applied to any power  $(-H)^s\psi$ . There also holds the non radial conservation law

$$\mathcal{P}_j = \frac{1}{4} \left(\Im \int \partial_j\psi\bar{\psi}\right)^2 + \mu^2 \left(\int x_j|\psi|^2\right)^2, \quad j = 1, 2.$$

*Proof.* Mass conservation:

$$\begin{aligned} \partial_t\|\psi\|_{\mathbb{L}^2}^2 &= \partial_t \int |\psi|^2 = 2\Re \int \bar{\psi}\partial_t\psi = 2\Re \int -i\bar{\psi}(-\mu\Delta\psi + \mu|x|^2\psi + \lambda|\psi|^2\psi) \\ &= 2\Re \int -i(\mu\bar{\psi}\Delta\psi + \mu|x|^2|\psi|^2 + \lambda|\psi|^4) = 2\mu\Re \int -i\bar{\psi}\Delta\psi \\ &= 2\mu\Re \int i|\nabla\psi|^2 = 0. \end{aligned}$$

Energy conservation:

$$\begin{aligned} \frac{d}{dt}E_{\mu,\lambda} &= \frac{1}{2} \frac{d}{dt} \left\langle -\mu\Delta\psi + \mu|x|^2\psi + \frac{\lambda}{2}|\psi|^2\psi, \psi \right\rangle \\ &= \frac{1}{2} \left( -2\mu\Re\langle\Delta\psi, \partial_t\psi\rangle + 2\mu\Re\langle|x|^2\psi, \partial_t\psi\rangle + 4\Re\left\langle\frac{\lambda}{2}|\psi|^2\psi, \partial_t\psi\right\rangle \right) \\ &= \Re(i\langle\partial_t\psi, \partial_t\psi\rangle) = 0. \end{aligned}$$

For the momentum, we compute

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \int |x|^2|\psi|^2 &= \frac{1}{2} \frac{d}{dt} \langle |x|^2\psi, \psi \rangle = \Re\langle |x|^2\psi, \partial_t\psi \rangle = \Re\langle |x|^2\psi, i\mu\Delta\psi - i\mu|x|^2\psi - i\lambda|\psi|^2\psi \rangle \\ &= \mu\Im\langle |x|^2\psi, \Delta\psi \rangle = \mu\Im \int |x|^2\psi\Delta\bar{\psi} = -\mu\Im \int \nabla\bar{\psi} \cdot \nabla(|x|^2\psi) \\ &= -\mu\Im \int \nabla\bar{\psi} \cdot 2x\psi - \mu\Im \int \nabla\bar{\psi} \cdot \nabla\psi|x|^2 = -2\mu\Im \int x \cdot \nabla\bar{\psi}\psi \\ &= 2\mu\Im \int x \cdot \nabla\psi\bar{\psi}, \end{aligned} \tag{2.2}$$

and

$$\frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla\psi\bar{\psi} = \frac{1}{2} \Im \int (x \cdot \nabla\partial_t\psi\bar{\psi} + x \cdot \nabla\psi\partial_t\bar{\psi}).$$

An integration by parts gives

$$\int x \cdot \nabla \phi \psi = - \int \phi \nabla \cdot (x \psi) = - \int \phi (\psi d + x \cdot \nabla \psi),$$

hence

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla \psi \bar{\psi} &= \frac{1}{2} \Im \int (-\partial_t \psi (\bar{\psi} d + x \cdot \nabla \bar{\psi}) + x \cdot \nabla \psi \partial_t \bar{\psi}) \\ &= \frac{1}{2} \Im \int (-\partial_t \psi \bar{\psi} d - \partial_t \psi x \cdot \nabla \bar{\psi} + \partial_t \bar{\psi} x \cdot \nabla \psi) \\ &= \frac{1}{2} \Im \int (-\partial_t \psi \bar{\psi} d + 2i \Im [\partial_t \bar{\psi} x \cdot \nabla \psi]) \\ &= -\frac{d}{2} \Im \int \partial_t \psi \bar{\psi} + \Im \int \partial_t \bar{\psi} x \cdot \nabla \psi. \end{aligned}$$

Recall the equation satisfied by  $\psi$ :

$$\partial_t \psi = i\mu \Delta \psi - i\mu |x|^2 \psi - i\lambda |\psi|^2 \psi,$$

therefore

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla \psi \bar{\psi} &= -\frac{d}{2} \Im \int i [\mu \Delta \psi - \mu |x|^2 \psi - \lambda |\psi|^2 \psi] \bar{\psi} \\ &\quad + \Im \int i [-\mu \Delta \bar{\psi} + \mu |x|^2 \bar{\psi} + \lambda |\psi|^2 \bar{\psi}] x \cdot \nabla \psi. \end{aligned}$$

We have

$$-\frac{d}{2} \Im \int i [\mu \Delta \psi - \mu |x|^2 \psi - \lambda |\psi|^2 \psi] \bar{\psi} = \frac{d}{2} \int [\mu |\nabla \psi|^2 + \mu |x|^2 |\psi|^2 + \lambda |\psi|^4],$$

and

$$\Im \int i [-\mu \Delta \bar{\psi} + \mu |x|^2 \bar{\psi} + \lambda |\psi|^2 \bar{\psi}] x \cdot \nabla \psi = \Re \int [-\mu \Delta \bar{\psi} + \mu |x|^2 \bar{\psi} + \lambda |\psi|^2 \bar{\psi}] x \cdot \nabla \psi.$$

Moreover,

$$\begin{aligned} \int |x|^2 \bar{\psi} x \cdot \nabla \psi &= - \int \psi \nabla \cdot (x |x|^2 \bar{\psi}) = - \int \psi (d |x|^2 \bar{\psi} + 2 |x|^2 \bar{\psi} + x |x|^2 \cdot \nabla \bar{\psi}) \\ \iff \int |x|^2 \bar{\psi} x \cdot \nabla \psi + \int \overline{|x|^2 \bar{\psi} x \cdot \nabla \psi} &= - \int \psi (d |x|^2 \bar{\psi} + 2 |x|^2 \bar{\psi}) \\ \iff \Re \int |x|^2 \bar{\psi} x \cdot \nabla \psi &= - \int \psi \left( \frac{d}{2} |x|^2 \bar{\psi} + |x|^2 \bar{\psi} \right). \end{aligned}$$

Finally,

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla \psi \bar{\psi} &= \frac{d}{2} \int [\mu |\nabla \psi|^2 + \mu |x|^2 |\psi|^2 + \lambda |\psi|^4] \\ &\quad + \Re \int [-\mu \Delta \bar{\psi} + \lambda |\psi|^2 \bar{\psi}] x \cdot \nabla \psi - \mu \int \psi \left( \frac{d}{2} |x|^2 \bar{\psi} + |x|^2 \bar{\psi} \right) \\ &= \frac{d}{2} \int [\mu |\nabla \psi|^2 + \lambda |\psi|^4] + \Re \int [-\mu \Delta \bar{\psi} + \lambda |\psi|^2 \bar{\psi}] x \cdot \nabla \psi - \mu \int |x|^2 |\psi|^2 \end{aligned}$$



$$= \frac{d}{2}\mu \int |\nabla\psi|^2 - \mu \int |x|^2|\psi|^2 + \frac{d}{2}\lambda \int |\psi|^4 + \Re \int [-\mu\Delta\bar{\psi} + \lambda|\psi|^2\bar{\psi}] x \cdot \nabla\psi$$

We are in the two-dimensional case  $d = 2$ , hence

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla\psi\bar{\psi} &= \int \mu|\nabla\psi|^2 - \mu \int |x|^2|\psi|^2 + \lambda \int |\psi|^4 + \Re \int [-\mu\Delta\bar{\psi} + \lambda|\psi|^2\bar{\psi}] x \cdot \nabla\psi \\ &= 2E_\lambda + \frac{\lambda}{2} \int |\psi|^4 - 2\mu \int |x|^2|\psi|^2 + \Re \int [-\mu\Delta\bar{\psi} + \lambda|\psi|^2\bar{\psi}] x \cdot \nabla\psi. \end{aligned}$$

Moreover,

$$\begin{aligned} \int |\psi|^2\bar{\psi} x \cdot \nabla\psi &= - \int \psi \nabla \cdot (|\psi|^2\bar{\psi} x) \\ &= - \int \psi (2\Re(\bar{\psi}\nabla\psi) \cdot \bar{\psi} x + |\psi|^2\nabla\bar{\psi} \cdot x + d|\psi|^2\bar{\psi}) \\ &= - \int (2\Re(\bar{\psi}\nabla\psi) \cdot |\psi|^2 x + \psi|\psi|^2\nabla\bar{\psi} \cdot x + 2|\psi|^4) \\ \iff 2\Re \int |\psi|^2\bar{\psi} x \cdot \nabla\psi &= -2\Re \int \bar{\psi}\nabla\psi \cdot |\psi|^2 x - 2 \int |\psi|^4 \\ \iff \Re \int |\psi|^2\bar{\psi} x \cdot \nabla\psi &= -\frac{1}{2} \int |\psi|^4, \end{aligned}$$

Finally,

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla\psi\bar{\psi} &= 2E_\lambda + \frac{\lambda}{2} \int |\psi|^4 - 2\mu \int |x|^2|\psi|^2 - \mu\Re \int \Delta\bar{\psi} x \cdot \nabla\psi - \frac{\lambda}{2} \int |\psi|^4 \\ &= 2E_\lambda - 2\mu \int |x|^2|\psi|^2 - \mu\Re \int \Delta\bar{\psi} x \cdot \nabla\psi \end{aligned}$$

We then use the Pohozaev identity (2.1) in dimension  $d = 2$ , which yields

$$\Re \left( \int x \cdot \nabla\psi\Delta\bar{\psi} \right) = 0.$$

Therefore,

$$\frac{1}{2} \frac{d}{dt} \Im \int x \cdot \nabla\psi\bar{\psi} = 2E_{\mu,\lambda} - 2\mu \int |x|^2|\psi|^2.$$

From the conservation of the energy  $E_\lambda$  and equation (2.2),

$$\frac{d^2}{dt^2} \Im \int x \cdot \nabla\psi\bar{\psi} = -16\mu^2 \Im \int x \cdot \nabla\psi\bar{\psi}.$$

Hence, the conservation laws

$$\begin{aligned} &\frac{1}{16} \left( \frac{d}{dt} \left[ \Im \int x \cdot \nabla\psi\bar{\psi} \right] \right)^2 + \mu^2 \left( \Im \int x \cdot \nabla\psi\bar{\psi} \right)^2 \\ &= \left( E_{\mu,\lambda} - \mu \|x\psi\|_{\mathbb{L}^2}^2 \right)^2 + \mu^2 \left( \Im \int x \cdot \nabla\psi\bar{\psi} \right)^2 \end{aligned}$$

For the non radial conservation law:

$$\frac{d}{dt} \Im \int \partial_j\psi\bar{\psi} = -2\Im \int \partial_t\psi\bar{\partial}_j\bar{\psi} = 2\Re \int i\partial_t\psi\bar{\partial}_j\bar{\psi} = 2\mu \int |x|^2\Re(\psi\bar{\partial}_j\bar{\psi}) = -2\mu \int x_j|\psi|^2,$$

owing to the facts that integrations by parts yield

$$-\Re \int \Delta \psi \partial_j \bar{\psi} = \Re \int \partial_j \psi \Delta \bar{\psi},$$

and

$$2\Re \int |\psi|^2 \psi \partial_j \bar{\psi} = \int |\psi|^2 \partial_j |\psi|^2 = - \int |\psi|^2 \partial_j |\psi|^2 \implies \Re \int |\psi|^2 \psi \partial_j \bar{\psi} = 0.$$

We also have

$$\frac{1}{2} \frac{d}{dt} \int x_j |\psi|^2 = \Re \int x_j \partial_t \psi \bar{\psi} = \Im \int x_j i \partial_t \psi \bar{\psi} = \mu \Im \int -\Delta \psi x_j \bar{\psi} = \mu \Im \int \partial_j \psi \bar{\psi}.$$

Hence the relations

$$\begin{cases} \frac{d}{dt} \int x_j |\psi|^2 = 2\mu \Im \int \partial_j \psi \bar{\psi} \\ \frac{d}{dt} \Im \int \partial_j \psi \bar{\psi} = -2\mu \int x_j |\psi|^2, \end{cases}$$

which have the conservation law

$$\mathcal{P}_j = \frac{1}{4} \left( \Im \int \partial_j \psi \bar{\psi} \right)^2 + \mu^2 \left( \int x_j |\psi|^2 \right)^2.$$

□

### 2.1.2 Renormalized flow

Recall the expression (1.2) of a bubble:

$$u(t, x) = \frac{A}{L} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} v(s, y), \quad y = \frac{x - X(t)}{L(t)}, \quad \frac{ds}{dt} = \frac{1}{L(t)^2}. \quad (2.3)$$

We compute, in dimension  $d \geq 1$ :

$$\Delta_x u = \frac{A e^{i\gamma}}{L^3} \Delta_y \left[ e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} v(s, y) \right],$$

and

$$\partial_k \left[ e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} v \right] = e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} \left[ \partial_k v + i \left( L\beta_k - \frac{B}{2} y_k \right) v \right], \quad k = 1, \dots, d, \quad (2.4)$$

and

$$\begin{aligned} \partial_k^2 \left[ e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} v \right] &= e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} \\ &\times \left[ \partial_k^2 v + i \left( L\beta_k - \frac{B}{2} y_k \right) \partial_k v - i \frac{B}{2} v + i \left( L\beta_k - \frac{B}{2} y_k \right) \left[ \partial_k v + i \left( L\beta_k - \frac{B}{2} y_k \right) v \right] \right] \\ &= e^{iL\beta \cdot y - i\frac{B}{4}|y|^2} \left[ \partial_k^2 v + i (2L\beta_k - B y_k) \partial_k v + \left( -i \frac{B}{2} - L^2 \beta_k^2 + LB \beta_k y_k - \frac{B^2}{4} y_k^2 \right) v \right]. \end{aligned}$$

Hence,

$$\Delta_x u = \frac{A}{L^3} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} v$$

$$\times \left[ \Delta_y v + i(2L\beta - By) \cdot \nabla v + \left( -i\frac{B}{2}d - L^2|\beta|^2 + LB\beta \cdot y - \frac{B^2}{4}|y|^2 \right) v \right].$$

We have

$$\begin{aligned} -|x|^2 u &= -\frac{A}{L} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} |Ly + X|^2 v \\ &= \frac{A}{L^3} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} \left( -L^4|y|^2 - 2L^3 X \cdot y - L^2|X|^2 \right) v, \end{aligned}$$

thus

$$\begin{aligned} -Hu &= \frac{A}{L^3} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} \left\{ \Delta_y v - iB \left( \frac{d}{2} v + \Lambda v \right) - L^2 (|\beta|^2 + |X|^2) v \right. \\ &\quad \left. + 2iL\beta \cdot \nabla v + (LB\beta - 2L^3 X) \cdot yv + \left( -\frac{B^2}{4} - L^4 \right) |y|^2 v \right\}, \end{aligned} \quad (2.5)$$

where we denoted  $\Lambda v := y \cdot \nabla v$ . We now compute

$$\begin{aligned} \partial_t u &= \partial_t \left( e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L} v(s, y) \right) \\ &= e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L} \left[ \partial_t v + \frac{A_t}{A} v - \frac{L_t}{L} (v + \Lambda v) - \frac{X_t}{L} \cdot \nabla v \right] \\ &\quad + e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L} i v \\ &\quad \times \left[ \gamma_t + \beta_t \cdot (x-X) - \beta \cdot X_t - \frac{B_t}{4L^2} |x-X|^2 \right. \\ &\quad \left. + \frac{2L_t B}{4L^3} |x-X(t)|^2 + \frac{2B}{4L^2} (x-X) \cdot X_t \right] \\ &= e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L^3} \left[ \partial_s v + \frac{A_s}{A} v - \frac{L_s}{L} (v + \Lambda v) - \frac{X_s}{L} \cdot \nabla v \right] \\ &\quad + e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L^3} i v \\ &\quad \times \left[ \gamma_s + L\beta_s \cdot y - \beta \cdot X_s - \frac{B_s}{4} |y|^2 + \frac{2L_s B}{4L} |y|^2 + \frac{B}{2} y \cdot \frac{X_s}{L} \right], \end{aligned}$$

and hence

$$\begin{aligned} i\partial_t u &= e^{i\gamma + i\beta \cdot (x-X) - i\frac{B}{4L^2}|x-X|^2} \frac{A}{L^3} \left\{ i\partial_s v + (-\gamma_s + \beta \cdot X_s) v + \left( \frac{A_s}{A} - \frac{L_s}{L} \right) i v - \frac{L_s}{L} i\Lambda v \right. \\ &\quad \left. - i\frac{X_s}{L} \cdot \nabla v + \left( -L\beta_s - \frac{B X_s}{2L} \right) \cdot yv + \left( \frac{B_s}{4} - \frac{B L_s}{2L} \right) |y|^2 v \right\}. \end{aligned} \quad (2.6)$$

This yields

$$\begin{aligned} i\partial_t u - Hu &= \frac{A}{L^3} e^{i\gamma + iL\beta \cdot y - i\frac{B}{4}|y|^2} \left\{ i\partial_s v + \left( -\gamma_s + \beta \cdot X_s - L^2 (|\beta|^2 + |X|^2) \right) v \right. \\ &\quad + \left( \frac{A_s}{A} - \frac{L_s}{L} - B\frac{d}{2} \right) i v + \left( -\frac{L_s}{L} - B \right) i\Lambda v + i \left( 2L\beta - \frac{X_s}{L} \right) \cdot \nabla v \\ &\quad + \left( -2L^3 X + LB\beta - L\beta_s - \frac{B X_s}{2L} \right) \cdot yv \\ &\quad \left. + \Delta_y v + \left[ \frac{B_s}{4} - \left( \frac{B^2}{4} + L^4 \right) - \frac{B L_s}{2L} \right] |y|^2 v \right\} (s, y). \end{aligned} \quad (2.7)$$

### 2.1.3 Hamiltonian formulation for the free bubble

The one free bubble corresponds to the modulation equations

$$\begin{cases} -\gamma_s + \beta \cdot X_s - L^2(|\beta|^2 + |X|^2) = 0 \\ \frac{A_s}{A} - \frac{L_s}{L} - \frac{B}{2}d = 0 \\ -\frac{L_s}{L} - B = 0 \\ X_s = 2L^2\beta \\ -2L^3X + LB\beta - L\beta_s - \frac{BX_s}{2L} = 0 \\ \frac{B_s}{4} - \left(\frac{B^2}{4} + L^4\right) - \frac{B}{2}\frac{L_s}{L} = -1, \end{cases}$$

or equivalently

$$\begin{cases} A_s = \frac{AB}{2}(d-2) \\ L_s = -BL \\ B_s = -4 + 4L^4 - B^2 \\ X_s = 2L^2\beta \\ \beta_s = -2L^2X \\ \gamma_s = L^2(|\beta|^2 - |X|^2). \end{cases} \quad (2.8)$$

If the parameters are solutions to system (2.8), the function  $v$  then has to solve the Harmonic Oscillator with respect to time  $s$  and space  $y$ .

In time  $t$ , as  $\frac{d}{ds} = L^2\frac{d}{dt}$ , this system is

$$\begin{cases} A_t = \frac{AB}{2L^2}(d-2) \\ L_t = -\frac{B}{L} = -2L\partial_B\mathcal{E} \\ B_t = -\frac{4}{L^2} + 4L^2 - \frac{B^2}{L^2} = 2L\partial_L\mathcal{E} \\ X_t = 2\beta = \nabla_\beta\mathcal{R} \\ \beta_t = -2X = -\nabla_X\mathcal{R} \\ \gamma_t = |\beta|^2 - |X|^2, \end{cases} \quad (2.9)$$

with

$$\mathcal{E}(B, L) = \frac{1}{L^2} \left(1 + \frac{B^2}{4}\right) + L^2, \quad \text{and} \quad \mathcal{R}(X, \beta) = |X|^2 + |\beta|^2.$$

Then we set

$$k = \frac{1}{2} \log L, \quad L = e^{2k},$$

and the system becomes

$$\begin{cases} A_t = \frac{AB}{2}(d-2)e^{-4k} \\ k_t = -\partial_B \mathcal{H} \\ B_t = \partial_k \mathcal{H} \\ X_t = \nabla_\beta \mathcal{H} \\ \beta_t = -\nabla_X \mathcal{H} \\ \gamma_t = |\beta|^2 - |X|^2, \end{cases} \quad (2.10)$$

with

$$\mathcal{H}(k, B, X, \beta) = \mathcal{E}(k, B) + \mathcal{R}(X, \beta) = e^{-4k} \left( \frac{B^2}{4} + 1 \right) + e^{4k} + |X|^2 + |\beta|^2.$$

**Lemma 2.3.** *There exists a symplectic change of variable  $(X, B, k, \beta) \mapsto (h, a, \xi, \theta) \in \mathbb{R} \times \mathbb{R}^d \times [0, 2\pi] \times [0, 2\pi]^d$ , such that the Hamiltonian in these variables is given by*

$$E(h, a, \xi, \theta) = 4h + 2|a|^2, \quad (2.11)$$

so that the flow in variable  $(h, a, \xi, \theta)$  is given by

$$\begin{aligned} a(t) &= a(0), \\ \theta(t) &= \theta(0) + 2t, \\ h(t) &= h(0), \\ \xi(t) &= \xi(0) - 4t. \end{aligned} \quad (2.12)$$

We have the explicit formulae:

$$\begin{aligned} A(t) &= A(0) \left( \frac{L(t)}{L(0)} \right)^{\frac{2-d}{2}}, \\ e^{4k(t)} &= L(t)^2 = 2h(t) - \cos(\xi(t)) \sqrt{4h(t)^2 - 1}, \\ B(t) &= 2 \sin(\xi(t)) \sqrt{4h(t)^2 - 1}, \\ X_i(t) &= \sin(\theta_i(t)) \sqrt{2a_i(t)}, \quad i = 1, \dots, d, \\ \beta_i(t) &= \cos(\theta_i(t)) \sqrt{2a_i(t)}, \quad i = 1, \dots, d, \\ \gamma(t) &= \gamma(0) + \sum_{l=1}^d a_l(0) [\sin(2\theta_l(t)) - \sin(2\theta_l(0))] \end{aligned} \quad (2.13)$$

*Proof.* For the  $(X, \beta)$  part, it suffices to check that

$$X_i = \sqrt{2a_i(0)} \sin(2t + \theta_i(0)) \quad \text{and} \quad \beta_i = \sqrt{2a_i(0)} \cos(2t + \theta_i(0)) \quad i = 1, \dots, d,$$

are solutions. The expression for  $\gamma(t)$  will be computed later within the proof of Lemma 2.5. For the  $(k, B)$  part we use the method of generating functions, described e.g. in [HLW06, Sect. VI.5]. We can express  $B$  in terms of  $k$  and the Hamiltonian  $\mathcal{E}$ , so that on the set  $\{B > 0\}$  we have:

$$B = 2\sqrt{e^{4k}\mathcal{E} - e^{8k} - 1}. \quad (2.14)$$

This equality holds for  $e^{4k} \in [e^{4k_0}, e^{4k_1}]$ , where  $e^{4k_0}, e^{4k_1}$  are the reals roots of the polynomial  $-z^2 + \mathcal{E}z - 1$ ,

$$e^{4k_0} = \frac{1}{2} (\mathcal{E} - \sqrt{\mathcal{E}^2 - 4}), \quad e^{4k_1} = \frac{1}{2} (\mathcal{E} + \sqrt{\mathcal{E}^2 - 4}). \quad (2.15)$$

In order to obtain a symplectic change of variables, we look for a function  $S(k, \mathcal{E})$  such that

$$B = \frac{\partial S}{\partial k}(k, \mathcal{E}).$$

We easily obtain  $S(k, \mathcal{E})$ , by integrating on  $[k_0, k]$ :

$$S(k, \mathcal{E}) = 2 \int_{k_0}^k \sqrt{e^{4z} \mathcal{E} - e^{8z} - 1} dz.$$

The variable  $\phi$  which makes the mapping  $(B, k) \mapsto (\phi, \mathcal{E})$  symplectic is defined by

$$\phi = \frac{\partial S}{\partial \mathcal{E}}(k, \mathcal{E}) = \int_{k_0}^k \frac{e^{4z}}{\sqrt{e^{4z} \mathcal{E} - e^{8z} - 1}} dz.$$

We have

$$\frac{d\phi}{dt} = \frac{e^{4k} k_t}{\sqrt{e^{4k} - e^{8k} - 1}} = \frac{-e^{4k} \partial_B \mathcal{E}}{\frac{B}{2}} = \frac{-e^{-4k} \frac{B}{2} e^{4k}}{\frac{B}{2}} = -1.$$

We now proceed to obtaining an explicit expression for  $\psi$ :

$$\begin{aligned} \phi &= \int_{k_0}^k \frac{e^{4z}}{\sqrt{e^{4z} \mathcal{E} - e^{8z} - 1}} dz = \frac{1}{4} \int_{e^{4k_0}}^{e^{4k}} \frac{1}{\sqrt{\mathcal{E}u - u^2 - 1}} du \\ &= \frac{1}{4\sqrt{\frac{\mathcal{E}^2}{4} - 1}} \int_{e^{4k_0}}^{e^{4k}} \frac{1}{\sqrt{1 - \left(\frac{u - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}}\right)^2}} du \\ &= \frac{1}{4} \int_{\frac{e^{4k_0} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}}}^{\frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}}} \frac{1}{\sqrt{1 - u^2}} du. \end{aligned}$$

Recall the definition (2.15) of  $k_0$ , which yields

$$e^{4k_0} - \frac{\mathcal{E}}{2} = -\sqrt{\frac{\mathcal{E}^2}{4} - 1}.$$

Therefore,

$$\begin{aligned} \phi &= \frac{1}{4} \int_{-1}^{\frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}}} \frac{1}{\sqrt{1 - u^2}} du = \frac{1}{4} \left( \arcsin \left( \frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}} \right) + \frac{\pi}{2} \right) \\ &= \frac{1}{4} \arcsin \left( \frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}} \right) + \frac{\pi}{8} \in \left[ 0, \frac{\pi}{4} \right]. \end{aligned}$$

We want the angle variable to lie in  $[0, 2\pi]$  so the above expression describes an eighth of a period. But we are only considering the set  $\{B > 0\}$ , thus the angle  $\xi$  we are looking for must lie only in  $[0, \pi]$ . Hence we set  $(\xi, h) = (4\phi, \mathcal{E}/4)$  and let the Hamiltonian  $\mathcal{E}(\xi, h) = 4h$  with a slight abuse of notation. It is then clear that  $\frac{dh}{dt} = 0$  and  $\frac{d\xi}{dt} = -4$ . Moreover,

$$\xi = \arcsin\left(\frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}}\right) + \frac{\pi}{2} \in [0, \pi], \quad (2.16)$$

and hence

$$\frac{e^{4k} - \frac{\mathcal{E}}{2}}{\sqrt{\frac{\mathcal{E}^2}{4} - 1}} = \sin\left(\xi - \frac{\pi}{2}\right) = -\cos(\xi).$$

We obtain

$$\begin{aligned} e^{4k} = L^2 &= \frac{\mathcal{E}}{2} - \cos(\xi)\sqrt{\frac{\mathcal{E}^2}{4} - 1} = 2h - \cos(\xi)\sqrt{4h^2 - 1} \\ &= 2h \left(1 - \cos(\xi)\sqrt{1 - \frac{1}{4h^2}}\right). \end{aligned}$$

With this formula, we have

$$0 < L^2 < 4h = \mathcal{E},$$

and (2.14) becomes

$$\begin{aligned} B &= 2\sqrt{\mathcal{E}e^{4k} - e^{8k} - 1} = 2\sqrt{4he^{4k} - (e^{4k})^2 - 1} = 2\sqrt{(4h^2 - 1)\sin^2(\xi)} \\ &= 2\sin(\xi)\sqrt{4h^2 - 1}, \end{aligned}$$

where the last equality holds for  $\xi \in [0, \pi]$ .

Finally, it remains to integrate the ODE on  $A$ , which is

$$A_t = \frac{AB}{2}(d-2)e^{-4k}.$$

From the expressions we just obtained we get

$$A_t = A(d-2)\frac{\sin(\xi)\sqrt{4h^2 - 1}}{2h - \cos(\xi)\sqrt{4h^2 - 1}}.$$

The solution to this equation is of the form

$$A(t) = A(0) \exp\left\{(d-2) \int_0^t \frac{\sin(\xi(s))\sqrt{4h(s)^2 - 1}}{2h(s) - \cos(\xi(s))\sqrt{4h(s)^2 - 1}} ds\right\}.$$

Moreover, we know that  $s \mapsto h(s)$  is constant, and that  $\xi(s) = \xi(0) - 4s$ . Hence we have to solve

$$A(t) = A(0) \exp\left\{(d-2) \int_0^t \frac{\sin(\xi(0) - 4s)\sqrt{4h(0)^2 - 1}}{2h(0) - \cos(\xi(0) - 4s)\sqrt{4h(0)^2 - 1}} ds\right\}.$$

One can easily check that we have the following equality:

$$\begin{aligned} & \int_0^t \frac{\sin(\xi(0) - 4s)\sqrt{4h(0)^2 - 1}}{2h(0) - \cos(\xi(0) - 4s)\sqrt{4h(0)^2 - 1}} ds \\ &= -\frac{1}{4} \left[ \log \left( 2h(t) - \cos(\xi(t))\sqrt{4h(t)^2 - 1} \right) - \log \left( 2h(0) - \cos(\xi(0))\sqrt{4h(0)^2 - 1} \right) \right]. \end{aligned}$$

Note that, unless  $h(0) = \frac{1}{2}$  or  $h(t) = \frac{1}{2}$ , these quantities are well-defined since  $2h(s) > \sqrt{4h(s)^2 - 1}$ ,  $s \in \{0, t\}$ . Thus, we obtain

$$\begin{aligned} A(t) &= A(0)e^{\frac{2-d}{4} \left[ \log \left( 2h(t) - \cos(\xi(t))\sqrt{4h(t)^2 - 1} \right) - \log \left( 2h(0) - \cos(\xi(0))\sqrt{4h(0)^2 - 1} \right) \right]} \\ &= C \left( 2h(0) - \cos(\xi(0) - 4t)\sqrt{4h(0)^2 - 1} \right)^{\frac{2-d}{4}}, \end{aligned}$$

where we defined  $C := A(0) \left( 2h(0) - \cos(\xi(0))\sqrt{4h(0)^2 - 1} \right)^{\frac{d-2}{4}}$ . We recognize here the expressions for  $L(0)^2$  and  $L(t)^2$ , hence the claimed result.  $\square$

In practice, one would know the parameters  $(A, L, B, X, \beta, \gamma)$  and would apply (2.13) in order to update them. We have the following result, which allows to obtain action-angle variables from the bubble's parameters:

**Lemma 2.4.** *The change of variables  $(L, B, X, \beta) \mapsto (h, a, \xi, \theta)$  is explicit, and at time  $t = 0$  we have*

$$\begin{aligned} a_i(0) &= \frac{1}{2} \left( X_i(0)^2 + \beta_i(0)^2 \right), i = 1, \dots, d, \\ \theta_i(0) &= \arctan \left( \frac{X_i(0)}{\beta_i(0)} \right), i = 1, \dots, d, \\ h(0) &= \frac{L(0)^4 + 1 + \frac{B(0)^2}{4}}{4L(0)^2}, \\ \xi(0) &= \arctan \left( \frac{B(0)}{4h(0) - 2L(0)^2} \right), \end{aligned} \tag{2.17}$$

whenever  $\theta(0)$  and  $\xi(0)$  are well-defined. When any one of them is ill-defined – which happens when  $X_i(0) = \beta_i(0) = 0$ ,  $i \in \{1, \dots, d\}$  or when  $L(0) = 1$  and  $B(0) = 0$  – any value can be taken and the time-evolution of  $A(t)$ ,  $L(t)$ ,  $B(t)$ ,  $X(t)$  and  $\beta(t)$  will not depend on the value.

Note that to define  $\xi(0)$  we could also use equation (2.16), but this is not appropriate from a computational point of view. Some more details are given in Remark 2.1.

*Proof.* We have  $a_i(0) = \frac{1}{2} (X_i(0)^2 + \beta_i(0)^2)$ ,  $i = 1, \dots, d$ . If  $a_i(0) > 0$  we can define  $\theta_i(0)$  as  $\theta_i(0) = \arctan \left( \frac{X_i(0)}{\beta_i(0)} \right)$ . Otherwise, if  $a_i(0) = 0$ , then we recall that  $a(t) = a(0)$  and hence – whatever  $\theta(0)$  – we have  $X_i(t) = 0$  and  $\beta_i(t) = 0$ . Therefore, in the case  $a_i(0) = 0$ , the exact value of  $\theta_i(0)$  does not change the behavior of  $t \mapsto (X_i(t), \beta_i(t))$ .

For the  $(L, B)$  part,

$$L(0)^2 - 2h(0) = -\cos(\xi(0))\sqrt{4h(0)^2 - 1},$$



hence

$$(L(0)^2 - 2h(0))^2 = L(0)^4 - 4L(0)^2h(0) + 4h(0)^2 = \cos(\xi(0))^2 (4h(0)^2 - 1).$$

We also have

$$\left(\frac{B(0)}{2}\right)^2 = \frac{B(0)^2}{4} = \sin(\xi(0))^2 (4h(0)^2 - 1).$$

Then,

$$L(0)^4 - 4L(0)^2h(0) + 4h(0)^2 + \frac{B(0)^2}{4} = 4h(0)^2 - 1,$$

that is

$$4L(0)^2h(0) = L(0)^4 + \frac{B(0)^2}{4} + 1.$$

We deduce that  $h(0), L(0) \neq 0$ , and therefore

$$h(0) = \frac{L(0)^4 + \frac{B(0)^2}{4} + 1}{4L(0)^2}.$$

Note that  $h(0)$  is bounded from below by  $\frac{1}{2}$ . Indeed,

$$\begin{aligned} L(0)^4 - 2L(0)^2 + 1 + \frac{B(0)^2}{4} &= (L(0)^2 - 1)^2 + \frac{B(0)^2}{4} \geq 0 \\ \iff L(0)^4 + 1 + \frac{B(0)^2}{4} &\geq 2L(0)^2 \\ \iff h(0) &\geq \frac{1}{2}. \end{aligned}$$

From this we also get that  $h(0) = \frac{1}{2} \iff L(0)^2 = 1$  and  $B(0) = 0$ .

If  $h(0) > \frac{1}{2}$ , we have

$$\begin{cases} 2h(0) - L(0)^2 = \cos(\xi(0))\sqrt{4h(0)^2 - 1} \\ \frac{B(0)}{2} = \sin(\xi(0))\sqrt{4h(0)^2 - 1}, \end{cases} \implies \frac{B(0)/2}{2h(0) - L(0)^2} = \tan(\xi(0)),$$

hence

$$\xi(0) = \arctan\left(\frac{B(0)/2}{2h(0) - L(0)^2}\right).$$

Otherwise, in the case  $h(0) = \frac{1}{2}$ , the value of  $\xi(0)$  is not rigorously defined. However, as previously, the exact value of  $\xi(0)$  is not important because  $h(t) = h(0) = \frac{1}{2}$ , which means that  $L(t)^2 = 1$  and  $B(t) = 0$ . Therefore, in the case  $h(0) = \frac{1}{2}$ , the mapping  $t \mapsto (L(t), B(t))$  does not depend on the value of  $\xi(0)$ . Finally, since the mapping  $t \mapsto L(t)$  does not depend on  $\xi(0)$  in the case  $h(0) = \frac{1}{2}$ , we also have that  $t \mapsto A(t)$  does not depend on the exact value of  $\xi(0)$ , thanks to the expression of  $A(t) = A(0) (L(t)/L(0))^{\frac{2-d}{2}}$ .  $\square$

## 2.2 A particular case: $v(s, y) = e^{-\frac{1}{2}|y|^2}$

When we have chosen the modulation equations (2.9), we chose them so that  $v$  is itself solution to the Harmonic Oscillator in time  $s$  and space  $y$ . This could maybe ease the process of finding a solution, but we can do even better: if we consider a particular expression for the function  $v$  we are also able to compute its time derivative and its laplacian in (2.7). By doing so, we can take into account those operators within new modulation equations.

We then have to choose a particular shape for the functions  $v$ . Note that the treatment of each bubble  $j$  is done separately, hence each function  $v_j$  can have its own shape different from the others. For simplicity, we take all the functions  $v_j$  to be gaussian functions. There are two main reasons for this choice: the first one is that when the width of a normalized gaussian function tend to zero, we can assimilate the function to a Dirac mass and hence view the proposed algorithm as an exact particle algorithm. The second reason is that we will have to consider the shapes of the functions  $v_j$  when we will add cubic interactions, and the gaussian functions allow us to perform most of the computations exactly, which greatly reduces the computational complexity and improves its accuracy. The gaussian shape is also motivated by the idea of Gaussian Beams.

From now on, the bubbles will have the following expression:

$$u_j(t, x) := \frac{A_j}{L_j} e^{i\gamma_j + iL_j\beta_j \cdot y_j - i\frac{B_j}{4}|y_j|^2} e^{-\frac{1}{2}|y_j|^2}, \quad \text{with} \quad y_j := \frac{x - X_j}{L_j}. \quad (2.18)$$

Since equation (HO) is linear with respect to  $\psi$ , if we use the ansatz (1.1) then we have to solve the Harmonic Oscillator equation for each bubble  $j$ :

$$i\partial_t u_j = -\Delta_x u_j + |x|^2 u_j \quad (2.19)$$

We can reuse equation (2.7) with  $v_j(s_j, y_j) = e^{-\frac{|y_j|^2}{2}}$ , and take advantage of the following equality:

$$\Delta_y v(y) = \Delta_y \left( e^{-\frac{|y|^2}{2}} \right) = (|y|^2 - d) v$$

This yields almost the same system of equations as (2.8): only the equation on  $\gamma_s$  changes, and we have

$$(\gamma_j)_s = L^2 (|\beta|^2 - |X|^2) - d.$$

With respect to time  $t$ , we get

$$(\gamma_j)_t = |\beta|^2 - |X|^2 - \frac{d}{L^2}. \quad (2.20)$$

If the parameters satisfy the modulation equations (2.9) (where the equation on  $\gamma_t$  has been changed to (2.20)), we have

$$i\partial_t u_j - H u_j = 0,$$

*i.e.* the Harmonic oscillator equation is automatically satisfied for the bubble  $j$ . Furthermore, we have the following result:

**Lemma 2.5.** Equation (2.20) can be integrated explicitly by using equation (2.13), and we have

$$\begin{aligned} \gamma(T) = \gamma(0) &+ \sum_{l=1}^d \frac{a_l(0)}{2} [\sin(2\theta_l(T)) - \sin(2\theta_l(0))] \\ &+ \frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} - 2T \right) \right) \\ &- \frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2}, \end{aligned} \quad (2.21)$$

where, if  $m_0 \in \mathbb{Z}$  is such that  $\frac{\xi(0)}{2} \in m_0\pi + \left[-\frac{\pi}{2}, \frac{\pi}{2}\right]$ , then  $m_T \in \mathbb{Z}$  is defined by  $\frac{\xi(T)}{2} \in (m_0 - m_T)\pi + \left[-\frac{\pi}{2}, \frac{\pi}{2}\right]$ .

Moreover, in the cases where  $a_i(0) = 0$ ,  $i \in \{1, \dots, d\}$  or  $h(0) = \frac{1}{2}$ , the formula (2.17) for  $\theta_i(0)$ ,  $i \in \{1, \dots, d\}$  or  $\xi(0)$  are ill-defined, but any value can be taken as a substitution and this will not affect the behavior of the mapping  $t \mapsto \gamma(t)$ .

*Proof.* We now proceed to the direct integration of  $\gamma_t$ .

$$\gamma(T) - \gamma(0) = \int_0^T \dot{\gamma}(t) dt = \int_0^T \left[ |\beta(t)|^2 - |X(t)|^2 - \frac{d}{L(t)^2} \right] dt.$$

We have

$$\begin{aligned} &\int_0^T [|\beta(t)|^2 - |X(t)|^2] dt \\ &= \int_0^T \left\{ \sum_{l=1}^d 2a_l \cos(\theta_l(t))^2 - \sum_{l=1}^d 2a_l \sin(\theta_l(t))^2 \right\} dt \\ &= \int_0^T 2 \sum_{l=1}^d a_l (\cos(\theta_l(t))^2 - \sin(\theta_l(t))^2) dt \\ &= \int_0^T \sum_{l=1}^d 2a_l \cos(2\theta_l(t)) dt \\ &= \sum_{l=1}^d \frac{a_l}{2} [\sin(2\theta_l(T)) - \sin(2\theta_l(0))], \end{aligned}$$

where the last equality has been obtained using (2.12). Owing to (2.13),

$$\begin{aligned} \int_0^T \frac{d}{L(t)^2} dt &= \int_0^T \frac{d}{\underbrace{2h(0)}_{=:c_1} - \underbrace{\sqrt{4h(0)^2 - 1}}_{=:c_2} \cos(\xi(0) - 4t)} dt \\ &= \int_0^T \frac{d}{c_1 - c_2 \cos(\xi(0) - 4t)} dt \\ &= \frac{d}{4} \int_{\xi(0)-4T}^{\xi(0)} \frac{1}{c_1 - c_2 \cos(t)} dt. \end{aligned}$$

Recall the following trig. identity:

$$\cos(2\tau) = \frac{1 - \tan(\tau)^2}{1 + \tan(\tau)^2}, \quad \tau \in \mathbb{R},$$

hence

$$\begin{aligned}
& \int_0^T \frac{d}{c_1 - c_2 \cos(\xi(0) - 4t)} dt \\
&= \frac{d}{4} \int_{\xi(0)-4T}^{\xi(0)} \frac{1}{c_1 - c_2 \frac{1 - \tan(t/2)^2}{1 + \tan(t/2)^2}} dt \\
&= \frac{d}{4} \int_{\xi(0)-4T}^{\xi(0)} \frac{1 + \tan(t/2)^2}{c_1(1 + \tan(t/2)^2) - c_2(1 - \tan(t/2)^2)} dt \\
&= \frac{d}{4} \int_{\xi(0)-4T}^{\xi(0)} \frac{1 + \tan(t/2)^2}{(c_1 + c_2) \tan(t/2)^2 + c_1 - c_2} dt \\
&= \frac{d}{4(c_1 - c_2)} \int_{\xi(0)-4T}^{\xi(0)} \frac{1 + \tan(t/2)^2}{\frac{c_1+c_2}{c_1-c_2} \tan(t/2)^2 + 1} dt \\
&= \frac{d}{2(c_1 - c_2)} \int_{\frac{\xi(0)}{2}-2T}^{\frac{\xi(0)}{2}} \frac{1 + \tan(t)^2}{\frac{c_1+c_2}{c_1-c_2} \tan(t)^2 + 1} dt \\
&= \frac{d}{2(c_1 - c_2)} \int_{\frac{\xi(0)}{2}-2T}^{\frac{\xi(0)}{2}} \frac{\frac{d}{dt}(\tan(t))}{\frac{c_1+c_2}{c_1-c_2} \tan(t)^2 + 1} dt \\
&= \frac{d}{2(c_1 - c_2)} \frac{1}{\sqrt{\frac{c_1+c_2}{c_1-c_2}}} \int_{\frac{\xi(0)}{2}-2T}^{\frac{\xi(0)}{2}} \frac{\frac{d}{dt} \left( \sqrt{\frac{c_1+c_2}{c_1-c_2}} \tan(t) \right)}{\left[ \sqrt{\frac{c_1+c_2}{c_1-c_2}} \tan(t) \right]^2 + 1} dt.
\end{aligned}$$

Moreover,  $(c_1 - c_2)(c_1 + c_2) = c_1^2 - c_2^2 = (2h)^2 - (4h^2 - 1) = 1$  and  $c_1 - c_2 > 0$ , thus  $\sqrt{\frac{c_1+c_2}{c_1-c_2}} = (c_1 + c_2)$  and

$$\int_0^T \frac{d}{L(t)^2} dt = \frac{d}{2} \int_{\frac{\xi(0)}{2}-2T}^{\frac{\xi(0)}{2}} \frac{\frac{d}{dt}((c_1 + c_2) \tan(t))}{((c_1 + c_2) \tan(t))^2 + 1} dt.$$

Now let  $m_0 \in \mathbb{Z}$  such that  $\frac{\xi(0)}{2} \in m_0\pi + \left(-\frac{\pi}{2}, \frac{\pi}{2}\right]$ , and  $m_T \in \mathbb{Z}$  such that  $\frac{\xi(T)}{2} \in (m_0 - m_T)\pi + \left(-\frac{\pi}{2}, \frac{\pi}{2}\right]$ . We recall that  $\xi(T) = \xi(0) - 4T$ . Then

$$\begin{aligned}
\int_0^T \frac{d}{L(t)^2} dt &= \frac{d}{2} \int_{\frac{\xi(0)}{2}-2T}^{\frac{\xi(0)}{2}} \underbrace{\frac{\frac{d}{dt}((c_1 + c_2) \tan(t))}{((c_1 + c_2) \tan(t))^2 + 1}}_{=: f(t)} dt \\
&= \frac{d}{2} \int_{m_0\pi - \frac{\pi}{2}}^{\frac{\xi(0)}{2}} f(t) dt + \frac{d}{2} \int_{(m_0-1)\pi - \frac{\pi}{2}}^{m_0\pi - \frac{\pi}{2}} f(t) dt + \cdots + \frac{d}{2} \int_{\frac{\xi(0)}{2}-2T}^{(m_0-m_T)\pi + \frac{\pi}{2}} f(t) dt.
\end{aligned}$$

For  $m \in \mathbb{Z}$ , we have

$$\begin{aligned}
\int_{m\pi - \frac{\pi}{2}}^{m\pi + \frac{\pi}{2}} f(t) dt &= [\arctan((c_1 + c_2) \tan(t))]_{m\pi - \frac{\pi}{2}}^{m\pi + \frac{\pi}{2}} \\
&= [\arctan((c_1 + c_2) \tan(t))]_{-\frac{\pi}{2}}^{\frac{\pi}{2}} = \pi.
\end{aligned}$$

Now write  $\widetilde{\xi(0)} := \frac{\xi(0)}{2} - m_0\pi \in \left(-\frac{\pi}{2}, \frac{\pi}{2}\right]$ , and  $\widetilde{\xi(t)} := \frac{\xi(t)}{2} - (m_0 - m_T)\pi \in \left(-\frac{\pi}{2}, \frac{\pi}{2}\right]$ . Then,

$$\int_0^T \frac{d}{L(t)^2} dt$$

$$\begin{aligned}
&= \frac{d}{2}(m_T - 1)\pi + \frac{d}{2} \int_{m_0\pi - \frac{\pi}{2}}^{\frac{\xi(0)}{2}} f(t)dt + \frac{d}{2} \int_{\frac{\xi(0)}{2} - 2T}^{(m_0 - m_T)\pi + \frac{\pi}{2}} f(t)dt \\
&= (m_T - 1) \frac{\pi d}{2} + \frac{d}{2} \int_{-\frac{\pi}{2}}^{\frac{\xi(0)}{2}} f(t)dt + \frac{d}{2} \int_{\frac{\xi(t)}{2}}^{\frac{\pi}{2}} f(t)dt \\
&= (m_T - 1) \frac{\pi d}{2} + \frac{d}{2} [\arctan((c_1 + c_2) \tan(t))]_{-\frac{\pi}{2}}^{\frac{\xi(0)}{2}} + \frac{d}{2} [\arctan((c_1 + c_2) \tan(t))]_{\frac{\xi(t)}{2}}^{\frac{\pi}{2}} \\
&= (m_T - 1) \frac{\pi d}{2} + \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} \right) \right) + \frac{\pi d}{2} \\
&\quad + \frac{\pi d}{2} - \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(t)}{2} \right) \right) \\
&= m_T \frac{\pi d}{2} + \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} \right) \right) - \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(t)}{2} \right) \right) \\
&= m_T \frac{\pi d}{2} + \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} \right) \right) - \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} - 2T \right) \right)
\end{aligned}$$

Hence

$$\begin{aligned}
-\int_0^T \frac{d}{L(t)^2} dt &= \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} - 2T \right) \right) \\
&\quad - \frac{d}{2} \arctan \left( (c_1 + c_2) \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2}.
\end{aligned}$$

Finally, it remains to show that if  $a_i(0) = 0$ ,  $i \in \{1, \dots, d\}$  or  $h(0) = \frac{1}{2}$ , then the behavior of  $t \mapsto \gamma(t)$  does not depend on the exact value of  $\theta_i(0)$ ,  $i \in \{1, \dots, d\}$  or  $\xi(0)$ . The exact formula for  $\gamma(T)$  is:

$$\begin{aligned}
\gamma(T) &= \gamma(0) + a_1(0) [\sin(2\theta_1(T)) - \sin(2\theta_1(0))] \\
&\quad + a_2(0) [\sin(2\theta_2(T)) - \sin(2\theta_2(0))] \\
&\quad + \frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} - 2T \right) \right) \\
&\quad - \frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2}.
\end{aligned}$$

It is clear that if  $a_i(0) = 0$  then  $\gamma(t)$  does not depend on  $\theta_i(0)$  nor  $\theta_i(t)$ ,  $i \in \{1, \dots, d\}$ . If  $h(0) = \frac{1}{2}$ , then

$$2h(0) + \sqrt{4h(0)^2 - 1} = 1,$$

so that

$$\begin{aligned}
&\frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} - 2T \right) \right) \\
&\quad - \frac{d}{2} \arctan \left( \left( 2h(0) + \sqrt{4h(0)^2 - 1} \right) \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2}
\end{aligned}$$

$$= \frac{d}{2} \arctan \left( \tan \left( \frac{\xi(T)}{2} \right) \right) - \arctan \left( \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2}$$

Since  $\arctan : \mathbb{R} \mapsto \left(-\frac{\pi}{2}, \frac{\pi}{2}\right]$ , we have

$$\begin{aligned} & \frac{d}{2} \arctan \left( \tan \left( \frac{\xi(T)}{2} \right) \right) - \frac{d}{2} \arctan \left( \tan \left( \frac{\xi(0)}{2} \right) \right) - m_T \frac{\pi d}{2} \\ &= \frac{d}{2} \frac{\widetilde{\xi(T)}}{2} - \frac{d}{2} \frac{\widetilde{\xi(0)}}{2} - m_T \frac{\pi d}{2} \\ &= \frac{d}{2} \frac{\xi(T)}{2} - (m_0 - m_T) \frac{\pi d}{2} - \frac{d}{2} \left( \frac{\xi(0)}{2} - m_0 \pi \right) - m_T \frac{\pi d}{2} \\ &= \frac{d}{2} \left( \frac{\xi(T)}{2} - \frac{\xi(0)}{2} \right) = -Td. \end{aligned}$$

This shows that, in the case  $h(0) = \frac{1}{2}$ , the mapping  $t \mapsto \gamma(t)$  does not depend on the value chosen for the ill-defined quantity  $\xi(0)$ .  $\square$

Using Lemmata 2.3 and 2.4, we are now able to obtain an easy numerical algorithm which simulates the evolution of bubbles according to the Harmonic Oscillator on a time interval  $[0, T]$ . It is described in Algorithm 1.

---

**Algorithm 1** Solving the Harmonic oscillator with Bubbles

---

**for**  $j = 1, \dots, N$  **do**  $\triangleright j$  denotes a bubble's index  
  Use (2.17) to get the action-angle variables  $(h, a, \xi, \theta)$  at time 0.  
  Use (2.12) to update the variables  $(h, a, \xi, \theta)$  up to time  $T$ .  
  Use (2.13) (with the expression for  $\gamma(t)$  replaced by (2.21)) to get the parameters of bubble  $u_j$  at time  $T$ .  
**end for**

---

*Remark 2.1* (Numerical considerations). Here are a few remarks about Algorithm 1:

- When applying equation (2.17) to obtain the action-angle variables from the bubbles' parameters, it is advised to use the function  $\arctan2(y, x)$  instead of  $\arctan(y/x)$  because it allows to obtain an angle lying in  $(-\pi, \pi]$  instead of  $(-\pi/2, \pi/2]$  by taking into account the signs of both  $x$  and  $y$ . This is also the reason why we do not define  $\xi(0)$  by (2.16). Moreover most numerical implementations of  $\arctan2$  return a finite value for  $\arctan2(0, 0)$ , which avoids the manual tuning of a numerical threshold to know whether  $a_i(0)$  or  $h(0)$  vanish numerically or not. We recall that in this case the exact value returned does not impact the behavior of  $t \mapsto (L(t), B(t), X(t), \beta(t), \gamma(t))$ .
- The algorithm yields an exact solution as soon as the initial data is a sum of bubbles. If not, then the only error committed is the discretization error when approximating the initial condition  $\psi(t = 0)$  by the ansatz (1.1).
- This numerical algorithm does not need any discretization in time nor in space.
- The solution obtained is the *exact* solution of the equation (HO) defined on the whole space  $\mathbb{R}^d$ , and no numerical boundary conditions are needed.

### 3 The Dirac-Frenkel-MacLachlan principle

In this section we consider the Schrödinger equation (cNLS). As it has been explained before, the equation consists in two parts: the linear part (HO), and the nonlinear part (cNLS-nonLin.). Section 2 was dedicated to solving the Harmonic oscillator, namely the linear part. We are interested now in solving the nonlinear part, and as it is usually done for numerical simulations, we will use a splitting method. This will allow us to solve (cNLS) by solving separately (HO) and (cNLS-nonLin.), one after the other. By doing so, a splitting error is made, which depends on the timestep  $\Delta t$ , and the order of the error depends on the specific splitting method. It is also possible to apply high-order splitting methods.

We focus on approximating numerically the solution to (cNLS-nonLin.):

$$i\partial_t\psi = \psi|\psi|^2.$$

We are free to use any method we want, but one has to keep in mind that Algorithm 1 solves (HO) exactly when  $\psi$  is expressed under the form (1.1), i.e. as a sum of bubbles. Therefore we would like the approximate solution to (cNLS-nonLin.) to keep this particular form. This naturally calls for the use of the Dirac-Frenkel-MacLachlan principle (abbreviated DFMP). For more details, see [LL20, Sect. 3]. Let  $\mathcal{M}$  be a manifold of complex-valued Gaussian functions:

$$\mathcal{M} := \left\{ u \in \mathbb{L}^2(\mathbb{R}^d) \left| \begin{array}{l} u(x) = \sum_{j=1}^N \frac{A_j}{L_j} e^{i\gamma_j + i\beta_j \cdot (x - X_j) - \frac{2+iB_j}{4L_j^2} |x - X_j|^2} \\ A_j, B_j, \gamma_j \in \mathbb{R}, L_j \in \mathbb{R}_+, X_j, \beta_j \in \mathbb{R}^d \end{array} \right. \right\}. \quad (3.1)$$

We look for a function  $u \in \mathcal{M}$  that solves (cNLS-nonLin.) on  $\mathcal{M}$ . More precisely,  $u$  is defined such that its time derivative lies in the tangent space of  $\mathcal{M}$  at  $u$ ,  $\mathcal{T}_{u(t)}\mathcal{M}$ , and such that the residual of equation (cNLS-nonLin.) is orthogonal to the tangent space. That is,

$$\begin{aligned} \partial_t u(t) &\in \mathcal{T}_{u(t)}\mathcal{M}, \quad \text{such that} \\ \langle f, i\partial_t u(t) - u(t)|u(t)|^2 \rangle &= 0, \quad \forall f \in \mathcal{T}_{u(t)}\mathcal{M}. \end{aligned} \quad (3.2)$$

*Remark 3.1.* The definition of  $\partial_t u(t)$  via (3.2), initially proposed by Dirac and Frenkel [Dir30, Fre34], has been later criticized by MacLachlan [McL64]. He proposed an alternative approach, which would consist in minimizing the quantity

$$\left\| i\partial_t u(t) - |u(t)|^2 u(t) \right\|^2.$$

However, the two formulations are equivalent if the tangent space  $\mathcal{T}_{u(t)}\mathcal{M}$  is  $\mathbb{C}$ -linear [BLKVL88]. This is the case here because multiplying by the complex unit  $i$  simply amounts to  $\gamma_j \mapsto \gamma_j + \frac{\pi}{2}$ . Therefore, the approaches by Dirac-Frenkel and MacLachlan are equivalent.

Let  $B_{u(t)}$  be a basis of  $\mathcal{T}_{u(t)}\mathcal{M}$ , then (3.2) is equivalent to

$$\begin{aligned} \partial_t u(t) &\in \mathcal{T}_{u(t)}\mathcal{M}, \quad \text{such that} \\ \langle f, i\partial_t u(t) \rangle &= \langle f, u(t)|u(t)|^2 \rangle, \quad \forall f \in B_{u(t)}. \end{aligned} \quad (3.3)$$

A family (which may happen to be linearly dependent) spanning the tangent space  $\mathcal{T}_{u(t)}\mathcal{M}$  is given by

$$\begin{aligned} B_{u(t)} &= \left\{ e^{i\Gamma_j(y_j) - \frac{|y_j|^2}{2}}, (y_j)_1 e^{i\Gamma_j(y_j) - \frac{|y_j|^2}{2}}, \dots, (y_j)_d e^{i\Gamma_j(y_j) - \frac{|y_j|^2}{2}}, |y_j|^2 e^{i\Gamma_j(y_j) - \frac{|y_j|^2}{2}} : j = 1, \dots, N \right\}, \\ &=: \{b_{j,1}, b_{j,2}, \dots, b_{j,d+1}, b_{j,d+2} : j = 1, \dots, N\}, \end{aligned} \quad (3.4)$$

where we defined

$$\Gamma_j(y_j) := \gamma_j + L_j \beta_j \cdot y_j - \frac{B_j}{4} |y_j|^2.$$

Thus, (3.3) is equivalent to

$$\langle i\partial_t u(t), b_{j,l} \rangle = \langle u|u|^2, b_{j,l} \rangle, \quad j = 1, \dots, N, \quad l = 1, \dots, d+2. \quad (3.5)$$

The next step consists in expressing (3.5) as a linear system involving the parameters of the bubbles and their time derivative. We then solve the linear system, which yields ODEs on the parameters that we can integrate numerically. The main advantage of this approach is that it guarantees to keep the approximate solution of (cNLS-nonLin.) as a sum of  $N$  bubbles.

In order to obtain the linear system, we first have to get the expression of  $i\partial_t u(t)$  when  $v(y) = e^{-\frac{|y|^2}{2}}$ : by summing (2.6) over  $j = 1, \dots, N$ , one has

$$\begin{aligned} i\partial_t u &= \sum_{j=1}^N \frac{u_j}{L_j^2} \left\{ |y_j|^2 \left( i \frac{(L_j)_s}{L_j} - \frac{B_j (L_j)_s}{2L_j} + \frac{(B_j)_s}{4} \right) \right. \\ &\quad \left. + y_j \cdot \left( -L_j (\beta_j)_s + i \frac{(X_j)_s}{L_j} - \frac{B_j (X_j)_s}{2L_j} \right) \right. \\ &\quad \left. + i \frac{(A_j)_s}{A_j} - i \frac{(L_j)_s}{L_j} + \beta \cdot (X_j)_s - (\gamma_j)_s \right\}. \end{aligned} \quad (3.6)$$

More concisely, we have

$$\begin{aligned} i\partial_t u &= \sum_{j=1}^N \frac{A_j}{L_j^3} e^{i\Gamma_j - \frac{|y_j|^2}{2}} \left\{ |y_j|^2 \left( E_j^{(5)} + iE_j^{(6)} \right) \right. \\ &\quad \left. + y_j \cdot \left( E_j^{(3)(1, \dots, d)} + iE_j^{(4)(1, \dots, d)} \right) \right. \\ &\quad \left. + \left( E_j^{(1)} + iE_j^{(2)} \right) \right\} \\ &= \sum_{j=1}^N \frac{A_j}{L_j^3} \left\{ b_{j,1} \left( E_j^{(1)} + iE_j^{(2)} \right) + b_{j,2} \left( E_j^{(3)(1)} + iE_j^{(4)(1)} \right) \right. \\ &\quad \left. \dots + b_{j,d+1} \left( E_j^{(3)(d)} + iE_j^{(4)(d)} \right) + b_{j,d+2} \left( E_j^{(5)} + iE_j^{(6)} \right) \right\}, \end{aligned} \quad (3.7)$$

where

$$\begin{aligned} E_j^{(1)} &:= \beta_j \cdot (X_j)_s - (\gamma_j)_s, & E_j^{(2)} &:= \frac{(A_j)_s}{A_j} - \frac{(L_j)_s}{L_j}, \\ E_j^{(3)(l)} &:= -L_j ((\beta_j)_l)_s - \frac{B_j}{2L_j} ((X_j)_l)_s, & E_j^{(4)(l)} &:= \frac{((X_j)_l)_s}{L_j}, \quad l = 1, \dots, d, \\ E_j^{(5)} &:= \frac{(B_j)_s}{4} - \frac{B_j (L_j)_s}{2L_j}, & E_j^{(6)} &:= \frac{(L_j)_s}{L_j}, \end{aligned} \quad (3.8)$$



and where  $E_j^{(k)(1,\dots,d)}$  denotes the vector  $(E_j^{(k)(1)}, \dots, E_j^{(k)(d)})$ . We recall the subscript  $s$  denotes the derivative with respect to time  $s$ .

According to (3.5), we then want to project  $i\partial_t u(t)$  against every element of  $B_{u(t)}$ . We obtain the following linear system:

$$\mathbf{A}\mathbf{E} = \mathbf{S}, \quad (3.9)$$

where

$$\mathbf{A} := \begin{pmatrix} \langle b_{1,1}, b_{1,1} \rangle & \langle b_{1,2}, b_{1,1} \rangle & \dots & \langle b_{N,d+1}, b_{1,1} \rangle & \langle b_{N,d+2}, b_{1,1} \rangle \\ \vdots & & & & \vdots \\ \langle b_{1,1}, b_{N,d+2} \rangle & \langle b_{1,2}, b_{N,d+2} \rangle & \dots & \langle b_{N,d+1}, b_{N,d+2} \rangle & \langle b_{N,d+2}, b_{N,d+2} \rangle \end{pmatrix} \in \mathbb{C}^{(d+2)N, (d+2)N},$$

$$\mathbf{E} := \begin{pmatrix} \frac{A_1}{L_1^3} (E_1^{(1)} + iE_1^{(2)}) \\ \frac{A_1}{L_1^3} (E_1^{(3)(1)} + iE_1^{(4)(1)}) \\ \vdots \\ \frac{A_1}{L_1^3} (E_1^{(3)(d)} + iE_1^{(4)(d)}) \\ \frac{A_1}{L_1^3} (E_1^{(5)} + iE_1^{(6)}) \\ \vdots \\ \frac{A_j}{L_j^3} (E_j^{(1)} + iE_j^{(2)}) \\ \frac{A_j}{L_j^3} (E_j^{(3)(1)} + iE_j^{(4)(1)}) \\ \vdots \\ \frac{A_j}{L_j^3} (E_j^{(3)(d)} + iE_j^{(4)(d)}) \\ \frac{A_j}{L_j^3} (E_j^{(5)} + iE_j^{(6)}) \\ \vdots \\ \frac{A_N}{L_N^3} (E_N^{(1)} + iE_N^{(2)}) \\ \frac{A_N}{L_N^3} (E_N^{(3)(1)} + iE_N^{(4)(1)}) \\ \vdots \\ \frac{A_N}{L_N^3} (E_N^{(3)(d)} + iE_N^{(4)(d)}) \\ \frac{A_N}{L_N^3} (E_N^{(5)} + iE_N^{(6)}) \end{pmatrix} \in \mathbb{R}^{(d+2)N},$$

and

$$\mathbf{S} := \begin{pmatrix} \langle u|u|^2, b_{1,1} \rangle \\ \vdots \\ \langle u|u|^2, b_{N,d+2} \rangle \end{pmatrix} \in \mathbb{C}^{(d+2)N}.$$

The matrix  $\mathbf{A}$  is the Gram matrix of the family  $B_{u(t)}$ , which obviously depends on time. In order to solve the linear system (3.9) we shall use the Moore-Penrose pseudo-inverse which always exists, and which corresponds to the Least Squares solution if the matrix  $\mathbf{A}^*\mathbf{A}$  is invertible. The matrix  $\mathbf{A}$  is invertible if and only if  $B_{u(t)}$  is a linearly independent family of  $\mathbb{L}^2(\mathbb{R}^d)$ . We can already notice that if two bubbles have the same parameters then the family will be linearly dependent: this is why the Moore-Penrose pseudo-inverse is used instead of  $\mathbf{A}^{-1}$ , which is not always well-defined.

Once the linear system (3.9) is solved, we obtain  $\mathbf{E}$ , from which we can update the modulation parameters. In order to solve numerically the linear system, we shall rewrite it under a more convenient form. Let  $\mathbf{A}_{\Re} := \Re(\mathbf{A})$ ,  $\mathbf{A}_{\Im} := \Im(\mathbf{A})$ ,  $\mathbf{E}_{\Re} := \Re(\mathbf{E})$ ,  $\mathbf{E}_{\Im} := \Im(\mathbf{E})$ ,  $\mathbf{S}_{\Re} := \Re(\mathbf{S})$ , and  $\mathbf{S}_{\Im} := \Im(\mathbf{S})$ . Then, (3.9) writes:

$$\begin{aligned} \mathbf{A}\mathbf{E} = \mathbf{S} &\iff (\mathbf{A}_{\Re} + i\mathbf{A}_{\Im})(\mathbf{E}_{\Re} + i\mathbf{E}_{\Im}) = \mathbf{S}_{\Re} + i\mathbf{S}_{\Im} \\ &\iff \begin{cases} \mathbf{A}_{\Re}\mathbf{E}_{\Re} - \mathbf{A}_{\Im}\mathbf{E}_{\Im} = \mathbf{S}_{\Re} \\ \mathbf{A}_{\Im}\mathbf{E}_{\Re} + \mathbf{A}_{\Re}\mathbf{E}_{\Im} = \mathbf{S}_{\Im} \end{cases} \\ &\iff \begin{pmatrix} \mathbf{A}_{\Re} & -\mathbf{A}_{\Im} \\ \mathbf{A}_{\Im} & \mathbf{A}_{\Re} \end{pmatrix} \begin{pmatrix} \mathbf{E}_{\Re} \\ \mathbf{E}_{\Im} \end{pmatrix} = \begin{pmatrix} \mathbf{S}_{\Re} \\ \mathbf{S}_{\Im} \end{pmatrix}. \end{aligned} \quad (3.10)$$

It is more convenient to solve (3.10) than (3.9), because we only have to deal with real matrices and vectors.

*Remark 3.2.* We first tried to solve (3.9) using the Moore-Penrose pseudo-inverse, however it yielded incomprehensible results. After some investigation, we found out that the issue seems to be the complex numbers involved, and that they do not mix well with the pseudo-inverse. The linear system (3.10) yields much better results.

Once (3.10) is solved, we have to update the bubbles parameters according to (3.8). The parameters of the bubbles labelled  $j$  can be updated with  $(\mathbf{E}_{\Re})_k$  and  $(\mathbf{E}_{\Im})_k$  for  $k = (d+2)(j-1) + 1, \dots, (d+2)j$ . For the sake of clarity, let  $\mathbf{F} := \begin{pmatrix} \mathbf{E}_{\Re} \\ \mathbf{E}_{\Im} \end{pmatrix}$ . Then

$$\begin{aligned} \frac{A_j}{L_j^3} \begin{pmatrix} E_j^{(1)} \\ E_j^{(3)(1)} \\ \vdots \\ E_j^{(3)(d)} \\ E_j^{(5)} \\ E_j^{(2)} \\ E_j^{(4)(1)} \\ \vdots \\ E_j^{(4)(d)} \\ E_j^{(6)} \end{pmatrix} &= \begin{pmatrix} (\mathbf{E}_{\Re})_{(d+2)(j-1)+1} \\ (\mathbf{E}_{\Re})_{(d+2)(j-1)+2} \\ \vdots \\ (\mathbf{E}_{\Re})_{(d+2)(j-1)+d+1} \\ (\mathbf{E}_{\Re})_{(d+2)(j-1)+d+2} \\ (\mathbf{E}_{\Im})_{(d+2)(j-1)+1} \\ (\mathbf{E}_{\Im})_{(d+2)(j-1)+2} \\ \vdots \\ (\mathbf{E}_{\Im})_{(d+2)(j-1)+d+1} \\ (\mathbf{E}_{\Im})_{(d+2)(j-1)+d+2} \end{pmatrix} = \begin{pmatrix} \mathbf{F}_{(d+2)(j-1)+1} \\ \mathbf{F}_{(d+2)(j-1)+2} \\ \vdots \\ \mathbf{F}_{(d+2)(j-1)+d+1} \\ \mathbf{F}_{(d+2)(j-1)+d+2} \\ \mathbf{F}_{(d+2)N+(d+2)(j-1)+1} \\ \mathbf{F}_{(d+2)N+(d+2)(j-1)+2} \\ \vdots \\ \mathbf{F}_{(d+2)N+(d+2)(j-1)+d+1} \\ \mathbf{F}_{(d+2)N+(d+2)(j-1)+d+2} \end{pmatrix} =: \begin{pmatrix} F_j^{(1)} \\ F_j^{(3)(1)} \\ \vdots \\ F_j^{(3)(d)} \\ F_j^{(5)} \\ F_j^{(2)} \\ F_j^{(4)(1)} \\ \vdots \\ F_j^{(4)(d)} \\ F_j^{(6)} \end{pmatrix} \\ &\iff \begin{pmatrix} \beta_j \cdot (X_j)_s - (\gamma_j)_s \\ -L_j(\beta_j)_s - \frac{B_j}{2L_j}(X_j)_s \\ \frac{(B_j)_s}{4} - \frac{B_j(L_j)_s}{2L_j} \\ \frac{(A_j)_s}{A_j} - \frac{(L_j)_s}{L_j} \\ \frac{(X_j)_s}{L_j} \\ \frac{(L_j)_s}{L_j} \end{pmatrix} = \frac{L_j^3}{A_j} \Re \begin{pmatrix} F_j^{(1)} \\ F_j^{(3)(1, \dots, d)} \\ F_j^{(5)} \\ F_j^{(2)} \\ F_j^{(4)(1, \dots, d)} \\ F_j^{(6)} \end{pmatrix}. \end{aligned}$$

Hence

$$\left\{ \begin{array}{l} \beta_j \cdot (X_j)_s - (\gamma_j)_s = F_j^{(1)}, \\ -L_j(\beta_j)_s - \frac{B_j}{2L_j}(X_j)_s = F_j^{(3)(1,\dots,d)}, \\ \frac{(B_j)_s}{4} - \frac{B_j(L_j)_s}{2L_j} = F_j^{(5)}, \\ \frac{(A_j)_s}{A_j} - \frac{(L_j)_s}{L_j} = F_j^{(2)}, \\ \frac{(X_j)_s}{L_j} = F_j^{(4)(1,\dots,d)}, \\ \frac{(L_j)_s}{L_j} = F_j^{(6)}, \end{array} \right. \iff \left\{ \begin{array}{l} (A_j)_s = A_j (F_j^{(2)} + F_j^{(6)}), \\ (L_j)_s = L_j F_j^{(6)}, \\ (B_j)_s = 4F_j^{(5)} + 2B_j F_j^{(6)}, \\ (X_j)_s = L_j F_j^{(4)(1,\dots,d)}, \\ (\beta_j)_s = -\frac{1}{L_j} F_j^{(3)(1,\dots,d)} - \frac{B_j}{2L_j} F_j^{(4)(1,\dots,d)}, \\ (\gamma_j)_s = L_j \beta_j \cdot F_j^{(4)(1,\dots,d)} - F_j^{(1)}, \end{array} \right.$$

and with respect to time  $t$ ,

$$\left\{ \begin{array}{l} (A_j)_s = \frac{A_j}{L_j^2} (F_j^{(2)} + F_j^{(6)}), \\ (L_j)_s = \frac{1}{L_j} F_j^{(6)}, \\ (B_j)_s = \frac{4}{L_j^2} F_j^{(5)} + \frac{2}{L_j^2} B_j F_j^{(6)}, \\ (X_j)_s = \frac{1}{L_j} F_j^{(4)(1,\dots,d)}, \\ (\beta_j)_s = -\frac{1}{L_j^3} F_j^{(3)(1,\dots,d)} - \frac{B_j}{2L_j^3} F_j^{(4)(1,\dots,d)}, \\ (\gamma_j)_s = \frac{1}{L_j} \beta_j \cdot F_j^{(4)(1,\dots,d)} - \frac{1}{L_j^2} F_j^{(1)}, \end{array} \right. \quad (3.11)$$

### 3.1 Computing coefficients of the linear system (3.9)

In order to be able to compute  $\mathbf{A}$  and  $\mathbf{S}$ , we give the exact expression of the inner products involved. For  $j, l = 1, \dots, N$ , let

$$\left\{ \begin{array}{l} z := \frac{2 + iB_l}{4L_l^2} + \frac{2 - iB_j}{4L_j^2}, \\ a := \frac{X_l}{L_l^2} + \frac{X_j}{L_j^2}, \\ \xi := \frac{B_j}{2L_j^2} X_j + \beta_j - \frac{B_l}{2L_l^2} X_l - \beta_l, \\ C = \exp \left\{ i(\gamma_l - \gamma_j) - \frac{2 + iB_l}{4L_l^2} |X_l|^2 - \frac{2 - iB_j}{4L_j^2} |X_j|^2 - i\beta_l \cdot X_l + i\beta_j \cdot X_j \right\}. \end{array} \right. \quad (3.12)$$

Those quantities obviously depend on the indices  $j$  and  $l$ , but for clarity we do not write explicitly these dependences since they are pretty clear. Then, for  $n, m = 1, \dots, d$ ,

$$\langle b_{l,1}, b_{j,1} \rangle = C \hat{f}(\xi)$$

$$\begin{aligned}
\langle b_{l,n+1}, b_{j,1} \rangle &= \frac{C}{L_l} \left( \widehat{x f_n} - (X_l)_n \widehat{f} \right) (\xi) \\
\langle b_{l,d+2}, b_{j,1} \rangle &= \frac{C}{L_l^2} \left( \widehat{|x|^2 f} - 2X_l \cdot \widehat{x f} + |X_l|^2 \widehat{f} \right) (\xi) \\
\langle b_{l,n+1}, b_{j,m+1} \rangle &= \frac{C}{L_j L_l} \left[ \widehat{x_n x_m f} - (X_l)_n \widehat{x_m f} - (X_j)_m \widehat{x_n f} + (X_l)_n (X_j)_m \widehat{f} \right] (\xi) \\
\langle b_{l,d+2}, b_{j,m+1} \rangle &= \frac{C}{L_l^2 L_j} \left[ \widehat{x_m |x|^2 f} - 2X_l \cdot \widehat{x_m x f} + |X_l|^2 \widehat{x_m f} \right. \\
&\quad \left. - (X_j)_m \widehat{|x|^2 f} + 2(X_j)_m X_l \cdot \widehat{x f} - |X_l|^2 (X_j)_m \widehat{f} \right] (\xi) \\
\langle b_{l,d+2}, b_{j,d+2} \rangle &= \frac{C}{L_l^2 L_j^2} \left[ \widehat{|x|^4 f} - 2X_l \cdot \widehat{|x|^2 x f} + |X_l|^2 \widehat{|x|^2 f} - 2X_j \cdot \widehat{|x|^2 f} \right. \\
&\quad \left. + 4 \sum_{n,m=1}^d (X_l)_n (X_j)_m \widehat{x_n x_m f} - 2|X_l|^2 X_j \cdot \widehat{x f} \right. \\
&\quad \left. + \widehat{|x|^2 f} |X_j|^2 - 2|X_j|^2 X_l \cdot \widehat{x f} + |X_l|^2 |X_j|^2 \widehat{f} \right] (\xi)
\end{aligned}$$

Moreover, we recall that  $\mathbf{A}$  is hermitian, so the above relations allow us to obtain all We now compute the components of the vector  $S$ . For  $j, k, l, m = 1, \dots, N$ , let

$$\left\{ \begin{aligned}
C_{\Im} &:= \exp \{ i (\gamma_k + \gamma_l - \gamma_m - \gamma_j) \} \\
&\quad \times \exp \{ i (\beta_j \cdot X_j + \beta_m \cdot X_m - \beta_l \cdot X_l - \beta_k \cdot X_k) \} \\
&\quad \times \exp \left\{ -i \left( \frac{B_k}{4L_k^2} |X_k|^2 + \frac{B_l}{4L_l^2} |X_l|^2 - \frac{B_m}{4L_m^2} |X_m|^2 - \frac{B_j}{4L_j^2} |X_j|^2 \right) \right\}, \\
C_{\Re} &:= \exp \left\{ -\frac{1}{2} \left( \frac{|X_k|^2}{L_k^2} + \frac{|X_l|^2}{L_l^2} + \frac{|X_m|^2}{L_m^2} + \frac{|X_j|^2}{L_j^2} \right) \right\}, \\
C &:= \frac{A_k A_l A_m}{L_k L_l L_m} C_{\Im} C_{\Re}, \\
\xi &:= - \left[ \beta_k + \beta_l - \beta_m - \beta_j + \frac{B_k}{2L_k^2} X_k + \frac{B_l}{2L_l^2} X_l - \frac{B_m}{2L_m^2} X_m - \frac{B_j}{2L_j^2} X_j \right], \\
z &:= \frac{1}{2} \left( \frac{1}{L_k^2} + \frac{1}{L_l^2} + \frac{1}{L_m^2} + \frac{1}{L_j^2} \right) + i \left( \frac{B_k}{4L_k^2} + \frac{B_l}{4L_l^2} - \frac{B_m}{4L_m^2} - \frac{B_j}{4L_j^2} \right), \\
a &:= \frac{1}{L_k^2} X_k + \frac{1}{L_l^2} X_l + \frac{1}{L_m^2} X_m + \frac{1}{L_j^2} X_j.
\end{aligned} \right. \tag{3.13}$$

Those quantities obviously depend on the indices  $j, k, l$  and  $m$ , but for clarity we do not write explicitly these dependences since they are pretty clear. Then, for  $1 \leq r \leq d$ ,

$$\begin{aligned}
\langle u|u|^2, b_{j,1} \rangle &= \sum_{k,l,m} C \widehat{f}(\xi) \\
\langle u|u|^2, b_{j,r+1} \rangle &= \sum_{k,l,n} \frac{C}{L_j} \left( \widehat{x_r f} - (X_j)_r \widehat{f} \right) \\
\langle u|u|^2, b_{j,d+2} \rangle &= \sum_{k,l,m} \frac{C}{L_j^2} \left( \widehat{|x|^2 f} - 2X_j \cdot \widehat{x f} + |X_j|^2 \widehat{f} \right).
\end{aligned}$$

We refer to Appendix A for more details. Moreover, Appendix B contains Table 1 which gives the useful Fourier transforms.

*Remark 3.3* (Computational complexity). In (2.18) we chose  $v_j(s_j, y_j) = e^{-\frac{1}{2}|y_j|^2}$ . This choice was made so that the inner products involved in the application of the DFMP are computable exactly. Therefore we do not rely on numerical integration to compute the coefficients of the linear system (3.9). In particular, this shows that the computational effort required to obtain the linear system is  $\mathcal{O}(N^4d + N^2(d+2)^2)$ . To obtain the total complexity, we have to add the cost of computing the pseudo-inverse of the hermitian matrix  $\mathbf{A} \in \mathbb{C}^{(d+2)N, (d+2)N}$ , which is  $\mathcal{O}((d+2)^3N^3)$ . This yields the overall computational complexity:  $\mathcal{O}(N^4d + d^3N^3)$ .

We obtain Algorithm 2 which can be used to obtain an approximate solution to (cNLS) as a sum of bubbles, using the Strang splitting between the linear and nonlinear parts, and using an arbitrary explicit time-integrator for the nonlinear part.

---

**Algorithm 2** Approximating a solution to (cNLS) as a sum of bubbles.

---

```

for Each timestep of size  $dt$  do
  for  $j = 1, \dots, N$  do  $\triangleright j$  denotes a bubble's index.
    Use Algorithm 1 to update the bubbles over a timestep of size  $dt/2$ .
    for each stage of a time-integrator do
      Compute the coefficients of the linear system (3.9).
      Solve the linear system (3.9) to obtain  $\mathbf{E}$ .
      Use (3.11) to update the parameters over a timestep whose length depends
      on the stage of the time-integrator.
    end for
    Use Algorithm 1 to update the bubbles over a timestep of size  $dt/2$ .
  end for
end for

```

---

*Remark 3.4.* The error term for Algorithm 2 is of order 2 since we are using a Strang splitting. We emphasize however that the  $\mathbb{L}^2$  norm may be better preserved: indeed, algorithm 2 is a composition of two sub-algorithms. The first one is Algorithm 1 and preserves exactly the  $\mathbb{L}^2$  norm, and the second sub-algorithm preserves the  $\mathbb{L}^2$  norm up to the time-discretization error (for the conservation of  $\mathbb{L}^2$  norm by DFMP, see Section 3.2). In our numerical examples we will use the 4-th order Runge-Kutta method, hence the  $\mathbb{L}^2$  norm will be globally preserved up to some error term of order  $\Delta t^4$ .

## 3.2 Hamiltonian and norm conservation for the interactions

When solving (cNLS-nonLin.) via the DFMP, i.e. when solving the linear system (3.9), a Hamiltonian is conserved.

**Lemma 3.1.** *Let  $u(t)$  be the approximation to (cNLS-nonLin.) obtained by applying the Dirac-Frenkel-MacLachlan principle, and define*

$$H_{\text{interactions}}(t) := \frac{1}{4} \langle u(t), u(t) | u(t) |^2 \rangle = \frac{1}{4} \langle u(t)^2, u(t)^2 \rangle.$$

Then  $H_{\text{interactions}}$  is conserved, i.e.

$$\frac{d}{dt}H_{\text{interactions}}(t) = 0,$$

and the  $\mathbb{L}^2$  norm of  $u$  is also conserved.

*Proof.* We have

$$H_{\text{interactions}}(t) := \frac{1}{4}\langle u(t), u(t)|u(t)|^2 \rangle = \frac{1}{4}\langle u(t)^2, u(t)^2 \rangle,$$

by using the Hermitian property of the inner product  $\langle \cdot, \cdot \rangle$ . Then,

$$\begin{aligned} \frac{d}{dt}H_{\text{interactions}}(t) &= \frac{1}{4}\frac{d}{dt}\langle u(t)^2, u(t)^2 \rangle \\ &= \frac{1}{4}\langle 2u(t)\partial_t u(t), u(t)^2 \rangle + \frac{1}{4}\langle u(t)^2, 2u(t)\partial_t u(t) \rangle \\ &= \Re \langle u(t)\partial_t u(t), u(t)^2 \rangle \\ &= \Re \langle \partial_t u(t), u(t)|u(t)|^2 \rangle. \end{aligned}$$

By definition of  $\partial_t u(t)$ , we have  $\partial_t u(t) \in \mathcal{T}_{u(t)}\mathcal{M}$ , hence we can take  $f = \partial_t u(t)$  in (3.2). We obtain the following equality:

$$\langle \partial_t u(t), u(t)|u(t)|^2 \rangle = \langle \partial_t u(t), i\partial_t u(t) \rangle = -i\|\partial_t u(t)\|^2.$$

Therefore,

$$\frac{d}{dt}H_{\text{interactions}}(t) = \Re(-i\|\partial_t u(t)\|^2) = 0.$$

Using similar ideas, we can easily show the conservation of the  $\mathbb{L}^2$  norm: we obviously have  $u(t) \in \mathcal{T}_{u(t)}\mathcal{M}$ , hence

$$\begin{aligned} \frac{d}{dt}\|u(t)\|^2 &= 2\Re \langle u(t), \partial_t u(t) \rangle = 2\Re \langle u(t), -iu(t)|u(t)|^2 \rangle \\ &= 2\Re(i\langle |u(t)|^2, |u(t)|^2 \rangle) = 0 \end{aligned}$$

□

### 3.3 Recovering the Harmonic Oscillator equations

Suppose the family  $B_{u(t)} \subset \mathbb{L}^2(\mathbb{R}^d)$  defined by (3.4) is linearly independent, and consider the equation (HO). By summing equation (2.7) over  $j = 1, \dots, N$  with  $v_j(s_j, y_j) = e^{-\frac{|y_j|^2}{2}}$ , and letting this sum be equal to zero, we obtain an equation of the form

$$\sum_{j=1}^N (c_{j,1}b_{j,1} + c_{j,2}b_{j,2} + \dots + c_{j,d+1}b_{j,d+1} + c_{j,d+2}b_{j,d+2}) = 0. \quad (3.14)$$

Thanks to the assumption that  $B_{u(t)}$  is a linearly independent family, we know that we must have

$$c_{k,1} = c_{k,2} = \dots = c_{k,d+1} = c_{k,d+2} = 0, \quad k = 1, \dots, (d+2)N. \quad (3.15)$$

This yields exactly the system of equations (2.8), with the  $\gamma$  equation replaced by (2.20). In other words, the DFMP approach gives the same equations as those given in Section 2.2 when  $B_{u(t)}$  is a linearly independent family. However, our approach as described in Section 2.2 allows to solve them exactly and not only numerically with some numerical time-integrator.

Finally, if the family  $B_{u(t)}$  is linearly dependent, then we cannot write equation (3.15) anymore, hence the DFMP approach fails. Our approach avoids this issue by naturally imposing conditions (3.15) in all cases.

## 4 Numerical examples

In this section we will assess the efficiency of the Bubbles approach with the Dirac-Frenkel-MacLachlan approach against a spectral method in the two-dimensional case.

### 4.1 Spectral scheme

We start by discussing the spectral method we shall use to compare with the results of Algorithm 2. We refer to [For96] for a general introduction to spectral methods for the Schrödinger equation, and to [ABB13] for grid-based schemes applied to the Gross-Pitaevskii equation.

We now present a method which can be understood as the application of [BCL21] to a simpler equation, namely the Harmonic Oscillator. We use a splitting method to simulate the linear part (HO), and thanks to [Ber20, AB21] we have:

$$\begin{aligned} e^{-it(-\Delta+|x|^2)} &= e^{-\frac{1}{2}\tanh(it)|x|^2} e^{\frac{1}{2}\sinh(2it)\Delta_x} e^{-\frac{1}{2}\tanh(it)|x|^2} \\ &= e^{-\frac{i}{2}\tan(t)|x|^2} e^{\frac{i}{2}\sin(2t)\Delta_x} e^{-\frac{i}{2}\tan(t)|x|^2}. \end{aligned} \quad (4.1)$$

We can cite [JMS11] which also presents a spectral method based on the Fourier transform with time splitting, however our method is different in that (4.1) is exact and hence we do not have any time-splitting error.

The first and third exponentials on the RHS are straightforward to compute on a grid. For the second one, we use a Fourier transform:  $e^{\frac{i}{2}\sin(2t)\Delta_x}$  is the propagator of the following equation:

$$\partial_t \psi = i \cos(2t) \Delta_x \psi.$$

By using a Fourier transform, we get

$$\partial_t \mathcal{F}(\psi)(\xi) = i \cos(2t) \mathcal{F}(\Delta_x \psi)(\xi) = -i \cos(2t) |\xi|^2 \mathcal{F}(\psi)(\xi).$$

Hence,

$$\mathcal{F}(\psi(t, \cdot))(\xi) = e^{-\frac{i}{2}\sin(2t)|\xi|^2} \mathcal{F}(\psi(0, \cdot))(\xi).$$

The RHS exponential is straightforward to compute in the Fourier space. Hence, an exact-time spectral approximation of the solution to (HO) is given by Algorithm 3. From this, it is easy to obtain an algorithm which simulates (cNLS) with interactions. It consists in using a Strang splitting method on (cNLS), by splitting the linear part (HO) and the nonlinear part (cNLS-nonLin.). The linear part is approximated via Algorithm 3, and the

---

**Algorithm 3** Spectral solver for (HO), with an exact time resolution for each splitting step.

---

Discretize the initial data  $\eta$  on a Grid  $\subset \mathbb{R}^d$ .

**for** Each timestep of size  $\Delta t$  **do**

**for**  $x \in \text{GRID}$  **do**  $\triangleright x \in \mathbb{R}^d$ .

        Multiply  $\eta(x)$  by  $e^{-\frac{i}{2} \tan(\Delta t) |x|^2}$ .

**end for**

    Apply a FFT to  $\eta$ .  $\triangleright$  FFT: Fast Fourier Transform.

**for**  $\xi \in \text{FOURIER GRID}$  **do**  $\triangleright \xi \in \mathbb{R}^d$ .

        Multiply  $\mathcal{F}(\eta)(\xi)$  by  $e^{-\frac{i}{2} \sin(2\Delta t) |\xi|^2}$ .

**end for**

    Apply an inverse FFT to  $\mathcal{F}(\eta)$ .

**for**  $x \in \text{GRID}$  **do**

        Multiply  $\eta(x)$  by  $e^{-\frac{i}{2} \tan(\Delta t) |x|^2}$ .

**end for**

**end for**

---



---

**Algorithm 4** Spectral solver for (cNLS), with a Strang Splitting method.

---

Discretize the initial data  $\eta$  on a Grid  $\subset \mathbb{R}^d$ .

**for** Each timestep of size  $\Delta t$  **do**

    Use Algorithm 3 with a stepsize  $\Delta t/2$ .

**for**  $x \in \text{GRID}$  **do**  $\triangleright$  Add interactions.

        Multiply  $\eta(x)$  by  $e^{-i \Delta t |\eta(x)|^2}$ .

**end for**

    Use Algorithm 3 with a stepsize  $\Delta t/2$ .

**end for**

---



computation of interactions is explicit thanks to the fact that  $|u(t, x)|^2$  does not depend on time (see e.g. [Fao12, Sect. 2.2]). This fully describes Algorithm 4.

Of course, in practical applications one is not able to define a grid over  $\mathbb{R}^d$ . Hence, Algorithms 3 and 4 have to be modified by defining GRID as a discretization of a finite-volume subset of  $\mathbb{R}^d$ , typically a product of intervals in each dimension. For all of our numerical examples, this will be  $[-15, 15] \times [-15, 15]$ , discretized using  $N_x \times N_y$  points. In order to have an easily computable FFT, one has to use a spatial uniform grid, which then defines the FOURIER GRID. Special care has to be paid when choosing the number of points: if we have Fourier frequencies larger than the *Nyquist frequency*, then we will observe a phenomenon known as *aliasing*. This may not be problematic for the Harmonic Oscillator (HO) depending on the initial condition, but will eventually become an issue when simulating (cNLS) because it involves interactions and hence an infinite number of frequencies. Moreover, by using a FFT-based algorithm we implicitly impose periodic boundary conditions.

## 4.2 Discretization into a sum of Bubbles


We need to decompose any arbitrary function into a finite sum of  $N$  bubbles. A solution to this question has been proposed in [QY10], but it involves integrals over the whole phase space, which is something we want to avoid.

We could also use a nonlinear least squares approach, but our experimental results showed that it tends to yield spread out gaussians, which may present huge overlaps between them. The overlaps cause issues with the DFMP, for instance a blow-up of the conservative quantities. This has been observed during our experiments but the results are not reported in this paper. The issue of discretizing an arbitrary function into a sum of bubble without too much overlaps is not the main concern of this paper, hence we will use a visual trial-and-error discretization. Another possible way of discretizing the initial data is outlined in [AKLP22].


## 4.3 Observables

In order to compare the bubbles scheme against the spectral method, we compare them in absence of interactions, i.e. on the Harmonic Oscillator (HO), as well as in the presence of nonlinear interactions, i.e. on (cNLS). We showed in Lemma 2.2 the conservation of some quantities for (HO) and (cNLS), we will focus on mass, energy and momentum. When computing the observables for the spectral solution, we noted that the approximation of the gradient using finite differences with periodic boundary conditions yielded very rough results while the gradient approximation using the Fast Fourier Transform gave more accurate results. We use the latter approximation in the Figures of Section 4.4. In the case of bubbles, we compute every integral by hand thanks to the assumption  $v(s, y) = e^{-\frac{|y|^2}{2}}$ , some details are given in Appendix C. When reporting the results in the following log-plots, all values with an amplitude smaller than  $10^{-16}$  were set to be equal to  $10^{-16}$ .

For all of the results shown, the spectral scheme is supplied with the exact initial condition and not a projection on the grid of the bubbles discretization.

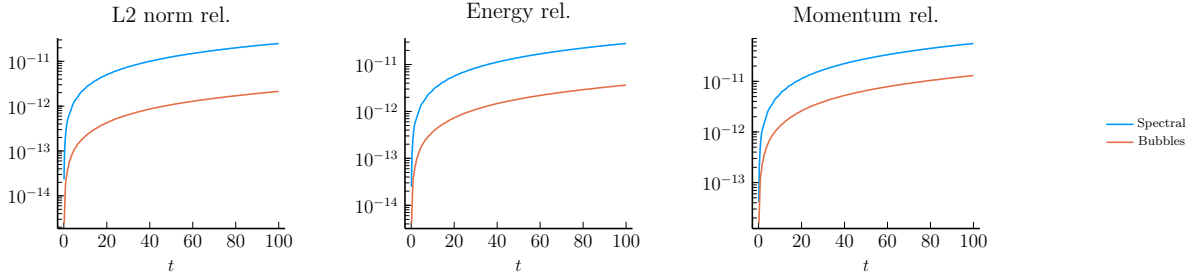

(a) Approximate solution to the Harmonic Oscillator (HO).

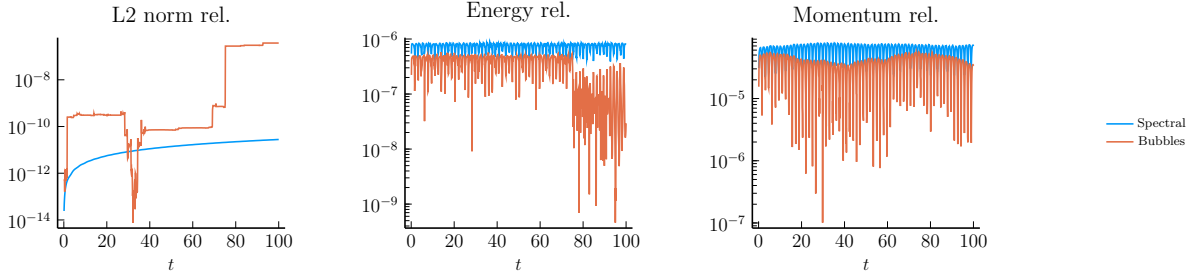

(b) Approximate solution to the Schrödinger equation (cNLS) using DFMP Algorithm.

Figure 1: Test case 1. Relative evolution of mass, energy and momentum with bubbles and spectral methods.  $\Delta t = 10^{-3}$ . Time-integrator for the nonlinear part of the splitting: Runge-Kutta of order 4. Spectral scheme with  $N_x = 128, N_y = 129$ .

## 4.4 Results

We consider examples adapted from [BJM03].


### 4.4.1 Test case 1: Zero phase initial data

The initial condition reads


$$\psi(t = 0, x) = \pi e^{-\frac{|x-\mu_1|^2}{2}} + 2e^{-\frac{|x-\mu_2|^2}{2}}, \quad x \in \mathbb{R}^2, \quad \mu_1 = (0, 2), \quad \mu_2 = (1, 0). \quad (4.2)$$

The results are displayed in Figure 1. The solution approximated with the DFMP approach globally outperforms the spectral method on both the Harmonic Oscillator and the cubic NonLinear Schrödinger equations. On the Harmonic Oscillator, the solution obtained with the Bubbles scheme is about one order of magnitude better than the spectral scheme. When we compare them on (cNLS), i.e. when adding interactions, the  $\mathbb{L}^2$  norm is better conserved for the spectral scheme, but the other conservative quantities are better conserved on a long time for the Bubbles scheme.

The ‘‘jumps’’ in the DFMP approach may be explained by an ill-conditioned Gram matrix, which would then yield a very rough approximation of the modulation parameters.

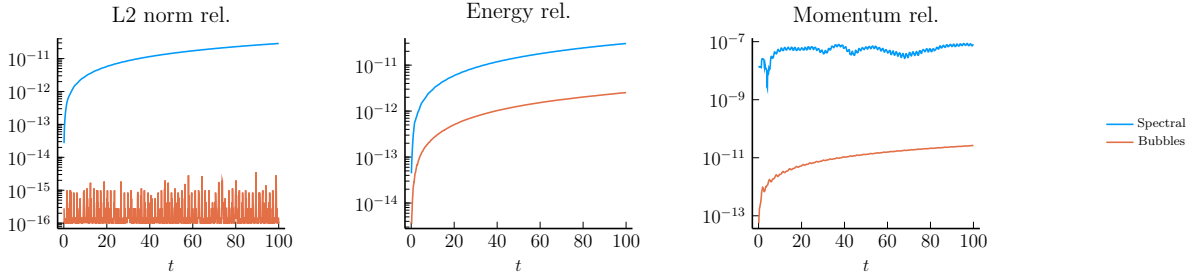

(a) Approximate solution to the Harmonic Oscillator (HO).

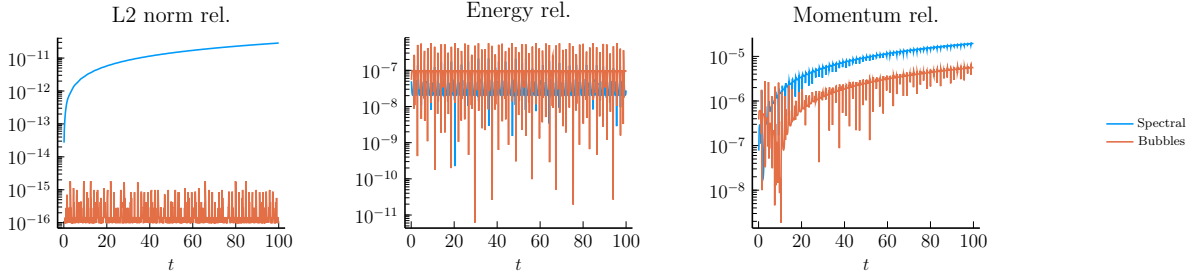

(b) Approximate solution to the Schrödinger equation (cNLS) using DFMP Algorithm.

Figure 2: Test case 2. Relative evolution of mass, energy and momentum with bubbles and spectral methods.  $\Delta t = 10^{-3}$ . Time-integrator for the nonlinear part of the splitting: Runge-Kutta of order 4. Spectral scheme with  $N_x = 128, N_y = 129$ .

#### 4.4.2 Test case 2: Weak interactions

The initial condition reads

$$\psi(t = 0, x) = e^{-|x-\mu_3|^2} e^{i \cosh |x-\mu_3|}, \quad x \in \mathbb{R}^2, \quad \mu_3 = (1, 1). \quad (4.3)$$

The approximation of this function as a sum of bubbles is pretty straightforward: we know that for  $x$  small,  $\cosh x \approx 1 + \frac{x^2}{2}$ , hence

$$\psi(t = 0, x) \approx e^{-|x-\mu_3|^2} e^{i + i \frac{|x-\mu_3|^2}{2}}, \quad x \in \mathbb{R}^2.$$

The results are displayed in Figure 2. This example shows the performance of the DFMP approach in its most efficient setting: it only has one bubble. This explains the very good conservation results obtained: the Bubbles scheme outperforms the spectral scheme on both (HO) and (cNLS), except for the energy on (cNLS). However, even in this case, the error of the DFMP method remains generally less than one order of magnitude larger than the error from the spectral method.

#### 4.4.3 Test case 3: Strong interactions

The initial condition reads

$$\psi(t = 0, x) = \begin{cases} \sqrt{M^2 - |x|^2} e^{i \cosh \sqrt{x_1^2 + x_2^2}}, & |x|^2 < M^2 \\ 0 & \text{otherwise} \end{cases}, \quad M = 4. \quad (4.4)$$

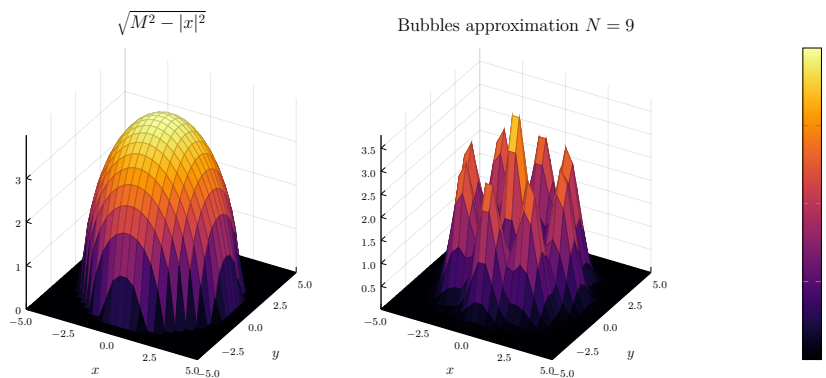


Figure 3: Approximation of  $x \mapsto \sqrt{M^2 - |x|^2}$  as a sum of bubbles

We apply the same approximation for the complex exponential as previously explained, and use a “visual trial-and-error” discretization of the square root. It yields a number of  $N = 9$  bubbles. We emphasize the fact that this discretization may be far from being the best one achievable, however the process of discretizing an arbitrary function into a sum of bubbles is not the main concern of this paper. The discretization of the initial square root is given in Figure 3.


The results are displayed in Figure 4. This example is by far the most interesting of the three test cases presented in this paper, because it shows that with the discretization given in Figure 3 the conservation properties are pretty good for the Bubbles scheme, even when there are a lot of interactions between bubbles. The spectral scheme is globally outperformed by the Bubbles scheme, except for the  $\mathbb{L}^2$  norm in the presence of interactions, which is better conserved by the spectral scheme. Even in this case, the conservation of this quantity with the DFMP is relatively correct.

The “jumps” in the relative evolution of conservative quantities may be explained by an ill-conditioned Gram matrix in DFMP. It also has to be noted that if the discretization presents too much overlap between the gaussian functions, then the DFMP approach fails and the conservative quantities blow up: this has been observed with other discretizations of the same initial data, and is not reported here.


## 5 Conclusion

We presented in this work an approach based on recent results from [FR20]. It allows to solve exactly the Harmonic Oscillator (HO) for initial functions that can be represented as a sum of modulated functions (the *bubbles*), for a certain kind of modulation.

In this context we focused on a particular subclass of such functions, modulated gaussians, which have the advantage of allowing explicit computations. This is particularly interesting since we do not have to rely on any sort of discretization of the phase space, which is usually the main computational burden in numerical simulations. We obtain an algorithm which yields an exact solution as soon as the initial data is a sum of modulated gaussians. If we consider an arbitrary function, the only error this algorithm makes is the initial discretization of said function as a finite sum of modulated gaussians. Moreover, the algorithm only relies on a small number of parameters whose time-evolution is

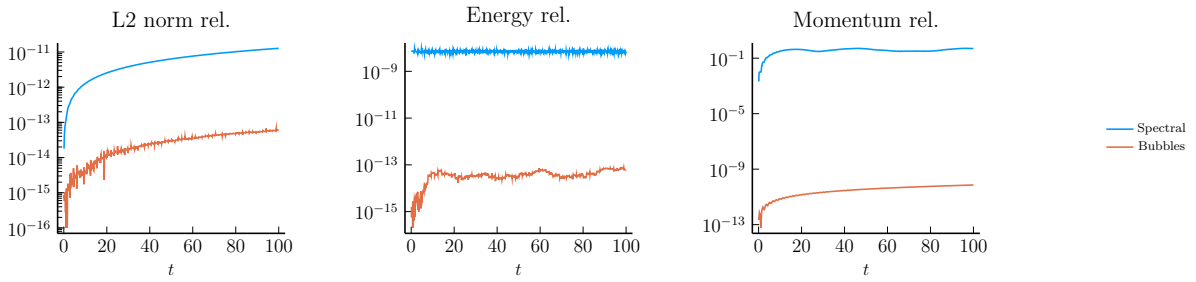

(a) Approximate solution to the Harmonic Oscillator (HO).

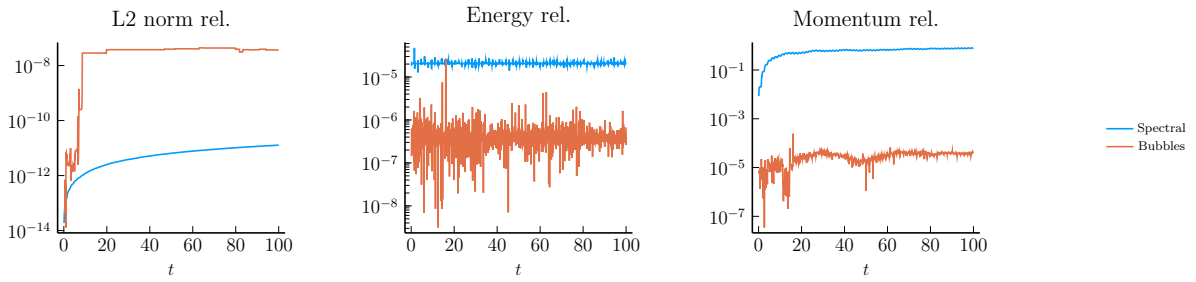

(b) Approximate solution to the Schrödinger equation (cNLS) using DFMP Algorithm.

Figure 4: Test case 3. Relative evolution of mass, energy and momentum with bubbles and spectral methods.  $\Delta t = 10^{-3}$ . Time-integrator for the nonlinear part of the splitting: Runge-Kutta of order 4. Spectral scheme with  $N_x = 128, N_y = 129$ .

explicit, making it very fast and computationally efficient.

We also extended the results from [FR20] by allowing cubic interactions, at the cost of approximating the solution to (cNLS-nonLin.) via the Dirac-Frenkel-MacLachlan principle. Once again, considering only modulated gaussian functions allowed us to perform explicit computations and to obtain a numerical algorithm whose computational complexity writes  $\mathcal{O}(N^4d + N^3d^3)$ . Here  $d$  is the dimension and  $N$  is the number of bubbles. The most critical parameter is  $N$ , which corresponds roughly to the precision of the discretization when considering arbitrary initial data. For any given function, the higher  $N$ , the better we can approximate it as a sum of modulated gaussian functions. We then have a clear trade-off between the speed of the algorithm and the precision of the discretization.

Finally, our numerical examples show that the bubbles algorithm globally outperforms a spectral method combined with time splitting, where each splitting step is solved exactly.

As a final note, we emphasize the fact that any grid-based method is inherently bound to a finite subset of  $\mathbb{R}^d$  to which we have to add boundary conditions, while the bubble approach does not have such restrictions.

## Acknowledgements

The authors would like to thank J. Bernier for spotting an abnormal behavior in the spectral method and for his help in fixing it. EF and YLH were sponsored by the Centre Henri Lebesgue, program ANR-11-LABX-0020-0.

## Appendix A Computing the coefficients of the linear system (3.9)

### A.1 Coefficients of the matrix A

$\langle b_{l,1}, b_{j,1} \rangle$ .

$$\begin{aligned}
\langle b_{l,1}, b_{j,1} \rangle &= e^{i\gamma_l - i\gamma_j} \int_{\mathbb{R}^d} e^{iL_l\beta_l \cdot \frac{x-X_l}{L_l} - i\frac{B_l}{4} \left| \frac{x-X_l}{L_l} \right|^2} e^{-\frac{1}{2} \left| \frac{x-X_l}{L_l} \right|^2} \\
&\quad \times e^{-iL_j\beta_j \cdot \frac{x-X_j}{L_j} + i\frac{B_j}{4} \left| \frac{x-X_j}{L_j} \right|^2} e^{-\frac{1}{2} \left| \frac{x-X_j}{L_j} \right|^2} dx \\
&= e^{i(\gamma_l - \gamma_j)} \int_{\mathbb{R}^d} e^{i\beta_l \cdot (x-X_l) - i\beta_j \cdot (x-X_j)} e^{-\frac{2+iB_l}{4} \left| \frac{x-X_l}{L_l} \right|^2} e^{-\frac{2-iB_j}{4} \left| \frac{x-X_j}{L_j} \right|^2} dx \\
&= e^{i(\gamma_l - \gamma_j) - \frac{2+iB_l}{4L_l^2} |X_l|^2 - \frac{2-iB_j}{4L_j^2} |X_j|^2 - i\beta_l \cdot X_l + i\beta_j \cdot X_j} \\
&\quad \times \int_{\mathbb{R}^d} e^{i(\beta_l - \beta_j) \cdot x} e^{-\frac{2+iB_l}{4L_l^2} (|x|^2 - 2x \cdot X_l)} e^{-\frac{2-iB_j}{4L_j^2} (|x|^2 - 2x \cdot X_j)} dx \\
&= e^{i(\gamma_l - \gamma_j) - \frac{2+iB_l}{4L_l^2} |X_l|^2 - \frac{2-iB_j}{4L_j^2} |X_j|^2 - i\beta_l \cdot X_l + i\beta_j \cdot X_j} \\
&\quad \times \int_{\mathbb{R}^d} e^{i(\beta_l - \beta_j + \frac{B_l}{2L_l^2} X_l - \frac{B_j}{2L_j^2} X_j) \cdot x} e^{-\left( \frac{1}{L_l^2} X_l + \frac{1}{L_j^2} X_j \right) \cdot x} e^{-\left( \frac{2+iB_l}{4L_l^2} + \frac{2-iB_j}{4L_j^2} \right) |x|^2} dx
\end{aligned}$$

Let

$$\begin{cases}
z := \frac{2 + iB_l}{4L_l^2} + \frac{2 - iB_j}{4L_j^2}, \\
a := \frac{X_l}{L_l^2} + \frac{X_j}{L_j^2}, \\
\xi := \frac{B_j}{2L_j^2}X_j + \beta_j - \frac{B_l}{2L_l^2}X_l - \beta_l, \\
C = \exp \left\{ i(\gamma_l - \gamma_j) - \frac{2 + iB_l}{4L_l^2}|X_l|^2 - \frac{2 - iB_j}{4L_j^2}|X_j|^2 - i\beta_l \cdot X_l + i\beta_j \cdot X_j \right\},
\end{cases} \tag{A.1}$$

and  $f(x) := e^{-z|x|^2 + a \cdot x}$ . Then

$$\langle b_{l,1}, b_{j,1} \rangle = C \int_{\mathbb{R}^d} e^{-i\xi \cdot x} f(x) dx = C \widehat{f}(\xi)$$

$\langle b_{l,n+1}, b_{j,1} \rangle, 1 \leq n \leq d.$

$$\begin{aligned}
\langle b_{l,n+1}, b_{j,1} \rangle &= C \int_{\mathbb{R}^d} \frac{(x - X_l)_n}{L_l} e^{-i\xi \cdot x} f(x) dx \\
&= \frac{C}{L_l} \left( \widehat{x f_n} - (X_l)_n \widehat{f} \right) (\xi)
\end{aligned}$$

$\langle b_{l,d+2}, b_{j,1} \rangle$

$$\begin{aligned}
\langle b_{l,d+2}, b_{j,1} \rangle &= C \int_{\mathbb{R}^d} e^{-i\xi \cdot x} f(x) \frac{|x - X_l|^2}{L_l^2} dx \\
&= \frac{C}{L_l^2} \int_{\mathbb{R}^d} e^{-i\xi \cdot x} f(x) (|x|^2 - 2x \cdot X_l + |X_l|^2) dx \\
&= \frac{C}{L_l^2} \left( \widehat{|x|^2 f} - 2X_l \cdot \widehat{x f} + |X_l|^2 \widehat{f} \right) (\xi)
\end{aligned}$$

$\langle b_{l,n+1}, b_{j,m+1} \rangle, 1 \leq n, m \leq d.$

$$\begin{aligned}
\langle b_{l,n+1}, b_{j,m+1} \rangle &= C \int_{\mathbb{R}^d} \frac{x_n - (X_l)_n}{L_l} \frac{x_m - (X_j)_m}{L_j} e^{-i\xi \cdot x} f(x) dx \\
&= \frac{C}{L_j L_l} \int_{\mathbb{R}^d} (x_n - (X_l)_n)(x_m - (X_j)_m) e^{-i\xi \cdot x} f(x) dx \\
&= \frac{C}{L_j L_l} \int_{\mathbb{R}^d} [x_n x_m - x_n (X_j)_m - x_m (X_l)_n + (X_l)_n (X_j)_m] \\
&\quad \times e^{-i\xi \cdot x} f(x) dx \\
&= \frac{C}{L_j L_l} \left[ \widehat{x_n x_m f} - (X_l)_n \widehat{x_m f} - (X_j)_m \widehat{x_n f} + (X_l)_n (X_j)_m \widehat{f} \right] (\xi).
\end{aligned}$$

$\langle b_{l,d+2}, b_{j,m+1} \rangle, 1 \leq m \leq d.$

$$\begin{aligned}
& \langle b_{l,d+2}, b_{j,m+1} \rangle \\
&= C \int_{\mathbb{R}^d} e^{-i\xi \cdot x} e^{-z|x|^2+a \cdot x} \frac{|x - X_l|^2}{L_l^2} \frac{x_m - (X_j)_m}{L_j} dx \\
&= \frac{C}{L_l^2 L_j} \int_{\mathbb{R}^d} e^{-i\xi \cdot x} e^{-z|x|^2+a \cdot x} \left( |x|^2 - 2x \cdot X_l + |X_l|^2 \right) (x_m - (X_j)_m) dx \\
&= \frac{C}{L_l^2 L_j} \left[ \widehat{x_m |x|^2 f} - 2X_l \cdot \widehat{x_m x f} + |X_l|^2 \widehat{x_m f} \right. \\
&\quad \left. - (X_j)_m \widehat{|x|^2 f} + 2(X_j)_m X_l \cdot \widehat{x f} - |X_l|^2 (X_j)_m \widehat{f} \right] (\xi).
\end{aligned}$$

$\langle b_{l,d+2}, b_{j,d+2} \rangle$

$$\begin{aligned}
\langle b_{l,d+2}, b_{j,d+2} \rangle &= C \int_{\mathbb{R}^d} e^{-i\xi \cdot x} e^{-z|x|^2+a \cdot x} \frac{|x - X_l|^2}{L_l^2} \frac{|x - X_j|^2}{L_j^2} dx \\
&= \frac{C}{L_l^2 L_j^2} \int_{\mathbb{R}^d} e^{-i\xi \cdot x} e^{-z|x|^2+a \cdot x} \left( |x|^2 - 2x \cdot X_l + |X_l|^2 \right) \\
&\quad \times \left( |x|^2 - 2x \cdot X_j + |X_j|^2 \right) dx \\
&= \frac{C}{L_l^2 L_j^2} \int_{\mathbb{R}^d} e^{-i\xi \cdot x} e^{-z|x|^2+a \cdot x} \left( |x|^4 - 2|x|^2 x \cdot X_l + |X_l|^2 |x|^2 \right. \\
&\quad \left. - 2(x \cdot X_j) |x|^2 + 4(x \cdot X_l)(x \cdot X_j) - 2(x \cdot X_j) |X_l|^2 \right. \\
&\quad \left. + |x|^2 |X_j|^2 - 2(x \cdot X_l) |X_j|^2 + |X_l|^2 |X_j|^2 \right) dx \\
&= \frac{C}{L_l^2 L_j^2} \left[ \widehat{|x|^4 f} - 2(X_l + X_j) \cdot \widehat{|x|^2 x f} + (|X_l|^2 + |X_j|^2) \widehat{|x|^2 f} \right. \\
&\quad \left. + 4(x \cdot X_l) \widehat{(x \cdot X_j) f} - 2(|X_l|^2 X_j + |X_j|^2 X_l) \cdot \widehat{x f} \right. \\
&\quad \left. + |X_l|^2 |X_j|^2 \widehat{f} \right] (\xi)
\end{aligned}$$

Moreover,

$$\begin{aligned}
(x \cdot X_l)(x \cdot X_j) &= \left( \sum_{n=1}^d x_n (X_l)_n \right) \left( \sum_{m=1}^d x_m (X_j)_m \right) \\
&= \sum_{n,m=1}^d (X_l)_n (X_j)_m x_n x_m,
\end{aligned}$$

Hence

$$(x \cdot X_l) \widehat{(x \cdot X_j) f} = \sum_{n,m=1}^d (X_l)_n (X_j)_m \widehat{x_n x_m f}.$$

## A.2 Coefficients of the vector of interactions $S$

$\langle u|u|^2, b_{j,1} \rangle$



$$\langle u|u|^2, b_{j,1} \rangle = \sum_{k,l,m} \frac{A_k A_l A_m}{L_k L_l L_m} \left\langle e^{i\Gamma_k + i\Gamma_l - i\Gamma_m} e^{-\frac{|y_k|^2 + |y_l|^2 + |y_m|^2}{2}}, e^{i\Gamma_j} e^{-\frac{1}{2}|y_j|^2} \right\rangle$$

We recall the previously defined notations:

$$\begin{cases} y_k = \frac{x - X_k}{L_k}, \\ \Gamma_k(x) = \gamma_k + \beta_k \cdot (x - X_k) - \frac{B_k}{4L_k^2} |x - X_k|^2. \end{cases}$$

Then,

$$\begin{aligned} -\frac{1}{2} (|y_k|^2 + |y_l|^2 + |y_m|^2 + |y_j|^2) &= -\frac{1}{2L_k^2} |x - X_k|^2 - \frac{1}{2L_l^2} |x - X_l|^2 - \frac{1}{2L_m^2} |x - X_m|^2 \\ &\quad - \frac{1}{2L_j^2} |x - X_j|^2 \\ &= -\frac{1}{2} \left( \frac{1}{L_k^2} + \frac{1}{L_l^2} + \frac{1}{L_m^2} + \frac{1}{L_j^2} \right) |x|^2 + \left( \frac{1}{L_k^2} X_k + \frac{1}{L_l^2} X_l + \frac{1}{L_m^2} X_m + \frac{1}{L_j^2} X_j \right) \cdot x \\ &\quad - \frac{1}{2} \left( \frac{|X_k|^2}{L_k^2} + \frac{|X_l|^2}{L_l^2} + \frac{|X_m|^2}{L_m^2} + \frac{|X_j|^2}{L_j^2} \right), \end{aligned}$$

and

$$\begin{aligned} &(\Gamma_k + \Gamma_l - \Gamma_m - \Gamma_j) \\ &= \gamma_k + \beta_k \cdot (x - X_k) - \frac{B_k}{4L_k^2} |x - X_k|^2 + \gamma_l + \beta_l \cdot (x - X_l) - \frac{B_l}{4L_l^2} |x - X_l|^2 \\ &\quad - \gamma_m - \beta_m \cdot (x - X_m) + \frac{B_m}{4L_m^2} |x - X_m|^2 - \gamma_j - \beta_j \cdot (x - X_j) + \frac{B_j}{4L_j^2} |x - X_j|^2 \\ &= (\gamma_k + \gamma_l - \gamma_m - \gamma_j) + (\beta_j \cdot X_j + \beta_m \cdot X_m - \beta_l \cdot X_l - \beta_k \cdot X_k) \\ &\quad - \left( \frac{B_k}{4L_k^2} |X_k|^2 + \frac{B_l}{4L_l^2} |X_l|^2 - \frac{B_m}{4L_m^2} |X_m|^2 - \frac{B_j}{4L_j^2} |X_j|^2 \right) \\ &\quad + x \cdot \left( \beta_k + \beta_l - \beta_m - \beta_j + \frac{B_k}{2L_k^2} X_k + \frac{B_l}{2L_l^2} X_l - \frac{B_m}{2L_m^2} X_m - \frac{B_j}{2L_j^2} X_j \right) \\ &\quad - \left( \frac{B_k}{4L_k^2} + \frac{B_l}{4L_l^2} - \frac{B_m}{4L_m^2} - \frac{B_j}{4L_j^2} \right) |x|^2 \end{aligned}$$

Define

$$\begin{aligned}
C_{\Im} &:= \exp \{i(\gamma_k + \gamma_l - \gamma_m - \gamma_j)\} \\
&\quad \times \exp \{i(\beta_j \cdot X_j + \beta_m \cdot X_m - \beta_l \cdot X_l - \beta_k \cdot X_k)\} \\
&\quad \times \exp \left\{ -i \left( \frac{B_k}{4L_k^2} |X_k|^2 + \frac{B_l}{4L_l^2} |X_l|^2 - \frac{B_m}{4L_m^2} |X_m|^2 - \frac{B_j}{4L_j^2} |X_j|^2 \right) \right\} \\
C_{\Re} &:= \exp \left\{ -\frac{1}{2} \left( \frac{|X_k|^2}{L_k^2} + \frac{|X_l|^2}{L_l^2} + \frac{|X_m|^2}{L_m^2} + \frac{|X_j|^2}{L_j^2} \right) \right\} \\
C &:= \frac{A_k A_l A_m}{L_k L_l L_m} C_{\Im} C_{\Re} \\
\xi &:= - \left[ \beta_k + \beta_l - \beta_m - \beta_j + \frac{B_k}{2L_k^2} X_k + \frac{B_l}{2L_l^2} X_l - \frac{B_m}{2L_m^2} X_m - \frac{B_j}{2L_j^2} X_j \right] \\
z &:= \frac{1}{2} \left( \frac{1}{L_k^2} + \frac{1}{L_l^2} + \frac{1}{L_m^2} + \frac{1}{L_j^2} \right) + i \left( \frac{B_k}{4L_k^2} + \frac{B_l}{4L_l^2} - \frac{B_m}{4L_m^2} - \frac{B_j}{4L_j^2} \right) \\
a &:= \frac{1}{L_k^2} X_k + \frac{1}{L_l^2} X_l + \frac{1}{L_m^2} X_m + \frac{1}{L_j^2} X_j
\end{aligned}$$

and  $f(x) := e^{-z|x|^2 + a \cdot x}$ . Then

$$\langle u|u|^2, b_{j,1} \rangle = \sum_{k,l,m} C \widehat{f}(\xi). \tag{A.2}$$

$\langle u|u|^2, b_{j,r+1} \rangle$ ,  $r = 1, \dots, d$

$$\begin{aligned}
&\langle u|u|^2, b_{j,r+1} \rangle \\
&= \sum_{k,l,m} \frac{A_k A_l A_m}{L_k L_l L_m} \left\langle e^{i\Gamma_k + i\Gamma_l - i\Gamma_m} e^{-\frac{|y_k|^2 + |y_l|^2 + |y_m|^2}{2}}, e^{i\Gamma_j} e^{-\frac{1}{2}|y_j|^2} \frac{x_r - (X_j)_r}{L_j} \right\rangle \\
&= \sum_{k,l,m} \frac{C}{L_j} \left( \widehat{x_r f} - (X_j)_r \widehat{f} \right).
\end{aligned}$$

$\langle u|u|^2, b_{j,d+2} \rangle$

$$\begin{aligned}
&\langle u|u|^2, b_{j,d+2} \rangle \\
&= \sum_{k,l,m} \frac{A_k A_l A_m}{L_k L_l L_m} \left\langle e^{i\Gamma_k + i\Gamma_l - i\Gamma_m} e^{-\frac{|y_k|^2 + |y_l|^2 + |y_m|^2}{2}}, e^{i\Gamma_j} e^{-\frac{1}{2}|y_j|^2} \left| \frac{x - X_j}{L_j} \right|^2 \right\rangle \\
&= \sum_{k,l,m} \frac{C}{L_j^2} \left( \widehat{|x|^2 f} - 2X_j \cdot \widehat{x f} + |X_j|^2 \widehat{f} \right).
\end{aligned}$$

## Appendix B Fourier transforms of Gaussians

$h(x)$	$\widehat{h}(\xi)/e^{-\frac{(\xi+ia)\cdot(\xi+ia)}{4z}}$
$f$	$\left(\frac{\pi}{z}\right)^{\frac{d}{2}}$
$xf$	$-i\left(\frac{\pi}{z}\right)^{\frac{d}{2}}\frac{\xi+ia}{2z}$
$x_mx_n f$	$-\frac{1}{4z^2}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}(\xi_n+ia_n)(\xi_m+ia_m)$
$x_m^2 f$	$\frac{1}{2z}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}\left[1-\frac{(\xi_m+ia_m)^2}{2z}\right]$
$ x ^2 f$	$\frac{1}{2z}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}\left[d-\frac{ \xi ^2+2ia\cdot\xi- a ^2}{2z}\right]$
$x_m x ^2 f$	$-\frac{i}{4z^2}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}(\xi_m+ia_m)\left[d+2-\frac{ \xi ^2+2ia\cdot\xi- a ^2}{2z}\right]$
$x_m^2 x_n^2 f$	$\frac{1}{4z^2}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}\left(1-\frac{(\xi_n+ia_n)^2}{2z}\right)\left(1-\frac{(\xi_m+ia_m)^2}{2z}\right)$
$x_m^4 f$	$\frac{1}{4z^2}\left(\frac{\pi}{z}\right)^{\frac{d}{2}}\left[3-6\frac{(\xi_m+ia_m)^2}{2z}+\frac{(\xi_m+ia_m)^4}{4z^2}\right]$

Table 1: Fourier Transform of some polynomials in  $x = (x_1, \dots, x_d) \in \mathbb{R}^d$  multiplied by  $f(x) = e^{-z|x|^2+a\cdot x}$ ,  $z \in \mathbb{C}$ ,  $\Re(z) > 0$ ,  $a \in \mathbb{R}^d$ .

**Lemma B.1** (Fourier transform of complex Gaussians). *Let  $z \in \mathbb{C}$ ,  $\Re(z) \geq 0$ . Then,*

$$\mathcal{F}\left(e^{-z|\cdot|^2}\right)(\xi) = \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{-\frac{|\xi|^2}{4z}}, \quad \xi \in \mathbb{R}^d. \quad (\text{B.1})$$

More generally, let  $z = z_1 + iz_2 \in \mathbb{C}$ ,  $z_1, z_2 \in \mathbb{R}$ ,  $z_1 > 0$ ,  $a \in \mathbb{R}^d$  and

$$f : x \in \mathbb{R}^d \mapsto \exp\left(-z|x|^2 + a \cdot x\right) \in \mathbb{C}, \quad (\text{B.2})$$

then we have the Fourier transforms given by Table 1.

*Proof.* For the sake of clarity, for  $\xi, a \in \mathbb{R}^d$  and  $z \in \mathbb{C}$ , let

$$E(\xi, a, z) := \exp\left\{-\frac{|\xi|^2 + 2ia \cdot \xi - |a|^2}{4z}\right\} = \exp\left\{-\frac{(\xi + ia) \cdot (\xi + ia)}{4z}\right\}.$$

$\widehat{f}$ .

We have

$$-z|x|^2 + a \cdot x = -z\left|x - \frac{a}{2z_1}\right|^2 - i\frac{z_2 a}{z_1} \cdot x + \frac{z|a|^2}{4z_1^2}.$$

Recall the following usual properties on Fourier transform:

$$\widehat{f(x-a)} = \widehat{f}(\xi)e^{-ia\cdot\xi}, \quad \widehat{fe^{-ia\cdot x}} = \widehat{f}(\xi+a).$$

Let

$$g(x) = e^{-z \left| x - \frac{a}{2z_1} \right|^2},$$

then

$$\hat{g}(\xi) = \left( \frac{\pi}{z} \right)^{\frac{d}{2}} e^{-\frac{|\xi|^2}{4z} - \frac{ia \cdot \xi}{2z_1}}$$

and

$$f(x) = g(x) e^{-\frac{iz_2}{z_1} a \cdot x + \frac{z|a|^2}{4z_1^2}}.$$

Hence,

$$\begin{aligned} \widehat{f}(\xi) &= e^{\frac{z|a|^2}{4z_1^2}} \hat{g}\left(\xi + \frac{z_2}{z_1} a\right) = \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{\frac{z|a|^2}{4z_1^2}} e^{-\frac{1}{4z} \left| \xi + \frac{z_2}{z_1} a \right|^2 - \frac{ia}{2z_1} \cdot \left(\xi + \frac{z_2}{z_1} a\right)} \\ &= \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{\frac{z|a|^2}{4z_1^2} - \frac{1}{4z} \left( |\xi|^2 + 2\frac{z_2}{z_1} a \cdot \xi + \frac{z_2^2}{z_1^2} |a|^2 \right) - \frac{ia \cdot \xi}{2z_1} - \frac{i|a|^2 z_2}{2z_1^2}} \\ &= \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{-\frac{|\xi|^2}{4z} + (a \cdot \xi) \left( -\frac{z_2}{2z z_1} - \frac{i}{2z_1} \right) + |a|^2 \left( \frac{z}{4z_1^2} - \frac{z_2}{4z z_1^2} - \frac{iz_2}{2z_1^2} \right)} \\ &= \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{-\frac{|\xi|^2}{4z} - \frac{a \cdot \xi}{2z z_1} [z_2 + i(z_1 + iz_2)] + \frac{|a|^2}{4z z_1^2} [(z_1 + iz_2)^2 - z_2^2 - 2iz_2(z_1 + iz_2)]} \\ &= \left(\frac{\pi}{z}\right)^{\frac{d}{2}} e^{-\frac{|\xi|^2}{4z} - i\frac{a \cdot \xi}{2z} + \frac{|a|^2}{4z}} \\ &= \left(\frac{\pi}{z}\right)^{\frac{d}{2}} E(\xi, a, z). \end{aligned}$$

$\widehat{xf}$ .

$$\begin{aligned} \widehat{xf}(\xi) &= i\nabla_{\xi} \widehat{f} = i\nabla_{\xi} \left[ \left(\frac{\pi}{z}\right)^{\frac{d}{2}} E(\xi, a, z) \right] = i \left(\frac{\pi}{z}\right)^{\frac{d}{2}} E(\xi, a, z) \left[ -\frac{\xi}{2z} - \frac{ia}{2z} \right] \\ &= -i \left(\frac{\pi}{z}\right)^{\frac{d}{2}} \frac{\xi + ia}{2z} E(\xi, a, z). \end{aligned}$$

$\widehat{x_m^2 f}$ ,  $m = 1, \dots, d$ .

$$\begin{aligned} \widehat{x_m^2 f}(\xi) &= i\partial_{\xi_m} (\widehat{xf})_m = i\partial_{\xi_m} \left[ -i \left(\frac{\pi}{z}\right)^{\frac{d}{2}} \frac{(\xi + ia)_m}{2z} E(\xi, a, z) \right] \\ &= \frac{1}{2z} \left(\frac{\pi}{z}\right)^{\frac{d}{2}} \left[ E(\xi, a, z) + (\xi_m + ia_m) E(\xi, a, z) \left( -\frac{\xi_m}{2z} - \frac{ia_m}{2z} \right) \right] \\ &= \frac{1}{2z} \left(\frac{\pi}{z}\right)^{\frac{d}{2}} \left[ 1 - \frac{(\xi_m + ia_m)^2}{2z} \right] E(\xi, a, z). \end{aligned}$$

$\widehat{x_m x_n f}$ ,  $m, n = 1, \dots, d$ ,  $n \neq m$ .

$$\begin{aligned}\widehat{x_m x_n f}(\xi) &= i\partial_{\xi_m} (\widehat{x f})_n = i\partial_{\xi_m} \left[ -i \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \frac{\xi_n + ia_n}{2z} E(\xi, a, z) \right] \\ &= \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} (\xi_n + ia_n) \left[ -\frac{\xi_m + ia_m}{2z} \right] E(\xi, a, z) \\ &= -\frac{1}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} (\xi_n + ia_n) (\xi_m + ia_m) E(\xi, a, z).\end{aligned}$$

$\widehat{|x|^2 f}$ .

$$\begin{aligned}\widehat{|x|^2 f}(\xi) &= \widehat{x_1^2 f}(\xi) + \dots + \widehat{x_d^2 f}(\xi) \\ &= \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ d - \frac{(\xi_1 + ia_1)^2 + \dots + (\xi_d + ia_d)^2}{2z} \right] E(\xi, a, z) \\ &= \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ d - \frac{|\xi|^2 + 2ia \cdot \xi - |a|^2}{2z} \right] E(\xi, a, z).\end{aligned}$$

$\widehat{x_m |x|^2 f}$ ,  $m = 1, \dots, d$ .

$$\begin{aligned}\widehat{x_m |x|^2 f}(\xi) &= i\partial_{\xi_m} \left[ \widehat{|x|^2 f}(\xi) \right] = i\partial_{\xi_m} \left[ \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( d - \frac{|\xi|^2 + 2ia \cdot \xi - |a|^2}{2z} \right) E(\xi, a, z) \right] \\ &= \frac{i}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ -2 \frac{\xi_m + ia_m}{2z} + \left( d - \frac{|\xi|^2 + 2ia \cdot \xi - |a|^2}{2z} \right) \left( -\frac{\xi_m + ia_m}{2z} \right) \right] E(\xi, a, z) \\ &= -\frac{i}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} (\xi_m + ia_m) \left[ d + 2 - \frac{|\xi|^2 + 2ia \cdot \xi - |a|^2}{2z} \right] E(\xi, a, z).\end{aligned}$$

$\widehat{x_m^3 f}$ ,  $m = 1, \dots, d$ .

$$\begin{aligned}\widehat{x_m^3 f}(\xi) &= i\partial_{\xi_m} \left[ \widehat{x_m^2 f}(\xi) \right] = i\partial_{\xi_m} \left[ \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_m + ia_m)^2}{2z} \right) E(\xi, a, z) \right] \\ &= \frac{i}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ -2 \frac{\xi_m + ia_m}{2z} + \left( -\frac{\xi_m + ia_m}{2z} \right) \left( 1 - \frac{(\xi_m + ia_m)^2}{2z} \right) \right] E(\xi, a, z) \\ &= -\frac{i}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} (\xi_m + ia_m) \left[ 3 - \frac{(\xi_m + ia_m)^2}{2z} \right] E(\xi, a, z) \\ &= -\frac{i}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ 3(\xi_m + ia_m) - \frac{(\xi_m + ia_m)^3}{2z} \right] E(\xi, a, z).\end{aligned}$$

$\widehat{x_m x_n^2 f}$ ,  $m, n = 1, \dots, d$ ,  $n \neq m$ .

$$\begin{aligned}\widehat{x_m x_n^2 f}(\xi) &= i\partial_{\xi_m} (\widehat{x_n^2 f}) = i\partial_{\xi_m} \left[ \frac{1}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_n + ia_n)^2}{2z} \right) E(\xi, a, z) \right] \\ &= -\frac{i}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_n + ia_n)^2}{2z} \right) \frac{\xi_m + ia_m}{2z} E(\xi, a, z).\end{aligned}$$

$\widehat{x_m^4 f}$ ,  $m = 1, \dots, d$ .

$$\begin{aligned}\widehat{x_m^4 f}(\xi) &= i\partial_{\xi_m} [\widehat{x_m^3 f}(\xi)] = i\partial_{\xi_m} \left[ -\frac{i}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 3(\xi_m + ia_m) - \frac{(\xi_m + ia_m)^3}{2z} \right) E(\xi, a, z) \right] \\ &= \frac{1}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ 3 - 3\frac{(\xi_m + ia_m)^2}{2z} + \left( 3(\xi_m + ia_m) - \frac{(\xi_m + ia_m)^3}{2z} \right) \left( -\frac{\xi_m + ia_m}{2z} \right) \right] E(\xi, a, z) \\ &= \frac{1}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left[ 3 - 6\frac{(\xi_m + ia_m)^2}{2z} + \frac{(\xi_m + ia_m)^4}{4z^2} \right] E(\xi, a, z).\end{aligned}$$

$\widehat{x_m^2 x_n^2 f}$ ,  $m = 1, \dots, d$ ,  $n \neq m$ .

$$\begin{aligned}\widehat{x_m^2 x_n^2 f}(\xi) &= i\partial_{\xi_m} (\widehat{x_m x_n^2 f})_n = i\partial_{\xi_m} \left[ -\frac{i}{2z} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_n + ia_n)^2}{2z} \right) \frac{\xi_m + ia_m}{2z} E(\xi, a, z) \right] \\ &= \frac{1}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_n + ia_n)^2}{2z} \right) \partial_{\xi_m} [(\xi_m + ia_m) E(\xi, a, z)] \\ &= \frac{1}{4z^2} \left( \frac{\pi}{z} \right)^{\frac{d}{2}} \left( 1 - \frac{(\xi_n + ia_n)^2}{2z} \right) \left( 1 - \frac{(\xi_m + ia_m)^2}{2z} \right) E(\xi, a, z).\end{aligned}$$

□

## Appendix C Miscellaneous computations

We provide in this section some miscellaneous computations, which hold in dimension  $d = 2$  as long as  $v_j(s_j, y_j) = e^{-\frac{|y_j|^2}{2}}$ ,  $j = 1, \dots, N$ .

### C.1 Conservative quantities in dimension $d = 2$

We give the explicit expressions for the conservative quantities involved in Lemma 2.2, in the two-dimensional case.

The  $\mathbb{L}^2$  norm of a sum of  $N$  bubbles is given by

$$\|u\|_{\mathbb{L}^2}^2 = \sum_{k,l=1}^N \frac{A_k A_l}{L_k L_l} \langle b_{k,1}, b_{l,1} \rangle.$$

The energy of a sum of bubbles is given by

$$E_{\mu,\lambda} = \frac{\mu}{2} \langle -\Delta u + |x|^2 u, u \rangle + \frac{\lambda}{4} \langle |u|^2 u, u \rangle = E_{\mu,0} + E_{0,\lambda} = \mu E_{1,0} + \lambda E_{0,1}.$$

We have

$$2E_{1,0} = \langle Hu, u \rangle = \langle -\Delta u, u \rangle + \langle |x|^2 u, u \rangle = \sum_{j,k=1}^N \langle \nabla_x u_j, \nabla_x u_k \rangle + \sum_{j,k=1}^N \langle |x|^2 u_j, u_k \rangle.$$

Furthermore,

$$\begin{aligned} \langle \nabla_x u_j, \nabla_x u_k \rangle &= \frac{A_j A_k}{L_j L_k} \left\langle \left( i\beta_j - \frac{2 + iB_j}{2L_j} y_j \right) b_{j,1}, \left( i\beta_k - \frac{2 + iB_k}{2L_k} y_k \right) b_{k,1} \right\rangle \\ &= \frac{A_j A_k}{L_j L_k} \left\{ \beta_j \cdot \beta_k \langle b_{j,1}, b_{k,1} \rangle + i \frac{2 + iB_j}{2L_j} \beta_k \cdot \left( \langle b_{j,2}, b_{k,1} \rangle \right) \right. \\ &\quad \left. - i \frac{2 - iB_k}{2L_k} \beta_j \cdot \left( \langle b_{j,1}, b_{k,2} \rangle \right) \right. \\ &\quad \left. + \frac{2 + iB_j}{2L_j} \frac{2 - iB_k}{2L_k} \left( \langle b_{j,2}, b_{k,2} \rangle + \langle b_{j,3}, b_{k,3} \rangle \right) \right\}, \end{aligned}$$

and

$$\begin{aligned} \langle |x|^2 u_j, u_k \rangle &= \frac{A_j A_k}{L_j L_k} \left\langle \left( L_j^2 |y_j|^2 + 2L_j y_j \cdot X_j + |X_j|^2 \right) b_{j,1}, b_{k,1} \right\rangle \\ &= \frac{A_j A_k}{L_j L_k} \left\{ L_j^2 \langle b_{j,4}, b_{k,1} \rangle + 2L_j X_j \cdot \left( \begin{array}{c} \langle b_{j,2}, b_{k,1} \rangle \\ \langle b_{j,3}, b_{k,1} \rangle \end{array} \right) + |X_j|^2 \langle b_{j,1}, b_{k,1} \rangle \right\}. \end{aligned}$$

We also have

$$E_{0,1} = \langle u|u|^2, u \rangle = \sum_{j=1}^N \frac{A_j}{L_j} \langle u|u|^2, b_{j,1} \rangle.$$

We now proceed to computing the momentum, given by

$$M_{\mu,\lambda} = \left( E_{\mu,\lambda} - \mu \|xu\|_{\mathbb{L}^2}^2 \right)^2 + \mu^2 \left( \Im \int x \cdot \nabla u \bar{u} \right)^2.$$

We know how to compute  $E_{\mu,\lambda}$  from previously, as well as  $\|xu\|_{\mathbb{L}^2}^2 = \langle |x|^2 u, u \rangle$ . It only remains to compute

$$\begin{aligned} \int x \cdot \nabla u \bar{u} &= \sum_{j,k=1}^N \frac{A_j A_k}{L_j L_k} \left\langle (L_j y_j + X_j) \cdot \left( i\beta_j - \frac{2 + iB_j}{2L_j} y_j \right) b_{j,1}, b_{k,1} \right\rangle \\ &= \sum_{j,k=1}^N \frac{A_j A_k}{L_j L_k} \left\{ iL_j \beta_j \cdot \left( \begin{array}{c} \langle b_{j,2}, b_{k,1} \rangle \\ \langle b_{j,3}, b_{k,1} \rangle \end{array} \right) - \frac{2 + iB_j}{2} \langle b_{j,4}, b_{k,1} \rangle \right. \\ &\quad \left. + i\beta_j \cdot X_j \langle b_{j,1}, b_{k,1} \rangle - \frac{2 + iB_j}{2L_j} X_j \cdot \left( \begin{array}{c} \langle b_{j,2}, b_{k,1} \rangle \\ \langle b_{j,3}, b_{k,1} \rangle \end{array} \right) \right\}. \end{aligned}$$

Note that all the inner products involved have already been computed when creating the DFMP matrix.

## References

- [AB21] Paul Alphonse and Joackim Bernier. Polar decomposition of semigroups generated by non-selfadjoint quadratic differential operators and regularizing effects, December 2021.
- [ABB13] Xavier Antoine, Weizhu Bao, and Christophe Besse. Computational methods for the dynamics of the nonlinear Schrödinger/Gross-Pitaevskii equations. *Computer Physics Communications*, 184(12):2621–2633, December 2013.
- [AKLP22] L. Adamowicz, S. Kvaal, C. Lasser, and T. B. Pedersen. Laser-induced dynamic alignment of the HD molecule without the Born–Oppenheimer approximation. *The Journal of Chemical Physics*, 157(14):144302, October 2022.
- [BCL21] Joackim Bernier, Nicolas Crouseilles, and Yingzhe Li. Exact Splitting Methods for Kinetic and Schrödinger Equations. *Journal of Scientific Computing*, 86(1):10, January 2021.
- [Ber20] Joackim Bernier. Exact splitting methods for semigroups generated by inhomogeneous quadratic differential operators, November 2020.
- [BJM03] Weizhu Bao, Dieter Jaksch, and Peter A. Markowich. Numerical solution of the Gross–Pitaevskii equation for Bose–Einstein condensation. *Journal of Computational Physics*, 187(1):318–342, May 2003.
- [BLKVL88] J. Broeckhove, L. Lathouwers, E. Kesteloot, and P. Van Leuven. On the equivalence of time-dependent variational principles. *Chemical Physics Letters*, 149(5-6):547–550, September 1988.
- [Car21] Rémi Carles. *Semi-Classical Analysis for Nonlinear Schrödinger Equations: WKB Analysis, Focal Points, Coherent States*. World Scientific, New Jersey, 2nd edition edition, 2021.
- [CCFM17] Fernando Casas, Nicolas Crouseilles, Erwan Faou, and Michel Mehrenberger. High-order Hamiltonian splitting for the Vlasov–Poisson equations. *Numerische Mathematik*, 135(3):769–801, March 2017.
- [CCP+00] M. M. Cerimele, M. L. Chiofalo, F. Pistella, S. Succi, and M. P. Tosi. Numerical solution of the Gross-Pitaevskii equation using an explicit finite-difference scheme: An application to trapped Bose-Einstein condensates. *Physical Review E*, 62(1):1382–1389, July 2000.
- [CK90] Rob D. Coalson and Martin Karplus. Multidimensional variational Gaussian wave packet dynamics with application to photodissociation spectroscopy. *The Journal of Chemical Physics*, 93(6):3919–3930, September 1990.
- [Dir30] P. A. M. Dirac. Note on Exchange Phenomena in the Thomas Atom. *Mathematical Proceedings of the Cambridge Philosophical Society*, 26(3):376–385, July 1930.



- [Fao12] Erwan Faou. *Geometric Numerical Integration and Schrödinger Equations*. Zurich Lectures in Advanced Mathematics. European Mathematical Society, Zürich, Switzerland, 2012.
- [For96] Bengt Fornberg. *A Practical Guide to Pseudospectral Methods*. Number 1 in Cambridge Monographs on Applied and Computational Mathematics. Cambridge University Press, Cambridge ; New York, 1996.
- [FR20] Erwan Faou and Pierre Raphael. On weakly turbulent solutions to the perturbed linear Harmonic oscillator. *arXiv:2006.08206 [math]*, June 2020.
- [Fre34] Jakov Frenkel. *Wave Mechanics - Advanced General Theory*. Oxford University Press, 1st edition, 1934.
- [GLPR18] Patrick Gérard, Enno Lenzmann, Oana Pocovnicu, and Pierre Raphaël. A Two-Soliton with Transient Turbulent Regime for the Cubic Half-Wave Equation on the Real Line. *Annals of PDE*, 4(1):7, June 2018.
- [Hel76] Eric J. Heller. Time dependent variational approach to semiclassical dynamics. *The Journal of Chemical Physics*, 64(1):63–73, January 1976.
- [HH87] Daniel Huber and Eric J. Heller. Generalized Gaussian wave packet dynamics. *The Journal of Chemical Physics*, 87(9):5302–5311, November 1987.
- [HLW06] Ernst Hairer, Christian Lubich, and Gerhard Wanner. *Geometric Numerical Integration: Structure-Preserving Algorithms for Ordinary Differential Equations*. Number 31 in Springer Series in Computational Mathematics. Springer, Berlin ; New York, 2nd ed edition, 2006.
- [JMS11] Shi Jin, Peter Markowich, and Christof Sparber. Mathematical and computational methods for semiclassical Schrödinger equations. *Acta Numerica*, 20:121–209, May 2011.
- [KV13] R Killip and M Visan. Nonlinear Schrödinger Equations at Critical Regularity. 2013.
- [LL20] Caroline Lasser and Christian Lubich. Computing quantum dynamics in the semiclassical regime. *Acta Numerica*, 29:229–401, May 2020.
- [McL64] A.D. McLachlan. A variational solution of the time-dependent Schrodinger equation. *Molecular Physics*, 8(1):39–44, January 1964.
- [MQ02] Robert I. McLachlan and G. Reinout W. Quispel. Splitting methods. *Acta Numerica*, 11:341–434, January 2002.
- [MR05] Frank Merle and Pierre Raphaël. The blow-up dynamic and upper bound on the blow-up rate for critical nonlinear Schrödinger equation. *Annals of Mathematics*, 161(1):157–222, January 2005.
- [MR18] Yvan Martel and Pierre Raphaël. Strongly Interacting Blow-up Bubbles for the mass critical NLS. 2018.

- [MRRS20] Frank Merle, Pierre Raphaël, Igor Rodnianski, and Jeremie Szeftel. ON THE IMPLOSION OF A THREE DIMENSIONAL COMPRESSIBLE FLUID. page 87, 2020.
- [QY10] Jianliang Qian and Lexing Ying. Fast Gaussian wavepacket transforms and Gaussian beams for the Schrödinger equation. *Journal of Computational Physics*, 229(20):7848–7873, October 2010.
- [Tao06] Terence Tao. *Nonlinear Dispersive Equations*, volume 106 of *CBMS Regional Conference Series in Mathematics*. American Mathematical Society, Providence, Rhode Island, June 2006.
- [TTK22] Tsogbayar Tsednee, Banzragch Tsednee, and Tsookhuu Khinayat. Numerical solution to the time-dependent Gross-Pitaevskii equation, November 2022.
- [Wan17] Huimin Wang. Numerical simulation for the Gross-Pitaevskii equation based on the lattice Boltzmann method. *Advances in Space Research*, 60(6):1261–1270, September 2017.
- [WRB04] G. A. Worth, M. A. Robb, and I. Burghardt. A novel algorithm for non-adiabatic direct dynamics using variational Gaussian wavepackets. *Faraday Discussions*, 127:307, 2004.