



HAL
open science

A Fresh Approach to Learning Register Automata

Benedikt Bollig, Peter Habermehl, Martin Leucker, Benjamin Monmege

► **To cite this version:**

Benedikt Bollig, Peter Habermehl, Martin Leucker, Benjamin Monmege. A Fresh Approach to Learning Register Automata. 2012. hal-00743240v1

HAL Id: hal-00743240

<https://hal.science/hal-00743240v1>

Submitted on 18 Oct 2012 (v1), last revised 11 Jun 2013 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A Fresh Approach to Learning Register Automata^{*}

Benedikt Bollig¹, Peter Habermehl², Martin Leucker³, and Benjamin Monmege¹

¹ LSV, ENS Cachan & CNRS, France

² Univ Paris Diderot, Sorbonne Paris Cité, LIAFA, CNRS, France

³ ISP, University of Lübeck, Germany

Abstract. This paper provides an Angluin-style learning algorithm for a class of register automata supporting the notion of *fresh* data values. More specifically, we introduce *session automata* which are well suited for modeling protocols in which sessions using fresh values are of major interest, like in security protocols or ad-hoc networks. We show that session automata (i) have an expressiveness partly extending, partly reducing that of register automata, (ii) admit a symbolic regular representation, and (iii) have a decidable equivalence problem. We use these results to establish a learning algorithm that can infer inherently non-deterministic session automata. Moreover, in the case of deterministic automata, it has a better complexity wrt. membership queries than existing learning algorithms for register automata. We strengthen the importance of our automaton model by its characterization in monadic second-order logic.

1 Introduction

Learning automata deals with the inference of automata based on some partial information, for example samples, which are words that either belong to their accepted language or not. A popular framework is that of active learning defined by Angluin [2] in which a learner may consult a teacher for so-called membership and equivalence queries to eventually infer the automaton in question. Learning automata has a lot of applications in computer science. Notable examples are the use in model checking [12] and testing [3]. See [18] for an overview.

While active learning of regular languages is meanwhile well understood and is supported by freely available libraries such as `learnlib` [19] and `libalf` [8], extensions beyond plain regular languages are still an area of active research. Recently, automata dealing with potentially infinite data as first class citizens have been studied. Seminal works in this area are that of [1, 15] and [14]. While the first two use abstraction and refinement techniques to cope with infinite data, the second approach learns a sub-class of register automata.

In this paper, we follow the work on learning register automata. However, we study a different model than [14], having the ability to require that input data is *fresh* in the sense that it has not been seen so far. This feature has been

^{*} This work is partially supported by EGIDE/DAAD-Procope (LeMon).

proposed in [24] in the context of semantics of programming languages, as, for example, fresh names are needed to model object creation in object-oriented languages. Moreover, fresh data values are important ingredients in modeling security protocols which often make use of so-called fresh nonces to achieve their security assertions [17]. Finally, fresh names are also important in the field of network protocols and are one of the key ingredients of the π -calculus [20].

In general, the equivalence problem of register automata is undecidable (even without freshness). This limits their applicability in active learning, as equivalence queries cannot be implemented (correctly and completely). Therefore, we restrict the studied automaton model to either store fresh data values or read data values from registers. In the terminology of [24], we retain global freshness, while local freshness is discarded. We call our model *session automata*. They are well-suited whenever fresh values are important for a finite period, for which they will be stored in one of the registers. Session automata correspond to the model from [7] without stacks. They are incomparable with the model from [14].

Session automata accept data words, i.e., words over an alphabet $\Sigma \times D$, where Σ is a finite set of labels and D an infinite set of data values. A data word can be mapped to a so-called symbolic word where we record for each different data value the register in which it was stored (when appearing for the first time) or from which it was read later. To each symbolic word we define a symbolic word in unique normal form representing the same data words by fixing a canonical way of storing data values in registers. Then, we show how to transform a session automaton into a unique canonical automaton that accepts the same data language. This canonical automaton can be seen as a classical finite-state automaton and, therefore, we can define an active learning algorithm for session automata in a natural way. In terms of the size of the canonical automaton, the number of membership and equivalence queries needed is polynomial (both in the number of states and in the number of registers). When the reference model are arbitrary (data) deterministic automata, the complexity is polynomial in the number of states and exponential in the number of registers.

Applicability of our framework in verification (e.g., compositional verification [10] and infinite state regular model checking [13]) is underpinned by the fact that session automata form a robust language class: While inclusion is undecidable for register automata [21], we show that it is decidable for session automata. In [7], model checking session automata was shown decidable wrt. a powerful monadic second-order logic with data-equality predicate (dMSO). Here, we also provide a natural fragment of dMSO that precisely captures session automata.

To summarize, we show that session automata (i) have a unique canonical form, (ii) have a decidable inclusion problem, (iii) enjoy a logical characterization, and (iv) can be learned via an active learning algorithm. Altogether, this provides a versatile learning framework for languages over infinite alphabets.

Outline. The paper is structured as follows. In Section 2 we introduce session automata. In Section 3 we present an active learning algorithm for them and in Section 4 we give some language theoretic properties of our model and a logical characterization. Missing proofs can be found in the appendix.

2 Data Words and Session Automata

2.1 Data Words, Sessions, and Symbolic Words

We let \mathbb{N} (respectively, $\mathbb{N}_{>0}$) be the set of natural numbers (respectively, non-zero natural numbers). For $n \in \mathbb{N}$, we let $[n]$ denote the set $\{1, \dots, n\}$. In the following, we fix a non-empty finite alphabet Σ of *labels* and an infinite set D of *data values*. In examples, we usually use $D = \mathbb{N}$. A *data word* is a sequence of elements of $\Sigma \times D$, i.e., an element from $(\Sigma \times D)^*$. An example data word over $\Sigma = \{a, b\}$ and $D = \mathbb{N}$ is $(a, 4)(b, 2)(b, 4)$.

Our automata will not be able to distinguish between data words that are equivalent up to permutation of data values. Intuitively, this corresponds to saying that data values can only be compared wrt. equality. When two data words w_1 and w_2 are equivalent in that sense, we write $w_1 \approx w_2$, e.g. $(a, 4)(b, 2)(b, 4) \approx (a, 2)(b, 5)(b, 2)$. The equivalence class of a data word w wrt. \approx is written $[w]_{\approx}$.

We can view a data word as being composed of (not necessarily disjoint) sessions, each session determining the scope in which a given data value is used. Let $w = (a_1, d_1) \cdots (a_n, d_n) \in (\Sigma \times D)^*$ be a data word. We let $Fresh(w) \stackrel{\text{def}}{=} \{i \in [n] \mid d_i \neq d_j \text{ for all } j \in \{1, \dots, i-1\}\}$ be the set of positions of w where a data value occurs for the first time. Accordingly, we let $Last(w) \stackrel{\text{def}}{=} \{i \in [n] \mid d_i \neq d_j \text{ for all } j \in \{i+1, \dots, n\}\}$. A set $S \subseteq [n]$ is a *session* of w if there are $i \in Fresh(w)$ and $j \in Last(w)$ such that $S = \{i, \dots, j\}$ and $d_i = d_j$. For $i \in [n]$, let $Session(i)$ denote the unique session S with $d_{\min(S)} = d_i$. Thus $Session(i)$ is the scope in which d_i is used. Note that $Fresh(w) = \{\min(Session(i)) \mid i \in [n]\}$. For $k \geq 1$, we say that w is *k-bounded* if every position of w belongs to at most k sessions. A language L is *k-bounded* if every word in L is so. Note that the set of all data words is not *k-bounded*, for any k .

Figure 1 illustrates a data word w with four sessions. It is 2-bounded, as no position shares more than 2 sessions. We have $Session(7) = \{4, \dots, 9\}$ and $Fresh(w) = \{1, 2, 4, 6\}$.

Intuitively, k is the number of resources that will be needed to execute a k -bounded word. Speaking in terms of automata, a resource is a register that can store a data value. Our automata will be able to write a fresh data value into some register r , denoted $f(r)$, or reuse a data value that has already been stored in r , denoted $r(r)$. In other words, automata will work over (a finite subset of) the alphabet $\Sigma \times \Gamma$ where $\Gamma \stackrel{\text{def}}{=} \{f(r), r(r) \mid r \in \mathbb{N}_{>0}\}$. A word over $\Sigma \times \Gamma$ is called a *symbolic word*. Given a symbolic word $u = (a_1, t_1) \cdots (a_n, t_n)$ and a position $i \in [n]$, $reg(i)$ denotes the register r that is used at i , i.e., such that $t_i \in \{f(r), r(r)\}$. Similarly, we define the type $type(i) \in \{f, r\}$ of i .

1	2	3	4	5	6	7	8	9
a	b	a	a	c	c	b	c	c
4	2	4	3	2	1	3	1	3

Fig. 1. A data word

1	2	3	4	5	6	7	8	9
a	b	a	a	c	c	b	c	c
f(1)	f(2)	r(1)	f(1)	r(2)	f(2)	r(1)	r(2)	r(1)

Fig. 2. A symbolic word




Fig. 3. A simple session automaton

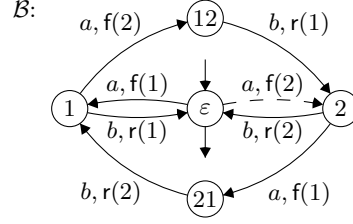


Fig. 4. A client-server system

Naturally, a register has to be initialized before it can be used. So, we call u *well formed* if, for all $j \in [n]$ with $\text{type}(j) = r$, there is $i \leq j$ such that $t_i = f(\text{reg}(j))$. Let WF denote the set of well formed words. A well formed symbolic word is illustrated in Figure 2. We have $\text{type}(5) = r$ and $\text{reg}(5) = 2$.

A symbolic word $u = (a_1, t_1) \cdots (a_n, t_n) \in \text{WF}$ generates a set of data words. Intuitively, a position i with $t_i = f(r)$ opens a new session, writing a fresh data value in register r . The same data value is reused at positions $j > i$ with $t_j = r(r)$, unless r is reinitialized at some position i' with $i < i' < j$. Formally, $w \in (\Sigma \times D)^*$ is a *concretization* of u if it is of the form $(a_1, d_1) \cdots (a_n, d_n)$ such that, for all $i, j \in [n]$ with $i \leq j$, (i) $i \in \text{Fresh}(w)$ iff $\text{type}(i) = f$, and (ii) $d_i = d_j$ iff both $\text{reg}(i) = \text{reg}(j)$ and there is no position i' with $i < i' \leq j$ such that $t_{i'} = f(\text{reg}(i))$. For example, the data word from Figure 1 is a concretization of the symbolic word from Figure 2. By $\gamma(u)$, we denote the set of concretizations of a well formed word u . We extend γ to sets $L \subseteq (\Sigma \times \Gamma)^*$ and let $\gamma(L) \stackrel{\text{def}}{=} \{\gamma(u) \mid u \in L \cap \text{WF}\}$.

Remark 1. Let us state some simple properties of γ . It is easily seen that $w \in \gamma(u)$ implies $\gamma(u) = [w]_{\approx}$. Let $k \geq 1$. If $u \in \text{WF} \cap (\Sigma \times \Gamma_k)^*$ where $\Gamma_k \stackrel{\text{def}}{=} \{f(r), r(r) \mid r \in [k]\}$, then all data words in $\gamma(u)$ are k -bounded. Moreover, $\gamma((\Sigma \times \Gamma_k)^*)$ is the set of all k -bounded data words.

2.2 Session Automata

As suggested, we consider automata over the alphabet $\Sigma \times \Gamma$ to process data words. Actually, they are equipped with a *finite* number $k \geq 1$ of registers so that we rather deal with finite automata over $\Sigma \times \Gamma_k$.

Definition 1. Let $k \geq 1$. A k -register session automaton (or just session automaton) over Σ and D is a finite automaton over $\Sigma \times \Gamma_k$, i.e., a tuple $\mathcal{A} = (Q, q_0, F, \delta)$ where Q is the finite set of states, $q_0 \in Q$ the initial state, $F \subseteq Q$ the set of accepting states, and $\delta : Q \times (\Sigma \times \Gamma_k) \rightarrow 2^Q$ the transition function.

The *symbolic language* $L_{\text{symp}}(\mathcal{A}) \subseteq (\Sigma \times \Gamma_k)^*$ of \mathcal{A} is defined in the usual way, considering \mathcal{A} as a finite automaton. Its (*data*) *language* is $L_{\text{data}}(\mathcal{A}) \stackrel{\text{def}}{=} \gamma(L_{\text{symp}}(\mathcal{A}))$. By Remark 1, $L_{\text{data}}(\mathcal{A})$ is closed under \approx . Moreover, it is k -bounded, which motivates the naming of our automata.

Example 1. Consider the 2-register session automaton \mathcal{A} from Figure 3. It recognizes the set of all 2-bounded data words over $\Sigma = \{a\}$.

Example 2. The 2-register session automaton \mathcal{B} over $\Sigma = \{a, b\}$ from Figure 4 represents a client-server system. A server can receive requests on two channels of capacity 1, represented by the two registers. Requests are acknowledged in the order in which they are received. When the automaton performs $(a, f(r))$, a client gets a unique transaction key, which is stored in r . Later, the request is acknowledged performing $(b, r(r))$. E.g., $(a, 8)(a, 4)(b, 8)(a, 3)(b, 4)(b, 3) \in L_{data}(\mathcal{B})$.

Session automata come with two natural notions of determinism.

- We call $\mathcal{A} = (Q, q_0, F, \delta)$ *symbolically deterministic* if $|\delta(q, (a, t))| \leq 1$ for all $(a, t) \in \Sigma \times \Gamma_k$ so that δ can be seen as a partial function $Q \times (\Sigma \times \Gamma_k) \rightarrow Q$.
- We call \mathcal{A} *data deterministic* if it is symbolically deterministic and, for all $q \in Q$, $a \in \Sigma$, and $r_1, r_2 \in [k]$ with $r_1 \neq r_2$, we have that $\delta(q, (a, f(r_1))) \neq \emptyset$ implies $\delta(q, (a, f(r_2))) = \emptyset$. Intuitively, given a data word as input, the automaton is data deterministic if, in each state, given a pair letter/data value, there is at most one fireable transition.

While “data deterministic” implies “symbolically deterministic”, the converse is not true. For example, the data automata \mathcal{A} and \mathcal{B} from Figures 3 and 4 are symbolically deterministic but not data deterministic. However, the automaton \mathcal{B}' with the dashed transition from state ε to state 2 removed is data deterministic.

Note that we allow inherently data non-deterministic automata in our framework, while [14] restricts to deterministic ones.

Theorem 1. *Session automata are strictly more expressive than data deterministic session automata.*

Session automata are expressively incomparable with the various register automata models considered in [16, 21, 23, 9, 14]. In particular, the languages from Examples 1 and 2 are not recognizable by the model for which a learning algorithm exists [14]. On the other hand, our model cannot recognize “the set of all data words” or “every consecutive data values are distinct”. Our automata are subsumed by fresh-register automata [24], class memory automata [5], and data automata [6]. However, no algorithm for the inference of the latter is known. Note that we consider one-dimensional data words, unlike [14] where labels have an arity and can carry several data values. We chose our restriction for ease of presentation. Following [7], our automata can be easily extended to multi-dimensional data words. This also holds for the learning algorithm.

2.3 Canonical Session Automata

Our goal will be to infer the data language of a session automaton \mathcal{A} in terms of a canonical session automaton \mathcal{A}^C , which we develop in the following.

As a first step, we associate with $w = (a_1, d_1) \cdots (a_n, d_n) \in (\Sigma \times D)^*$ a *symbolic normal form* $snf(w) \in \text{WF}$ such that $w \in \gamma(snf(w))$, based on the

idea that data values are always stored in the first register whose data value is not needed anymore. To do so, we determine $t_1, \dots, t_n \in \Gamma$ and set $snf(w) = (a_1, t_1) \cdots (a_n, t_n)$. Let S_1, \dots, S_m be the unique enumeration of all sessions of w such that $\min(S_1) < \cdots < \min(S_m)$. We define $\tau : Fresh(w) \rightarrow \mathbb{N}_{>0}$ inductively by $\tau(i) = \min(FreeReg(i))$ where $FreeReg(i) \stackrel{\text{def}}{=} \mathbb{N}_{>0} \setminus \{\tau(i') \mid i' \in Fresh(w) \text{ such that } i' < i \text{ and } i \in Session(i')\}$. With this, we set, for all $i \in [n]$,

$$t_i = \begin{cases} f(\tau(i)) & \text{if } i \in Fresh(w) \\ r(\tau(\min(Session(i)))) & \text{otherwise.} \end{cases}$$

One readily verifies that $snf(w) = (a_1, t_1) \cdots (a_n, t_n)$ is well formed and that properties (i) and (ii) in the definition of a concretization hold. This proves $w \in \gamma(snf(w))$. For example, Figure 2 shows the symbolic normal form of the data word from Figure 1. The mapping snf carries over to languages in the expected manner.

Remark 2. Let $w \in (\Sigma \times D)^*$. Then, w is k -bounded iff $snf(w) \in (\Sigma \times \Gamma_k)^*$. Moreover, for all data languages L , we have $L = \gamma(snf(L))$. Note that $w \approx w'$ implies $snf(w) = snf(w')$, which validates our choice of denomination for snf . Indeed, two equivalent data words w and w' have the same set of sessions (in particular, $Fresh(w) = Fresh(w')$) and the same Σ -labels. Thus, the mappings τ used to define $snf(w)$ and $snf(w')$ are the same and $snf(w) = snf(w')$.

Example 3. (continued from Example 2) We consider again \mathcal{B} of Figure 4. Let \mathcal{B}' be the automaton that we obtain from \mathcal{B} when we remove the dashed transition. We have $L_{data}(\mathcal{B}) = L_{data}(\mathcal{B}')$, but $snf(L_{data}(\mathcal{B})) = L_{symb}(\mathcal{B}') \subsetneq L_{symb}(\mathcal{B})$.

Example 4. Let us consider the language $NF_k \stackrel{\text{def}}{=} snf(\gamma(\Sigma \times \Gamma_k)^*)$ consisting of the symbolic normal forms of all k -bounded data words. We explain how to construct a symbolically deterministic k -register session automaton \mathcal{A} such that $L_{symb}(\mathcal{A}) = NF_k$. Its state space is $Q = (\{0\} \cup [k]) \times 2^{[k]}$, consisting of (i) the greatest register already initialized (indeed we will only use a register r if every register $r' < r$ is already used), (ii) a subset P of registers that we promise to reuse again before resetting their value. The initial state of \mathcal{A} is $(0, \emptyset)$, the set of accepting states is $(\{0\} \cup [k]) \times \{\emptyset\}$. We now describe the set of transitions. For every $a \in \Sigma$, $i \in \{0\} \cup [k]$, $P \subseteq [k]$, and $r \in [k]$:

$$\delta((i, P), (a, r(r))) = \begin{cases} \{(i, P \setminus \{r\})\} & \text{if } r \leq i \\ \emptyset & \text{otherwise} \end{cases}$$

$$\delta((i, P), (a, f(r))) = \begin{cases} \{(\max(i, r), P \cup [r-1])\} & \text{if } r-1 \leq i \wedge r \notin P \\ \emptyset & \text{otherwise} \end{cases}$$

Figure 5 depicts the 2-register session automaton for NF_2 .

The example shows that regularity of the symbolic language $(\Sigma \times \Gamma_k)^*$ is preserved under $snf(\gamma(\cdot))$. We now prove that this is the case for every regular language over $\Sigma \times \Gamma_k$. The proof will actually use the special case of NF_k .

Lemma 1. *Let L be a regular language over $\Sigma \times \Gamma_k$. Then, $snf(\gamma(L))$ is a regular language over $\Sigma \times \Gamma_k$.*

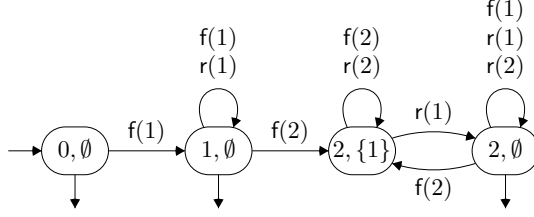


Fig. 5. A 2-register session automaton recognizing NF_2

Proof. Let $L \subseteq (\Sigma \times \Gamma_k)^*$ be regular. Consider the language $\tilde{L} = \{u \in \text{WF} \cap (\Sigma \times \Gamma_k)^* \mid \text{there is } u' \in L \text{ such that } \gamma(u) = \gamma(u')\}$, i.e., the set of well formed symbolic words having the same concretizations as some word from L . We can easily show that $\text{snf}(\gamma(L)) = \text{NF}_k \cap \tilde{L}$. Indeed, if $u \in \text{snf}(\gamma(L))$, then there are $u' \in L$ and $w \in \gamma(u')$ such that $u = \text{snf}(w)$. Necessarily, w is k -bounded. Hence, $u \in \text{NF}_k$. Moreover, we have $[w]_{\approx} = \gamma(u')$ (by Remark 1) and $w \in \gamma(\text{snf}(w)) = \gamma(u)$ implying also $[w]_{\approx} = \gamma(u)$. Finally, we obtain $\gamma(u) = \gamma(u')$. Reciprocally, if $u \in \text{NF}_k \cap \tilde{L}$, then there is $u' \in L$ such that $\gamma(u) = \gamma(u')$. Hence, starting from any word w in $\gamma(u)$, we have $u = \text{snf}(w)$ (by uniqueness of the symbolic normal form stated in Remark 2) and $w \in \gamma(u') \subseteq \gamma(L)$, so that $u \in \text{snf}(\gamma(L))$.

We know from Example 4 that NF_k is regular. It remains to be shown that \tilde{L} is regular. To do so, let $\mathcal{A} = (Q, q_0, F, \delta)$ be a k -register session automaton such that $L_{\text{symb}}(\mathcal{A}) = L$. We construct a k -register session automaton $\tilde{\mathcal{A}} = (Q \times \text{Inj}(k), (q_0, 0), F \times \text{Inj}(k), \tilde{\delta})$ recognizing the symbolic language \tilde{L} . Hereby, $\text{Inj}(k)$ is the set of partial injective mappings from $[k]$ to $[k]$, and $0 \in \text{Inj}(k)$ denotes the mapping with empty domain. These partial mappings are used to remember the correspondence between old register indices and new ones, so they may be understood as a set of constraints. For example, the mapping $(2 \mapsto 1, 1 \mapsto 3)$ stands for “old register 2 henceforth refers to 1, and old register 1 henceforth refers to 3”. Any subset of these constraints forms always a *valid* partial injective mapping. In the following, such a subset is called a sub-mapping. For example, $\pi = (1 \mapsto 3)$ is a sub-mapping of the previous one; it can then be extended with the new constraint $2 \mapsto 2$, that we denote $\pi[2 \mapsto 2]$. We describe now the transition relation of $\tilde{\mathcal{A}}$:

$$\begin{aligned} \tilde{\delta}((q, \pi), (a, r(\pi(r)))) &= \{(q', \pi) \mid q' \in \delta(q, (a, r(r)))\} \\ \tilde{\delta}((q, \pi), (a, f(r'))) &= \{(q', \pi') \mid q' \in \delta(q, (a, f(r))) \wedge \pi' = \pi''[r \mapsto r'] \\ &\quad \text{with } \pi'' \text{ maximal sub-mapping of } \pi \text{ s.t. } \pi''[r \mapsto r'] \text{ injective}\} \end{aligned}$$

We simulate r -transitions simply using the current mapping π . For f -transitions, we update π , recording the new permutation of the registers. One can indeed show that $L_{\text{symb}}(\tilde{\mathcal{A}}) = \tilde{L}$.

Building the product of the automaton recognizing NF_k and the automaton $\tilde{\mathcal{A}}$, we obtain a k -register session automaton recognizing $\text{snf}(\gamma(L))$. Its number of states is bounded above by $O(|Q| \times k! \times (k+1) \times 2^k)$ (as the number of partial injective mappings in $\text{Inj}(k)$ is bounded above by $O(k!)$). \square

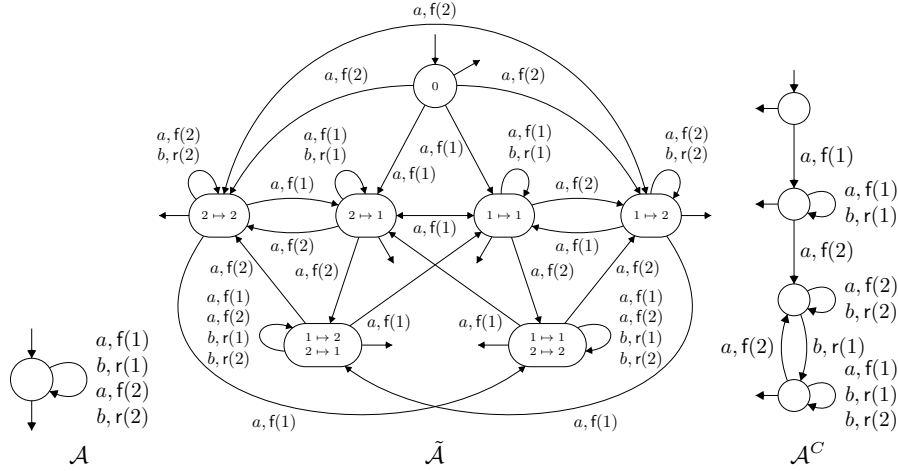


Fig. 6. A 2-register automaton \mathcal{A} , the automaton $\tilde{\mathcal{A}}$, and the canonical automaton \mathcal{A}^C

In other words, for every k -register session automaton \mathcal{A} , there is a k -register session automaton \mathcal{A}' such that $L_{\text{symp}}(\mathcal{A}') = \text{snf}(L_{\text{data}}(\mathcal{A}))$ and, therefore, $L_{\text{data}}(\mathcal{A}') = L_{\text{data}}(\mathcal{A})$. We denote by \mathcal{A}^C the minimal symbolically deterministic automaton \mathcal{A}' satisfying $L_{\text{symp}}(\mathcal{A}') = \text{snf}(L_{\text{data}}(\mathcal{A}))$. Note that the number k' of registers effectively used in \mathcal{A}^C may be smaller than k , and we actually consider \mathcal{A}^C to be a k' -register session automaton.

From the constructions of the automata for NF_k and \tilde{L} (proof of Lemma 1), we can infer upper bounds on the size of the canonical session automaton.

Theorem 2. *Let $\mathcal{A} = (Q, q_0, F, \delta)$ be a k -register session automaton. Then, \mathcal{A}^C has at most $2^{O(|Q| \times (k+1)! \times 2^k)}$ states. If \mathcal{A} is data deterministic, then \mathcal{A}^C has at most $O(|Q| \times (k+1)! \times 2^k)$ states. Finally, \mathcal{A}^C uses at most k registers.*

Example 5. Examples of \mathcal{A} and $\tilde{\mathcal{A}}$, as defined in the previous proof, are given in Figure 6. The figure also depicts the canonical automaton \mathcal{A}^C associated with \mathcal{A} , obtained by determinizing and minimizing the product of both $\tilde{\mathcal{A}}$ and the deterministic automaton recognizing NF_2 (as given in Figure 5). Note that \mathcal{A}^C is symbolically deterministic and minimal.

3 Learning Session Automata

In this section, we introduce an active learning algorithm for session automata. In the usual active learning setting (as introduced by Angluin [2]), a *learner* interacts with a so-called minimally adequate *teacher* (MAT), an oracle which can answer *membership* and *equivalence queries*. In our case, the learner is given the task to infer the data language $L_{\text{data}}(\mathcal{A})$ defined by a given session automaton \mathcal{A} . We suppose here that the learner knows the session automaton or any other device accepting $L_{\text{data}}(\mathcal{A})$. In practice, this might not be the case — \mathcal{A} could

be a black box — and equivalence queries could be (approximately) answered, for example, by extensive testing. The learner can ask if a *data* word is accepted by \mathcal{A} or not. Furthermore it can ask equivalence queries which consist in giving an *hypothesis* session automaton to the teacher who either answers yes, if the hypothesis is equivalent to \mathcal{A} (i.e., both data languages are the same), or gives a data word which is a counterexample, i.e., either a data word which is accepted by the hypothesis automaton but should not or vice versa.

Given the data language $L_{data}(\mathcal{A})$ accepted by a session automaton \mathcal{A} over Σ and D , our learning algorithm will learn the canonical k -register session automaton \mathcal{A}^C , i.e., the minimal symbolically deterministic automaton recognizing the data language $L_{data}(\mathcal{A})$ and the regular language $L_{symb}(\mathcal{A}^C)$ over $\Sigma \times \Gamma_k$. Therefore one can consider that the learning target is the regular language $L_{symb}(\mathcal{A}^C)$ and use any active learning algorithm for regular languages. However, as the teacher answers only questions over data words, membership queries have to be adapted: since \mathcal{A}^C only accepts symbolic data words which are in normal form, a membership query for a given symbolic data word u not in normal form will be answered negatively (without consulting the teacher); otherwise, the teacher will be given one data word included in $\gamma(u)$ (all the answers on words of $\gamma(u)$ are the same). Notice that the number of registers needed to accept a data language is a priori not known. Thus the learning algorithm starts by trying to learn a 1-register session automaton and increases the number of registers as necessary.

Any active learning algorithm for regular languages may be adapted to our setting. Here we describe a variant of Rivest and Schapire's [22] algorithm which is itself a variant of Angluin's L^* algorithm [2]. An overview of learning algorithms for deterministic finite state automata can be found for example in [4].

The algorithm is based on the notion of *observation table* which contains the information accumulated by the learner during the learning process. An observation table over a given alphabet $\Sigma \times \Gamma_k$ is a triple $\mathcal{O} = (T, U, V)$ with U, V two sets of words over $\Sigma \times \Gamma_k$ such that $\varepsilon \in U, V$ and T a mapping $(U \cup U.(\Sigma \times \Gamma_k)) \times V \rightarrow \{+, -\}$. A table is partitioned into an upper part U and a lower part $U.(\Sigma \times \Gamma_k)$. We define for each $u \in U \cup U.(\Sigma \times \Gamma_k)$ a mapping $row(u): V \rightarrow \{+, -\}$ where $row(u)(v) = T(u, v)$. An observation table must satisfy the following property: for all $u, u' \in U$ such that $u \neq u'$ we have $row(u) \neq row(u')$, i.e., there exists a $v \in V$ such that $T(u, v) \neq T(u', v)$. This means that the rows of the upper part of the table are pairwise distinct. A table is *closed* if for all u' in $U.(\Sigma \times \Gamma_k)$ there exists a $u \in U$ such that $row(u) = row(u')$. From a closed table we can construct, as follows, a symbolically deterministic session automaton whose states correspond to the rows of the upper part of the table.

Definition 2. For a closed table $\mathcal{O} = (T, U, V)$ over a finite alphabet $\Sigma \times \Gamma_k$ we define a symbolically deterministic k -register session automaton $A_{\mathcal{O}} = (Q, q_0, F, \delta)$ over $\Sigma \times \Gamma_k$ by $Q = U$, $q_0 = \varepsilon$, $F = \{u \in Q \mid T(u, \varepsilon) = +\}$, and for all $u \in Q$ and $(a, t) \in \Sigma \times \Gamma_k$, $\delta(u, (a, t)) = u'$ if $row(u(a, t)) = row(u')$. Notice that this is well defined as the table is closed.

We now describe in detail our active learning algorithm for a given session automaton \mathcal{A} given in Table 1. It is based on a loop which repeatedly constructs

```

initialize  $k := 1$  and
 $\mathcal{O} := (T, U, V)$  by  $U = V = \{\varepsilon\}$  and  $T(u, \varepsilon)$  for all  $u \in U \cup U \cdot (\Sigma \times \Gamma_k)$  with membership queries
repeat
  while  $\mathcal{O}$  is not closed
    do
      find  $u \in U$  and  $(a, t) \in \Sigma \times \Gamma_k$  such that for all  $u \in U$ :  $row(u(a, t)) \neq row(u)$ 
      extend table to  $\mathcal{O} := (T', U \cup \{u(a, t)\}, V)$  by membership queries
    from  $\mathcal{O}$  construct the hypothesized automaton  $\mathcal{A}_{\mathcal{O}}$  (cf. Definition 2)
    if  $L_{data}(\mathcal{A}) = L_{data}(\mathcal{A}_{\mathcal{O}})$ 
      then equivalence test succeeds
    else get counterexample  $w \in (L_{data}(\mathcal{A}) \setminus L_{data}(\mathcal{A}_{\mathcal{O}})) \cup (L_{data}(\mathcal{A}_{\mathcal{O}}) \setminus L_{data}(\mathcal{A}))$ 
      find minimal  $k'$  such that  $snf(w) \in \Sigma \times \Gamma_{k'}$ 
      if  $k' > k$ 
        then set  $k := k'$ 
          extend table to  $\mathcal{O} := (T', U, V)$  over  $\Sigma \times \Gamma_k$  by membership queries
      if  $\mathcal{O}$  is closed /* is true if  $k' \leq k$  */
        then find a breakpoint where  $v$  is the distinguishing word
          extend table to  $\mathcal{O} := (T', U, V \cup \{v\})$  by membership queries
    until equivalence test succeeds
return  $\mathcal{A}_{\mathcal{O}}$ 

```

Table 1. The learning algorithm for a session automaton \mathcal{A}

a closed table using membership queries, builds the corresponding automaton and then asks an equivalence query. This is repeated until \mathcal{A} is learned. An important part of any active learning algorithm is the treatment of counterexamples provided by the teacher as an answer to an equivalence query. Suppose that for a given $\mathcal{A}_{\mathcal{O}}$ constructed from a closed table $\mathcal{O} = (T, U, V)$ the teacher answers by a counterexample data word w . Let $z = snf(w)$. If z uses more registers than available in the current alphabet, we extend the alphabet and then the table. If the obtained table is not closed, we restart from the beginning of the loop. Otherwise – and also if z does not use more registers – we use Rivest and Schapire’s [22] technique to extend the table by adding a suitable v to V making it non-closed. The technique is based on the notion of breakpoint. As z is a counterexample, (1) $z \in L_{symb}(\mathcal{A}_{\mathcal{O}}) \iff z \notin L_{symb}(\mathcal{A}^C)$. Let $z = z_1 \cdots z_m$. Then, for any i with $1 \leq i \leq m + 1$, let z be decomposed as $z = u_i v_i$, where $u_1 = v_{m+1} = \varepsilon$, $v_1 = u_{m+1} = z$ and the length of u_i is equal to $i - 1$ (we have also $z = u_i z_i v_{i+1}$ for all i s.t. $1 \leq i \leq m$). Let s_i be the state visited by z just before reading the i th letter, along the computation of z on $\mathcal{A}_{\mathcal{O}}$: i is a breakpoint if $s_i z_i v_{i+1} \in L_{symb}(\mathcal{A}_{\mathcal{O}}) \iff s_{i+1} v_{i+1} \notin L_{symb}(\mathcal{A}^C)$. Because of (1) such a break-point must exist and can be obtained with $O(\log(m))$ membership queries by a dichotomous search. The word v_i is called the distinguishing word. If V is extended by v_i the table is not closed anymore ($row(s_i)$ and $row(s_i z_i)$ are different). Now, the algorithm closes the table again, then asks another equivalence query and so forth until termination. At each iteration of the loop the number of rows (each of those correspond to a state in the automaton \mathcal{A}^C) is increased by at least one. Notice that the same counterexample might be given several times. The treatment of the counterexample only guarantees that the table will contain one more row in its upper part. We obtain the following theorem.

Theorem 3. *Let \mathcal{A} be a k' -register session automaton over Σ and D . Let \mathcal{A}^C be the corresponding canonical k -register session automaton. Let N be its number of states, K be the size of $\Sigma \times \Gamma_k$ and M the length of the longest counterexample returned by an equivalence query. Then, the learning algorithm for \mathcal{A} terminates with at most $O(KN^2 + N \log(M))$ membership and $O(N)$ equivalence queries.*

Proof. This follows directly from the proof of correctness and complexity of Rivest and Schapire's algorithm [4, 22]. Notice that the equivalence query cannot return a counterexample whose normal form uses more than k registers, since either it is accepted by \mathcal{A}^C and therefore uses at most k registers or it is rejected by \mathcal{A}^C and uses $k' > k$ registers but then it is also rejected by any automaton over an alphabet $\Sigma \times \Gamma_{k''}$ with $k'' < k'$ as is the case of all constructed \mathcal{A}_O . \square

Let us discuss the complexity of our algorithm. In terms of the canonical session automaton, the number of required membership and equivalence queries is polynomial. When we consider data deterministic session automata, the complexity is still polynomial in the number of states, but exponential in k (with constant base). As usual, we have to add one exponent wrt. (data) non-deterministic automata. In [14], the number of equivalence queries is polynomial in the size of the underlying automaton. In contrast, the number of membership queries contains a factor n^k where n is the number of states and k the number of registers. This may be seen as a drawback, as n is typically large. Note that our setting allows one to infer automata that are inherently data non-deterministic. This also distinguishes our work from [14].

Example 6. We apply our learning algorithm on the data language given by the automaton \mathcal{A} of Figure 6. In Figure 7 the successive observation tables constructed by the algorithm are given. To save space some letters whose rows contain only $-$'s are omitted. In Figure 8 the successive automata constructed from the closed observation tables are given. For sake of clarity we omit for each automaton the sink state and the transitions leading to it.

We start with the alphabet $\Sigma \times \Gamma_1 = \{(a, f(1)), (a, r(1)), (b, f(1)), (b, r(1))\}$. We omit letters $(a, r(1))$ and $(b, f(1))$. Table \mathcal{O}_1 is obtained after initialization and closing by adding $(b, r(1))$ to the top. We use $_$ to indicate that all letters will lead to the same row. From \mathcal{O}_1 the first hypothesis automaton \mathcal{A}_1 is constructed. We suppose that the equivalence query gives back as counterexample the data word $(a, 3)(b, 3)$ whose normal form is $(a, f(1))(b, r(1))$. Here the breakpoint yields the distinguishing word $(b, r(1))$. We add it to V . The obtained table is not closed anymore. We close it by adding $(a, f(1))$ to the top and get table \mathcal{O}_2 yielding hypothesis automaton \mathcal{A}_2 . Notice that $L_{symb}(\mathcal{A}_2) = L_{symb}(\mathcal{A}^C) \cap (\Sigma \times \Gamma_1)^*$. This means that the equivalence query must give back a data word whose normal form is using at least 2 registers (here $(a, 7)(a, 4)(b, 7)$ with normal form $(a, f(1))(a, f(2))(b, r(1))$). As the word uses 2 registers we extend the alphabet to $\Sigma \times \Gamma_2$ and obtain table \mathcal{O}_3 . We close the table and get \mathcal{O}_4 . From there we obtain the hypothesis automaton \mathcal{A}_4 . After the equivalence query we get $(a, f(1))(a, f(2))(b, r(1))(b, r(2))$ as normal form of the data word counterexample

<table style="border-collapse: collapse;"> <tr> <th style="border-right: 1px solid black; padding: 2px;">\mathcal{O}_1</th> <th style="padding: 2px;">ε</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">-</td> </tr> </table>	\mathcal{O}_1	ε	$(b, r(1))$	-	$(a, f(1))$	+	$(b, r(1))$	-	\Rightarrow	<table style="border-collapse: collapse;"> <tr> <th style="border-right: 1px solid black; padding: 2px;">\mathcal{O}_2</th> <th style="padding: 2px;">ε</th> <th style="padding: 2px;">$\ (b, r(1))$</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> </table>	\mathcal{O}_2	ε	$\ (b, r(1))$	$(b, r(1))$	+	-	$(a, f(1))$	-	-	$(a, f(1))$	+	+	$(a, f(1))(a, f(1))$	-	-	$(a, f(1))(b, r(1))$	+	+	\Rightarrow	<table style="border-collapse: collapse;"> <tr> <th style="border-right: 1px solid black; padding: 2px;">\mathcal{O}_3</th> <th style="padding: 2px;">ε</th> <th style="padding: 2px;">$\ (b, r(1))$</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> </table>	\mathcal{O}_3	ε	$\ (b, r(1))$	$(b, r(1))$	+	-	$(a, f(1))$	-	-	$(a, f(1))$	+	+	$(a, f(2))$	-	-	$(b, r(2))$	-	-	$(b, r(1))$	-	-	$(a, f(1))(a, f(1))$	+	+	$(a, f(1))(b, r(1))$	+	+	$(a, f(1))(a, f(2))$	-	+	$(a, f(1))(b, r(2))$	-	-	\Rightarrow	<table style="border-collapse: collapse;"> <tr> <th style="border-right: 1px solid black; padding: 2px;">\mathcal{O}_4</th> <th style="padding: 2px;">ε</th> <th style="padding: 2px;">$\ (b, r(1))$</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">+</td> </tr> </table>	\mathcal{O}_4	ε	$\ (b, r(1))$	$(a, f(2))$	-	-	$(b, r(2))$	-	-	$(b, r(1))$	-	-	$(a, f(1))(a, f(1))$	+	+	$(a, f(1))(b, r(1))$	+	+	$(a, f(1))(b, r(2))$	-	-	$(a, f(1))(a, f(2))(a, f(1))$	-	-	$(a, f(1))(a, f(2))(b, r(1))$	+	+	$(a, f(1))(a, f(2))(a, f(2))$	-	+	$(a, f(1))(a, f(2))(b, r(2))$	-	+	\Rightarrow	<table style="border-collapse: collapse;"> <tr> <th style="border-right: 1px solid black; padding: 2px;">\mathcal{O}_5</th> <th style="padding: 2px;">ε</th> <th style="padding: 2px;">$\ (b, r(1))$</th> <th style="padding: 2px;">$\ (b, r(2))$</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(2))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(b, r(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(b, r(2))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(a, f(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))(a, f(1))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))(b, r(1))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))(a, f(2))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$</td> <td style="padding: 2px;">-</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">-</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> <td style="padding: 2px;">+</td> </tr> </table>	\mathcal{O}_5	ε	$\ (b, r(1))$	$\ (b, r(2))$	$(b, r(1))$	+	-	-	$(a, f(1))$	-	-	-	$(a, f(1))(a, f(2))$	+	+	-	$(a, f(1))(a, f(2))(b, r(1))$	-	+	-	$(a, f(2))$	+	+	+	$(b, r(2))$	-	-	-	$(b, r(1))$	-	-	-	$(a, f(1))(a, f(1))$	-	-	-	$(a, f(1))(b, r(1))$	+	+	-	$(a, f(1))(b, r(2))$	+	+	-	$(a, f(1))(a, f(2))(a, f(1))$	-	-	-	$(a, f(1))(a, f(2))(a, f(2))$	-	-	-	$(a, f(1))(a, f(2))(a, f(2))$	-	-	-	$(a, f(1))(a, f(2))(b, r(1))(a, f(1))$	-	-	-	$(a, f(1))(a, f(2))(b, r(1))(b, r(1))$	+	+	+	$(a, f(1))(a, f(2))(b, r(1))(a, f(2))$	+	+	+	$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$	-	+	-	$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$	+	+	+
\mathcal{O}_1	ε																																																																																																																																																																															
$(b, r(1))$	-																																																																																																																																																																															
$(a, f(1))$	+																																																																																																																																																																															
$(b, r(1))$	-																																																																																																																																																																															
\mathcal{O}_2	ε	$\ (b, r(1))$																																																																																																																																																																														
$(b, r(1))$	+	-																																																																																																																																																																														
$(a, f(1))$	-	-																																																																																																																																																																														
$(a, f(1))$	+	+																																																																																																																																																																														
$(a, f(1))(a, f(1))$	-	-																																																																																																																																																																														
$(a, f(1))(b, r(1))$	+	+																																																																																																																																																																														
\mathcal{O}_3	ε	$\ (b, r(1))$																																																																																																																																																																														
$(b, r(1))$	+	-																																																																																																																																																																														
$(a, f(1))$	-	-																																																																																																																																																																														
$(a, f(1))$	+	+																																																																																																																																																																														
$(a, f(2))$	-	-																																																																																																																																																																														
$(b, r(2))$	-	-																																																																																																																																																																														
$(b, r(1))$	-	-																																																																																																																																																																														
$(a, f(1))(a, f(1))$	+	+																																																																																																																																																																														
$(a, f(1))(b, r(1))$	+	+																																																																																																																																																																														
$(a, f(1))(a, f(2))$	-	+																																																																																																																																																																														
$(a, f(1))(b, r(2))$	-	-																																																																																																																																																																														
\mathcal{O}_4	ε	$\ (b, r(1))$																																																																																																																																																																														
$(a, f(2))$	-	-																																																																																																																																																																														
$(b, r(2))$	-	-																																																																																																																																																																														
$(b, r(1))$	-	-																																																																																																																																																																														
$(a, f(1))(a, f(1))$	+	+																																																																																																																																																																														
$(a, f(1))(b, r(1))$	+	+																																																																																																																																																																														
$(a, f(1))(b, r(2))$	-	-																																																																																																																																																																														
$(a, f(1))(a, f(2))(a, f(1))$	-	-																																																																																																																																																																														
$(a, f(1))(a, f(2))(b, r(1))$	+	+																																																																																																																																																																														
$(a, f(1))(a, f(2))(a, f(2))$	-	+																																																																																																																																																																														
$(a, f(1))(a, f(2))(b, r(2))$	-	+																																																																																																																																																																														
\mathcal{O}_5	ε	$\ (b, r(1))$	$\ (b, r(2))$																																																																																																																																																																													
$(b, r(1))$	+	-	-																																																																																																																																																																													
$(a, f(1))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(2))$	+	+	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))$	-	+	-																																																																																																																																																																													
$(a, f(2))$	+	+	+																																																																																																																																																																													
$(b, r(2))$	-	-	-																																																																																																																																																																													
$(b, r(1))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(1))$	-	-	-																																																																																																																																																																													
$(a, f(1))(b, r(1))$	+	+	-																																																																																																																																																																													
$(a, f(1))(b, r(2))$	+	+	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(a, f(1))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(a, f(2))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(a, f(2))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))(a, f(1))$	-	-	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))(b, r(1))$	+	+	+																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))(a, f(2))$	+	+	+																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$	-	+	-																																																																																																																																																																													
$(a, f(1))(a, f(2))(b, r(1))(b, r(2))$	+	+	+																																																																																																																																																																													

Fig. 7. The successive observation tables

$(a, 9)(a, 3)(b, 9)(b, 3)$. After adding $(b, r(2))$ to V and closing the table by moving $(a, f(1))(a, f(2))(b, r(1))$ to the top we get finally the table \mathcal{O}_5 from which the canonical automaton \mathcal{A}^C is obtained and the equivalence query succeeds.

4 Language Theoretical Results

In this section, we establish some language-theoretic properties of session automata, which they inherit from classical regular languages. These results demonstrate a certain robustness as required in verification tasks such as compositional verification [10] and infinite-state regular model checking [13].

4.1 Closure and Decidability Properties

Theorem 4. *Data languages recognized by session automata are closed under intersection and union. They are also closed under complementation in the following sense: given a k -register session automaton \mathcal{A} , the language $\gamma((\Sigma \times \Gamma_k)^*) \setminus L_{data}(\mathcal{A})$ is recognized by a k -register session automaton.*

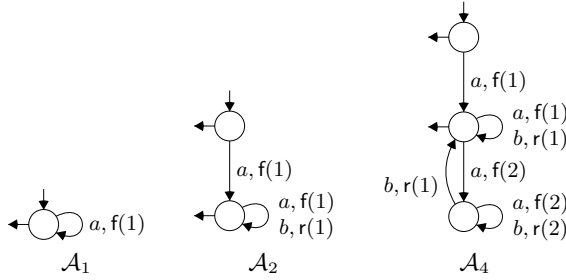


Fig. 8. The successive hypothesis automata

Proof. Let \mathcal{A} be a k -register session automaton, and \mathcal{B} a k' -register session automaton. Using a classical product construction for \mathcal{A}^C and \mathcal{B}^C , we obtain a $\min(k, k')$ -register session automaton recognizing the data language $L_{data}(\mathcal{A}) \cap L_{data}(\mathcal{B})$. The language $L_{data}(\mathcal{A}) \cup L_{data}(\mathcal{B})$ is recognized by the $\max(k, k')$ -register session automaton that we obtain as the “disjoint union” of \mathcal{A} and \mathcal{B} , branching on the first transition in one of these two automata.

Finally, let us consider a symbolically deterministic k -register session automaton \mathcal{A} . Without loss of generality, by adding a sink state, we can suppose that \mathcal{A} is complete. Then, every well formed symbolic word over $\Sigma \times \Gamma_k$ has exactly one run in \mathcal{A} . The automaton \mathcal{A}' constructed from \mathcal{A} by taking as accepting states the non-accepting states of \mathcal{A} verifies that $L_{symb}(\mathcal{A}') = (\Sigma \times \Gamma_k)^* \setminus L_{symb}(\mathcal{A})$ so that $L_{data}(\mathcal{A}') = \gamma((\Sigma \times \Gamma_k)^* \setminus L_{data}(\mathcal{A}))$. \square

Theorem 5. *The inclusion problem for session automata is decidable.*

Proof. Considering two session automata \mathcal{A} and \mathcal{B} , we can decide inclusion $L_{data}(\mathcal{A}) \subseteq L_{data}(\mathcal{B})$ by considering the canonical automata \mathcal{A}^C and \mathcal{B}^C . Indeed, $L_{data}(\mathcal{A}) \subseteq L_{data}(\mathcal{B}) \iff snf(L_{data}(\mathcal{A})) \subseteq snf(L_{data}(\mathcal{B})) \iff L_{symb}(\mathcal{A}^C) \subseteq L_{symb}(\mathcal{B}^C)$. Thus, it is sufficient to check inclusion for \mathcal{A}^C and \mathcal{B}^C . \square

4.2 A Logical Characterization of Session Automata

In this section, we provide a logical characterization of session automata. The logic we consider is classical monadic second-order (MSO) logic over finite alphabets, which is known to be expressively equivalent to finite automata. To deal with data values, there is an additional binary predicate, which allows us to test two word positions for data equality. The following paragraph gives a short account of *data MSO logic* (dMSO). For more background, we refer the reader to [21, 23, 6].

We fix infinite supplies of first-order variables x, y, \dots , which are interpreted as word positions, and second-order variables X, Y, \dots , which are taken as sets of positions. Atomic dMSO formulas are $x = y$, $label(x) = a$ (with $a \in \Sigma$), $y = x + 1$, and $x \in X$. They allow us to reason about word positions in the expected

manner: given a data word $w = (a_1, d_1) \cdots (a_n, d_n) \in (\Sigma \times D)^*$, positions $i, j \in [n]$, and a set $I \subseteq [n]$, we have $w, i, j \models x = y$ (to be read as “ w satisfies $x = y$ when x is interpreted as i and y as j ”) if $i = j$; $w, i \models \text{label}(x) = a$ if $a_i = a$; $w, i, j \models y = x + 1$ if $j = i + 1$; and $w, i, I \models x \in X$ if $i \in I$. To reason about data, there is another atomic formula, $x \sim y$, which compares data values at x and y . More precisely, $w, i, j \models x \sim y$ if $d_i = d_j$. Finally, dMSO logic provides negation and disjunction, as well as existential quantifiers $\exists x \varphi$ and $\exists X \varphi$ (with φ a dMSO formula), interpreted as usual. In addition, we use abbreviations such as *true*, $x \leq y$, $\forall x \varphi$, $\varphi \wedge \psi$, $\varphi \rightarrow \psi$, etc. A sentence is a formula without free variables. For a dMSO sentence φ , we set $L_{data}(\varphi) \stackrel{\text{def}}{=} \{w \in (\Sigma \times D)^* \mid w \models \varphi\}$. We denote by MSO the fragment of dMSO not making use of \sim . An MSO formula can also be interpreted over words from Σ^* , without data. For an MSO sentence φ , we let $L_{symb}(\varphi) \subseteq \Sigma^*$ denote the set of words $w \in \Sigma^*$ such that $w \models \varphi$.

Note that dMSO is a very expressive logic and goes beyond virtually all automata models defined for data words [21, 6, 11]. We identify a fragment of dMSO, called *session MSO logic*, that is expressively equivalent to session automata. While register automata also enjoy a logical characterization [11], we are not aware of a logic capturing the automata model considered in [14].

Definition 3 (Session MSO Logic). *A session MSO (sMSO) formula is a dMSO sentence of the form*

$$\varphi = \exists X_1 \cdots \exists X_m (\alpha \wedge \forall x \forall y (x \sim y \leftrightarrow \beta))$$

such that α and β are MSO formulas (not containing the predicate \sim).

Example 7. For instance, $\varphi_1 = \forall x \forall y (x \sim y \leftrightarrow x = y)$ is an sMSO formula. Its semantics $L_{data}(\varphi_1)$ is the set of data words in which every data value occurs at most once. Moreover, $\varphi_2 = \forall x \forall y (x \sim y \leftrightarrow \text{true})$ is an sMSO formula, and $L_{data}(\varphi_2)$ is the set of data words where all data values coincide. As a last example, let $\varphi_3 = \exists X \forall x \forall y (x \sim y \leftrightarrow (\neg \exists z \in X (x < z \leq y \vee y < z \leq x)))$. Then, $L_{data}(\varphi_3)$ is the set of 1-bounded data words. Intuitively, the second-order variable X represents the set of positions where a fresh data value is introduced.

Theorem 6. *A data language is recognized by a session automaton iff it is definable by an sMSO formula.*

In [7], it was already shown (for a more powerful model) that model checking is decidable:

Theorem 7 ([7]). *Given a session automaton \mathcal{A} and a dMSO sentence φ , one can decide whether $L_{data}(\mathcal{A}) \subseteq L_{data}(\varphi)$.*

5 Conclusion

In this paper, we provided a complete framework for algorithmic learning of session automata, a special class of register automata to process data words. As a key ingredient, we associated with every session automaton a canonical one, which revealed close connections with classical regular languages. As a next step, we plan to employ our setting for various verification tasks.

Acknowledgment. We are grateful to Thomas Schwentick for suggesting the symbolic normal form of data words.

References

1. F. Aarts, F. Heidarian, H. Kuppens, P. Olsen, and F. W. Vaandrager. Automata learning through counterexample guided abstraction refinement. In *FM*, LNCS 7436, pp. 10–27. Springer, 2012.
2. D. Angluin. Learning regular sets from queries and counterexamples. *Information and Computation*, 75(2):87–106, 1987.
3. T. Berg, O. Grinchtein, B. Jonsson, M. Leucker, H. Raffelt, and B. Steffen. On the correspondence between conformance testing and regular inference. In *FASE*, LNCS 3442, pp. 175–189. Springer, 2005.
4. T. Berg and H. Raffelt. Model checking. In *Model-based Testing of Reactive Systems*, LNCS 3472 of LNCS. Springer, 2005.
5. H. Björklund and Th. Schwentick. On notions of regularity for data languages. *Theoretical Computer Science*, 411(4-5):702–715, 2010.
6. M. Bojanczyk, C. David, A. Muscholl, T. Schwentick, and L. Segoufin. Two-variable logic on data words. *ACM Trans. Comput. Log.*, 12(4):27, 2011.
7. B. Bollig, A. Cyriac, P. Gastin, and K. Narayan Kumar. Model checking languages of data words. In *FoSSaCS’12*, LNCS 7213, pp. 391–405. Springer, 2012.
8. B. Bollig, J.-P. Katoen, C. Kern, M. Leucker, D. Neider, and D. Piegdon. libalf: the automata learning framework. In *CAV*, LNCS 6174, pp. 360–364. Springer, 2010.
9. S. Cassel, F. Howar, B. Jonsson, M. Merten, and B. Steffen. A succinct canonical register automaton model. In *ATVA*, LNCS 6996, pp. 366–380. Springer, 2011.
10. J. M. Cobleigh, D. Giannakopoulou, and C. S. Pasareanu. Learning assumptions for compositional verification. In *TACAS*, LNCS 2619, pp. 331–346. Springer, 2003.
11. T. Colcombet, C. Ley, and G. Puppis. On the use of guards for logics with data. In *Proceedings of MFCS’11*, LNCS 6907, pp. 243–255. Springer, 2011.
12. D. Giannakopoulou and J. Magee. Fluent model checking for event-based systems. In *ESEC / SIGSOFT FSE*, pp. 257–266. ACM, 2003.
13. P. Habermehl and T. Vojnar. Regular Model Checking Using Inference of Regular Languages. In *INFINITY’04*, ENTCS 138, pp. 21–36. Elsevier, 2005.
14. F. Howar, B. Steffen, B. Jonsson, and S. Cassel. Inferring canonical register automata. In *VMCAI*, LNCS 7148, pp. 251–266. Springer, 2012.
15. B. Jonsson. Learning of automata models extended with data. In *SFM*, LNCS 6659, pp. 327–349. Springer, 2011.
16. M. Kaminski and N. Francez. Finite-memory automata. *Theoretical Computer Science*, 134(2):329–363, 1994.
17. K. O. Kürtz, R. Küsters, and T. Wilke. Selecting theories and nonce generation for recursive protocols. In *FMSE*, pp. 61–70. ACM, 2007.
18. M. Leucker. Learning meets verification. LNCS 4709, pp. 127–151. Springer, 2007.
19. T. Margaria, H. Raffelt, B. Steffen, and M. Leucker. The LearnLib in FMICS-jETI. In *The Twelfth IEEE International Conference on Engineering of Complex Computer Systems (ICECCS)*, pp. 340–352. IEEE Computer Society Press, 2007.
20. R. Milner, J. Parrow, and D. Walker. A calculus of mobile processes, Parts I and II. *Information and Computation*, 100:1–77, Sept. 1992.
21. F. Neven, Th. Schwentick, and V. Vianu. Finite state machines for strings over infinite alphabets. *ACM Transactions on Computational Logic*, 5(3):403–435, 2004.

22. R. Rivest and R. Schapire. Inference of finite automata using homing sequences. *Information and Computation*, 103:299–347, 1993.
23. L. Segoufin. Automata and logics for words and trees over an infinite alphabet. In Z. Ésik, editor, *CSL 2006*, LNCS 4207, pp. 41–57. Springer, 2006.
24. N. Tzevelekos. Fresh-register automata. In T. Ball and M. Sagiv, editors, *POPL*, pp. 295–306. ACM, 2011.

Appendix

A Proof for Section 2

Theorem 1. *Session automata are strictly more expressive than data deterministic session automata.*

Proof. We show that the data language NF_2 presented in Example 4 cannot be recognized by a data deterministic session automaton. Indeed, suppose that such an automaton exists, with k registers. Then, consider the word $w = (a, 1)(a, 2)(a, 3) \cdots (a, k + 1) \in \text{NF}_2$, where every data value is fresh. By data determinism, there is a unique run accepting w . Along this run, let $i < j$ be two positions such that their two fresh data values have been stored in the same register r (such a pair must exist since the automaton has only k registers). Without loss of generality, we can consider the greatest position j verifying this condition, and then the greatest position i associated with j . This means that register r is used for the last time when reading j , and has not been used in-between positions i and j . Now, the word $(a, 1)(a, 2)(a, 3) \cdots (a, k + 1)(a, i) \in \text{NF}_2$ must be recognized by the automaton, but cannot since data value i appearing on the last position is not fresh anymore, and yet not stored in one of the registers (since register r was reused at j). \square

B Proof for Section 4

Theorem 6. *A data language is recognized by a session automaton iff it is definable by an sMSO formula.*

The construction of an sMSO formula $\exists X_1 \cdots \exists X_m (\alpha \wedge \forall x \forall y (x \sim y \leftrightarrow \beta))$ from a session automaton \mathcal{A} was implicitly shown in [7] (with a different goal, though). The idea is that the existential second-order variables X_1, \dots, X_m are used to guess an assignment of transitions to positions. In α , it is verified that the assignment corresponds to a run of \mathcal{A} . Moreover, β checks if data equality corresponds to the data flow as enforced by the transition labels from Γ_k .

Let us turn to the converse direction, from logic to automata. Fix an sMSO formula $\varphi = \exists X_1 \cdots \exists X_m (\alpha \wedge \forall x \forall y (x \sim y \leftrightarrow \beta))$. Then, β is a formula whose free variables are among x, y, X_1, \dots, X_m . As, moreover, β is an MSO

formula, which does not contain \sim , we can consider words over the finite alphabet $\Sigma \times \{0, 1\}^{m+2}$ as models of β . The idea is to interpret a position carrying letter $(a, 1, b, b_1, \dots, b_m)$ as x , and a position labeled $(a, b, 1, b_1, \dots, b_m)$ as y , while membership in X_i is indicated by b_i . Words where x and y are not uniquely determined, are disregarded. We can represent such models as tuples $(w, i, j, I_1, \dots, I_m)$ where $w \in \Sigma^*$, i denotes the position of the 1-entry in the unique first component, and j denotes the position of the 1-entry in the second component. As $L_{\text{symb}}(\beta) \subseteq (\Sigma \times \{0, 1\}^{m+2})^*$ is MSO definable, it is, by Büchi's theorem, recognized by some minimal deterministic finite automaton \mathcal{A}_β . Suppose that \mathcal{A}_β has $k_\beta \geq 1$ states. We fix this k_β for the remainder of the section.

Proposition 1. *The data language $L_{\text{data}}(\varphi)$ is k_β -bounded.*

Proof. Let $w = (a_1, d_1) \cdots (a_n, d_n) \in L_{\text{data}}(\varphi)$. There exists a tuple $\bar{I} = (I_1, \dots, I_m)$ of subsets of $[n]$ such that, for all $i, j \in [n]$,

$$d_i = d_j \iff (a_1 \cdots a_n, i, j, \bar{I}) \in L_{\text{symb}}(\beta). \quad (*)$$

Suppose, towards a contradiction, that w is not k_β -bounded. Then, there are $k > k_\beta$ and a position $i \in [n]$ such that i is contained in distinct sessions S_1, \dots, S_k . For $l \in \{1, \dots, k\}$, let $i_l = \min(S_l)$ and $j_l = \max(S_l)$. Note that the i_l are pairwise distinct, and so are the j_l . For every $l \in \{1, \dots, k\}$, we have $w_l = (a_1 \cdots a_n, i_l, j_l, \bar{I}) \in L_{\text{symb}}(\beta)$. Thus, for every such word w_l , there is a unique accepting run of \mathcal{A}_β , say, being in state q_l after executing position i . As \mathcal{A}_β has only k_β states, there are $l \neq l'$ such that $q_l = q_{l'}$. Thus, there is an accepting run of \mathcal{A}_β on $(a_1 \cdots a_n, i_l, j_{l'}, \bar{I})$. This contradicts (*), since I_l and $I_{l'}$ are distinct sessions. \square

Next, we construct a (data-free) MSO sentence φ' over the alphabet $\Sigma \times \Gamma_{k_\beta}$ (recall that $\Gamma_{k_\beta} = \{f, r\} \times [k_\beta]$) such that $\gamma(L_{\text{symb}}(\varphi')) = L_{\text{data}}(\varphi)$. We will need some additional macro MSO formulas over $\Sigma \times \Gamma_{k_\beta} \times \{0, 1\}^{m+2}$. For a first-order variable x and $r \in \{1, \dots, k_\beta\}$, we let $\text{fresh}_r(x)$ stand for $\bigvee_{a, \bar{b}} \text{label}(x) = (a, f(r), \bar{b})$. Moreover, we let $\text{reg}(x) = r$ be an abbreviation for $\text{fresh}_r(x) \vee \bigvee_{a, \bar{b}} \text{label}(x) = (a, r(r), \bar{b})$. Now, we define

$$\varphi' = \exists X_1 \cdots \exists X_m (\alpha' \wedge \forall x \forall y (\text{equal}(x, y) \leftrightarrow \beta'))$$

where

$$\text{equal}(x, y) = \bigvee_{r \in [k_\beta]} \left(\text{reg}(x) = r \wedge \text{reg}(y) = r \right. \\ \left. \wedge \neg \exists z (\text{fresh}_r(z) \wedge \min(x, y) < z \leq \max(x, y) < z) \right)$$

and α' and β' are obtained from α and β , respectively, by replacing $\text{label}(x) = a$ with $\bigvee_{t, \bar{b}} \text{label}(x) = (a, t, \bar{b})$, with \bar{b} ranging over $\{0, 1\}^m$ in α' and over $\{0, 1\}^{m+2}$ in β' .

Proposition 2. *We have $\gamma(L_{\text{symb}}(\varphi')) = L_{\text{data}}(\varphi)$.*

Proof. Let $u = (a_1, t_1) \cdots (a_n, t_n) \in L_{\text{symb}}(\varphi')$ be a well formed word, and let $w = (a_1, d_1) \cdots (a_n, d_n) \in \gamma(u)$. We will show $w \models \varphi$. There is a tuple $\bar{I} = (I_1, \dots, I_m)$ of subsets of $[n]$ such that $u, \bar{I} \models \alpha' \wedge \forall x \forall y (\text{equal}(x, y) \leftrightarrow \beta')$. This already implies $w, \bar{I} \models \alpha$. Now take two positions $i, j \in [n]$. By the definition of $\text{equal}(x, y)$ and γ , we have $d_i = d_j$ iff $u, i, j, \bar{I} \models \text{equal}(x, y)$ iff $u, i, j, \bar{I} \models \beta'$ iff $w, i, j, \bar{I} \models \beta$. We conclude $w \models \varphi = \exists X_1 \cdots \exists X_m (\alpha \wedge \forall x \forall y (x \sim y \leftrightarrow \beta))$.

For the converse direction, suppose $w = (a_1, d_1) \cdots (a_n, d_n) \in L_{\text{data}}(\varphi)$. There is a tuple $\bar{I} = (I_1, \dots, I_m)$ of subsets of $[n]$ such that $w, \bar{I} \models \alpha \wedge \forall x \forall y (x \sim y \leftrightarrow \beta)$. Therefore, it already holds $u, \bar{I} \models \alpha'$. By Proposition 1, w is k_β -bounded. Let $u = \text{snf}(w) = (a_1, t_1) \cdots (a_n, t_n)$. We have $w \in \gamma(u)$ and, according to Remark 2, $u \in (\Sigma \times \Gamma_{k_\beta})^*$. It remains to prove that $u, \bar{I} \models \forall x \forall y (\text{equal}(x, y) \leftrightarrow \beta')$. Take any two positions $i, j \in [n]$. We have $u, i, j, \bar{I} \models \text{equal}(x, y)$ iff $d_i = d_j$. The latter is the case iff $w, i, j, \bar{I} \models \beta$ (since $w \in L_{\text{data}}(\varphi)$), which holds iff $u, i, j, \bar{I} \models \beta'$. Thus, $u \models \varphi'$. \square

By Büchi's theorem, we can translate φ' into a finite automaton \mathcal{A} recognizing the models of φ' , which form a language over $\Sigma \times \Gamma_{k_\beta}$. By Proposition 2, interpreting \mathcal{A} as a session automaton, we obtain $L_{\text{data}}(\mathcal{A}) = L_{\text{data}}(\varphi)$.