



## GRAPHENE: FROM MATERIAL TO APPLICATIONS

P Landois, S Nanot, B Jouault, D Cakiroglu, S Contreras, S Juillaguet, H Peyre, J-M Decams, Oleksiy Drachenko, J Leotin, et al.

### ► To cite this version:

P Landois, S Nanot, B Jouault, D Cakiroglu, S Contreras, et al.. GRAPHENE: FROM MATERIAL TO APPLICATIONS. Graphene And Co Annual Meeting 2019, Oct 2019, Bad Herrenalb, Germany. hal-03144975

HAL Id: hal-03144975

<https://hal.science/hal-03144975>

Submitted on 18 Feb 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# GRAPHENE: FROM MATERIAL TO APPLICATIONS

P. Landois<sup>1</sup>, S. Nanot<sup>1</sup>, B. Jouault<sup>1</sup>, D. Cakiroglu<sup>1</sup>, S. Contreras<sup>1</sup>, S. Juillaguet<sup>1</sup>, H. Peyre<sup>1</sup>, J-M. Decams<sup>3</sup>, O. Drachenko<sup>2</sup>, J. Leotin<sup>2</sup> and C. Coillot<sup>1</sup>

<sup>1</sup>Laboratoire Charles Coulomb, Université de Montpellier, CNRS, Montpellier, 34095, FRANCE

<sup>2</sup>Laboratoire National des Champs Magnétiques Intenses, Université Paul Sabatier, Toulouse, 31400, FRANCE


<sup>3</sup>ANNEALSYS, Montpellier, 34000, FRANCE

**Context:** agriculture is one of the major cause of the climate change [1]. In France, agriculture is responsible for 19 % of the national GHG emissions caused by 3 gases : N<sub>2</sub>O (50%), CH<sub>4</sub> (40%) et CO<sub>2</sub>(10%). Agriculture is doubly concerned since it already faces dramatic consequences, due to climate change, like decrease of crop yields. That motivates the transition toward a new agriculture paradigm, known as **agroecology**. Agroforestry is one of the agroecologic practice, which combines trees and cereal crops. Growing trees and roots will sequester carbon in soils allowing to mitigate the carbon impact of the cultivated parcel [2]. These practices require careful studies of the GHG of the cultivated parcel which would be sustained by new **gaz sensor** technologies : cheap, robust and sensitive.




Graphene which has been early identified as very promising gaz sensor [3] still focuses interest in this direction [4,5].  
Is graphene sensitive enough to detect greenhouse gaz at a level allowing to sustain agroecologic studies ?

## Hall cross design on homogeneous and continued graphene growth on silicon carbide.


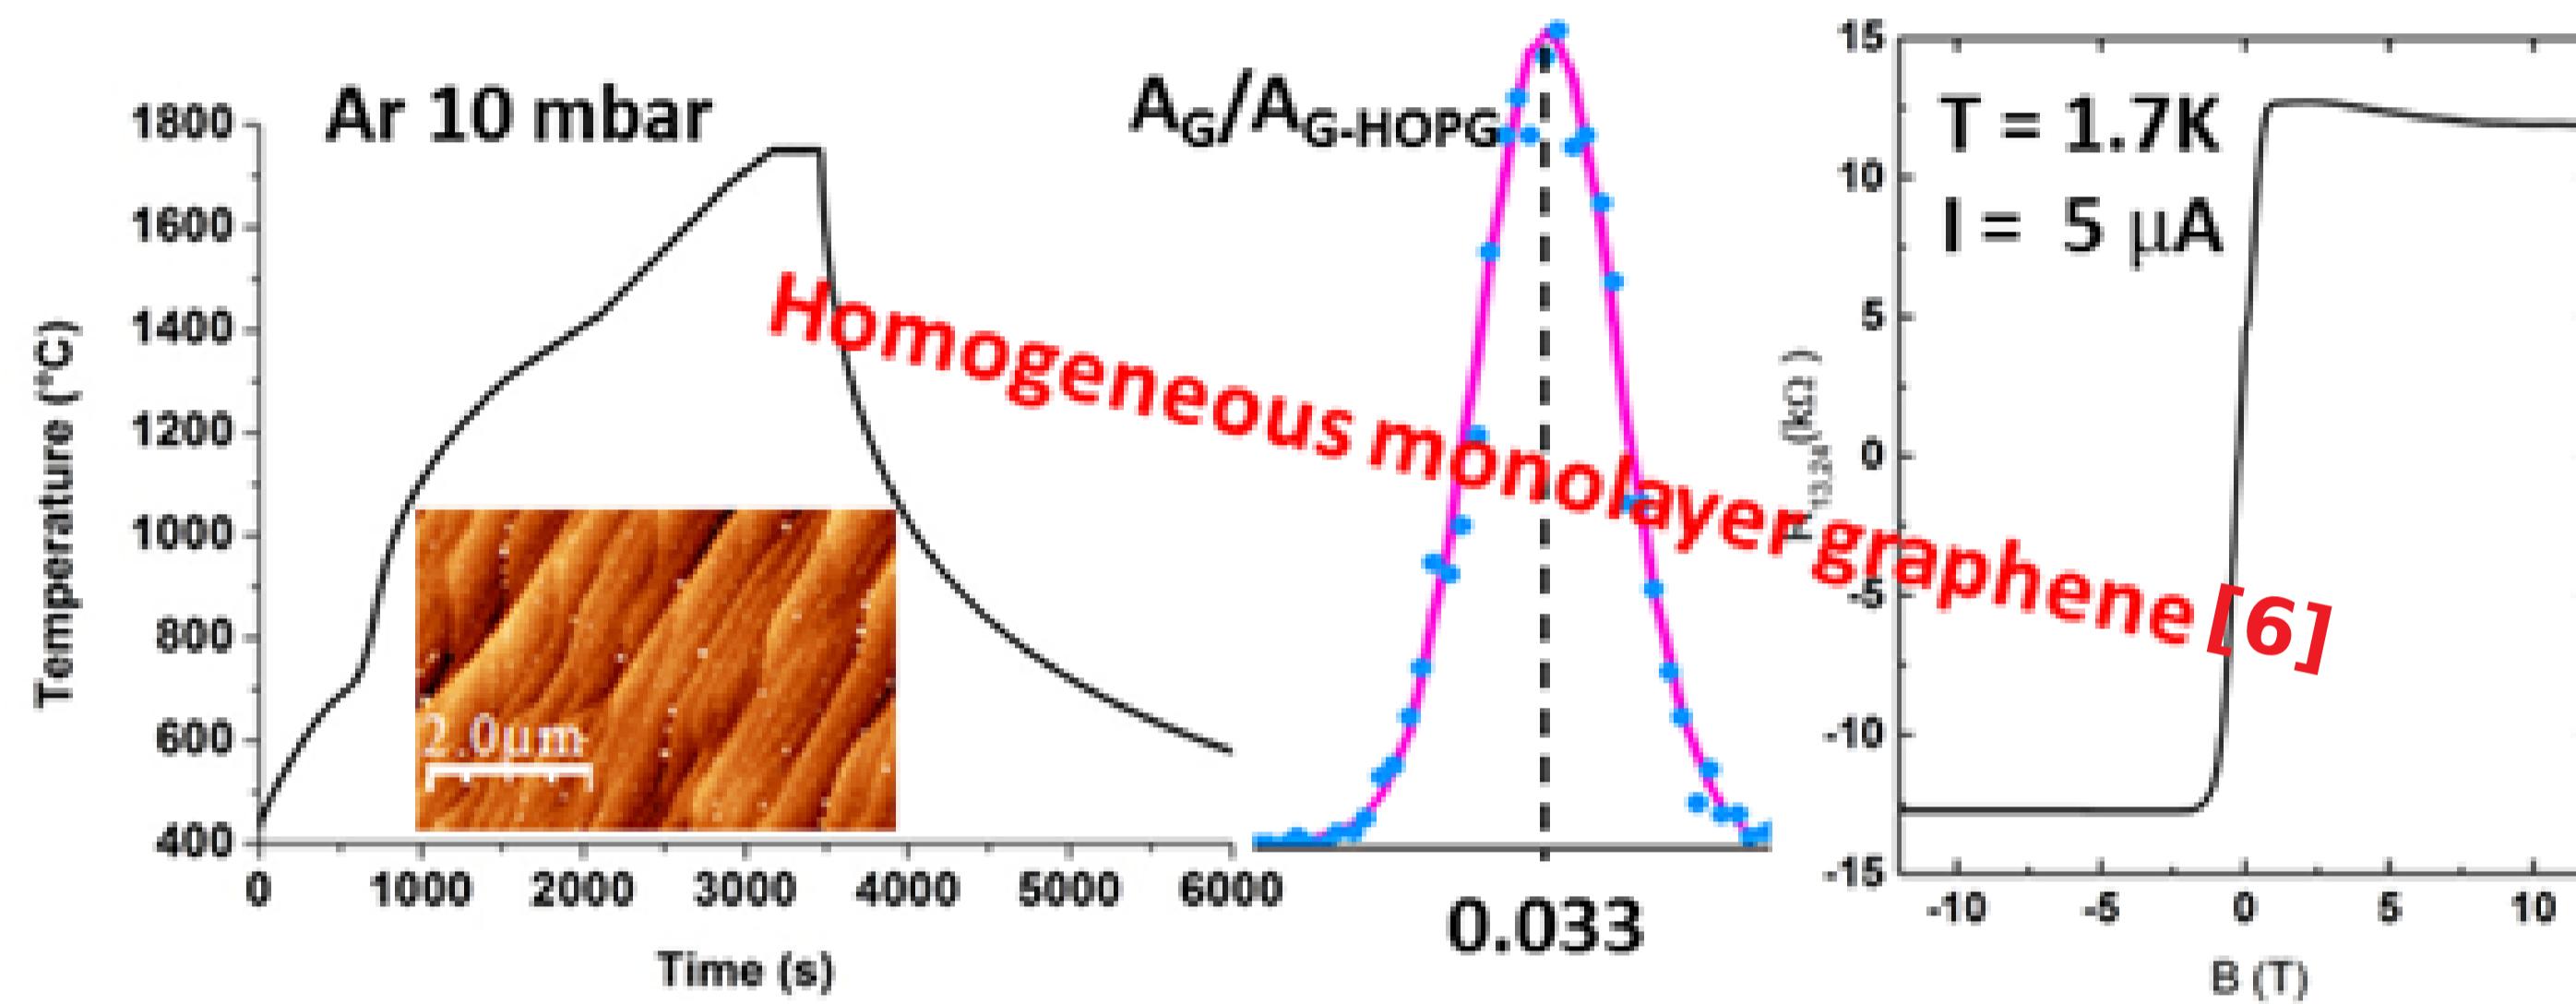


### Graphene Hall cross design by electron beam lithography

- Size = 600μmx80μm
- Graphene etching
- Contact pads Ti/Au (10nm/100nm) deposition
- Wire bonding
- Check Raman

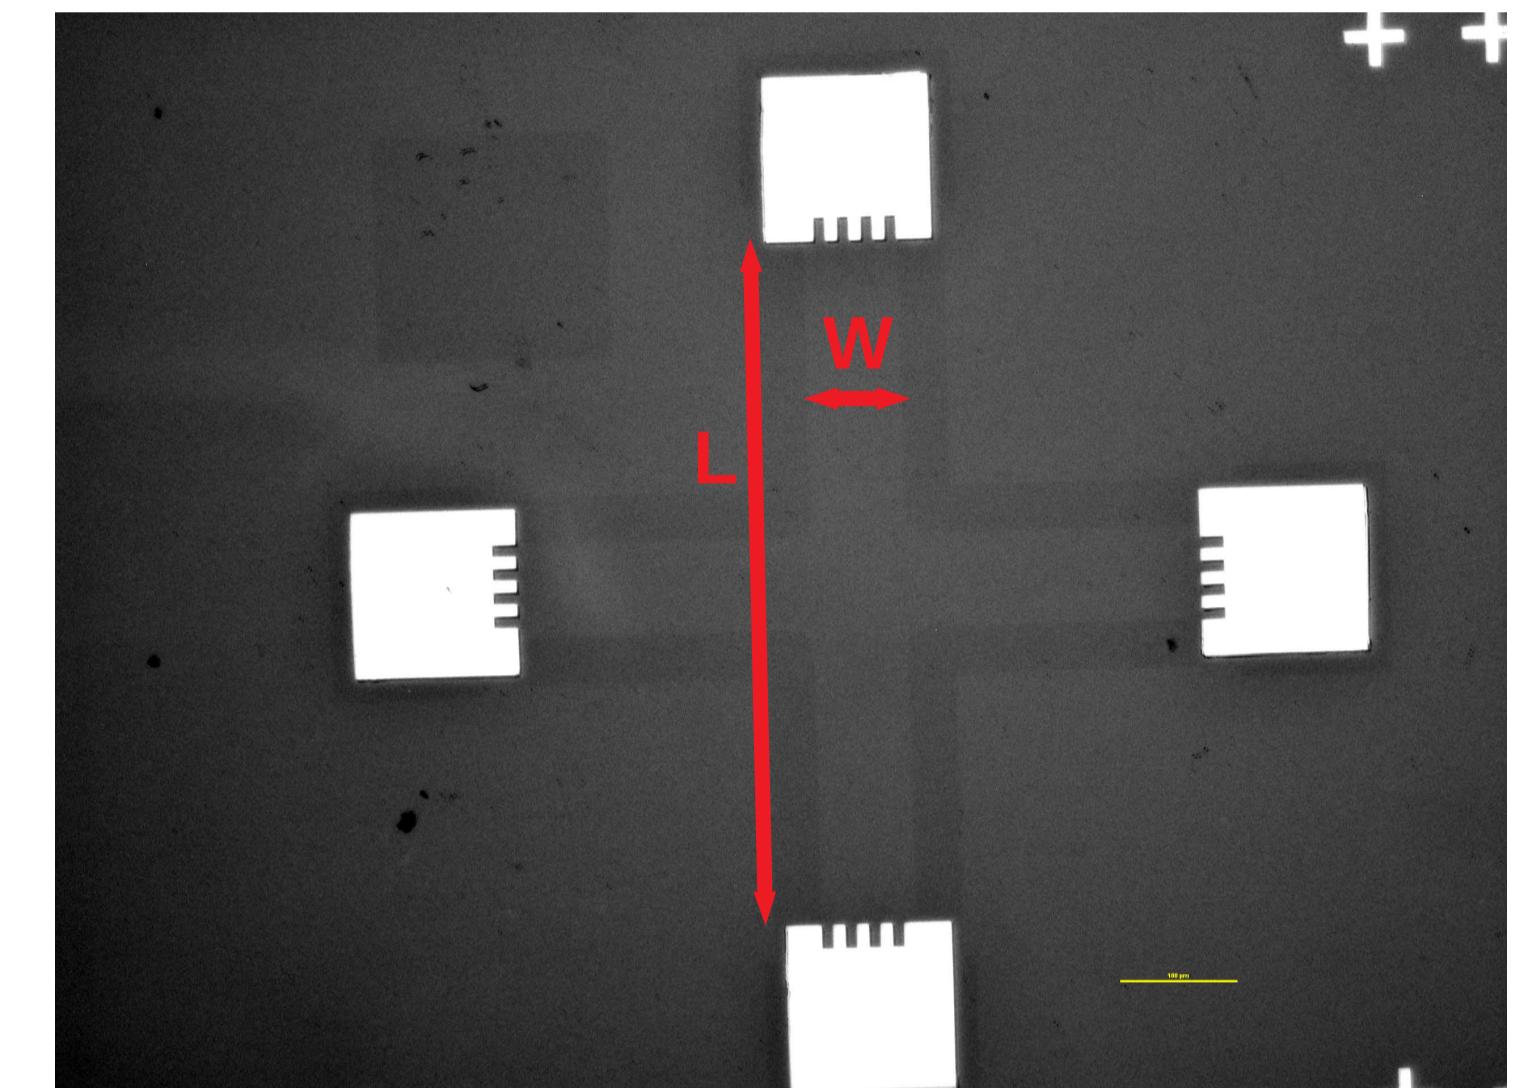

## From graphene to sensor : development of a dedicated electronic board (@300K)

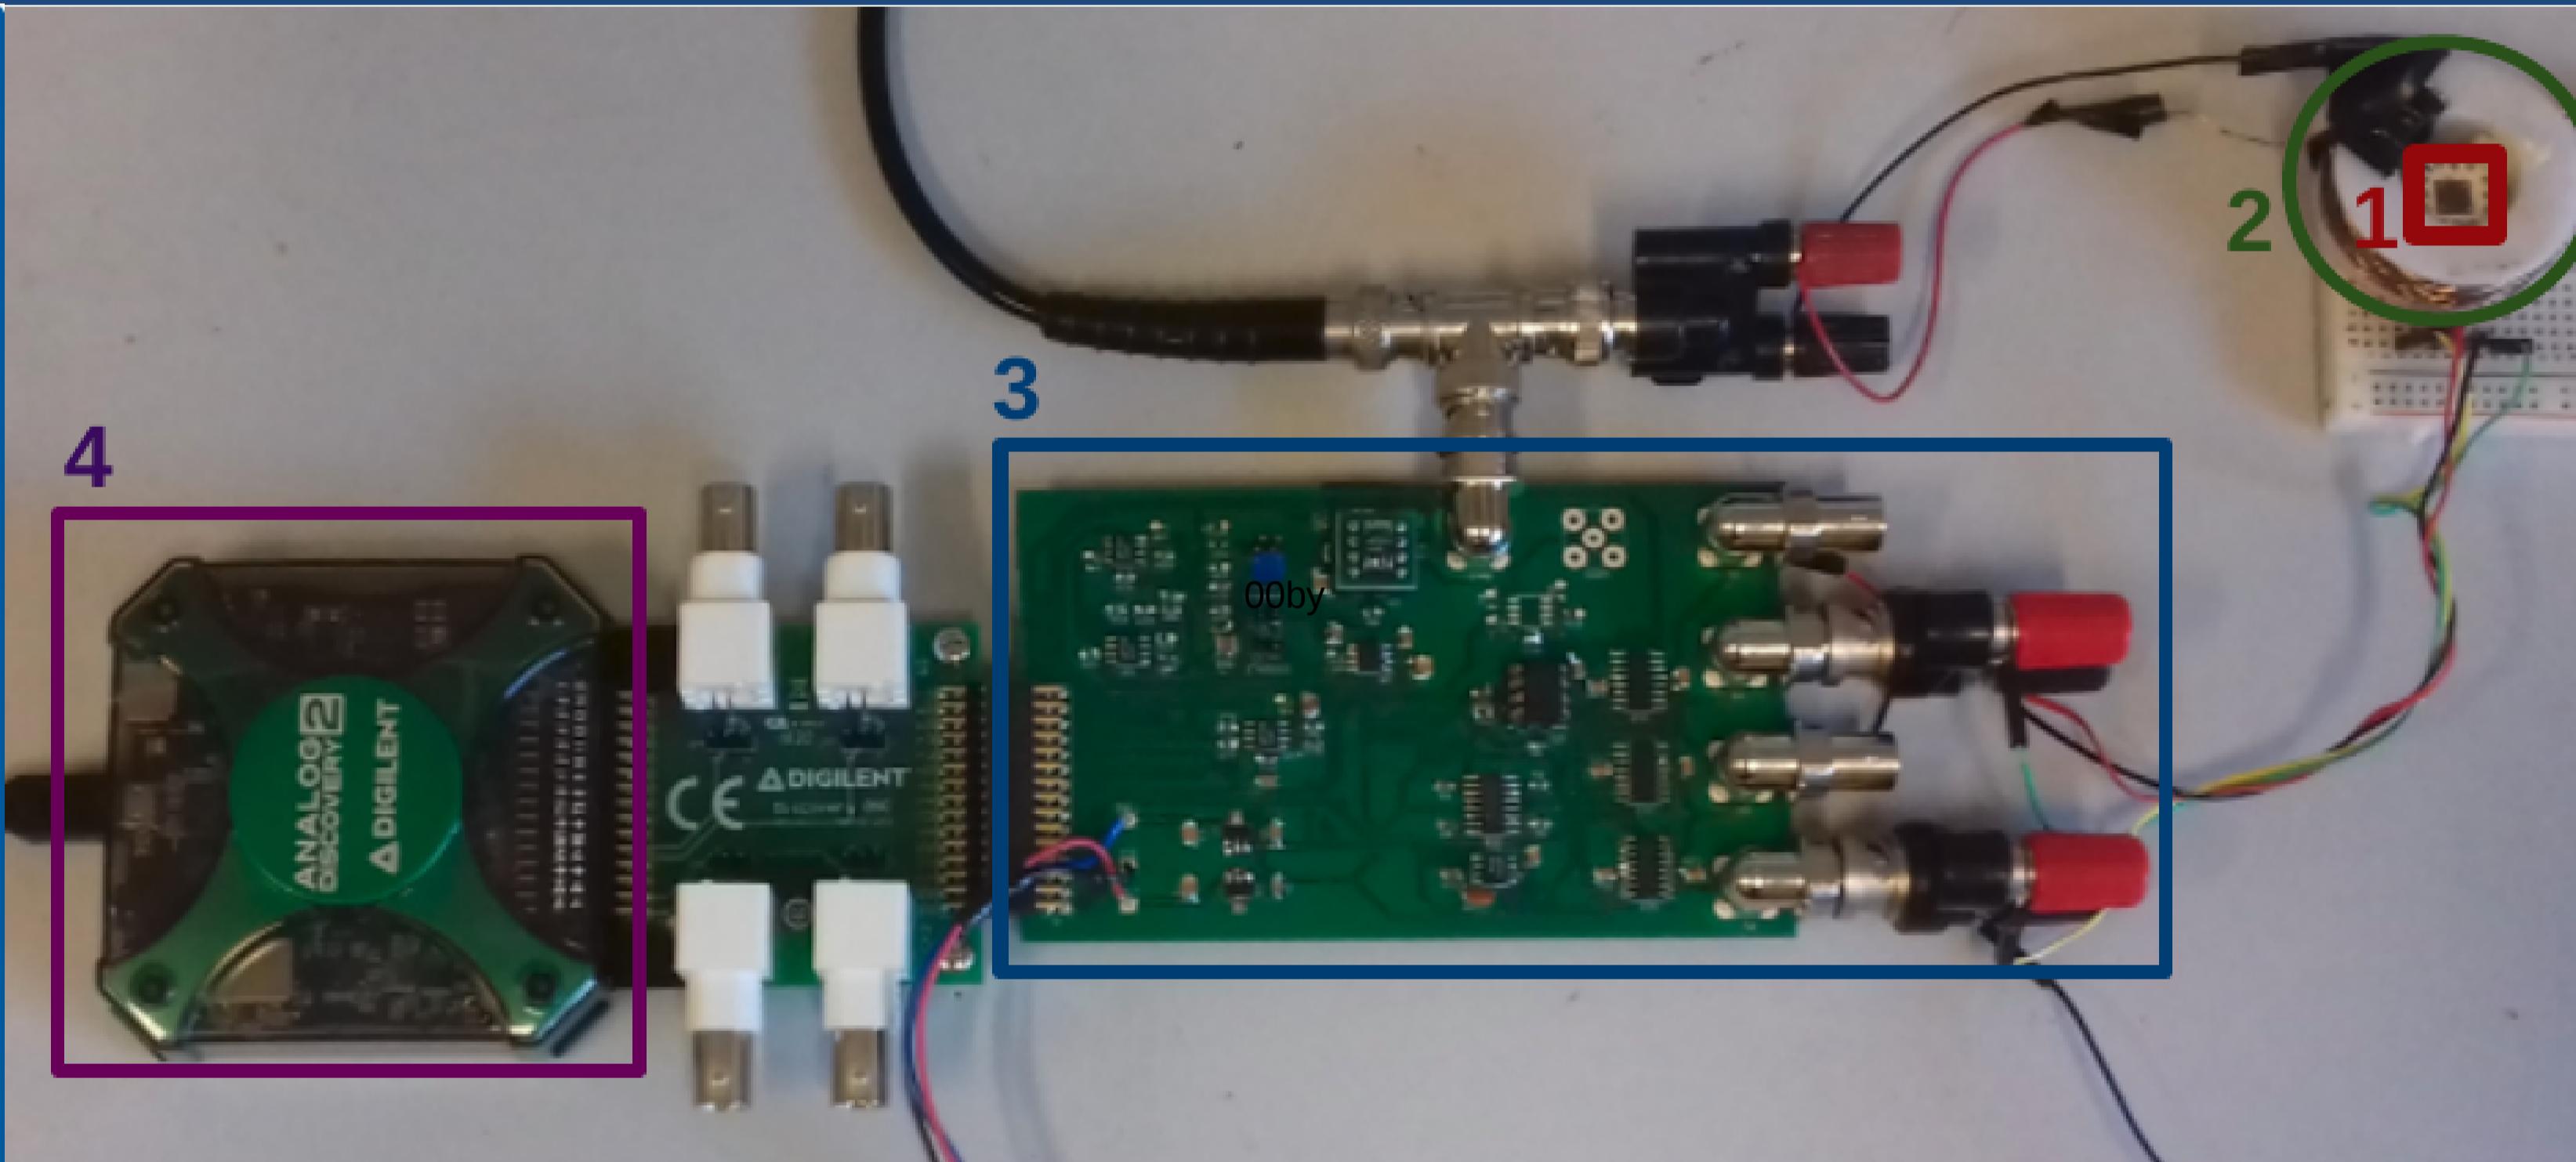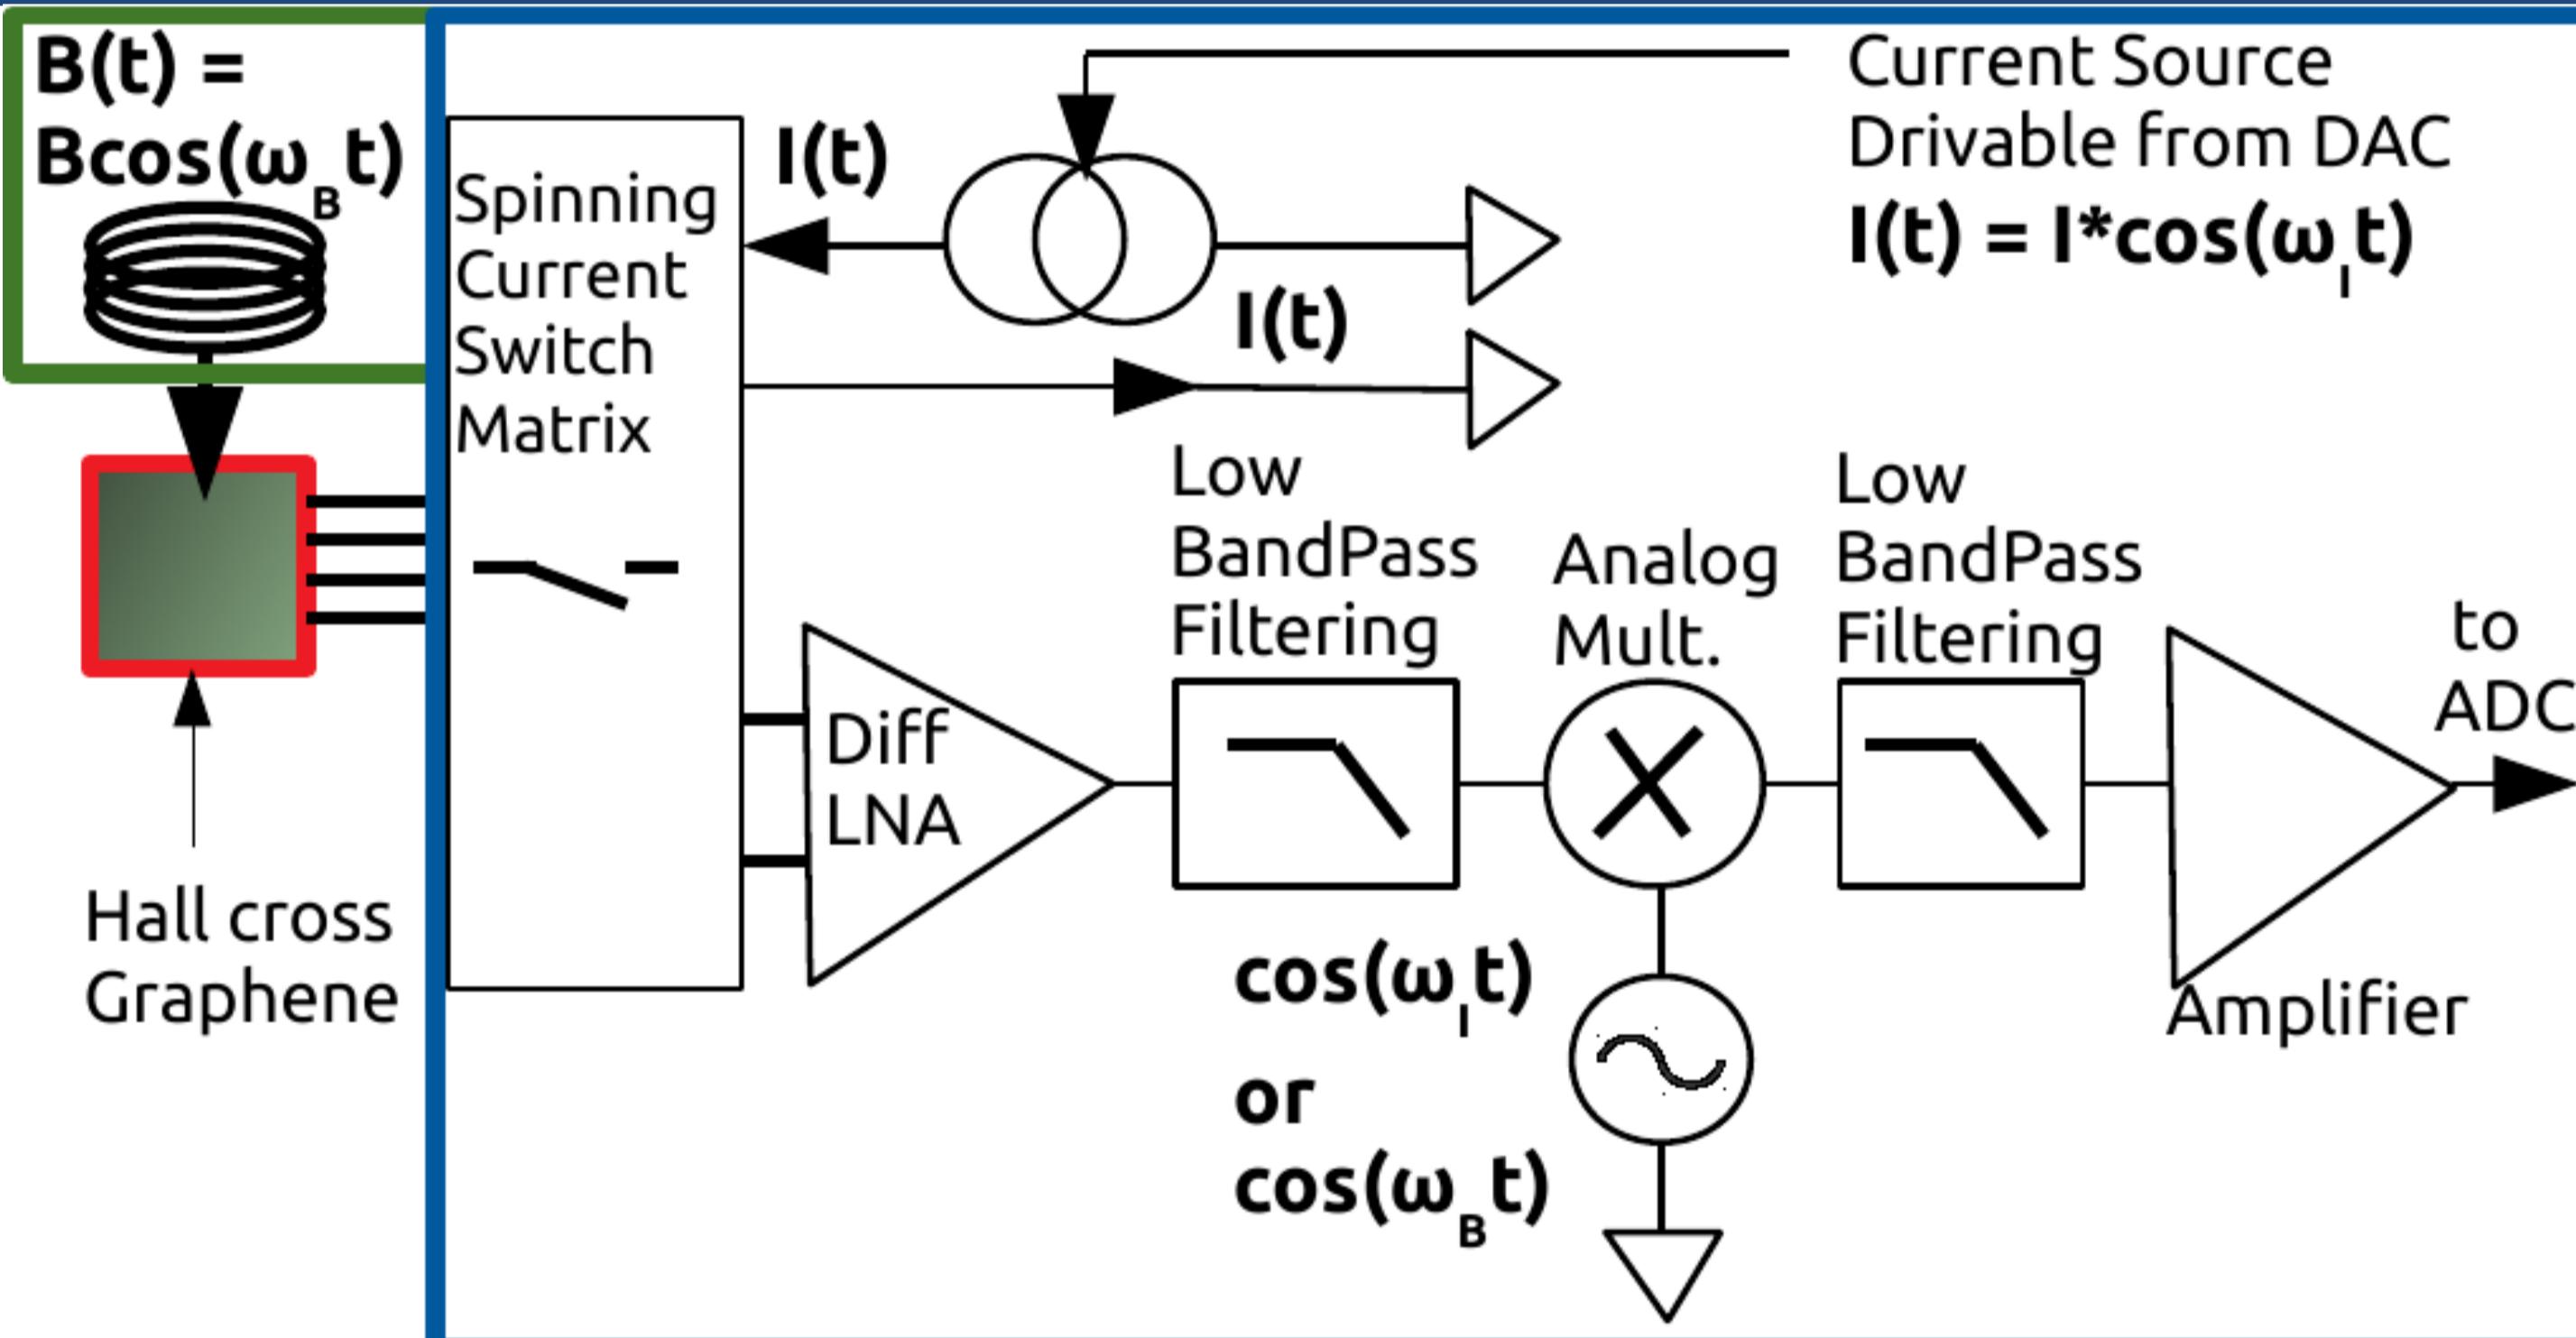

### Magnetotransport mode

#### a) Conductivity measurement

- Constant current biasing
- 2 wires V(I) (Hall cross) or 4 wires Van der Pauw (Square sample)

$$R_{HallCross} = \rho \frac{L}{W} \quad R_{sq} = \rho \frac{\pi}{\ln(2)}$$

$$\Rightarrow \sigma = qn\mu$$

#### b) Doping measurement@300K

- Magnetic field modulation
- Constant current biasing
- Hall voltage measurement

$$\Rightarrow V_{Hall} = \frac{IB \cos(\omega_B t)}{nq}$$


$$n = 4 \times 10^{12} \text{ cm}^{-2}$$

$$\mu = 1110 \text{ cm}^2 / (\text{V.s})$$

### Magnetometer mode

- Biassing current modulation/demodulation
- + Spinning current [6] => cancellation of the offset


$$\Rightarrow V_{Hall} = \frac{I \cos(\omega_I t) B}{nq} + R_{offset} \cos(\omega_I t)$$

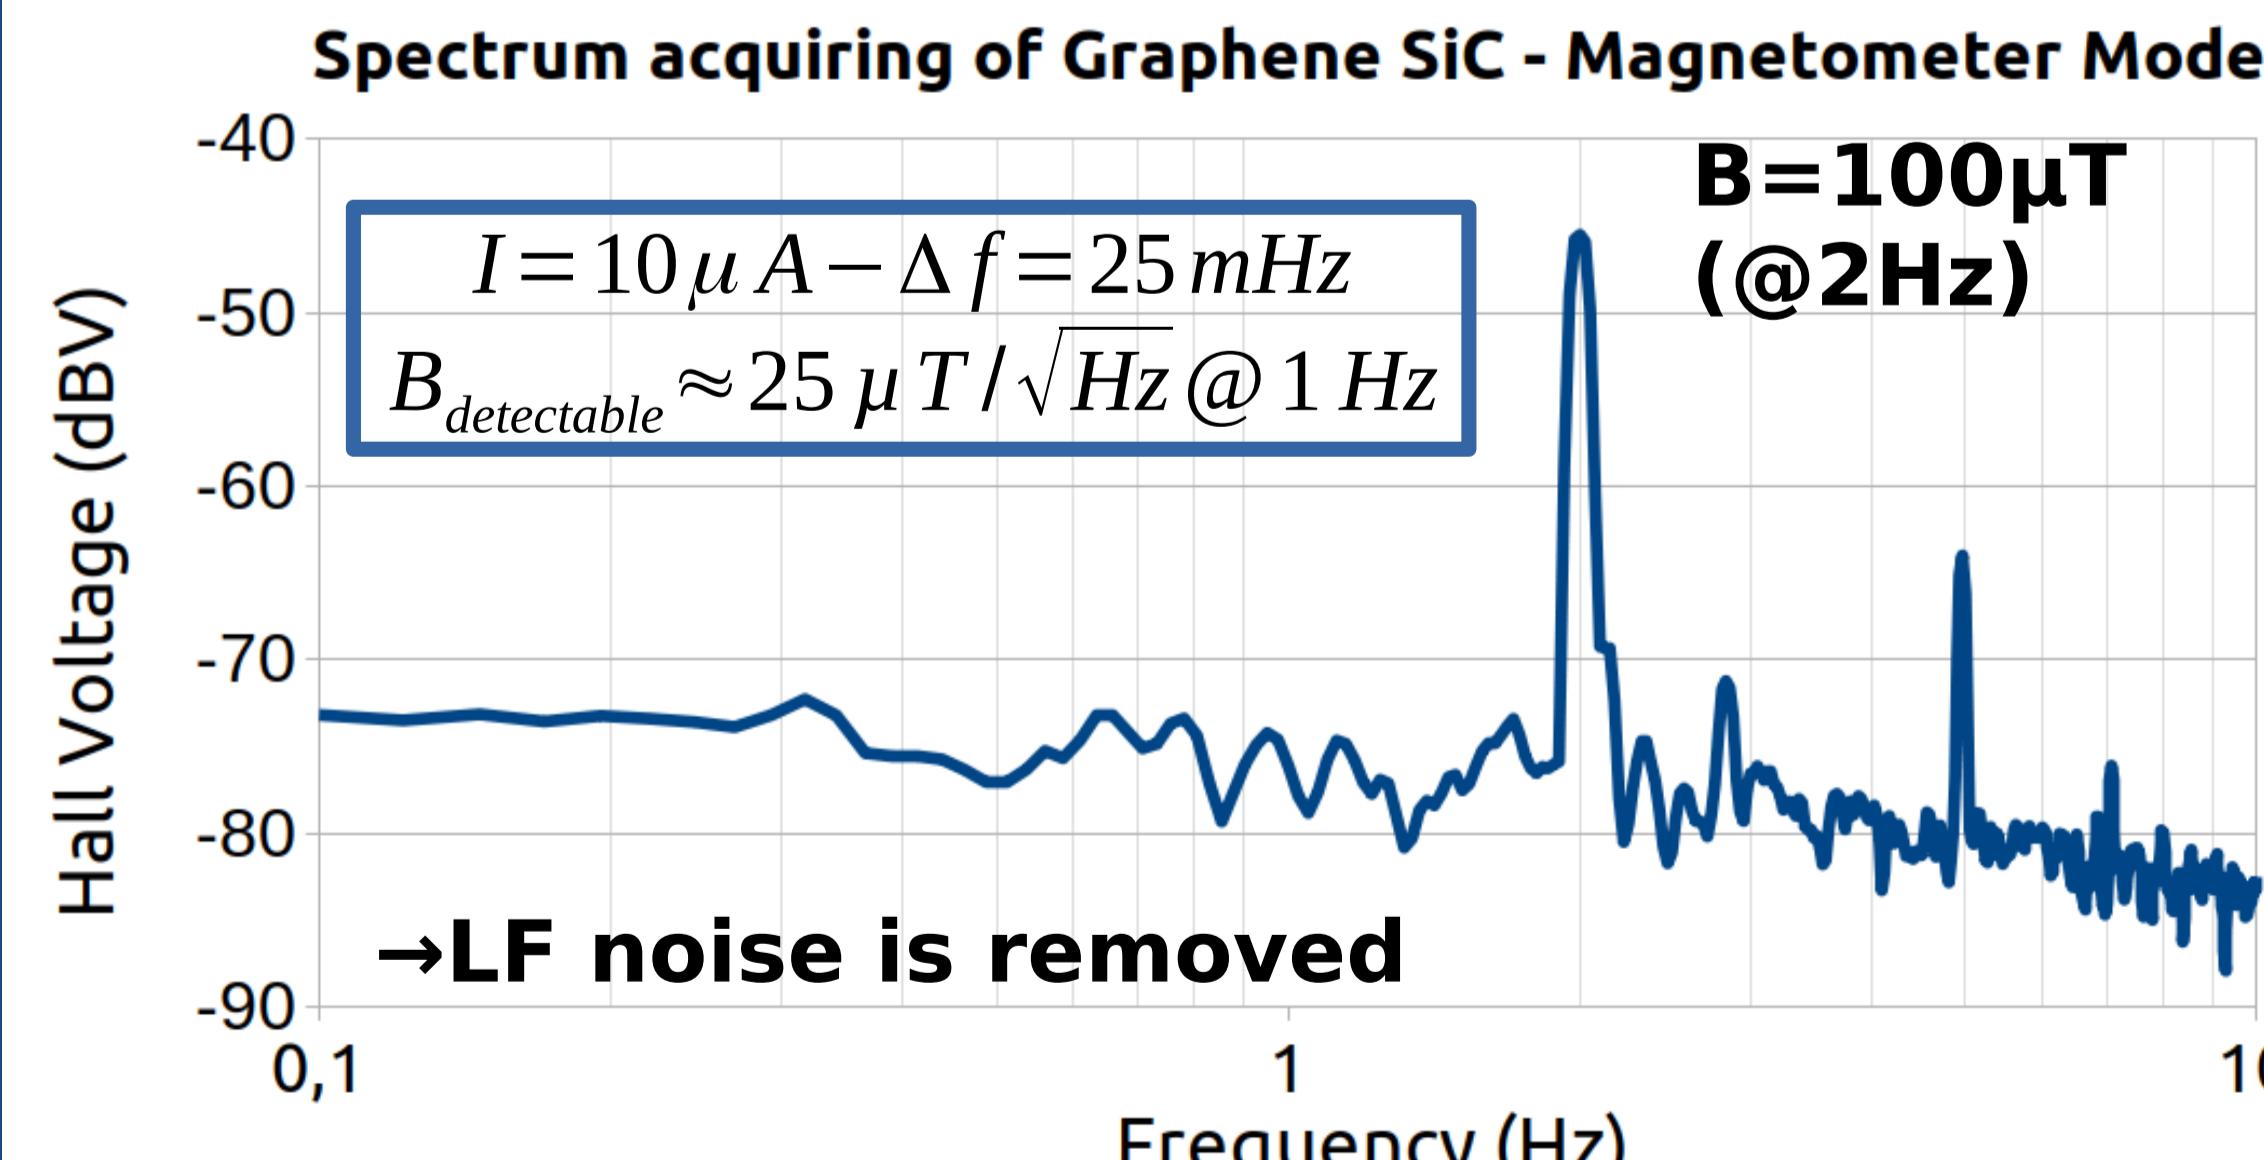

### Doping-meter mode

- Magnetic field modulation
- + spinning current
- + current modulation (option)

$$\Rightarrow n(t) = \frac{IB \cos(\omega_B t)}{V_{Hall}(t)q}$$

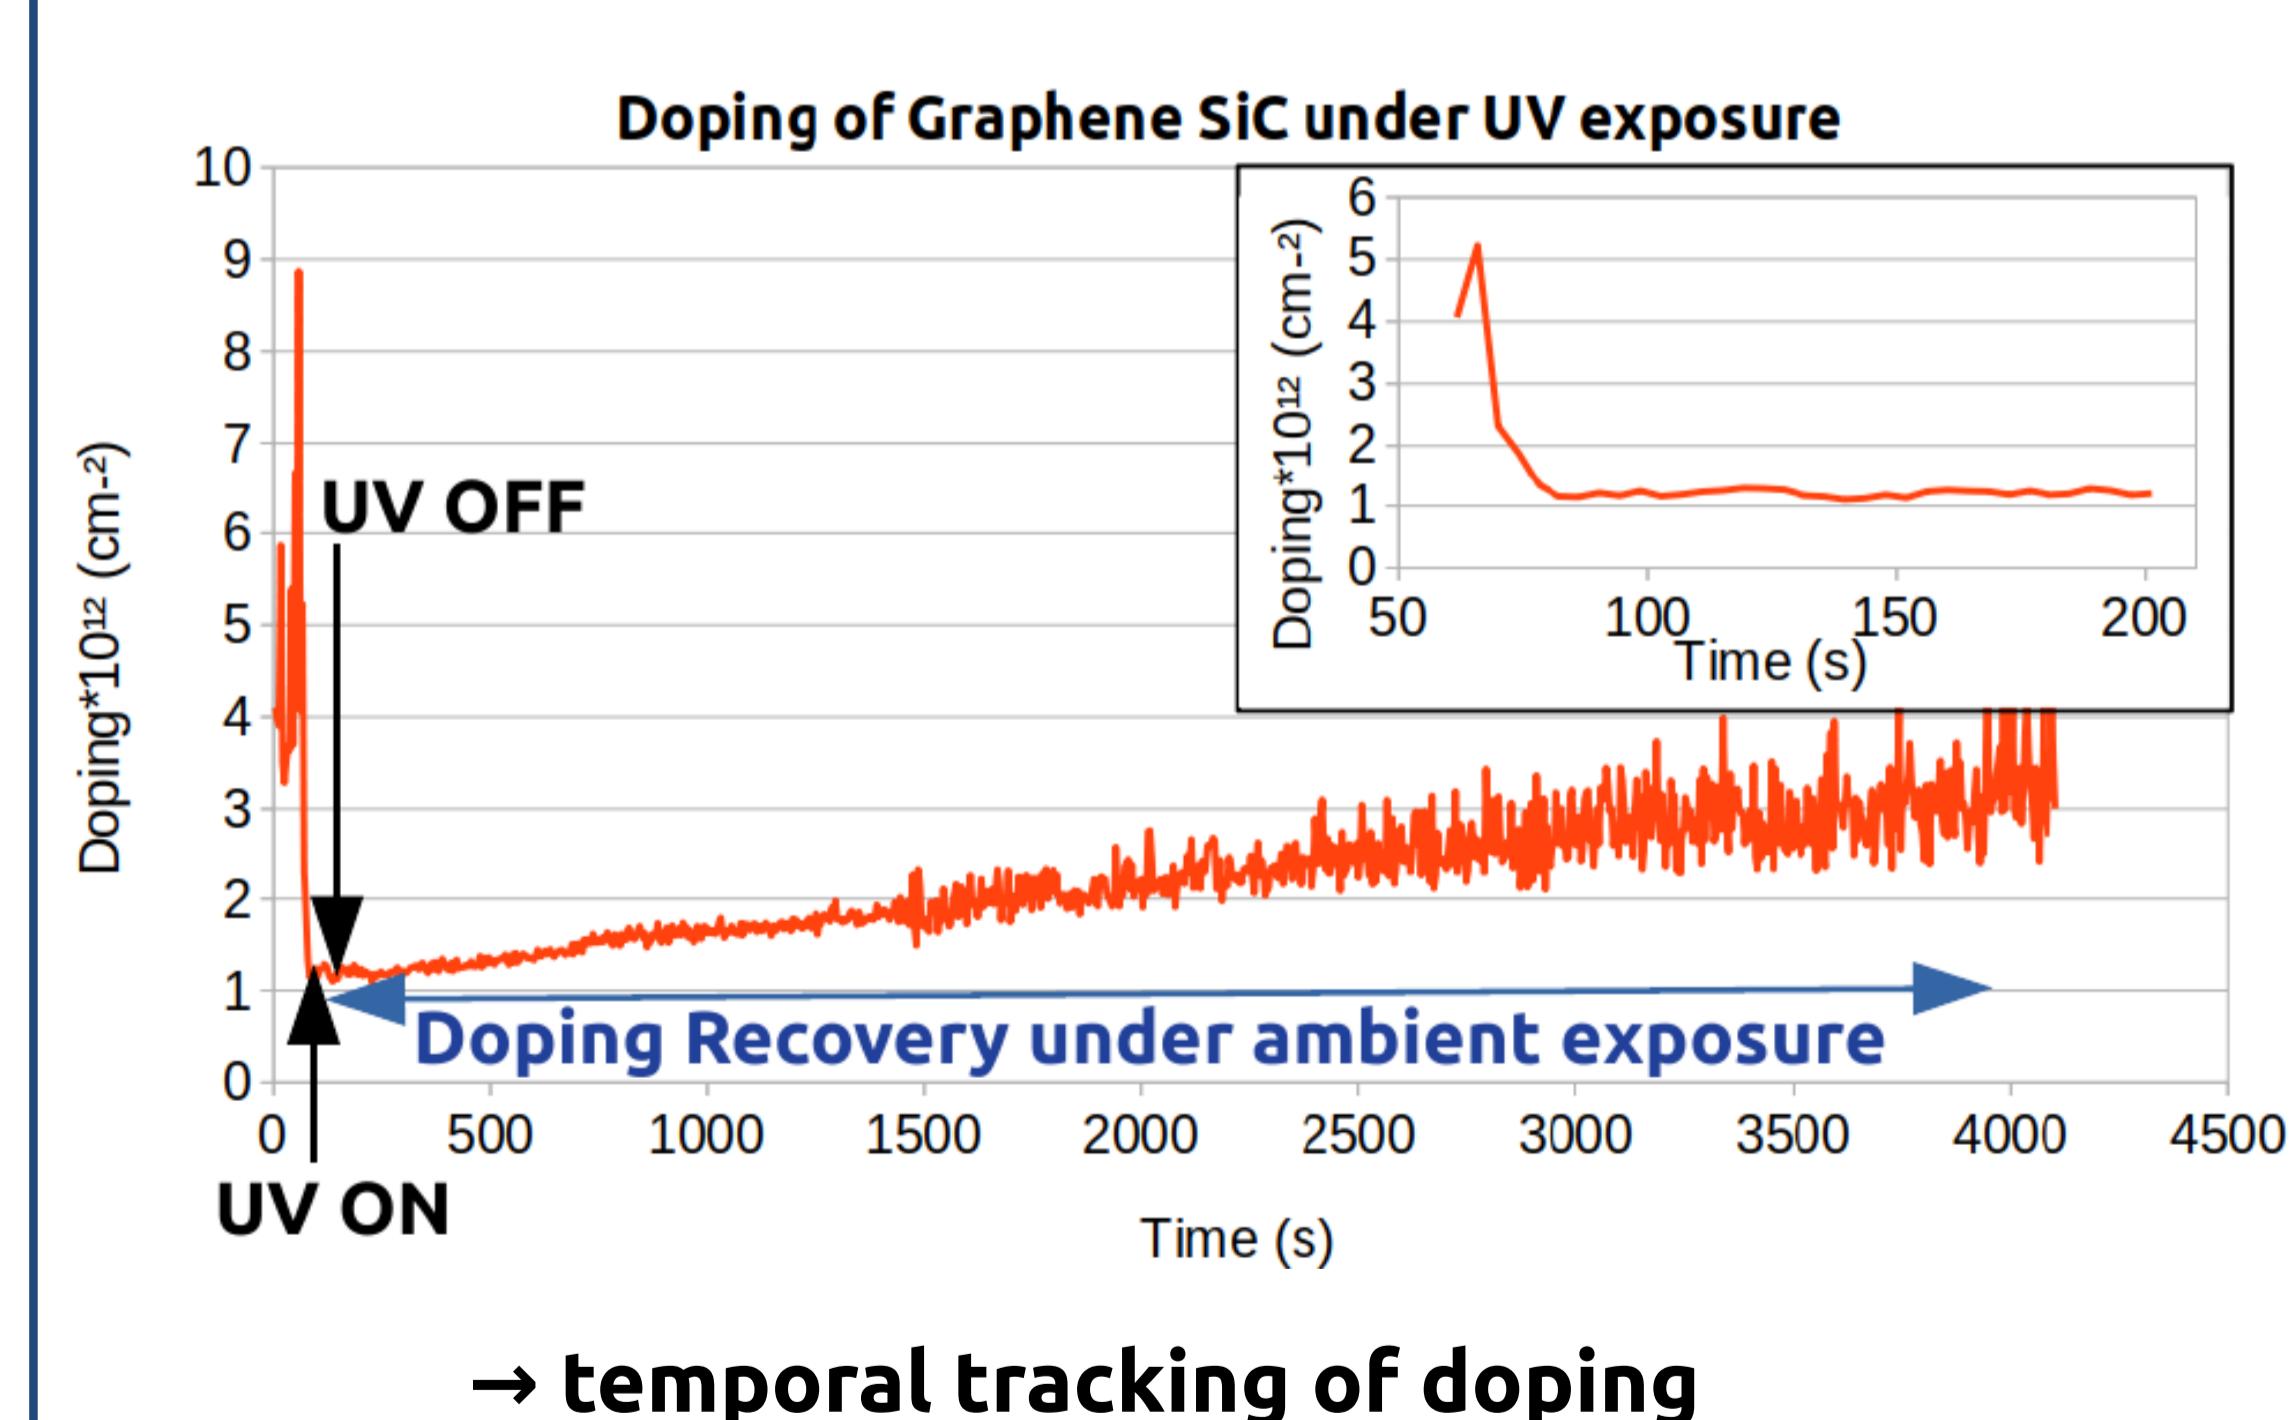

### Conclusion & perspectives

The spinning current method combined to current modulation allows to remove LF noise giving rise to equivalent magnetic noise **at low frequency** (i.e. <1Hz) significantly improved with respect to previous work [7]. Improving factors will permit to make graphene suitable candidate for magnetic field sensing.

The doping-meter mode is a first step towards the gas sensing ability [8] which will need to functionalize the graphene.

### Acknowledgments

This project is supported by the LabEx NUMEV incorporated into the I-Site MUSE. Special thanks to L2C-Team « Structures Carbonées de Basses Dimensionnalités ».

### References

- [1] Special Report on Climate Change and Land, IPCC, August (2019).
- [2] Seghieri et Harmand, Agroforesterie et services écosystémiques en zone tropicale, Ed. QUAE, (2019).
- [3] Schedin et al., Nat. Mat., 6, (2007), pp 652-655.
- [4] Fu et al., Adv. Mater., 29, (2017).
- [5] Landois et al., Phys. Chem. Chem. Phys., 19, (2017), pp. 15833–15841.
- [6] Mosser et al., IEEE Trans. on Inst. and Meas., 66, (2017), pp. 637-649.
- [7] Izci et al., IEEE Sensors Journal, 18, (2018), pp. 9534-9541.
- [8] Melios et al., ACS Sens., 3, (2018), pp. 1666-1674.