



**HAL**  
open science

## Generalization of whittle's formula to compound-gaussian processes

Jean-Pierre Delmas, Habti Abeida

► **To cite this version:**

Jean-Pierre Delmas, Habti Abeida. Generalization of whittle's formula to compound-gaussian processes. *IEEE Signal Processing Letters*, inPress, pp.746-750. 10.1109/LSP.2024.3367185 . hal-04360492v3

**HAL Id: hal-04360492**

**<https://hal.science/hal-04360492v3>**

Submitted on 14 Feb 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Generalization of Whittle's formula to compound-Gaussian processes

Jean-Pierre Delmas and Habti Abeida

**Abstract**—This letter presents an extension of the well-known Whittle's formula for the asymptotic Fisher information matrix (FIM) on the power spectrum parameters of zero-mean stationary Gaussian processes to compound Gaussian processes (CGP). The new formula includes a corrective factor that depends on the considered CG distribution, in addition to the usual Gaussian term.

**Index Terms**—Whittle's formula, Slepian-Bangs's formula, Cramér-Rao bound, compound-Gaussian process, Elliptical symmetric distributions, Student's  $t$  processes.

## I. INTRODUCTION

Parametric discrete-time CGP, also known as spherically invariant random processes (SIRP), are widely used in many statistical and engineering applications [1]. The CGP-based estimation problem attracting considerable interest is that of estimating its dependent parameters from a set of  $n$  consecutive measurements. The Cramér-Rao bound (CRB), which is typically computed as the inverse of the FIM, enables the evaluation of the performance of various parameter estimation algorithms. It is important to note closed-form expressions of the FIM, known as Slepian-Bangs (SB) formulas have been derived for the real, circular and noncircular complex Gaussian distributions in [2] [3], [4] and [5], respectively. These formulas were recently extended to circular and noncircular complex elliptically symmetric (ES) distributions in [6], [7] and [8], respectively. These latter formulas have been later extended when the density generator is considered as an infinite-dimensional nuisance parameter [9] or parameterized by a nuisance parameter [10].

However, the direct computation of these SB formulas roughly requires a number of operations proportional to  $n^3$  in most applications. Additionally, these formulas only allow numerical values without providing any engineering insight into the role of the different parameters. Alternatively, Whittle's asymptotic formula [11] was used to approximate the FIM for zero-mean non-deterministic stationary Gaussian processes. This approximation has much lower computational complexity and can be easily interpreted due to its spectral expression. To the best of our knowledge,

Habti Abeida is with Dept. of Electrical Engineering, College of Engineering, Taif University, Al-Haweiah, 21974, Saudi Arabia, email: h.abaida@tu.edu.sa, Jean-Pierre Delmas is with Samovar laboratory, Telecom SudParis, Institut Polytechnique de Paris, 91120 Palaiseau, France, e-mail: jean-pierre.delmas@it-sudparis.eu.

no work has yet addressed Whittle's asymptotic formula for zero-mean stationary CGPs.

This letter presents an alternative approximate expression of the FIM and a limit of the FIM rate for zero-mean stationary CGPs. The Toeplitz structure of the covariance matrix of the measurement is profitably used to derive these results, which generalize Whittle's formula [11]

The remainder of this letter is organized as follows. In Sec. II background on stationary CGPs is given, including Bang's formula and Whittle's formula for Gaussian processes. In Sec. III, some new results on Bang's formula for CG distributed r.v.s. are brought. After proving the EVD of the covariance matrix under various assumptions on the correlation sequence in Sec. IV, an approximation of the FIM and a limit of the FIM rate generalizing Whittle's formula are given for zero-mean stationary CGPs. Finally, Sec. VI concludes this letter.

The following notations are used in the letter:  $x =_d y$  and  $x \sim D$  mean that the r.v.  $x$  and  $y$  have the same distribution and  $x$  follows the distribution  $D$ , respectively.

## II. STATISTICAL BACKGROUND

### A. Preliminaries on stationary CGPs

Let us first recall that a discrete-time random process  $(x_k)_{k \in \mathbb{Z}}$  is said to be Gaussian if every finite collection of  $\{x_{k_1}, \dots, x_{k_n}\}$  forms a Gaussian random vector  $\mathbf{x} \stackrel{\text{def}}{=} (x_{k_1}, \dots, x_{k_n})^T \in \mathbb{R}^n$ , denoted  $\mathbf{x} \sim \mathcal{N}_n(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ , with p.d.f.

$$p(\mathbf{x}) = (2\pi)^{-n/2} |\boldsymbol{\Sigma}|^{-1/2} \exp\left(-\frac{1}{2}(\mathbf{x} - \boldsymbol{\mu})^T \boldsymbol{\Sigma}^{-1}(\mathbf{x} - \boldsymbol{\mu})\right). \quad (1)$$

It is also natural to consider more general families of ES processes (see e.g., [12]) by replacing the exponential function in (1) by an arbitrary function  $g_n(\cdot) : \mathbb{R}^+ \mapsto \mathbb{R}^+$  such that  $\int_0^\infty t^{n/2-1} g_n(t) dt < \infty$  (called density generator) to form the p.d.f. of an  $n$ -dimensional ES distributed r.v.

$$p(\mathbf{x}) = |\boldsymbol{\Sigma}|^{-1/2} g_n[(\mathbf{x} - \boldsymbol{\mu})^T \boldsymbol{\Sigma}^{-1}(\mathbf{x} - \boldsymbol{\mu})]. \quad (2)$$

In (2), it is assumed that the first and second-order moments exist, with  $\mathbb{E}(\mathbf{x}) = \boldsymbol{\mu}$  and  $\text{Cov}(\mathbf{x}) = \boldsymbol{\Sigma}$ , in order to avoid any scale ambiguity. Similarly, discrete-time ES random processes can be defined. However, to define time-discrete ES processes in such a way, not all ES distributed r.v.s can be used. In fact, the sequence of density generators  $g_n(\cdot)$  cannot be arbitrary, since it must satisfy the Kolmogorov consistency condition according to which the ES distribution

is closed under marginalization. This condition amounts to the fact that if (2) is the p.d.f. of  $\mathbf{x}_n$ , then the p.d.f. of any marginal  $\mathbf{x}_m$  of  $\mathbf{x}_n$  (where  $m > n$ ) is always given by (2). A necessary and sufficient condition for this property to hold is given in [13, Th. 2.2], namely the existence of a positive r.v.  $\tau$  of cumulative distribution function  $F\tau(\cdot)$  such that:

$$g_n(t) = (2\pi)^{-n/2} \int_0^\infty \tau^{-n/2} \exp(-t/2\tau) dF_\tau(\tau). \quad (3)$$

A further equivalent condition [14] is given by the stochastic representation of the ES distribution:

$$\mathbf{x} =_d \boldsymbol{\mu} + \sqrt{\mathcal{Q}_n} \boldsymbol{\Sigma}^{1/2} \mathbf{u}, \quad (4)$$

where  $\mathcal{Q}_n$  is a positive r.v. whose distribution depends on  $n$  which is independent of the r.v.  $\mathbf{u}$  uniformly distributed on the unit  $n$ -sphere, which has the particular form [15]:

$$\mathbf{x} =_d \boldsymbol{\mu} + \sqrt{\tau} \boldsymbol{\Sigma}^{1/2} \mathbf{n}_0, \quad (5)$$

where the r.v.  $\tau$  is independent of the r.v.  $\mathbf{n}_0 \sim \mathcal{N}_n(\mathbf{0}, \mathbf{I})$ . This is equivalent to state that the r.v.s  $\mathcal{Q}_n$  and  $\tau$  in (4)-(5) are related by  $\mathcal{Q}_n =_d \tau \chi_n^2$  where  $\tau$  and  $\chi_n^2$  are independent. This stochastic representation (5) characterizes the subclass of CG distributions, whose associated discrete-time random processes are called SIRP in the engineering literature. Further equivalent conditions on  $g_n(t)$  in (3) are given in [15]–[17].

Throughout this paper, we consider only zero-mean stationary CG processes  $(x_k)_{k \in \mathbb{Z}} \in \mathbb{R}$ . Similar to Gaussian processes, this property is ensured i.f.f. these processes are zero-mean wide-sense stationary. Their distribution is thus characterized by the distribution of the v.a.  $\tau$  and by the covariance matrix  $\text{Cov}(\mathbf{x}_n) = \boldsymbol{\Sigma}_{\mathbf{x}_n}$  of the r.v.  $\mathbf{x}_n = (x_{k+1}, x_{k+2}, \dots, x_{k+n})^T$ , which is a symmetric Toeplitz positive definite matrix with  $(\boldsymbol{\Sigma}_{\mathbf{x}_n})_{k,\ell} = r_x(\ell - k)$  where the sequence  $r_x(k) \stackrel{\text{def}}{=} \text{E}(x_\ell x_{\ell+k})$  is supposed absolutely summable. We assume that the spectrum  $S_x(f) = \sum_k r_x(k) e^{-i2\pi kf}$  depends on a parameter  $\boldsymbol{\theta} = (\theta_1, \dots, \theta_q)^T \in \mathbb{R}^q$ , which is omitted by simplicity. Although it is assumed that the mapping  $\boldsymbol{\theta} \mapsto S_x(f)$  is differentiable in the vicinity of the true value of  $\boldsymbol{\theta}$ .

### B. Reminder of results on Bangs's formulas

This is a brief reminder of the Slepian-Bangs formula for zero-mean ES distributed data  $\mathbf{x}_n \in \mathbb{R}^n$ . The formula is reduced to Bang's formula, where the density generator  $g_n(t)$  of the dependent distribution is either known or unknown [10]. This Bang's formula is given by the elementwise FIM under usual regularity conditions on  $g_n(t)$ :

$$\begin{aligned} (\mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta}))_{k,\ell} &= a_{1,n} \text{Tr}(\boldsymbol{\Sigma}_{\mathbf{x}_n}^{-1} \boldsymbol{\Sigma}'_{\mathbf{x}_n,k} \boldsymbol{\Sigma}_{\mathbf{x}_n}^{-1} \boldsymbol{\Sigma}'_{\mathbf{x}_n,\ell}) \\ &+ a_{2,n} \text{Tr}(\boldsymbol{\Sigma}_{\mathbf{x}_n}^{-1} \boldsymbol{\Sigma}'_{\mathbf{x}_n,k}) \text{Tr}(\boldsymbol{\Sigma}_{\mathbf{x}_n}^{-1} \boldsymbol{\Sigma}'_{\mathbf{x}_n,\ell}) \end{aligned} \quad (6)$$

with  $\boldsymbol{\Sigma}'_{\mathbf{x}_n,k} \stackrel{\text{def}}{=} \frac{\partial \boldsymbol{\Sigma}_{\mathbf{x}_n}}{\partial \theta_k}$ . The weights  $a_{1,n}$  and  $a_{2,n}$  are free from scalar ambiguity and given by

$$a_{1,n} = \frac{1}{2} \xi_{1,n} \quad (7)$$

for both classic and semiparametric Bangs's formulas, and

$$a_{2,n} = a_{2,n}^{\text{Clas}} = \frac{1}{4} (\xi_{1,n} - 1), \quad a_{2,n} = a_{2,n}^{\text{SePa}} = -\frac{1}{2n} \xi_{1,n} \quad (8)$$

for classic and semiparametric Bangs's formulas, respectively where

$$\xi_{1,n} = \frac{\text{E}[\mathcal{Q}_n^2 \phi_n^2(\mathcal{Q}_n)]}{n(n+2)}, \quad (9)$$

with  $\phi_n(t) \stackrel{\text{def}}{=} \frac{2}{g_n(t)} \frac{dg_n(t)}{dt}$ .

For Gaussian distributions  $\tau = 1$  gives  $\xi_{1,n}^{\text{G}} = 1$ , and for Student's  $t$ -distributions  $\tau^{-1} \sim \text{Gam}(\nu/2, 2/\nu)$  for which  $\xi_{1,n}^{\text{St}}$  has been derived in the circular complex case in [6], and in the real case in [10] using the real-to-complex representation, yielding

$$\xi_{1,n}^{\text{St}} = \frac{n + \nu}{n + \nu + 2}, \quad (10)$$

where  $\nu > 2$  is the degree of freedom parameter. For the generalized Gaussian (GG) distributions, it was proved in [19] that if the exponent  $s$  satisfies  $s \in (0, 1]$ , then these distributions belong to the subset of the CG distributions, whose p.d.f. of  $\sqrt{\tau}$  is given by [19, Th. 1]. The corresponding  $\xi_{1,n}^{\text{GG}}$  was derived in the circular complex case in [7], and in the real case in [10] using the real-to-complex representation, giving

$$\xi_{1,n}^{\text{GG}} = \frac{n + 2s}{n + 2}. \quad (11)$$

### C. Whittle's formula for Gaussian processes

The Whittle's formula presented here provides the limit of the FIM rate in the frequency domain for zero-mean purely non-deterministic stationary Gaussian processes [11, rel. (6.3)].

$$\lim_{n \rightarrow \infty} \frac{1}{n} (\mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta}))_{k,\ell} = \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df. \quad (12)$$

with  $S'_{x,k}(f) \stackrel{\text{def}}{=} \frac{\partial S_x(f)}{\partial \theta_k}$ .

Whittle first derived this formula using the asymptotic covariance least squares estimator in the multivariable framework. Porat [30, Th. 5.3] later proved it in the univariable framework using linear predictions.

## III. BANGS'S FORMULAS FOR CG DISTRIBUTIONS

Using  $\mathcal{Q}_n =_d \tau \chi_n^2$  for CG distributions, the general expression (9) of  $\xi_{1,n}$  can be rewritten in the following new form:

$$\begin{aligned} \xi_{1,n} &= \frac{1}{n(n+2)} \int_0^\infty \int_0^\infty u^2 v^2 \\ &\left( \frac{\int_0^\infty \tau^{-n/2-1} \exp(-uv/2\tau) dF_\tau(\tau)}{\int_0^\infty \tau^{-n/2} \exp(-uv/2\tau) dF_\tau(\tau)} \right)^2 dF_\tau(v) p_{\chi_n^2}(u) du, \end{aligned} \quad (13)$$

depending on  $n$  and the distribution of the r.v.  $\tau$ , under the constraint  $E(\tau) = 1$  to ensure that  $\text{Cov}(\mathbf{x}_n) = \Sigma_{\mathbf{x}_n}$ . Note that a direct calculation of the FIM was carried out in the case of complex circular CG distributions [18, Eqs. (19b), (20), (21b), (21c)] which leads to a much less compact expression.

Moreover, it follows from [20, Appendix A] for complex circular case, that for real-valued ES distributions

$$\frac{E[\mathcal{Q}_n^2 \phi_n^2(\mathcal{Q}_n)]}{n(n+2)} = 1 - 2 \frac{E[\mathcal{Q}_n^2 \phi_n'(\mathcal{Q}_n)]}{n(n+2)}, \quad (14)$$

with  $\phi_n'(t) \stackrel{\text{def}}{=} \frac{d\phi_n(t)}{dt}$ . We get for CG distributions, using  $\phi_n'(t) \geq 0$  proved in the Appendix, that  $0 < \xi_{1,n} \leq 1$ , and  $\xi_{1,n} = 1$  is equivalent to  $E[\mathcal{Q}_n^2 \phi_n'(\mathcal{Q}_n)] = 0 \Leftrightarrow \mathcal{Q}_n^2 \phi_n'(\mathcal{Q}_n) = 0$  a.s.  $\Leftrightarrow \phi_n'(\mathcal{Q}_n) = 0$  because  $\mathcal{Q}_n > 0$  a.s., i.e.,  $\mathbf{x}_n$  is Gaussian distributed. This allows us to state the new result:

*Result 1:* For CG distributions, the parameters  $(a_{1,n}, a_{2,n})$  of the FIM satisfy the relations:  $0 \leq a_{1,n} \leq 1/2$  and  $a_{2,n} \leq 0$ , and  $\mathbf{x}_n$  is Gaussian distributed i.f.f.  $(a_{1,n}, a_{2,n}) = (1/2, 0)$ .

This property proves that the Gaussian distribution always leads to the smallest stochastic CRB for CG distributions, but not in the larger family of the ES distributions as shown by the GG distributions associated with  $s > 1$  (11). In contrast, for parameterized mean, the Gaussian distribution always yields the largest stochastic CRB for all second-order distributions [21].

The asymptotic behavior of the sequence  $\xi_{1,n}$  is generally difficult to analyze from the intricate expression (13). However, in the next section, we will prove that  $\lim_{n \rightarrow \infty} \xi_{1,n} = 1$ .

#### IV. WHITTLE'S FORMULA FOR CG PROCESSES

##### A. Approximation formula

The following approximate eigenvalue decomposition (EVD) of the Toeplitz structured matrix  $\Sigma_{\mathbf{x}_n}$  has been derived and used for large  $n$  compared to the correlation length of  $x_k$  without rigorous theoretical support (see e.g., [22, eq. (9)], [23, eq. (5)] [24, p.186]):

$$\mathbf{W}_n^H \Sigma_{\mathbf{x}_n} \mathbf{W}_n \approx \text{Diag}(S_x(0), S_x(\frac{1}{n}), \dots, S_x(\frac{n-1}{n})), \quad (15)$$

where  $\mathbf{W}_n \in \mathbb{C}^{n \times n}$  is the discrete Fourier transform (DFT) unitary matrix defined by  $[\mathbf{W}_n]_{k,\ell} \stackrel{\text{def}}{=} \frac{1}{\sqrt{n}} e^{i2\pi(k-1)(\ell-1)/n}$ .

But this approximation (15) can be justified by the following limits for a  $(k, \ell)$ -th fixed element of  $\mathbf{W}_n^H \Sigma_{\mathbf{x}_n} \mathbf{W}_n$ , which are proved in the Appendix under the following conditions: For absolutely summable  $r_x(k)$ , one obtains

$$\lim_{n \rightarrow \infty} [\mathbf{W}_n^H \Sigma_{\mathbf{x}_n} \mathbf{W}_n]_{k,k} - S_x(\frac{k-1}{n}) = 0, \quad (16)$$

and, additionally, for banded Toeplitz matrices  $\Sigma_{\mathbf{x}_n}$

$$\lim_{n \rightarrow \infty} [\mathbf{W}_n^H \Sigma_{\mathbf{x}_n} \mathbf{W}_n]_{k,\ell} - \delta_{k,\ell} S_x(\frac{k-1}{n}) = 0, \quad (17)$$

where is  $\delta_{k,\ell}$  the Kronecker notation. Likewise, (17) also remains valid for the strongest absolutely summable condition  $kr_x(k)$ . Using  $\mathbf{W}_n^H \Sigma'_{\mathbf{x}_n, k} \mathbf{W}_n \approx \text{Diag}(S'_{x,k}(0), S'_{x,k}(\frac{1}{n}), \dots, S'_{x,k}(\frac{n-1}{n}))$  deduced from (15), we get if  $S_x(f) > 0$  for  $f \in [0, 1]$ :

$$\begin{aligned} & \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k} \Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, \ell}) = \\ & \text{Tr}[(\mathbf{W}_n \Sigma_{\mathbf{x}_n}^{-1} \mathbf{W}_n^H)(\mathbf{W}_n \Sigma'_{\mathbf{x}_n, k} \mathbf{W}_n^H)(\mathbf{W}_n \Sigma_{\mathbf{x}_n}^{-1} \mathbf{W}_n^H) \\ & (\mathbf{W}_n \Sigma'_{\mathbf{x}_n, \ell} \mathbf{W}_n)] \approx n \sum_{p=0}^{n-1} S_x^{-2}(\frac{p}{n}) S'_{x,k}(\frac{p}{n}) S'_{x,\ell}(\frac{p}{n}) \frac{1}{n}. \end{aligned} \quad (18)$$

We obtain for  $n$  sufficiently large, by replacing the Riemann sum at the points for  $\{0, \frac{1}{n}, \dots, \frac{n-1}{n}\}$  (18) with an integral, the approximation

$$\frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k} \Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, \ell}) \approx \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df. \quad (19)$$

Similarly, we have the following approximation

$$\frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k}) \approx \int_0^1 S_x^{-1}(f) S'_{x,k}(f) df. \quad (20)$$

Inserting (19) and (20) in (6), we immediately deduce the following new result:

*Result 2:* The entries of the FIM for zero-mean stationary CG processes are given for large  $n$  by the approximation:

$$\begin{aligned} \frac{1}{n} (\mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta}))_{k,\ell} & \approx a_{1,n} \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df \\ & + n a_{2,n} \int_0^1 S_x^{-1}(f) S'_{x,k}(f) df \int_0^1 S_x^{-1}(f) S'_{x,\ell}(f) df, \end{aligned} \quad (21)$$

where  $a_{1,n}$  and  $a_{2,n}$  are respectively given by (7) and (8), which are expressed in terms of  $\xi_{1,n}$  in (9).

##### B. Asymptotic formula

We consider here asymptotic properties of Toeplitz matrices depending on specific conditions on the spectra of  $x_k$ . Under the condition that there exists an  $m$  such that  $S_x(f) \geq m > 0$  and thanks to the notion of asymptotic equivalence of sequences of Toeplitz and circulant structured matrices with absolutely summable elements [27], [28], the following limits are proved in the Appendix of this paper:

$$\begin{aligned} & \lim_{n \rightarrow \infty} \frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k} \Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, \ell}) \\ & = \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df \end{aligned} \quad (22)$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k}) = \int_0^1 S_x^{-1}(f) S'_{x,k}(f) df. \quad (23)$$

Limits (22) and (23) are also proved in [26, Th. 5.1] for long-range dependent Gaussian processes, whose spectrum  $S_x(f)$  and  $(S'_{x,k}(f))_{k=1,\dots,q}$  satisfy some conditions [26, A2-A7]. However, since the proof only requires second-order properties of  $x_k$ , (22) and (23) remain valid for CG ARMA processes.

Finally, for Gaussian ARMA processes, whose spectra  $S_x(f) = \sigma^2 \left| \frac{A(e^{-i2\pi f})}{B(e^{-i2\pi f})} \right|^2$  such that  $A(z) = \sum_{k=0}^p a_k z^k$  and  $B(z) = \sum_{k=0}^q b_k z^k$  are both bounded away from zero for  $|z| \leq 1$ , the following stronger limits are proved in [25, Th. 1]:

$$\begin{aligned} & \frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k} \Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, \ell}) \\ &= \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df + O\left(\frac{1}{n}\right) \end{aligned} \quad (24)$$

and

$$\frac{1}{n} \text{Tr}(\Sigma_{\mathbf{x}_n}^{-1} \Sigma'_{\mathbf{x}_n, k}) = \int_0^1 S_x^{-1}(f) S'_{x,k}(f) df + O\left(\frac{1}{n}\right). \quad (25)$$

These limits are still valid for CG ARMA processes for the same reasons as previously stated.

Now consider, the FIM rate  $\frac{1}{n} \mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta})$ , whose limit as  $n$  tends to  $\infty$  exists from (6), (22) and (23) i.f.f  $\lim_{n \rightarrow \infty} a_{1,n}$  and  $\lim_{n \rightarrow \infty} na_{2,n}$  exist. Proving these latter limits from (13) is rather challenging. However, it is proven in [29, rel. 32] that  $\lim_{n \rightarrow \infty} \frac{1}{n} \mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta})$  exists for stationary processes with finite Markov order (i.e., where there exists  $P \in \mathbb{N}$  such that  $p(x_n/x_{n-1}, x_{n-2}, \dots) = p(x_n/x_{n-1}, \dots, x_{n-P})$ ).

Thus, we conclude from  $na_{2,n}^{\text{Clas}} = \frac{n}{4}(\xi_{1,n} - 1)$  (8) that for these processes  $\lim_{n \rightarrow \infty} \xi_{1,n} = 1$ , which implies from (7) that  $\lim_{n \rightarrow \infty} a_{1,n} = 1/2$ , and that  $\lim_{n \rightarrow \infty} na_{2,n}^{\text{Clas}} = c \leq 0$  from Result 1 and  $\lim_{n \rightarrow \infty} na_{2,n}^{\text{SePa}} = -1/2$  from (8). And furthermore, since more knowledge about the density generator leads to a larger FIM, we get  $c \geq -1/2$ . This allows us to state the following new result, which is an extension of Whittle's formula [11, rel. (6.3)], [30, Th. 5.3]:

*Result 3:* For stationary CG processes of finite Markov order, the FIM rate limit, which is a generalization of Whittle's formula for purely non-deterministic stationary Gaussian processes, has the following expression

$$\begin{aligned} \lim_{n \rightarrow \infty} \frac{1}{n} (\mathbf{I}_{\mathbf{x}_n}(\boldsymbol{\theta}))_{k,\ell} &= \frac{1}{2} \int_0^1 S_x^{-2}(f) S'_{x,k}(f) S'_{x,\ell}(f) df \\ &+ c \int_0^1 S_x^{-1}(f) S'_{x,k}(f) df \int_0^1 S_x^{-1}(f) S'_{x,\ell}(f) df, \end{aligned} \quad (26)$$

where  $c = -1/2$  when  $g_n(\cdot)$  is unknown, and  $-1/2 \leq c \leq 0$ , depending on the CG distribution when  $g_n(\cdot)$  is known.

From the values of  $\xi_{1,n}$  given in Sec. II-B,  $c = 0$ ,  $c = -1/2$ , and  $c = -(1-s)/2$  for the Gaussian, Student's  $t$  and GG distributions with  $s \in (0, 1]$ , respectively. We will see in the next section that  $c = 0$  for the  $\epsilon$ -contaminated Gaussian distribution.

## V. NUMERICAL ILLUSTRATIONS

In this section, we assume that  $x_k$  is a zero-mean  $\epsilon$ -contaminated Gaussian distributed with  $P(\tau = \tau_1) = 1 - \epsilon$  and  $P(\tau = \tau_0) = \epsilon$  under the constraint  $E(\tau) = (1 - \epsilon)\tau_1 + \epsilon\tau_0 = 1$ , where  $(\tau_0, \epsilon)$  are parameters that control the heaviness of the tails relative the Gaussian distribution. We assume an AR(1) spectrum, i.e.,  $S_x(f) = \frac{\sigma_x^2(1-a^2)}{|1-ae^{-i2\pi f}|^2}$  associated with  $r_x(k) = \sigma_x^2 a^{|k|}$  and  $|a| < 1$ , where  $\theta_1 \stackrel{\text{def}}{=} a$  is the only unknown parameter.

From numerical calculations, we can state that the approximations (19) and (20) are valid with a relative accuracy of 1% for arbitrary values of  $|a| < 1$ , and that  $\lim_{n \rightarrow \infty} na_{2,n} = 0$  as shown e.g. in Fig.1 for  $\epsilon = 0.1$  and some values of  $\tau_0$ . As  $\tau_0$  increases, distribution of  $\mathbf{x}_n$  deviates more from Gaussian distribution and  $na_{2,n}$  converges more slowly to 0.

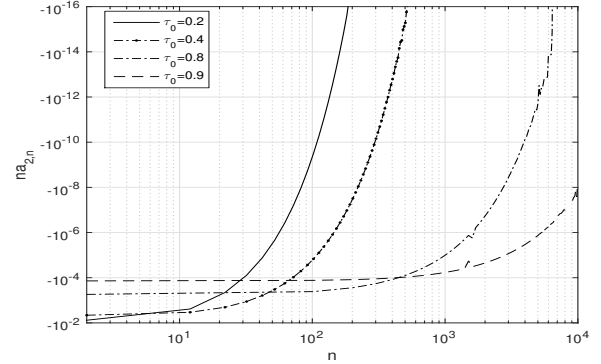


Fig.1 Coefficients  $na_{2,n}$  as a function of  $n$ .

## VI. CONCLUSION

This letter presents complementary results on Bangs's formula for CG distributed r.v.s. It provides an approximation of the FIM and a limit of the FIM rate, which is a generalization of Whittle's formula, for zero-mean stationary CG distributed random processes. Research is underway on extending Whittle's formula to continuous-time and multivariate stationary CG distributed random processes and giving some applications.

## APPENDIX

### A. Proof of $\phi'_n(t) \geq 0$

The first and second derivatives of  $g_n(t)$  can be obtained using (3), which yields  $g_n^{(k)}(t) = (-2)^{-k} (2\pi)^{-n/2} \int_0^\infty \tau^{-n/2-k} \exp(-t/2\tau) dF_\tau(\tau)$ ,  $k = 1, 2$ . Thus, from the definition of  $\phi_n(t)$ ,  $\phi'_n(t) \geq 0 \Leftrightarrow g_n^{(2)}(t)g_n(t) \geq [g_n^{(1)}(t)]^2$ , which holds thanks to Cauchy-Schwarz inequality. ■

### B. Proof of (16)

We get straightforwardly

$$[\mathbf{W}_n^H \Sigma_{\mathbf{x}_n} \mathbf{W}_n]_{k,k} = \sum_{|p| \leq n-1} \left(1 - \frac{|p|}{n}\right) r_x(p) e^{-i2\pi p(k-1)/n}.$$

Consequently, as  $n$  tends to  $\infty$ ,  $[\mathbf{W}_n^H \boldsymbol{\Sigma}_{\mathbf{x}_n} \mathbf{W}_n]_{1,1}$  tends to  $S_x(0) = \sum_p r_x(p)$  according to the Cesaro summability property [30, A10]. Therefore, for  $k > 1$ , we obtain:

$$[\mathbf{W}_n^H \boldsymbol{\Sigma}_{\mathbf{x}_n} \mathbf{W}_n]_{k,k} - S_x\left(\frac{k-1}{n}\right) = -\sum_{|p| \leq n-1} \frac{|p|}{n} r_x(p) e^{-i2\pi p(k-1)/n} - \sum_{|p| \geq n} r_x(p) e^{-i2\pi p(k-1)/n}, \quad (27)$$

and the modulus of the two terms of (27) are respectively upper-bounded by  $\frac{1}{n} \sum_{|p| \leq n-1} |p| |r_x(p)|$  and  $\sum_{|p| \geq n} |r_x(p)|$ . The first bound tends to zero as a consequence of the Cesaro summability property [30, A10], and the second term also tends to zeros as a reminder of the convergent series  $\sum_p |r_x(p)|$ . ■

### C. Proof of (17)

Suppose that  $r_x(p) = 0$  for  $|p| > P$ . We get straightforwardly for  $k \neq \ell$  and  $n > P$ :

$$\begin{aligned} [\mathbf{W}_n^H \boldsymbol{\Sigma}_{\mathbf{x}_n} \mathbf{W}_n]_{k,\ell} &= \frac{1}{n} r_x(0) e^{i2\pi(k-\ell)/n} \sum_{q=1}^n [e^{-i2\pi(k-\ell)/n}]^q \\ &+ \frac{1}{n} \sum_{0 < p \leq P} r_x(p) (e^{i2\pi p(1-\ell)/n} + e^{-i2\pi p(1-\ell)/n}) \\ &\left( \sum_{q=1}^{n-p} [e^{-i2\pi(k-\ell)/n}]^{q-1} \right), \end{aligned} \quad (28)$$

where  $\sum_{q=1}^n [e^{-i2\pi(k-\ell)/n}]^q = 0$  and  $|\sum_{q=1}^{n-p} [e^{-i2\pi(k-\ell)/n}]^{q-1}| = \frac{|\sin(\pi(k-\ell)(n-p)/n)|}{|\sin(\pi(k-\ell)/n)|}$  tends to  $p$  when  $n$  tends to  $\infty$ . ■

Suppose now that  $pr_x(p)$  is summable. This naturally implies (16) and for  $k \neq \ell$ , the second sum of (28) must be replaced by the unbounded sum  $\sum_{0 < p < n}$  where

$$\begin{aligned} |r_x(p) (e^{i2\pi p(1-\ell)/n} + e^{-i2\pi p(1-\ell)/n}) \\ \left( \sum_{q=1}^{n-p} [e^{-i2\pi(k-\ell)/n}]^{q-1} \right)| < 2p |r_x(p)| (1 + \epsilon), \end{aligned} \quad (29)$$

for  $n > N(\epsilon)$ ,  $\forall \epsilon > 0$ . ■

### D. Proof of (22) and (23)

To prove (22) and (23), the concept of asymptotically equivalent sequences of matrices (denoted by  $\sim$ ), introduced by Gray [28], is used to render Szego's theory [27] more accessible to a broader audience. This is achieved by the stronger assumption that the sequence  $r_x(k)$  is absolutely summable (i.e., Wiener case).

Following Gray's notation, let  $\mathbf{T}_n(S_x) \stackrel{\text{def}}{=} \boldsymbol{\Sigma}_{\mathbf{x}_n}$ , and  $\mathbf{C}_n(S_x)$  be an  $n \times n$  circulant matrix with the top row  $(c_0^n, \dots, c_{n-1}^n)$  where  $c_\ell^n \stackrel{\text{def}}{=} \frac{1}{n} \sum_{k=0}^{n-1} S_x\left(\frac{k}{n}\right) e^{-i2\pi \frac{k\ell}{n}}$ .

Assuming  $S_x(f) \geq m > 0$ , [28, Th. 5.2c] implies that  $[\mathbf{T}_n(S_x)]^{-1} \sim \mathbf{T}_n(S_x^{-1})$ . Then, it follows from [28, Th. 2.1.3] that

$$[\mathbf{T}_n(S_x)]^{-1} \mathbf{T}_n(S'_{x,k}) \sim \mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,k}). \quad (30)$$

Furthermore, it follows from [28, Th. 5.3(a), eq. (5.17)] that

$$\mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,k}) \sim \mathbf{C}_n(S_x^{-1} S'_{x,k}) \quad (31)$$

Therefore, (23) follows from [28, Th. 5.3(a), eq. (5.19)] with  $s = 1$ . ■

Applying (30) and [28, Th. 2.1.3], we obtain:

$$\begin{aligned} [\mathbf{T}_n(S_x)]^{-1} \mathbf{T}_n(S'_{x,k}) [\mathbf{T}_n(S_x)]^{-1} \mathbf{T}_n(S'_{x,\ell}) \\ \sim \mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,k}) \mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,\ell}), \end{aligned} \quad (32)$$

which implies from [28, Th. 5.3(a), eq. (5.22)]:

$$\begin{aligned} \mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,k}) \mathbf{T}_n(S_x^{-1}) \mathbf{T}_n(S'_{x,\ell}) \\ \sim \mathbf{C}_n(S_x^{-1} S'_{x,k} S_x^{-1} S'_{x,\ell}) \end{aligned} \quad (33)$$

and (22) follows from [28, Th. 5.3(a), eq. (5.23)] with  $s = 1$ . ■

### ACKNOWLEDGEMENT

Prof. Habti Abeida would like to thank the Deanship of Scientific Research at Taif University for their support.

### REFERENCES

- [1] K. Yao, "Spherically invariant random processes: Theory and applications," in Communications, Information and Network Security, chap. 6, pp. 313-322, Springer Science Business Media, New York, 2003.
- [2] D. Slepian, "Estimation of signal parameters in the presence of noise," *Trans. IRE Prof. Group Inform. Theory PG IT-3*, pp. 68-89, 1954.
- [3] W. J. Bangs, "Array processing with generalized beamformers," Ph.D. dissertation, Yale Univ., New Haven, CT, USA, 1971.
- [4] P. Stoica and R. Moses, *Introduction to Spectral Analysis*, Upper Saddle River, NJ: Prentice-Hall, 1997.
- [5] J.-P. Delmas and H. Abeida, "Stochastic Cramer-Rao bound for non-circular signals with application to DOA estimation," *IEEE Trans. Signal Process.*, vol. 52, no. 11, pp. 3192-3199, Nov. 2004.
- [6] O. Besson and Y. I. Abramovich, "On the Fisher information matrix for multivariate elliptically contoured distributions," *IEEE Signal Process. Lett.*, vol. 20, no. 11, pp. 1130-1133, Nov. 2013.
- [7] M. Greco and F. Gini, "Cramér-Rao lower bounds on covariance matrix estimation for complex elliptically symmetric distributions," *IEEE Trans. Signal Process.*, vol. 61, no. 24, pp. 6401-6409, Dec. 2013.
- [8] H. Abeida and J.-P. Delmas, "Slepian-Bangs formula and Cramér Rao bound for circular and non-circular complex elliptical symmetric distributions," *IEEE Signal Process. Letters*, vol. 26, no. 10, pp. 1561-1565, Oct. 2019.
- [9] S. Fortunati, F. Gini, M. S. Greco, A. M. Zoubir, and M. Rangaswamy, "Semiparametric CRB and Slepian-Bangs formulas for complex elliptically symmetric distributions," *IEEE Trans. Signal Process.*, vol. 67, no. 20, pp. 5352-5364, Oct. 2019.
- [10] H. Abeida and J.-P. Delmas, "Slepian-Bangs formulas for parameterized density generator of elliptically symmetric distributions," *Signal Processing*, vol. 205, January 2023.
- [11] P. Whittle, "The analysis of multiple stationary time series," *Journal of the Royal Statistical Society*, vol. 15, no. 1, pp. 125-139, 1953.
- [12] J.-P. Delmas, "Background on real and complex elliptically symmetric distributions", Chapter 1 in upcoming Springer book: *Elliptical Distributions in Signal Processing and Machine Learning*, 2024.

- [13] K. Yao, "A representation theorem and its applications to spherically invariant random processes," *Trans. Information Theory*, vol. 19, no. 5, pp. 600-608, Sept. 1973.
- [14] G.L. Wise and N.B. Gallagher, "On the spherically invariant random processes," *IEEE Trans. Information Theory* vol. 24, no. 1, pp. 118-120, Jan. 1978.
- [15] D.F. Andrews and C. I. Mallows, "Scale mixtures of normal distributions," *Journal Royal Stat Society B*, vol. 36, no.1, pp. 99-102, 1974.
- [16] Y. Kano, "Consistency property of elliptical probability density functions," *Journal of multivariate analysis*, vol. 51, pp. 139-147, 1994.
- [17] E. Gomez-Sanchez-Manzano, M Gomez-Villegas, and J. Marin, "Sequence of elliptical distributions and mixtures of normal distributions," *Journal of multivariate analysis*, vol. 97, pp. 295-310, 2005.
- [18] J. Wang, A. Dogandzic, and A. Nehorai, "Maximum Likelihood Estimation of Compound-Gaussian Clutter and Target Parameters," *IEEE Trans. Signal Process.* vol. 54, no. 10, pp. 3884-3898, October 2006.
- [19] E. Gomez-Sanchez-Manzano, M Gomez-Villegas, and J. Marin, "Multivariate exponential power distributions as mixtures of normal distributions with Bayesian applications," *Communications in Statistics - Theory and Methods*, vol. 37, no. 6, pp 972-985, 2008.
- [20] H. Abeida and J.-P. Delmas, "Efficiency of subspace-based estimators for elliptical symmetric distributions," *Signal Processing*, vol. 174, October 2020.
- [21] P. Stoica and P Babu, "The Gaussian data assumption leads to the largest Cramer-Rao bound," *IEEE Signal Processing Magazine*, vol. 28, no. 3, May 2011.
- [22] A. Zeira and A. Nehorai, "Frequency domain Cramer-Rao bound for Gaussian processes," *IEEE Trans. ASSP*, vol. 38, no. 6, pp. 1063-1066, June 1990.
- [23] B. Porat, "On the Fisher Information for the mean of a Gaussian process," *IEEE Trans. Signal Processing*, vol. 33 no. 8, pp. 2033-2035, August 1995.
- [24] C.W. Therrien, *Discrete random signals and statistical signal processing*, Englewood Cliffs, Prentice Hall, 1992.
- [25] M. Taniguchi, "On the second-order asymptotic efficiency of estimators of Gaussian ARMA processes," *The Annals of Statistics*, vol. 11, no. 1, pp. 157-169, 1983.
- [26] R. Dahlhaus, "Efficient parameter estimation for self-similar processes," *The Annals of Statistics*, vol. 17, no. 4, pp 1749-1766, 1989.
- [27] U. Grenander and G. Szego, *Toeplitz forms and their applications*, Chelsea Publishing Compagny, New York.
- [28] R. M. Gray, *Toeplitz and Circulant Matrices: A Review*, The essence of knowledge, Boston Delft, 2006.
- [29] M. Radaelli, G. T. Landi, K. Modi, and F. C Binder, "Fisher information of correlated stochastic processes," *New Journal of Physics*, June 2023.
- [30] B. Porat *Digital Processing of random variables*, Prentice Hall, Inc, 1993.