



**HAL**  
open science

# Hybrid MPI/OpenMP parallel strategies for a high order discontinuous Galerkin solver in aerodynamics

E. Martin, F. Renac

► **To cite this version:**

E. Martin, F. Renac. Hybrid MPI/OpenMP parallel strategies for a high order discontinuous Galerkin solver in aerodynamics. ECCOMAS 2014, Jul 2014, BARCELONE, Spain. hal-01131949

**HAL Id: hal-01131949**

**<https://hal.science/hal-01131949>**

Submitted on 16 Mar 2015

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# HYBRID MPI/OPENMP PARALLEL STRATEGIES FOR A HIGH ORDER DISCONTINUOUS GALERKIN SOLVER IN AERODYNAMICS

E. Martin<sup>1,\*</sup> and F. Renac<sup>2</sup>


<sup>1</sup> ONERA, The French Aerospace Lab, BP72 - 29 avenue de la Division Leclerc, FR-92322 CHATILLON CEDEX, [emeric.martin@onera.fr](mailto:emeric.martin@onera.fr), <http://www.onera.fr>

<sup>2</sup> ONERA, The French Aerospace Lab, BP72 - 29 avenue de la Division Leclerc, FR-92322 CHATILLON CEDEX, [florent.renac@onera.fr](mailto:florent.renac@onera.fr), <http://www.onera.fr>

**Key words:** *CFD, Discontinuous Galerkin method, HPC, OpenMP, MPI, Parallel Scalability, Performance Measurement*

The industrial demand for CFD predictions at an ever-increasing level of detail is the driving force for the development of highly accurate simulation techniques able to predict not only overall features, but also local values of the quantities of interest. At ONERA, the code Aghora is developed for the solution of complex flow systems in aerodynamics, including turbulent flows (RANS, LES, DNS). The main goal is to investigate the potential of high-order schemes based on Discontinuous Galerkin methods (DG) [1, 2] to deliver accurate solutions in this context. The downside of these methods is that they require long execution times and large memory consumptions. Designing efficient algorithms for modern multi-core architectures and developing highly-scalable parallel strategies turn out to be essential to tackle such challenges.

Domain decomposition methods based on a MPI strategy are usually applied to lower the CPU time and memory requirements of these methods. However, this approach may suffer from limitations due to the large number of degrees of freedom per element. In contrast, an OpenMP strategy will allow to offer a second level of partitioning within elements or per groups of elements or edges, and the association of both strategies is under the scope of the present work. We will present three parallel strategies that have been successfully implemented into Aghora. The first one corresponds to a simple MPI approach based on a domain decomposition method with non-blocking and synchronous communications. The second one is based on a hybrid MPI/OpenMP [3, 4, 5] approach, where OpenMP threads are forked only one time per MPI process and remain active during the whole iterative time scheme. The last one concerns another hybrid approach, where threads can now send messages thanks to a certain thread support level of the MPI library and take in charge boundary conditions treatment in parallel.

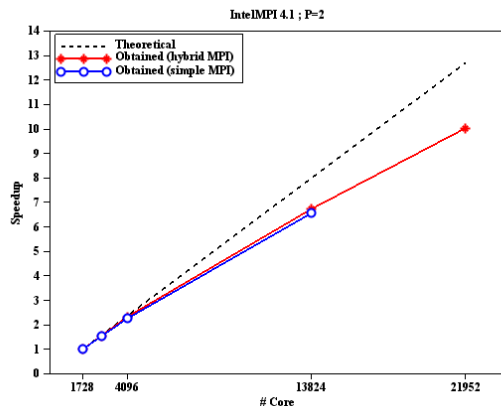

**Figure 1:** Taylor-Green Vortex DNS - Scalability for  $P = 2$

The performances of these approaches will be investigated in the context of real-life applications to compressible turbulent flows with high-order space discretization and explicit and implicit time integration techniques. Numerical experiments will be presented to assess their respective benefits and strong scalability analysis will be showed from several thousands to several tens of thousands computing cores. Sensitivity of the polynomial degree  $P$  of the DG method on performance will be discussed, but also the impact of the MPI thread support level choice or the implementation issues arising from the hybrid MPI/OpenMP paradigm. All of these experiments will be done on the Curie supercomputer on nodes composed of two eight-core Intel processors Sandy Bridge in the context of PRACE [6] projects.

## REFERENCES

- [1] B. Cockburn, G. E. Karniadakis and C. W. Shu. Discontinuous Galerkin methods. Theory, computation and applications. *Lecture Notes in Computational Science and Engineering*, Vol. **11**, Springer-Verlag, Berlin, 2000.
- [2] B. Cockburn and C. W. Shu. Runge-Kutta discontinuous Galerkin methods for convection-dominated problems. *J. Sci. Computing*, Vol. 16, 173-261, 2001.
- [3] P.-Fr. Lavallée and P. Wautelet. Hybrid MPI-OpenMP Programming. CNRS IDRIS Lessons, 2013.
- [4] H. Jin, D. Jespersen, P. Mehrotra, R. Biswas, L. Huang, and B. Chapman. High performance computing using MPI and OpenMP on multi-core parallel systems. *Parallel Computing*, Vol. **37**, 562575, 2011.
- [5] R. Lhner, J. D. Baum. Handling tens of thousands of cores with industrial/legacy codes: Approaches, implementation and timings. *Computers & Fluids*, Vol. **85**, 53-62, 2013.
- [6] Partnership for Advanced Computing in Europe. <http://www.prace-project.eu>.