



HAL
open science

Activity Networks with Delays application to toxicity analysis

Franck Delaplace, Cinzia Di Giusto, Jean-Louis Giavitto, Hanna Klaudel, Antoine Spicher

► **To cite this version:**

Franck Delaplace, Cinzia Di Giusto, Jean-Louis Giavitto, Hanna Klaudel, Antoine Spicher. Activity Networks with Delays application to toxicity analysis. [Research Report] Laboratoire d'Informatique, Signaux, et Systèmes de Sophia-Antipolis (I3S) / Equipe BIOINFO MDSC - Modèles Discrets pour les Systèmes Complexes. 2015. hal-01152719v1

HAL Id: hal-01152719

<https://hal.science/hal-01152719v1>

Submitted on 18 May 2015 (v1), last revised 26 Aug 2016 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Activity Networks with Delays

application to toxicity analysis

Franck Delaplace², Cinzia Di Giusto¹, Jean-Louis Giavitto³, Hanna Klaudel², and Antoine Spicher⁴

¹ I3S, Université de Nice Sophia-Antipolis, Nice, France

² IBISC, Université d'Evry - Val d'Essonne, Evry, France

³ CNRS, IRCAM, UPMC - UMR 9912 STMS & INRIA MuTant team, Paris, France

⁴ LACL, Université Paris-Est, Créteil, France

Abstract. ANDy, Activity Networks with Delays, is a discrete time framework aimed to the qualitative modelling of time-dependent activities such as biological networks and regulatory pathways.

Activities involve entities playing the role of activators, inhibitors or products of biochemical network operation. Activities may have given duration, *i.e.*, the time required to obtain results. An entity may represent an object (*e.g.*, an agent, a biochemical species or a family of thereof) with a local attribute, a state denoting its level (*e.g.*, concentration, strength). Entities levels may change as a result of an activity or may decrease gradually as time passes by.

The semantics of ANDy is formally given via high-level Petri nets ensuring this way some modularity. As main results we show that ANDy systems have finite state representations even for potentially infinite processes and that ANDy's concept of time has a direct counterpart in timed automata.

These results together with a modular and concise syntax make ANDy suitable for an easy and natural modelling of time-dependent (biological) systems. We conclude our paper with a general discussion on toxic behaviours, in particular we present a classification of toxicity properties and give some hints on how they can be verified with existing tools on ANDy systems.

1 Introduction

Activities are a central concern in many domains such as business (workflows, supply chains), transaction modelling (database transactions, web services) or biological systems (biological networks, regulatory pathways). These activity-driven domains, although quite different, share foundational principles and concern: the causal relationships among activities. It deals with questions such as, how long does it take to complete an activity, when it can be performed, or whether it can be delayed or even ignored.

Our main motivation comes from biological systems where data are species and the activities the reactions among them but we believe that our model could be adapted also to handle other domains as the ones mentioned above. Our proposal stems from reaction systems [5], a formalism based on *reactions*, each defined as a triple (R, I, P) with R set of *reactants*, I set of *inhibitors* and P set of *products*, and R, I and P taken from a common set of *species*. Reaction systems are based on three basic assumptions:

- (i) a reaction can take place only if all the reactants involved are available but none of the inhibitors are;
- (ii) if a species is available then a sufficient amount of it is necessary to trigger a reaction;
- (iii) species are not persistent: they become unavailable if they are not sustained by a reaction.

We complement this model by adding several important features. We allow a richer description of species states using attributes having potentially multiple values and introduce timing aspects. More precisely, the resulting formalism, *Activity Networks with Delays* (ANDy), targets systems composed of various *entities* (*i.e.*, species in reaction systems) that evolve by means of time-dependent activities. Each entity is characterised by one attribute, called *level*, representing rates, activation/inhibition status or expression degrees (*e.g.*, low, medium, high). *Activities* are rules describing the evolution of systems, involving (as for reaction systems) three sets of entities: *activators*, which must be present, *inhibitors*, which must be absent, and *results* whose expression levels have to be modified (increased or decreased). The introduction of time concerns both activities and entities. Activities have a duration and entities are subject to a *decay* process or aging that models the action of a non-specified environment: *i.e.*, levels decrease with time progression. Another difference is in the semantics of activities: while in reaction systems a maximal concurrency model is considered, here we adopt two types of activities: *mandatory* and *potential* ones. The former set of activities, once enabled, must take place altogether in the same time unit (in maximal concurrency) while the latter, non deterministically one at the time, may be performed or not. Following [31], as in our modelling all entities have discrete states and share the same global clock, it is reasonable to work with discrete time constraints.

Our main objective is to provide effective tools for the description and the understanding of the mechanisms and of the structural properties underpinning biological interactions networks. In biology, ordinary differential equations (ODE) remain the predominant modelling methodology[1]. Such models present however some drawbacks: they need a precise quantification of parameters, random interactions are difficult to model outside an averaged approach, system openness and non-linearities make hopeless the existence of analytic solutions, and numerical methods – often the only sensible option – are mainly descriptive and cannot form the basis for an explanatory theory. On the other hand, many languages and tools have been developed to build and explore discrete qualitative models in various application domains. Such models are rough abstractions of real world processes but they make possible to unravel the entangled causal relationships between system’s entities. More specifically in systems biology, formalisms like Petri nets [3], Boolean networks [30], process algebras [7] or rewriting systems [16] (to cite a few) have been used with undeniable success to understand the causal links between structure and behaviour in molecular networks. Nonetheless, the management of time is somewhat problematic in all of the previous approaches. In general, timing aspects are either disregarded or handled at a primitive level, which leads to expressiveness problems for the modeller. For example, modelling a synchronous evolution directly in Petri nets requires a coding that is not necessarily natural for a biologist. This is why here we propose a qualitative discrete formalism for biological systems

that provides, in particular, a direct account of timing aspects natural in biology such as activity duration and decay.

We complement our designing process with a general discussion on toxicity properties and how they can be tested against ANDy systems. In this respect, we aim at providing a methodology rather than a precise technique of testing.

Organisation of the paper. This paper is the extended and revised version of BIOPPN workshop paper [12]. The main difference with respect to [12] is the introduction of time aspects in ANDy systems and a more mature taxonomy of toxicity properties.

Section 2 introduces the principles behind ANDy networks and gives a formal definition of ANDy in terms of high-level Petri nets. It also states the main results of the paper addressing the finiteness of state space and the expressiveness of the formalism in terms of timed automata. The encoding of an ANDy network into timed automata is exponential showing the expressive relevance and the concision of the original ANDy's notation. In Section 3 we discuss an axiomatisation of toxicity properties and finally Sections 4 and 5 discuss related works and conclude.

An Appendix with additional material: the details of the encoding into timed automata and a supplementary example on the assimilation of aspartame in human body is added for the reviewer convenience.

2 Activity Networks with Delays

In this section we give the syntax and semantics of *Activity Networks with Delays* (ANDy) which is composed of a set of entities \mathcal{E} driven by a set of activities. We assume to work with a discrete notion of time represented by a tick event.

Entities. Each entity, $e \in \mathcal{E}$, is associated to a finite number of levels \mathcal{L}_e (from 0 to $\mathcal{L}_e - 1$), that in general represent ordered expression degrees (e.g., low, medium, high) and refer to a change in the entity capability of action. A decay duration is associated to each level of an entity e through the function $\delta_e : [0.. \mathcal{L}_e - 1] \rightarrow \mathbb{N}^+ \cup \{\omega\}$ allowing different duration's for different levels and where ω means unbounded duration. If $\delta_e(i) = \omega$, then level i is *permanent* and it can be modified only by an activity. Otherwise, if $\delta_e(i) \neq \omega$, the presence of the entity at level i is *transient*: once entity e at level i has passed $\delta_e(i)$ time units its level will pass to $i - 1$, i.e., it decays or ages gradually as time passes by. We fix $\delta_e(0) = \omega$ as no negative level is allowed. In principle, this substitutes a set of unspecified activities accounting for the action of an underspecified environment that consumes entities. A state s of an ANDy network assigns to each entity $e \in \mathcal{E}$ a level $\eta \in [0.. \mathcal{L}_e - 1]$. The initial state s_0 sets each entity e to a given level η_e .

Activities. The evolution of entities is driven by *activities*

$$\rho ::= A_\rho; I_\rho \xrightarrow{\Delta_\rho} R_\rho$$

where $\Delta_\rho \in \mathbb{N}$ is the activity duration, A_ρ (activators) and I_ρ (inhibitors) are sets of pairs (e, η_e) , and R_ρ (results) is a non empty set of pairs (e, v) , with $e \in \mathcal{E}$, $\eta_e \in$

$[0 \dots \mathcal{L}_e - 1]$ and $v \in \mathbb{Z}$. Entities can appear at most once in each set A_ρ , I_ρ and R_ρ , cf., Remark 1 below. We write $e \in A_\rho$ to denote $(e, \cdot) \in A_\rho$, similarly for I_ρ and R_ρ . We omit index ρ if it is clear from the context.

An activity ρ can take place only if it is *enabled*, this depends on the activator and inhibitor levels appearing in A_ρ and I_ρ . Nonetheless, observing only the current level of each entity is not enough to decide if an activity is enabled: such approach will miss the handling of decays and duration. To take into account a notion of elapsed time, an activity ρ is enabled (*i.e.*, may happen) if and only if:

- for each entity e_a of the activators set A_ρ (*i.e.*, $(e_a, \eta_a) \in A_\rho$), e_a is available at least at level η_a for the whole duration Δ_ρ ;
- for each entity e_i of the inhibitors set I_ρ (*i.e.*, $(e_i, \eta_i) \in I_\rho$), e_i is available at a level strictly inferior to η_i for the whole duration Δ_ρ ;

If an entity is an activator (resp. an inhibitor) at level ℓ for some activity ρ , it is also an activator (resp. an inhibitor) for ρ at all levels $l \geq \ell$ (resp. $l \leq \ell$). When an activity takes place, entities' levels appearing in the results are updated with the increment or decrement (up to the range of entity levels) v specified in the rule. Duration Δ_ρ characterises the number of ticks required for yielding change of levels of results, $\Delta_\rho = 0$ denotes an instantaneous activity.

Remark 1. Notice that:

- An entity may be both in A and R , *e.g.*, as in an auto-catalytic production where reaction products themselves are activators for the reaction. Similarly, an entity may be both in I and R : thus representing self-repressing activities.
- Activators and inhibitors are not “consumed”.
- An entity can appear in the same activity simultaneously as an activator and as an inhibitor but we require them to occur with different levels. For instance, the rule

$$\{(e, \eta)\} \cup A; \{(e, \eta')\} \cup I \xrightarrow{\Delta} R \quad \text{where } \eta < \eta'$$

requires that the activity takes place only if the level l_e of e belongs to the interval $\eta \leq l_e < \eta'$. In particular, if e has to be present in an activity exactly at level η , e should appear as an activator at level η and as inhibitor at level $\eta' = \eta + 1$.

- The set of activators and inhibitors $A \cup I$ is allowed to be empty. In this case, the activity is constantly enabled. This accounts for modelling an environment that continuously sustains the production of an entity. In this case a duration $\Delta \neq 0$ may be used to account for a start-up time.
- Once triggered an activity ρ must wait at least Δ_ρ before being enabled again⁵.

It is important to note that when an activity is enabled, it is not necessarily performed. The idea is to make a distinction between two types of activities:

⁵ This is a non restrictive hypothesis and by slightly modifying Definition 3 one can obtain different semantics that could depend on the specific modelled scenario: *e.g.*, once enabled an activity ρ can be triggered an unbounded number of times or once per time unit.

1. *potential* activities, denoted α in a set \mathcal{P} : if enabled, they *may* occur in an interleaved way thus the result depends on the order they are performed. It may happen that no potential activities occur even if they are enabled;
2. *mandatory* activities, denoted β in a set \mathcal{M} : if enabled they *must* occur within the same time unit. All enabled mandatory activities occur simultaneously.

As all mandatory activities β_i are triggered simultaneously, all updates related to an entity e are collected and summed up before being applied to the current level of e .

Definition 1 (ANDy network). An ANDy network is a triple $(\mathcal{E}, \mathcal{M}, \mathcal{P})$ where \mathcal{E} is the set of entities, \mathcal{M} is the set of mandatory activities and \mathcal{P} is the set of potential ones.

An ANDy network evolves by triggering enabled activities in two separate phases implementing one evolution step:

- Ph. 1 In this phase (between two ticks) **potential activities** that are enabled may be triggered. Their action occurs non-deterministically in an interleaved way. Any potential activity is triggered at most once in this phase.
- Ph. 2 This phase is the tick transition: the effect is that all concerned entities must decay and all enabled **mandatory activities** are performed simultaneously. Notice that as activators and inhibitors are not “consumed”, there are no conflicts and so there is a unique way (per time unit) to execute all enabled mandatory activities.

Example 1 (Repressilator). The repressilator [13] is a synthetic genetic regulatory network in Escherichia Coli consisting of three genes ($lacI, tetR, cI$) connected in a feedback loop such that each gene inhibits the next gene and is inhibited by the previous one. The repressilator exhibits a stable oscillation with fixed time period that is witnessed by the synthesis of a green fluorescent protein (GFP). According to [13]: “the resulting oscillation with typical periods of hours are slower than the cell division cycle so the state of the oscillator has to be transmitted from generation to generation”.

It may be modelled with five entities $\mathcal{E} = \{lacI, tetR, cI, GFP, gen\}$. The first three represent the three genes, each with two levels denoting an *on/off* state where level 1 = *on* has decay time 2. GFP has two levels (*on/off*) with unbounded decay. Finally, the evolution of successive generations is represented by entity gen with, let’s say, seven levels (with unbounded decay) to differentiate among generations.

The behaviour is modelled with potential and mandatory activities: potential activities (on the left below) are used to represent the feedback loop between $lacI, tetR$, and cI . Mandatory activities (on the right) handle the synthesis of GFP and show the evolution of generations.

$$\begin{array}{ll}
\alpha_1 : \emptyset; (lacI, 1) \xrightarrow{2} (tetR, +1) & \beta_1 : (lacI, 1); \emptyset \xrightarrow{0} (GFP, +1) \\
\alpha_2 : \emptyset; (tetR, 1) \xrightarrow{2} (cI, +1) & \beta_2 : (lacI, 0); (lacI, 1) \xrightarrow{0} (GFP, -1) \\
\alpha_3 : \emptyset; (cI, 1) \xrightarrow{2} (lacI, +1) & \beta_3 : (gen, 0); (gen, 6) \xrightarrow{1} (gen, +1) \\
& \beta_4 : (gen, 6); \emptyset \xrightarrow{1} (gen, -6)
\end{array}$$

In particular, the evolution of successive generations is circular modulo 7 (generations evolve from 0 to 6 and then they start again from 0) this allows us to have a finite number

of levels for gen). Activities β_3 and β_4 describe such a behaviour. Notice in particular the use of inhibitor ($gen, 6$) in β_3 that allows to apply the activity for all levels of gen from 0 to 5 and to apply β_4 for level 6.

We now exhibit a possible execution scenario for the repressilator, the table below shows for each line the current level of each entity:

$lacI$	$tetR$	cI	GFP	gen	description
0	0	1	0	0	initial state
0	0	1	0	0	after Ph. 2 (tick)
0	0	1	0	0	after Ph. 1 (no activity)
0	0	1	0	1	after Ph. 2 (tick and activity β_3)
0	1	1	0	1	after Ph. 1 (activity α_1)
0	1	1	0	1	after Ph. 2 (tick)
0	1	1	0	1	after Ph. 1 (no activity)
0	1	0	0	2	after Ph. 2 (tick, decay of cI and activity β_3)
1	1	0	0	2	after Ph. 1 (activity α_3)
1	1	0	0	2	after Ph. 2 (tick)
1	1	0	0	2	after Ph. 1 (no activity)
1	0	0	1	3	after Ph. 2 (tick, decay of $tetR$ and activities β_1, β_3)

◇

2.1 Petri Net formalisation.

The semantics of ANDy networks is formalised in terms of high-level Petri nets. We recall here the notations together with some elements of their semantics [23].

Definition 2. A high-level Petri net is a tuple (P, T, F, L, M_0) where:

- P is the set of places, T is the set of transitions, with $P \cap T = \emptyset$;
- $F \subseteq (P \times T) \cup (T \times P)$ is the set of arcs;
- L is the labelling of $P \cup T \cup F$ defined as follows:
 - $\forall p \in P, L(p)$ is a set of values;
 - $\forall t \in T, L(t)$ is a computable Boolean expression (a guard);
 - and $\forall f \in F, L(f)$ is a tuple of variables or values.
- M_0 is the initial marking putting a multiset of tokens in $L(p)$ in each $p \in P$.

The behaviour of high-level Petri nets is defined as usual: markings (states) are functions from places in P to multisets of possibly structured tokens in $L(p)$. A transition $t \in T$ is *enabled* at marking M , if there exists a valuation σ of all variables in the labelling of t such that the guard $L(t)$ evaluates to true ($L_\sigma(t) = \text{true}$) and there are enough tokens in all input places p of t to satisfy the corresponding input arcs, i.e., $L_\sigma((p, t)) \in M(p)$ for each input place p of t . The firing of t produces the marking M' : $\forall p \in P, M'(p) = M(p) - L_\sigma((p, t)) + L_\sigma((t, p))$ with $L_\sigma(f) = 0$ if $f \notin F$, – and + are multiset operators for removal and adding of one element, respectively. We denote it by $M[t;\sigma]M'$. Observe that for ANDy we are considering a subclass of high-level Petri nets where at most one arc per direction for each pair place/transition is

allowed and only one token can flow through. So, starting from an initial marking associating one token per place, this situation is maintained at each step of the net evolution.

As usual, in figures, places are represented as rounds, transitions as squares, and arcs as directed arrows. By convention, primed version of variables (e.g., x') are used to annotate output arcs of transitions, their evaluation is possibly computed using unprimed variables (e.g., x) appearing on input arcs. With an abuse of notation, singleton markings are denoted without brackets, the same is used in arc annotations. Also we refer to valuated variables without effectively mentioning the valuation σ : e.g., we say that the current value of variable w is w instead of $\sigma(w)$. An example of firing is shown in Figure 1.

We say that a marking M is *reachable* from the initial marking M_0 if there exists a firing sequence $(t_1, \sigma_1), \dots, (t_n, \sigma_n)$ such that $M_0[t_1:\sigma_1]M_1 \dots M_{n-1}[t_n:\sigma_n]M$. The state space of an initially marked Petri net comprises all the reachable markings.

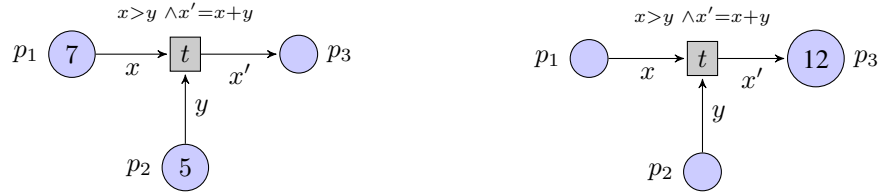


Fig. 1. Example of firing of transition t with $\sigma = \{x = 7, y = 5, x' = 12\}$.

ANDy's formalisation. In order to properly describe decay and the semantics of activities we need to record three kinds of information:

1. (decay) since how long an entity is at the current level since the last update,
2. (activators) since how long an entity is available at a level less or equal to the current one (recall that levels are inclusive),
3. (inhibitors) since how long a level greater than the current one has been left.

Notice that duration relative to Items 1 and 2 for the current level can be different: *i.e.*, if an entity is continuously sustained by some activities it remains available in the system at the current level for a period that may be longer than the corresponding decay time. Thus Item 1 reports the duration since the *last* update (*i.e.*, when the activity concerning the entity has been performed) and Item 2 is the duration since the *first* appearance of the entity at that level.

For this reason, we model each entity $e \in \mathcal{E}$ by a single Petri net place p_e carrying tuples $\langle l_e, u_e, \lambda_e \rangle$ as tokens where l_e is the current level of e ; u_e is a counter storing the duration spent in the current level since the last update (Item 1): $0 \leq u_e \leq \delta_e(l_e)$; and λ_e is a tuple of counters with \mathcal{L}_e fields (one for each level). Each counter $\lambda_e[i]$ contains

a duration interpreted as follows:

$$\lambda_e[i] = \begin{cases} \text{since how long } e \text{ has reached level } i \text{ (Item 2)} & \text{for } 0 \leq i \leq l_e \\ \text{since how long } e \text{ has left level } i \text{ (Item 3)} & \text{for } l_e < i \leq \mathcal{L}_e - 1 \\ \text{(or 0 if } e \text{ has not yet reached } i\text{).} & \end{cases}$$

Each place is initialised to $\langle \eta_e, 0, 0^{\mathcal{L}_e} \rangle$ where η_e is the given initial level of e and $0^{\mathcal{L}_e}$ denotes vector λ_e of counters uniformly initialised with zero.

It is worth observing that once a duration in λ has reached the maximum duration for all activities ($D = \max\{\Delta_\rho \mid \rho \in \mathcal{M} \cup \mathcal{P}\}$) it is useless to increment it, as for all duration greater than D , the guards of all activities involving the entity are satisfied.

Notation 1 We denote by $\lambda\{x/[l..l+n]\}$ the systematic update of values in counters $\lambda[l].. \lambda[l+n]$ to x . $\text{inc}_D(\lambda)$ is the increment by one of all values in λ : i.e., $\forall k \in [0.. \mathcal{L}_e - 1]$, $\lambda[k] = \min(\lambda[k] + 1, D)$ with $D \in \mathbb{N}$.

In order to cope with time aspects present in ANDy, we introduce a tick transition t_c (Figure 2(a)) that represents the time progression. Its effect is the one described by Phase Ph. 2 above: it increments counters of entities, takes care of the decay and simultaneously performs all enabled mandatory activities. More precisely:

Time: All counters in the entities are incremented by one: we pass from $\langle l, u, \lambda \rangle$ to $\langle l, u+1, \text{inc}_D(\lambda) \rangle$. Counter u remains unchanged for levels of unbounded duration.

Decay: An entity may stay at level l for $\delta(l)$ time units (i.e., $u \leq \delta(l)$). Decay happens as soon as the interval $\delta(l)$ is elapsed and is obtained by decreasing the level by one, till reaching level zero. We pass from $\langle l, u, \lambda \rangle$ to $\langle l-1, 0, \text{inc}_D(\lambda)\{0/l\} \rangle$.

Updates on a place p_r of a result entity r at level l_r containing token $\langle l_r, u_r, \lambda_r \rangle$, due to an activity ρ (i.e., $(r, \pm n) \in R_\rho$ with $n \in \mathbb{N}$) are performed⁶ as follows :

Increase $+n$: $\langle l_r + n, 0, \lambda_r\{0/[l_r + 1..l_r + n]\} \rangle$. l_r becomes $l_r + n$, u_r is reset to 0 restarting the counter for level $l_r + n$ and λ_r is updated to record the change to the new level by resetting the counters $\lambda_r[i]$ for all levels i from $l_r + 1$ to $l_r + n$.

Maintenance 0: $\langle l_r, 0, \lambda_r \rangle$: the current level is recharged resetting u_r to 0.

Decrease $-n$: $\langle l_r - n, 0, \lambda_r\{0/[l_r - n + 1..l_r]\} \rangle$. This case is symmetric to the increase one, except for the treatment of λ_r that is updated by resetting counters $\lambda_r[i]$ for all levels i from $l_r - n + 1$ to l_r .

Finally, every potential activity $\alpha \in \mathcal{P}$ is modelled with a transition t_α (Figure 2(b)) complying to Phase Ph. 1 above.

Definition 3. Given an ANDy network $(\mathcal{E}, \mathcal{M}, \mathcal{P})$ with initial state (e, η_e) for each $e \in \mathcal{E}$, the high-level Petri net representation is defined as tuple (P, T, F, L, M_0) where $l, l', u, u', \lambda, \lambda', w, w'$ range over variables and:

⁶ For the sake of simplicity, in the explanation we consider updates that do not exceed allowed boundaries, these cases are handled as expected in Definition 3.

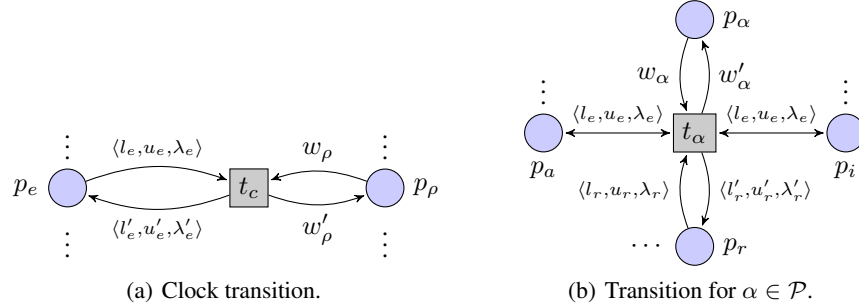


Fig. 2. Scheme of Petri net modelling of ANDy.

- $P = \{p_e \mid e \in \mathcal{E}\} \cup \{p_\rho \mid \rho \in \mathcal{M} \cup \mathcal{P}\}$;
- $T = \{t_c\} \cup \{t_\alpha \mid \alpha \in \mathcal{P}\}$;
- $F = \{(p, t_c), (t_c, p) \mid p \in P\} \cup \{(p_e, t_\alpha), (t_\alpha, p_e), (p_\alpha, t_\alpha), (t_\alpha, p_\alpha) \mid \alpha \in \mathcal{P}, e \in A_\alpha \cup I_\alpha \cup R_\alpha\}$
- Labels for places in P :

$$\begin{aligned} L(p_\rho) &= [0 \dots D] && \text{for each } \rho \in \mathcal{M} \cup \mathcal{P} \\ L(p_e) &= [0 \dots \mathcal{L}_e - 1] \times [0 \dots d] \times [0 \dots D]^{\mathcal{L}_e} && \text{for each } e \in \mathcal{E} \end{aligned}$$

with $d = \max\{\delta_e(i) \mid i \in [0 \dots \mathcal{L}_e - 1]\}$ and $D = \max\{\Delta_\rho \mid \rho \in \mathcal{M} \cup \mathcal{P}\}$

- Labels for arcs in F :

$$\begin{aligned} L((p_\rho, t_c)) &= w_\rho & L((t_c, p_\rho)) &= w'_\rho & \text{for each } \rho \in \mathcal{M} \cup \mathcal{P} \\ L((p_e, t_c)) &= \langle l_e, u_e, \lambda_e \rangle & L((t_c, p_e)) &= \langle l'_e, u'_e, \lambda'_e \rangle & \text{for each } e \in \mathcal{E} \end{aligned}$$

For each potential activity $\alpha \in \mathcal{P}$ and $e \in A_\alpha \cup I_\alpha \cup R_\alpha$:

$$\begin{aligned} L((p_e, t_\alpha)) &= \langle l_e, u_e, \lambda_e \rangle & L((t_\alpha, p_e)) &= \begin{cases} \langle l_e, u_e, \lambda_e \rangle & \text{if } e \notin R_\alpha \\ \langle l'_e, u'_e, \lambda'_e \rangle & \text{otherwise} \end{cases} \\ L((p_\alpha, t_\alpha)) &= w_\alpha & L((t_\alpha, p_\alpha)) &= w'_\alpha \end{aligned}$$

- Labels for transitions in T :

$$L(t_c) = \text{Calc}$$

where *Calc* is a complex formula given by Algorithm 1 that contains equalities of the form $x'_j = c_j$ for each net variable x'_j labelling an output arc of t_c . The algorithm takes as input all possible valuations σ for net variables of input arcs of t_c .

$$\begin{aligned} L(t_\alpha) &= w_\alpha \geq \Delta_\alpha \wedge w'_\alpha = 0 \wedge \\ &\quad \bigwedge_{(a, \eta_a) \in A_\alpha} (l_a \geq \eta_a \wedge \lambda[\eta_a] \geq \Delta_\alpha) \wedge \\ &\quad \bigwedge_{(i, \eta_i) \in I_\alpha} (l_i < \eta_i \wedge \lambda[\eta_i] \geq \Delta_\alpha) \wedge \\ &\quad \bigwedge_{(r, +n) \in R_\alpha} C_{r+} \wedge \bigwedge_{(r, 0) \in E_\alpha} C_{r0} \wedge \bigwedge_{(r, -n) \in R_\alpha} C_{r-}, \end{aligned}$$

Algorithm 1 Calc's algorithm

```

function CALC
  for all  $\rho \in \mathcal{M} \cup \mathcal{P}$  do    $w'_\rho := \max(w_\rho + 1, D)$ 
  for all  $e \in \mathcal{E}$  do
     $l'_e := l_e$     $u'_e := u_e$     $\lambda'_e := \text{inc}_D(\lambda_e)$ 
    if  $\delta(l_e) \neq \omega$  then    $u'_e := u_e + 1$ 
    if  $u_e > \delta(l_e)$  then    $l'_e := \max(0, l_e - 1)$     $u'_e := 0$ 
  for all  $\beta \in \mathcal{M}$  do
    if  $\forall (a, \eta_a) \in A_\beta (l_a \geq \eta_a \text{ and } \lambda[\eta_a] \geq \Delta_\beta)$    and
        $\forall (i, \eta_i) \in I_\beta (l_i < \eta_i \text{ and } \lambda[\eta_i] \geq \Delta_\beta)$    and    $(w_\beta \geq \Delta_\beta)$  then
        $w'_\beta := 0$ 
       for all  $(r, v) \in R_\beta$  do    $l'_r := l'_r + v$     $u'_r := 0$ 
  for all  $e \in \mathcal{E}$  do
     $l'_e := \max(0, \min(l'_e, \mathcal{L}_e - 1))$ 
    if  $l'_e < l_e$  then    $\lambda'_e := \lambda'_e \{0/[l'_e + 1..l_e]\}$ 
    if  $l'_e > l_e$  then    $\lambda'_e := \lambda'_e \{0/[l_e + 1..l'_e]\}$ 
  return  $\bigwedge_J (x'_j = c_j)$ 

```

where J is the number of output arcs of t_c , x'_j is the variable labeling the output arc and c_j is its evaluation via *Calc*

for each potential activity $\alpha \in \mathcal{P}$ with

$$\begin{aligned}
 C_{r+} : \langle l'_r, u'_r, \lambda'_r \rangle &= \langle \min(l_r + n, \mathcal{L}_r - 1), 0, \lambda_r \{0/[l_r + 1.. \min(l_r + n, \mathcal{L}_r - 1)]\} \rangle \\
 C_{r0} : \langle l'_r, u'_r, \lambda'_r \rangle &= \langle l_r, 0, \lambda_r \rangle \\
 C_{r-} : \langle l'_r, u'_r, \lambda'_r \rangle &= \langle \max(0, l_r - n), 0, \lambda_r \{0/[\min(0, l_r - n)..l_r]\} \rangle.
 \end{aligned}$$

- The initial marking is $M_0(p_e) = \langle \eta_s, 0, 0^{\mathcal{L}^e} \rangle$ for each $e \in \mathcal{E}$ and $M_0(p_\rho) = 0$ for $\rho \in \mathcal{M} \cup \mathcal{P}$.

We now comment on the transitions guards. Input and output arcs between the same place and transition with the same label (read arcs) are denoted in figures with a double-pointed arrow with a single label. We detail the conditions and the results of firing of t_α corresponding to a potential activity $\alpha = A; I \xrightarrow{\Delta} R$. We have:

- place p_α retains whether the activity can be performed $w_\alpha \geq \Delta$ and after firing the token is updated to 0, ($w'_\alpha = 0$).
- each activator $a \in A$ has to be present at least at level η_a for at least Δ time units, this is expressed by guard $l_a \geq \eta_a \wedge \lambda[\eta_a] \geq \Delta$;
- each inhibitor $i \in I$ has not to exceed level η_i for at least Δ time units, this is guaranteed by guard $l_i < \eta_i \wedge \lambda[\eta_i] \geq \Delta$;
- each result is updated according to conditions C_{r+} (increase), C_{r0} (maintenance), C_{r-} (decrease);

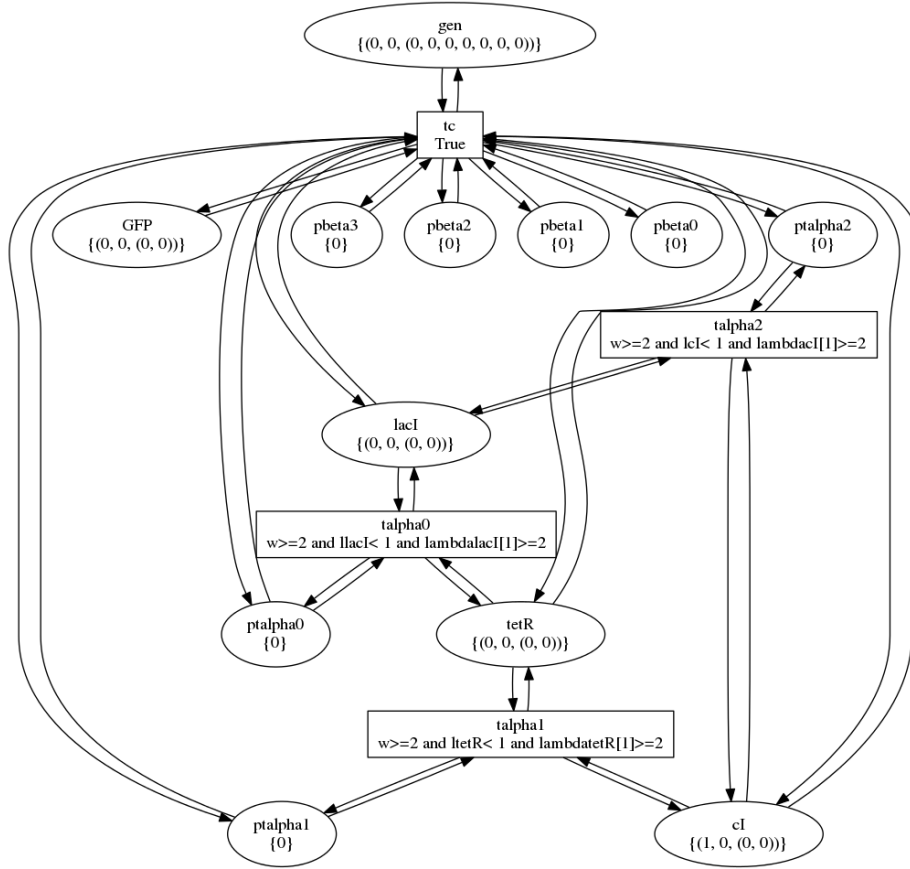


Fig. 3. The general shape of the ANDy network for the Repressilator from Example 1 (arcs annotations are omitted).

Transition t_c is always enabled, the effect of the firing is that all connected places are modified according to the valuation σ “computed” by algorithm *Calc*. The firing updates the levels of all entities dependently if they are involved in a mandatory activity or decay and increments the counters in p_ρ ($w'_\rho = w_\rho + 1$) for all $\rho \in \mathcal{M} \cup \mathcal{P}$ unless a mandatory activity β is performed in which case the corresponding w'_β is set to 0.

Example 2. Figure 3 gives the Petri net representation of the ANDy system introduced in Example 1, obtained via the Snakes library.

Expressiveness. The first result that we show for ANDy networks concerns the finiteness of the state space. Actually, even if the number of species and levels is finite, as a state of the network includes an information concerning time (that could be unbounded, if one takes a naive representation of dates), this could lead to an infinite state space.

Nonetheless in our case, when the local counters have reached the maximal duration for activities D , no new behaviours can be triggered by the system. This immediately provides a way of abstracting without loosing precision and thus getting a symbolic representation.

Theorem 2. *Let N be an ANDy network. The state space of N is finite*

Proof (Sketch). The proof follows from the observation that the type of tokens for each place is finite and each place can have at most one token. \square

Following from this result, it is easy to build a timed automata model [2] of the semantics of ANDy, this could help in better understanding and supporting the notion of time. Since their introduction timed automata have been widely used to model complex real time systems and to check their temporal properties. Since then many variants have been considered depending of synchronisation policies (synchronous, urgent, broadcast [4]).

The timed automaton should have as many localities as the markings of the Petri net. Tick transitions of the Petri net are represented by the natural time progression in timed automata and the discretization is imposed by specific guards. This simple encoding has the same size as the state space and therefore exponential. In Appendix A we provide a different encoding that is compositional with respect to entities and potential activities. This encoding is more compact but still exponential because of the nature of mandatory activities that have to be treated simultaneously and dynamically.

Next theorem states that the semantics in terms of timed automata is equivalent to the one of Definition 3.

Theorem 3. *ANDy can be encoded into timed automata preserving the semantics. The size of the encoding is exponential.*

This last result not only clarifies that ANDy can suitably handle time aspects but also it underlines the concision of the model. As a matter of fact, the syntax of ANDy profits from the advantages of Petri net modelling: *i.e.*, the state space is the combination of local information. This is not the case for automata where the number of localities is already exponential. Moreover the rule-based architecture of ANDy guarantees a modular construction of systems which is not the case neither (in general) for Petri nets nor for timed automata.

3 Application to toxicology

In this section, we explore the notion of toxicity and provide a methodology to analyse it in ANDy. Toxicology [32] studies the adverse effects of the exposures to chemicals at various levels of living entities: organism, tissue, cell and intracellular molecular systems. During the last decade, the accumulation of genomic and post-genomic data together with the introduction of new technologies for gene analysis has opened the way to *toxicogenomics*. Toxicogenomics combines toxicology with “Omics” technologies⁷ to study the *mode-of-action* of toxicants or environmental stressors on biological

⁷ “Omics” technologies are methodologies such as genomics, transcriptomics, proteomics and metabolomics.

systems. The mode-of-action is understood as the sequence of events from the absorption of chemicals to a toxic outcome. Toxicogenomics potentially improves clinical diagnosis capabilities and facilitates the identification of potential toxicity in drug discovery [14] or in the design of bio-synthetic entities [28].

The main approach used in toxicogenomics employs empirical analysis like in the identification of molecular biomarkers, *i.e.*, indicators of disease or toxicity in the form of specific gene expression patterns [11]. Clearly, biomarkers remain observational indicators linking genes related measures to toxic states. In this proposal, we complement these empirical methods with a computational method that aims at discovering the molecular mechanisms of toxicity. This way, instead of studying the phenomenology of the toxic impacts, we focus on the processes triggering adverse effects on organisms. Usually, the toxicity process is defined as a sequence of physiological events that causes the abnormal behaviour of a living organism with respect to its healthy state.

Healthy physiological states generally correspond to homeostasis, namely a process that maintains a dynamic stability of internal conditions against changes in the external environment. Hence, we will consider toxicity outcomes as deregulation of homeostasis processes, namely deviation of some intrinsic referential equilibrium of the system. Biological processes are usually given in terms of pathways which are causal chains of the responses to stimuli, this way the deregulation of homeostasis appears as the unexpected activation or inhibition of existing pathways. Moreover, in the context of toxicogenomics it is crucial to take into account at least two other parameters: the exposure time and the thresholds dosage delimiting the ranges of safe and hazardous effects. Considering the qualitative nature of ANDy models, we believe that the potential contribution lies in the analysis of the etiology of toxic processes. From this perspective, toxicity properties can be classified into two categories:

1. properties characterising pathological states or more generally associated to symptoms and
2. properties characterising sequences of states (traces), *e.g.*, non viable behaviours.

The former class of properties basically leads to check the reachability of some states, while the latter may be used to unravel sequences of events leading to toxic outcomes.

ANDy allows us to describe such scenarios and the Petri net representation of a reaction network with the associated marking graph may be used to detect and predict toxic behaviours related to the dynamics of biological networks, both from the point of view of the dose (*e.g.*, some species exceed a pathological level) and from the point of view of the exposure (*e.g.*, some species persist in time beyond some maximal exposure time). Remark that defining toxicity by characterising properties on sequences of events is more general than just characterising pathological states. It addresses the needs to characterise multifactorial scenario (*e.g.*, periodical behaviours relating possibly several species) and to discover complex etiology among reactants.

From healthy states to healthy behaviours. In ANDy a state is a marking in the marking graph, it collects for each species its current level and the corresponding λ vector. The first step is to observe that some states can be naturally characterised as dangerous, they highlight particular symptoms (*e.g.* the dosage of a poison has become relevant). Let \mathcal{D} be the set of such states. Symmetrically to dangerous states, there are some states

that characterise a “safe” condition (e.g. the organism is functioning normally and does not presents hazardous symptoms), denoted \mathcal{H} . Notice that there are states that are not assigned to any of the two classes, we group them into the \mathcal{R} set. Characterising harmful states corresponds only to verify toxicity problems as in Item 1 above, more complex properties (Item 2) need to refer to (sets of) traces in the marking graph. We therefore classify possible behaviours starting from an initial state into four toxicity scenarios:

1. those that lead to states in \mathcal{D} ,
2. those that irremediably quit \mathcal{H} and never reach it again: the tail of the trace visits only states in \mathcal{D} or \mathcal{R} (e.g., when a gene mutation knock out some pathway);
3. those that quit \mathcal{H} for too long in terms of ticks (even if they may reach it again), the regulation system allows, in principle, to reestablish the homeostatic equilibrium but the process takes too long, compromising the viability of the organism (e.g., DNA damage caused by hydrogen peroxide in Escherichia Coli can be recovered to some extent by DNA repair enzymes but the perturbation may lead to cell apoptosis if to important or too long [22]);
4. those that quit \mathcal{H} an unbounded number of times (systemic metabolic dysfunction, slow poisoning)

All these properties can be given in terms of temporal logic formulae. As mentioned above, the first item corresponds to reachability analysis thus instead of logic formulae ad hoc algorithms can be used as well. The second item can be dealt with formulae like the following in CTL: $EF EG (s \notin \mathcal{H})$, which means it is possible (EF) that starting from a certain moment all visited states (EG) will not belong to set \mathcal{H} . The remaining items correspond to more complex formulae whose formulation depends on the specific property of the system under consideration, for instance taking into account a precise number of ticks or a concrete sequence of states.

From healthy behaviours to healthy states. Notice that sometimes it is not sufficient or possible to describe the healthy condition of an organism (i.e. the ability of maintaining its capabilities) only in terms of the sets \mathcal{H} and \mathcal{D} . Indeed, for some organisms their viability conditions are characterised by complex behaviours such as specific traces or oscillations. We, thus, define toxic (and symmetrically viable) behaviours \mathcal{T}_{toxic} (resp. \mathcal{T}_{viable}) by giving the property characterising them (or simply by enumerating the traces). The properties can be described by specific temporal logic formulae (that can be rather complex employing also recursive operators). For instance, we can consider viable all traces that infinitely repeat an ordered sequence of three states as in our example of the repressilator (e.g., only lacL ON, then only tetR ON, and finally only cI ON) and where the period of oscillation is six ticks. This way toxicity can be checked by testing whether a trace belongs or not to \mathcal{T}_{toxic} . For instance, suppose that we want to describe the periodic activation of three genes a, b and c , we could use this μ calculus formula to describe \mathcal{T}_{viable} :

$$\nu.X(a \wedge \langle - \rangle \langle - \rangle \langle - \rangle tt \wedge [-](b \wedge [-](c \wedge [-]X)))$$

which means we are in a state with a activated, followed by three transitions, for each first transition we should have b activated and then c and so on recursively. In our case,

as the state space is finite, any ANDy network may be simulated by a Büchi automaton and the questions above may correspond either to check word acceptance or language inclusion, which are both decidable questions in our case.

Moreover once we have given the specification of viable and toxic behaviour, we may infer several interesting sets of states:

- states starting from which all possible futures are behaviours in $\mathcal{T}_{viable/toxic}$
- states that have at least one possible future in $\mathcal{T}_{viable/toxic}$,
- states that are included only in $\mathcal{T}_{viable/toxic}$.

Example 3. We generalise here the example of the repressilator given above: we take three entities $\{A, B, C\}$ each with decay duration 2 that are inhibited in turn by potential activities:

$$\begin{aligned} \alpha_1 &: \emptyset; (A, 1) \xrightarrow{2} (B, +1) \\ \alpha_2 &: \emptyset; (B, 1) \xrightarrow{2} (C, +1) \\ \alpha_3 &: \emptyset; (C, 1) \xrightarrow{2} (A, +1) \end{aligned}$$

we consider a new perturbed variant of the system with an additional entity D with only one level (*i.e.*, the entity is permanent) such that α_1 and α_3 remains unchanged and α_2 is modified in $\alpha'_2 : (D, 1); (B, 1) \xrightarrow{4} (C, +1)$.

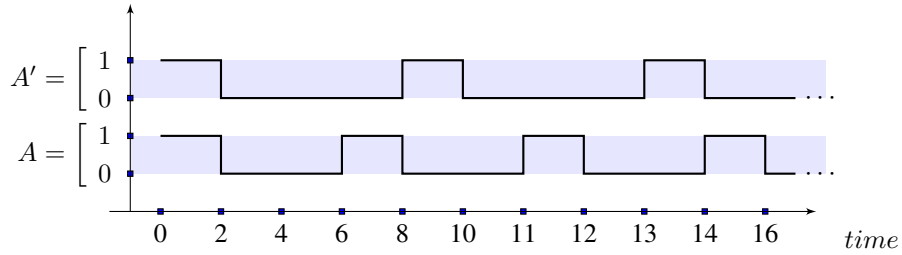


Fig. 4. Entities levels evolving with time corresponding to the given scenario.

Figure 4 above shows the periodic activation of entity A (first line) each six time units while the second line shows the periodic behaviour of A (second line, here denoted with A' to avoid confusion) in the system perturbed with entity D .

We now define \mathcal{T}_{viable} as all traces where entity A is activated every six ticks, clearly with this property all traces in the perturbed system will be toxic.

◇

Notice that formulae describing properties can be rather long requiring, for instance, a complex combination of all possible cases and interleaving. To this aim, in the future we plan to design a language with dedicated primitives that abbreviate common use cases (*i.e.*, macro instructions). A second example coming from a different domain and involving a greater number of activities and entities is given in Appendix B.

4 Related works

From a technical point of view, the closest related work is on reaction systems [5] or their Petri net representation [25]. Although we use a similar definition for activity, the semantics we have proposed is inherently different: in [5] all enabled reactions occur in one step while we consider two forms of activity evolution: simultaneous for mandatory activities and interleaved for potential ones. Furthermore, we have introduced discrete abstract levels that, to the best of our knowledge, are not taken into account in reaction systems. Also, we have presented a more elaborated notion of time that governs both entities and activities. In [6] the authors consider an extension of reaction systems with duration but it concerns only decay and not duration of activities. Furthermore the decay is referred to the number of steps and not to the discrete time progression as in our case.

From the Petri net modelling point of view, our representation of time is considerably different from the approaches traditionally used in time and timed Petri nets ([8] presents a survey with insightful comparison of the different approaches). The main difference lies on the fact that the progression of time is implicit and external to the system. By contrast, in our proposal we have assumed the presence of an explicit way of incrementing duration (modelled by synchronised counters). This is also different from the notion of timestamps introduced in [18] that again refers to an implicit notion of time. Indeed, our approach is conceptually closer to Petri nets with causal time [29] for the presence of an explicit transition for time progression. Nevertheless, in our approach time cannot be suspended under the influence of the environment (as is the case in [29]).

In a broader sense, our work could also be related to P-systems [26,24] or the κ -calculus [10] that describe the evolution of cells through rules. Both these approaches are mainly oriented to simulation while we are interested in verification aspects. Finally, always related to the modelling in Petri nets but with a different aim, levels have been used in qualitative approaches to address problems related to the identification of steady states in genetic networks such as in [9]. Nevertheless these contributions abstract away from time related aspects that are instead central in our proposal. Finally, it is interesting to notice that our formalism adds a new node in between timed and qualitative regions in the classification in [19].

5 Final remarks

We have introduced ANDy to model time-dependent activity-driven systems, which consist of a set of entities present in the environment at a given level. Entities can age as time passes by and their level is governed by a set of mandatory and potential activities with duration. The resulting Petri net is compact and provides an intelligible graphical representation of the described activities. Moreover, the network is easily scalable: the size of the network grows linearly with the number of added entities and activities. We have shown that, despite the ability of modelling timed (thus infinite) systems, ANDy networks have finite state space and that they have an alternative but exponential formulation with equivalent semantics into timed automata (TA).

The development of an equivalent semantics in terms of modular TA, was instrumental. Even if the TA formulation will have little impact on the final users, it helped us

to clarify the semantics of the temporal relationships in ANDy by confronting the high level Petri net approach with the direct representation of clocks accessible in TA. We insisted on a compositional form of TA, despite the fact that it will make the translation more complex than a direct translation, because we strongly advocate for modularity to face the scalability and reusability challenges posed by systems biology.

Finally we have discussed how toxicity problems can be addressed using our formalism. To the best of our knowledge this is the first attempt to give a general methodology, a systemic approach of toxicity analysis rather than a particular technique to verify them.

As the semantics of ANDy is given in terms of high-level Petri nets, ANDy networks can be easily used as overlay of existing implemented tools. We have prototyped a tool to simulate and build the state space of an ANDy network using the SNAKES toolkit [27]. We have also developed an alternative implementation using the MGS framework [17] to test several strategies that can be used to avoid the combinatorial explosion and to build lazily the state space. The first results are very positive, ANDy is particularly suited to describe biological systems, in particular regulatory networks and pathways whose formalisation is based on rules (activities). The tools above have been effectively used in the analysis of several applications: in physiology (modelling the metabolism of glucose) [12], in the modelling of regulatory networks (*e.g.*, the repressilator), etc. We have used SNAKES and MGS as they allow a rapid prototyping but we plan to re-implement the framework and to base further developments on mainstream tools that are well supported in the Petri net system biology community as simulation tool Snoopy [20] and related analysis tool MARCIE [21].

We plan to develop the ANDy approach along several directions. We want to extend decay function to arbitrary maps in \mathcal{L} . The problem is to generalise the notion of increase and decrease in a relevant way for the application. More structure can also be given to the notion of entity. Characterising an entity by several attributes (instead of only one level) raises the question of the causal relationships between these attributes and their update strategy. Another aspect that will be addressed in the future is to consider dynamic models where entities are created and deleted, as in [15]. Finally, it would certainly be interesting to find a systematic way for approximating stochastic rates into activities duration and decays.

Acknowledgements. This work was supported by the French project ANR BLANC 0307 01 - SYNBIOTIC. We thank the anonymous reviewers of PNSE for their comments on the preliminary version of this paper. We are grateful to M. Heiner, F. Pomereau and Y.-S. Le Cornec for useful suggestions and discussions.

References

1. U. Alon. *An introduction to systems biology: design principles of biological circuits*. CRC press, 2006.
2. R. Alur and D. L. Dill. A theory of timed automata. *TCS*, 126(2):183–235, 1994.
3. P. Baldan, N. Cocco, A. Marin, and M. Simeoni. Petri nets for modelling metabolic pathways: a survey. *Natural Computing*, 9(4):955–989, 2010.

4. G. Behrmann, A. David, and K. G. Larsen. A tutorial on UPPAAL. In M. Bernardo and F. Corradini, editors, *SFM*, volume 3185 of *LNCS*, pages 200–236. Springer, 2004.
5. R. Brijder, A. Ehrenfeucht, M. G. Main, and G. Rozenberg. A tour of reaction systems. *Journal of Foundations of Computer Science*, 22(7):1499–1517, 2011.
6. R. Brijder, A. Ehrenfeucht, and G. Rozenberg. Reaction systems with duration. In *Computation, Cooperation, and Life*, volume 6610 of *LNCS*, pages 191–202. Springer, 2011.
7. L. Cardelli. Abstract machines of systems biology. *Transactions on Computational Systems Biology*, 3737:145–168, 2005.
8. A. Cerone and A. Maggiolo-Schettini. Time-based expressivity of time petri nets for system specification. *TCS*, 216(1-2):1–53, 1999.
9. C. Chaouiya, A. Naldi, E. Remy, and D. Thieffry. Petri net representation of multi-valued logical regulatory graphs. *Natural Computing*, 10(2):727–750, 2011.
10. V. Danos and C. Laneve. Formal molecular biology. *TCS*, 325(1):69–110, 2004.
11. M. DeCristofaro and K. Daniels. Toxicogenomics in biomarker discovery. In D. Mendrick and W. Mattes, editors, *Essential Concepts in Toxicogenomics*, volume 460 of *Methods in Molecular Biology™*, pages 185–194. Humana Press, 2008.
12. C. Di Giusto, H. Klaudel, and F. Delaplace. Systemic approach for toxicity analysis. In M. Heiner, editor, *Proceedings of the 5th International Workshop on Biological Processes & Petri Nets co-located with 35th International Conference on Application and Theory of Petri Nets and Concurrency (PETRI NETS 2014), Tunis, Tunisia, June 23, 2014.*, volume 1159 of *CEUR Workshop Proceedings*, pages 30–44. CEUR-WS.org, 2014.
13. M. Elowitz and S. Leibler. A synthetic oscillatory network of transcriptional regulators. *Nature*, 403(6767):335–8, 2000.
14. W. R. Foster, S.-J. Chen, A. He, A. Truong, V. Bhaskaran, D. M. Nelson, D. M. Dambach, L. D. Lehman-McKeeman, and B. D. Car. A retrospective analysis of toxicogenomics in the safety assessment of drug candidates. *Toxicologic pathology*, 35(5):621–35, Aug. 2007.
15. J.-L. Giavitto, H. Klaudel, and F. Pommereau. Integrated regulatory networks (IRNs): Spatially organized biochemical modules. *TCS*, 431(1):219–234, May 2012.
16. J.-L. Giavitto, G. Malcolm, and O. Michel. Rewriting systems and the modelling of biological systems. *Comparative and Functional Genomics*, 5:95–99, Feb. 2004.
17. J.-L. Giavitto and A. Spicher. Topological Rewriting and the Geometrization of Programming. *Physica D: Nonlinear Phenomena*, 237(9):1302–1314, July 2008.
18. H.-M. Hanisch, K. Lautenbach, C. Simon, and J. Thieme. Timestamp petri nets in technical applications. In *WODES '98*, pages 321–326, 1998.
19. M. Heiner and D. Gilbert. How might petri nets enhance your systems biology toolkit. In *Petri Nets*, volume 6709 of *LNCS*, pages 17–37. Springer, 2011.
20. M. Heiner, M. Herajy, F. Liu, C. Rohr, and M. Schwarick. Snoopy - a unifying petri net tool. In *Petri Nets*, volume 7347 of *LNCS*, pages 398–407. Springer, 2012.
21. M. Heiner, C. Rohr, and M. Schwarick. Marcie - model checking and reachability analysis done efficiently. In *Petri Nets*, volume 7927 of *LNCS*, pages 389–399. Springer, 2013.
22. J. Imlay and S. Linn. Dna damage and oxygen radical toxicity. *Science*, 240(4857):1302–1309, 1988.
23. K. Jensen. *Coloured Petri Nets - Basic Concepts, Analysis Methods and Practical Use - Volume 1*. EATCS Monographs on TCS. Springer, 1992.
24. J. Kleijn and M. Koutny. Membrane systems with qualitative evolution rules. *Fundam. Inform.*, 110(1-4):217–230, 2011.
25. J. Kleijn, M. Koutny, and G. Rozenberg. Modelling reaction systems with petri nets. In *BioPPN-2011*, pages 36–52, 2011.
26. A. Paun, M. Paun, A. Rodríguez-Patón, and M. Sidoroff. P systems with proteins on membranes: a survey. *Int. Journal of Foundations of Computer Science*, 22(1):39–53, 2011.

27. F. Pommereau. Quickly prototyping Petri nets tools with SNAKES. *Petri net newsletter*, (10-2008):1–18, 10 2008. [SNAKES is available here](#).
28. L. Serrano. Synthetic biology: promises and challenges. *Molecular Systems Biology*, 3(158), 2007.
29. C. B. Thanh, H. Klaudel, and F. Pommereau. Petri nets with causal time for system verification. *ENTCS*, 68(5):85–100, 2002.
30. R. Thomas. Boolean formalisation of genetic control circuits. *Journal of theoretical biology*, 42:565–583, 1973.
31. F. Wang. Formal verification of timed systems: A survey and perspective. In *Proceedings of the IEEE*, pages 1–23, 2004.
32. M. D. Waters and J. M. Fostel. Toxicogenomics and systems toxicology: aims and prospects. *Nature reviews. Genetics*, 5(12):936–48, Dec. 2004.

A Encoding into Timed Automata

In Section 2 we have hinted at the construction of a timed automaton coming directly from the marking graph of an ANDy network. Here we present another encoding that is syntax-driven which is not straightforward because of the management of mandatory rules. Unfortunately, even if the obtained automata is smaller, we cannot avoid it to be exponential at least in the number of activities. We conclude this section showing that the semantics of ANDy in terms of timed automata is equivalent to the semantics in terms of high-level Petri nets.

Timed automata. A timed automaton is an annotated directed (and connected) graph, with an initial node and provided with a finite set of non-negative real variables called *clocks*. Nodes (called *locations*) are annotated with *invariants* (predicates allowing to enter or stay in a location). Arcs are annotated with *guards*, *communication labels*, and possibly with some clock *resets*. Guards are conjunctions of elementary predicates of the form $x \text{ op } c$, where $\text{op} \in \{>, \geq, =, <, \leq\}$ where x is a clock and c a (possibly parameterised) positive integer constant. As usual, the empty conjunction is interpreted as true. The set of all guards and invariant predicates will be denoted by G .

Definition 4. A timed automaton TA is a tuple $(L, l^0, X, \Sigma, Arcs, Inv)$, where

- L is a set of locations with $l^0 \in L$ the initial one, X is the set of clocks,
- $\Sigma = \Sigma^s \cup \Sigma^u \cup \Sigma^b$ is a set of communication labels, where Σ^s are synchronous, Σ^u are synchronous and urgent, and Σ^b are broadcast ones,
- $Arcs \subseteq L \times (G \cup \Sigma \cup R) \times L$ is a set of arcs between locations with a guard in G , a communication label in $\Sigma \cup \{\epsilon\}$, and a set of clock resets in $R = 2^X$; for all $a \in \Sigma^u$, we require the guard to be **true**;
- $Inv : L \rightarrow G$ assigns invariants to locations.

It is possible to define a synchronised product of a set of timed automata that work and synchronise in parallel. The automata are required to have disjoint sets of locations, but may share clocks and communication labels which are used for synchronisation. We define three communication policies:

- *synchronous* communications through labels $a \in \Sigma^s$ that require all the automata having label a to synchronise on a ;
- *synchronous urgent* communications through labels $u \in \Sigma^u$ that are synchronous as above but *urgent* meaning that there will be no delay if transition with label u can be taken;
- *broadcast* communications through labels $b!, b? \in \Sigma^b$ meaning that a set of automata can synchronise if one is emitting; notice that, a process can always emit (e.g., $b!$) and the receivers ($b?$) must synchronise if they can.

The synchronous product $TA_1 \parallel \dots \parallel TA_n$ of timed automata, where for each $j \in [1, \dots, n]$, $TA_j = (L_j, l_j^0, X_j, \Sigma_j, Arcs_j, Inv_j)$ and all L_j are pairwise disjoint sets of locations is the timed automaton $TA = (L, l^0, X, \Sigma, Arcs, Inv)$ such that:

- $L = L_1 \times \dots \times L_n$ and $l^0 = (l_1^0, \dots, l_n^0)$, $X = \bigcup_{j=1}^n X_j$, $\Sigma = \bigcup_{j=1}^n \Sigma_j$,


- $\forall l = (l_1, \dots, l_n) \in L: \text{Inv}(l) = \bigwedge_j \text{Inv}_j(l_j)$,
- Arcs is the set of arcs $(l_1, \dots, l_n) \xrightarrow{g, a, r} (l'_1, \dots, l'_n)$ such that (where for each $a \in \Sigma^s \cup \Sigma^u$, $S_a = \{j \mid 1 \leq j \leq n, a \in \Sigma_j^s \cup \Sigma_j^u\}$): for all $1 \leq j \leq n$, if $j \notin S_a$, then $l'_j = l_j$, otherwise there exist g_j and r_j such that $l_j \xrightarrow{g_j, a, r_j} l'_j \in E_j$; $g = \bigwedge_{j \in S_a} g_j$ and $r = \bigcup_{j \in S_a} r_j$.

The semantics of a synchronous product $TA_1 \parallel \dots \parallel TA_n$ is that of the underlying timed automaton TA (synchronising on synchronous and broadcast communication labels) as recalled below, with the following notations. A location is a vector $l = (l_1, \dots, l_n)$. We write $l[l'_j/l_j, j \in S]$ to denote the location l in which the j th element l_j is replaced by l'_j , for all j in some set S . A valuation is a function ν from the set of clocks to the non-negative reals. Let \mathbb{V} be the set of all clock valuations, and $\nu_0(x) = 0$ for all $x \in X$. We shall denote by $\nu \models F$ the fact that the valuation ν satisfies (makes true) the formula F . If r is a clock reset, we shall denote by $\nu[r]$ the valuation obtained after applying clock reset $r \subseteq X$ to ν ; and if $d \in \mathbb{R}_{>0}$ is a delay, $\nu + d$ is the valuation such that, for any clock $x \in X$, $(\nu + d)(x) = \nu(x) + d$.


The semantics of a synchronous product $TA_1 \parallel \dots \parallel TA_n$ is defined as a timed transition system (S, s_0, \rightarrow) , where $S = (L_1 \times \dots \times L_n) \times \mathbb{V}$ is the set of states, $s_0 = (l^0, \nu_0)$ is the initial state, and $\rightarrow \subseteq S \times S$ is the transition relation defined by:

- (sync): $(\bar{l}, \nu) \rightarrow (\bar{l}', \nu')$ if there exist arc $l \xrightarrow{g, a, r} l' \in \text{Arcs}$ such that $\nu \models g$, $\nu' = \nu[r]$, for $S_a = \{j \mid 1 \leq j \leq n, a \in \Sigma_j^s\}$, $l' = l[l'_j/l_j, j \in S_a]$, and there is no enabled transition with urgent communication label from (\bar{l}, ν) ;
- (urgent): as (sync) but $a \in \Sigma^u$ and there is no delay if transition with urgent communication label can be taken;
- (broadcast): $(\bar{l}, \nu) \rightarrow (\bar{l}', \nu')$ if there exist an output arc $l_j \xrightarrow{g_j, b^j, r^j} l'_j \in \text{Arcs}_j$ and a (possibly empty) set of input arcs of the form $l_k \xrightarrow{g_k, b^k, r^k} l'_k \in \text{Arcs}_k$ such that for all $k \in K = \{k_1, \dots, k_m\} \subseteq \{1, \dots, n\} \setminus \{j\}$, the size of K is maximal, $\nu \models \bigwedge_{k \in K \cup \{j\}} g_k$, $l' = l[l'_k/l_k, k \in K \cup \{j\}]$ and $\nu' = \nu[r_k, k \in K \cup \{j\}]$;
- (timed): $(l, \nu) \rightarrow (l, \nu + d)$ if $\nu + d \models \text{Inv}(l)$.

Here we exemplify timed automata usage: consider for instance the network of timed automata TA_1 and TA_2 with synchronous (non urgent) communications only:

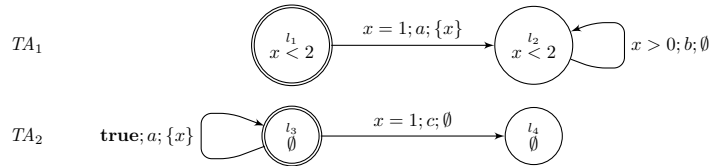

whose behaviour is given by their synchronised product $TA_1 \parallel TA_2$:



and where a possible run is:

$$[(l_1, l_3); x = 0] \rightarrow [(l_1, l_3); x = 1] \rightarrow [(l_2, l_3); x = 0] \rightarrow [(l_2, l_3); x = .5] \rightarrow [(l_2, l_3); x = .5] \rightarrow [(l_2, l_4); x = 1]$$

Encoding into timed automata. We are now ready to introduce the encoding of the high-level Petri net formalisation of ANDy, to this aim we need to add some notation:

Notation 4 Let $B = \{\beta_1, \dots, \beta_n\}$ be the set of all mandatory activities identifiers from \mathcal{M} , ordered alphabetically, i.e., $\beta_i < \beta_j$ if $i < j$. We denote by

$$B^{\otimes} = \{\text{seq}(h) \mid h \in \mathcal{P}(B) \wedge h \neq \emptyset\} \cup \{\varepsilon\},$$

the set of sequences $\text{seq}(h)$ obtained by concatenating the identifiers in non-empty subsets h of B , where for each $h = \{\beta_{i_1}, \dots, \beta_{i_m} \mid \forall j, k : i_j < i_k\} \in \mathcal{P}(B)$, $\text{seq}(h) = \beta_{i_1} \dots \beta_{i_m}$. We assume that if $B^{\otimes} = \{h_1 \dots h_k\}$, then the h_i 's are ordered by decreasing length and alphabetically in such a way that $h_1 = \beta_1 \dots \beta_{|B|}$ and $h_k = \varepsilon$.

Moreover, $\beta_i = h[i]$ is the identifier at the i -position, and $h = h_1 - h_2$ is the sequence of identifier in h_1 without those in h_2 .

The encoding of an ANDy network is the synchronised product of one timed automaton for each entity in \mathcal{E} together with a set of auxiliary automata that are used to handle potential and mandatory activities. The idea is that the global state of an ANDy network is divided into its local counterparts represented by state of entities (i.e., their levels). Thus for each entity e we build a timed automaton $TA(e, \eta_e)$ which has as many locations as the levels in e . Auxiliary automata are used to implement the encoding of places p_ρ ($TA(\rho)$ for $\rho \in \mathcal{M} \cup \mathcal{P}$) and to realise time progression together with mandatory activities (TA_\surd). More formally:

Definition 5. Given an ANDy network $(\mathcal{E}, \mathcal{M}, \mathcal{P})$, with initial expression level η_e for each $e \in \mathcal{E}$, the corresponding timed automata encoding is

$$\llbracket (\mathcal{E}, \mathcal{M}, \mathcal{P}) \rrbracket = \prod_{e \in \mathcal{E}} TA(e, \eta_e) \parallel \prod_{\alpha \in \mathcal{P}} TA(\alpha) \parallel \prod_{\beta \in \mathcal{M}} TA(\beta) \parallel TA_\surd$$

where $TA(e, \eta_e)$, $TA(\alpha)$, $TA(\beta)$ and TA_\surd are defined next. In the following we assume B to be the set of identifiers of mandatory activities in \mathcal{M} .

Entities. $TA(e, \eta_e) = (L_e, l_e^0, X_e, \Sigma_e, \text{Arcs}_e, \text{Inv}_e)$ where:

- $L_e = \{l_i^e \mid i \in [0 \dots \mathcal{L}_e]\} \cup \{k_i^h, k_i^{d,h} \mid i \in [0 \dots \mathcal{L}_e], h \in B^{\otimes}\}$ with $l_e^0 = l_{\eta_e}^e$
- $X_e = \{\lambda_i^e, u_i^e \mid i \in [0 \dots \mathcal{L}_e]\} \cup \{x_e\}$
- $\Sigma_e^s = \{\alpha \mid \alpha \text{ identifier of an activity in } \mathcal{P}\}$, $\Sigma_e^b = B^{\otimes}$, $\Sigma_e^u = \{\surd/h \mid h \in B^{\otimes}\}$
- $\text{Arcs}_e = \text{Arcs}_{\mathcal{P}} \cup \text{Arcs}_{\mathcal{M}}$ where

$$\text{Arcs}_{\mathcal{P}} = \{l_j \xrightarrow{g(A_\alpha) \wedge g(I_\alpha) \wedge x_e = 0, \alpha, r} l_e \mid e_{A_\alpha} \leq j < e_{I_\alpha}, \alpha \in \mathcal{P}, e \in A_\alpha \cup I_\alpha \cup R_\alpha\}$$

with j, e, e_{A_α} , and e_{I_α} are levels of e defined as follows:

$$\begin{aligned}
e_{A_\alpha} &= \begin{cases} \eta_a & \text{if } (e, \eta_a) \in A_\alpha \\ 0 & \text{otherwise} \end{cases} & e_{I_\alpha} &= \begin{cases} \eta_i & \text{if } (e, \eta_i) \in I_\alpha \\ \mathcal{L}_e & \text{otherwise} \end{cases} \\
g(A_\alpha) &= \begin{cases} \lambda_{\eta_a}^e \geq \Delta_\alpha & \text{if } (e, \eta_a) \in A_\alpha \\ \mathbf{true} & \text{otherwise} \end{cases} & g(I_\alpha) &= \begin{cases} \lambda_{\eta_i}^e \geq \Delta_\alpha & \text{if } (e, \eta_i) \in I_\alpha \\ \mathbf{true} & \text{otherwise} \end{cases} \\
m &= \begin{cases} \max(0, \min(j + v, \mathcal{L}_e - 1)) & \text{if } (e, v) \in R_\alpha \\ j & \text{otherwise} \end{cases} \\
r &= \begin{cases} \emptyset & \text{if } (e, v) \notin R_\alpha \\ \{u_m^e\} \cup \{\lambda_x^e \mid x \in [j + 1, m]\} & \text{if } (e, v) \in R_\alpha \wedge m - j > 0 \\ \{u_m^e\} & \text{if } (e, v) \in R_\alpha \wedge m - j = 0 \\ \{u_m^e\} \cup \{\lambda_x^e \mid x \in [m + 1, j]\} & \text{if } (e, v) \in R_\alpha \wedge m - j < 0 \end{cases} \\
\text{Arcs}_{\mathcal{M}} &= \{l_j \xrightarrow{g(d) \wedge g, h?, \emptyset} k_j^{d, h}, \mid j \in [0.. \mathcal{L}_e - 1], h \in B^\otimes\} \cup \\
&\quad \{l_j \xrightarrow{\neg g(d) \wedge g, h?, \emptyset} k_j^h, \mid j \in [0.. \mathcal{L}_e - 1], h \in B^\otimes\} \cup \\
&\quad \{k_j^{d, h} \xrightarrow{\mathbf{true}, h', r \cup \{x_e\}} l_e, \mid j \in [0.. \mathcal{L}_e - 1], h, h' \in B^\otimes, h < h'\} \cup \\
&\quad \{k_j^h \xrightarrow{\mathbf{true}, \sqrt{h'}, r' \cup \{x_e\}} l'_e, \mid j \in [0.. \mathcal{L}_e - 1], h, h' \in B^\otimes, h < h'\}
\end{aligned}$$

where

$$\begin{aligned}
g &= \bigwedge_{k=1}^n g(\beta_k) \wedge \bigwedge_{k=1}^m \neg g(\beta'_m) \text{ for } h = \beta_1 \cdots \beta_n \text{ and } h_1 - h = \beta'_1 \cdots \beta'_m \\
g(\beta) &= g'(A_\beta) \wedge g'(I_\beta) \text{ and } \beta = A_\beta; I_\beta \xrightarrow{\Delta_\beta} R_\beta \\
g(d) &= u_j > \delta_e(j)
\end{aligned}$$

$$\begin{aligned}
g'(A_\beta) &= \begin{cases} j \geq \eta_a \wedge \lambda_{\eta_a}^e \geq \Delta_\beta & \text{if } (e, \eta_a) \in A_\beta \\ \mathbf{true} & \text{otherwise} \end{cases} \\
g'(I_\beta) &= \begin{cases} j < \eta_i \wedge \lambda_{\eta_i}^e \geq \Delta_\beta & \text{if } (e, \eta_i) \in I_\beta \\ \mathbf{true} & \text{otherwise} \end{cases} \\
m &= \max(0, \min(\sum_{i \in [1..n]} f(h[i]') + j - 1, \mathcal{L}_e - 1)) \\
m' &= \max(0, \min(\sum_{i \in [1..n]} f(h[i]') + j, \mathcal{L}_e - 1)) \\
\text{where } f(h[i]) &= \begin{cases} v & \text{if } (e, v) \in R_{\beta_i} \\ 0 & \text{otherwise} \end{cases} \\
r &= \begin{cases} \{u_m^e\} \cup \{\lambda_x^e \mid x \in [j + 1, m]\} & \text{if } m - j > 0 \\ \{u_m^e\} & \text{if } m - j = 0 \\ \{u_m^e\} \cup \{\lambda_x^e \mid x \in [m + 1, j]\} & \text{if } m - j < 0 \end{cases} \\
r' &= \begin{cases} \{u_{m'}^e\} \cup \{\lambda_x^e \mid x \in [j + 1, m']\} & \text{if } m' - j > 0 \\ \{u_{m'}^e\} & \text{if } e \in h' \wedge m' - j = 0 \\ \{u_{m'}^e\} \cup \{\lambda_x^e \mid x \in [m' + 1, j]\} & \text{if } m' - j < 0 \\ \emptyset & \text{if } e \notin h' \end{cases}
\end{aligned}$$

- where $e \in h$ denotes formula: $\exists \beta_k = A_{\beta_k}; I_{\beta_k} \xrightarrow{\Delta_{\beta_k}} R_{\beta_k}$ s.t. $h = \beta_1 \cdots \beta_n, 1 \leq k \leq n \wedge (e, v) \in R_{\beta_k}$
- $Inv_e(l_i^e) = u_i^e \leq \delta_e(i)$ for all $i \in [0.. \mathcal{L}_e]$

Potential activity. $TA(\alpha) = (L_\alpha, l_\alpha^0, X_\alpha, \Sigma_\alpha, Arcs_\alpha, Inv_\alpha)$ for $\alpha \in \mathcal{P}$ where

- $L_\alpha = \{l_\alpha\}, l_\alpha^0 = \alpha, X_\alpha = \{w_\alpha\}, \Sigma_\alpha^s = \{\alpha\}$
- $Arcs_\alpha = \{l_\alpha \xrightarrow{w_\alpha \geq \Delta_\alpha, \alpha, \{w_\alpha\}} l_\alpha\}$
- $Inv_\alpha(l_\alpha) = \mathbf{true}$.

Mandatory activity. $TA(\beta) = (L_\beta, l_\beta^0, X_\beta, \Sigma_\beta, Arcs_\beta, Inv_\beta)$ for $\beta \in \mathcal{M}$ where

- $L_\beta = \{l_\beta, l'_\beta\}, l_\beta^0 = l_\beta, X_\beta = \{w_\beta\}, \Sigma_\beta^b = B^\otimes, \Sigma_\beta^u = \{\sqrt{h} \mid h \in B^\otimes\}$
- $Arcs_\beta = \{l_\beta \xrightarrow{w_\beta \geq \Delta_\beta, h?, \emptyset} l'_\beta \mid h \in B^\otimes, \beta \in h\} \cup \{l'_\beta \xrightarrow{\mathbf{true}, \sqrt{h}, \{w_\beta\}} l'_\beta \mid h \in B^\otimes, \beta \in h\}$
- $Inv_\beta(l_\beta) = \mathbf{true}$ and $Inv_\beta(l'_\beta) = \mathbf{true}$.

Time. $TA_\surd = (L_\surd, l_\surd^0, X_\surd, \Sigma_\surd, Arcs_\surd, Inv_\surd)$ where

- $L_\surd = \{l_h \mid h \in B^\otimes\} \cup \{l_\perp\}, l_\surd^0 = l_{h_1}, X_\surd = \{x\}, \Sigma_\surd^b = B^\otimes, \Sigma_\surd^u = \{\sqrt{h} \mid h \in B^\otimes\}$
- $Arcs_\surd = \{l_{h_i} \xrightarrow{x=1, h_i!, \emptyset} l_{h_{i+1}}, l_{h_{i+1}} \xrightarrow{\mathbf{true}, \sqrt{h_i}, \{x\}} l_{h_1} \mid h, i \in [1..n-1]\} \cup \{l_{h_n} \xrightarrow{x=1, h_n!, \emptyset} l_\perp, l_\perp \xrightarrow{\mathbf{true}, \sqrt{\varepsilon}, \{x\}} l_{h_1}\}$
- $Inv_\surd(l) = \mathbf{true}$ for all $l \in L_\surd$.

Theorem 5. *The above encoding of ANDy network $(\mathcal{E}, \mathcal{M}, \mathcal{P})$ is correct and complete.*

Proof (Sketch). Follows by induction on the length of the run and from a case analysis on the transition performed.

Some intuitions on the proof follows. For each entity e , the corresponding marking of place p_e , $M(p_e) = \langle l_e, u_e, \lambda_e \rangle$, in the Petri net representation is encoded by the state (location l_e^e and valuations of clocks variables u_i^e, λ_i^e for $i \in [0.. \mathcal{L}_e - 1]$) of each timed automaton $TA(e, \eta_e)$. Marking of places p_ρ (for $\rho \in \mathcal{M} \cup \mathcal{P}$) is given by the valuation of clock w_ρ in the corresponding timed automaton $TA(\rho)$.

Each transition of the Petri net is encoded by (a series of) timed automata arcs. For each transition t_α (corresponding to potential activity α) involving e there is a (synchronous) arcs in the timed automaton $TA(e, \eta_e)$ whose guard describes its role in the activity (activator, inhibitor or result). Clock w_α in $TA(\alpha)$ implements the constraint that the activity α is performed at most once in the interval $\Delta_\alpha: w_\alpha \geq \Delta_\alpha$. This way, the synchronous product of all automata reconstructs the full guard of the activity α and exactly one transition in the synchronised product of automata corresponds to the firing of transition t_α . The state reached after this transition coincides with the corresponding marking in the Petri net.

Transition t_c is trickier as time progression causes decay but more importantly the simultaneous action of mandatory activities. Notice that mandatory activities concern

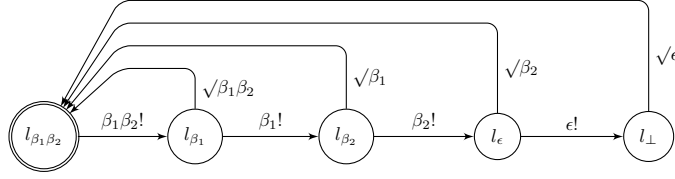


Fig. 5. The shape of timed automaton TA_{\surd} for $B^{\otimes} = \{\beta_1\beta_2, \beta_1, \beta_2, \epsilon\}$, where $\sqrt{\beta_1\beta_2}$, $\sqrt{\beta_1}$, $\sqrt{\beta_2}$, $\sqrt{\epsilon}$ are all synchronous urgent communication labels.

the global state of an ANDy network (the maximal set of enabled mandatory activities has to be performed each time t_c fires) but each sub-automaton of the synchronised automaton as only a partial/local information. That is why, we need to introduce the auxiliary automaton TA_{\surd} that coordinates and gathers partial information from all other automata. Thus, the implementation of t_c has two phases. The first one gathers partial information, performs the selection of the largest set of enabled mandatory activities and forces the time to progress in a discrete fashion; the second phase completes the time progression and synchronises all timed automata communicating the chosen maximal set of mandatory activities. Both phases are initiated by automaton TA_{\surd} which has two types of arcs: broadcast ones for the first phase and urgent synchronous ones for the second (see Figure 5). More precisely, TA_{\surd} progressively interrogates the entities timed automata $TA(e, \eta_e)$ and the mandatory activities automata $TA(\beta_i)$ to “compute” for each automaton the maximal set of enabled mandatory activities. This is obtained through broadcast arcs labelled with sequences of mandatory activities identifiers $h \in B^{\otimes}$, from the longest ($h = seq(B) = \beta_1 \cdots \beta_n$) to the shortest ($h = \epsilon$, i.e., no mandatory activity is enabled). As broadcast is a non blocking transition and because of the ordering on sequences in B^{\otimes} , each entity automaton chooses its maximal set of mandatory activities it is involved in. If it is necessary, it also performs decay. When all automata $TA(e, \eta_e)$ and $TA(\beta_i)$ have agreed on some sequence $h = \beta_{i_1} \dots \beta_{i_m}$ (in the worst case h is empty) the first phase is completed and $\{\beta_{i_1}, \dots, \beta_{i_m}\}$ is the largest set of enabled mandatory activities. The second phase is then implemented with an urgent synchronous arc synchronising all automata: TA_{\surd} , $TA(e, \eta_e)$, for each $e \in \mathcal{E}$, and $TA(\beta_i)$, for $i \in [i_1 \dots i_m]$. Notice that guards on broadcast transitions constraint the clocks to progress by one time unit at once. As a consequence, at the end of the two phase algorithm, timed automata of entities and of places p_p together with the corresponding clocks valuations exactly encode the marking reached after firing t_c . \square

B Blood glucose regulation

Here we introduce another example: *glucose regulation* in human body (Figure 6). This example shows that ANDy model is not limited to genetic regulations but it may express other kinds of interactions. In the following, we are always referring to the process under normal circumstances in a healthy body.

Glucose regulation is a homeostatic process: i.e., the rates of glucose in blood (*glycemia*) must remain stable at what we call the equilibrium state. Glycemia is reg-

ulated by two hormones: *insulin* and *glucagon*. When glycemia rises (for instance as a result of the digestion of a meal), insulin promotes the storing of glucose in muscles through the glycogenesis process, thus decreasing the blood glucose levels. Conversely, when glycemia is critically low, glucagon stimulates the process of glycogenolysis that increases the blood glucose level by transforming glycogen back into glucose.

We will focus on the assimilation of sweeteners: *i.e.*, sugars or artificial sweeteners such as aspartame. Whenever we eat something sweet either natural or artificial, the sweet sensation sends a signal to the brain (through *neurotransmitters*) that in turns stimulates the production of insulin by pancreas. In the case of sugar, the digestion transforms food into nutrients (*i.e.*, glucose) that are absorbed by blood. This way, sugar through digestion increases glucose in blood giving the sensation of satiety. In case the income of glucose produces hyperglycemia, the levels of glucose are promptly equilibrated by the intervention of insulin. Unlike sugar, artificial sweeteners are not assimilated by the body, hence they do not increase the glucose levels in blood. Nevertheless the insulin produced under the stimuli originated by the sweet sensation, although weak, can still cause the rate of glucose to drop engendering hypoglycemia. In response to that, the brain induces the stimulus of *hunger*. As a matter of fact this appears as an unwanted/toxic behaviour, indeed the assimilation of food (even if it contains aspartame) should calm hunger and induce satiety not the opposite.

This schema suggests that we should consider four levels for glycemia: low, hunger, equilibrium and high. Likewise for insulin we assume three levels: inactive, low and high. All other actors involved in glucose regulation, have only two levels (inactive or active). In this example, duration do not play a fundamental role, for the sake of simplicity we have set all complementary activities such as production of insulin and glucagon, to take the same amount of time, the signal to the brain is the fastest, and the decay of glycemia values are much longer than the digestion process.

Thus the set of involved entities is

$$\mathcal{E} = \{Sugar, Aspartame, Glycemia, Glucagon, Insulin\}$$

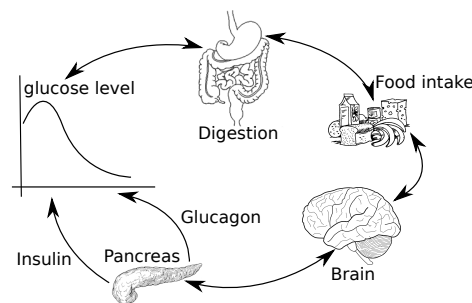


Fig. 6. Glucose metabolism

and their expression levels and corresponding decays are:

levels	duration
$\mathcal{L}_{sugar} = \{0, 1\}$	$\delta_{sugar}(1) = 2$
$\mathcal{L}_{aspartame} = \{0, 1\}$	$\delta_{aspartame}(1) = 2$
$\mathcal{L}_{glycemia} = \{0, 1, 2, 3\}$	$\delta_{glycemia}(1) = 8$ $\delta_{glycemia}(2) = 8$ $\delta_{glycemia}(3) = 8$
$\mathcal{L}_{glucagon} = \{0, 1\}$	$\delta_{glucagon}(1) = 3$
$\mathcal{L}_{insulin} = \{0, 1, 2\}$	$\delta_{insulin}(1) = 3$ $\delta_{insulin}(2) = 3$

The levels of glycemia are: 0 corresponding to low, 1 to hunger, 2 to equilibrium and 3 to high. Likewise for insulin we have 0 that corresponds to inactive, 1 to low and 2 to high. All levels for the other species are 0 for inactive and 1 for active. \diamond

The set of potential activities $\mathcal{P} = \{\alpha_k = A_k; I_k \rightarrow R_k \mid k \in [1..9]\}$ for the glucose metabolism example is:

$$\begin{aligned}
\alpha_1 &: (Sugar, 1); \emptyset \rightarrow (Insulin, +1), (Glycemia, +1) \\
\alpha_2 &: (Aspartame, 1); \emptyset \rightarrow (Insulin, +1) \\
\alpha_3 &: \emptyset; (Glycemia, 1) \rightarrow (Glucagon, +1) \\
\alpha_4 &: (Glycemia, 3); \emptyset \rightarrow (Insulin, +1) \\
\alpha_5 &: (Insulin, 2); \emptyset \rightarrow (Glycemia, -1) \\
\alpha_6 &: (Insulin, 1), (Glycemia, 3); \emptyset \rightarrow (Glycemia, -1) \\
\alpha_7 &: (Insulin, 1); (Glycemia, 2) \rightarrow (Glycemia, -1) \\
\alpha_8 &: (Glucagon, 1); \emptyset \rightarrow (Glycemia, +1)
\end{aligned}$$

α_1 and α_2 represent the assimilation of Sugar and Aspartame, respectively: while Aspartame only increases the level of Insulin, Sugar also increases Glycemia. α_3 takes care of hypoglycemia, *i.e.*, a Glycemia level equal to 0 (obtained by using $(Glycemia, 1)$ as inhibitor) engenders the production of Glucagon. On the contrary, hyperglycemia causes the production of Insulin (α_4). The presence of Insulin lowers Glycemia (activities $\alpha_5, \alpha_6, \alpha_7$). In particular Insulin level equal to 1 plays a role in the decrease of Glycemia only in case of hyperglycemia α_6 or hypoglycemia α_7 , otherwise the signal is not strong enough and we need Insulin at level 2 to see the effect on Glycemia (α_5). Last activity describes the role of Glucagon which if active increases the level of Glycemia.

For this example, the set of mandatory activities is empty. Observe now the behaviour of *Glycemia* in the following scenario:

initial state	$\langle 3, 0 \rangle$	
8 time units elapse, counter at level 3 updates	$\langle 3, 8 \rangle$	
one time unit elapses, <i>Glycemia</i> decays	$\langle 2, 0 \rangle$	
one time unit elapses, counter at level 2 updates	$\langle 2, 1 \rangle$	
activity α_5 decreases <i>Glycemia</i> level	$\langle 1, 0 \rangle$	
8 time units elapse, counter at level 1 updates	$\langle 1, 8 \rangle$	
one time unit elapses, <i>Glycemia</i> decays	$\langle 0, 0 \rangle$	
one time unit elapses, no effect since $\delta_{glycemia}(0) = \omega$	$\langle 0, 0 \rangle$.	\diamond

Figure 7 shows a simplification of the ANDy network $(\mathcal{E}, \mathcal{P}, \emptyset)$. It focuses only on the activity schema linking inputs (*i.e.*, activators and inhibitors) to results. Each input arc is labeled with either letter A or letter I denoting whether the input place is an activator or an inhibitor, respectively. Likewise, each output arc is labeled with a + or a - to denote increase or decrease of product levels by 1. For each activity transition α , we have omitted place q_α and all arcs in the opposite direction. The numbers inside each transition refers to the corresponding activity.

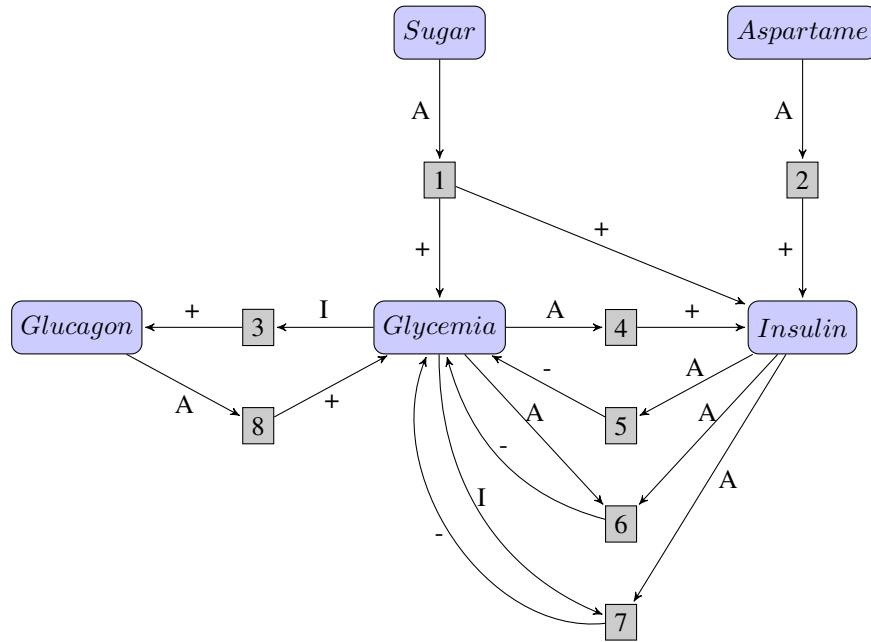


Fig. 7. Simplified ANDy network of glucose metabolism.

Figure 8, instead, shows a portion of the complete initially marked ANDy network for the glucose metabolism example, focusing only on activity α_7 .

The following properties can be expressed in CTL:

Symptoms: Is it possible to have an anomalous decrease of glucose levels in blood (revealing hypoglycemia)?

$$\mathbf{EF}(Glycemia, 0)$$

Causality: Does assimilation of sweeteners cause hypoglycemia?

$$\mathbf{EF}[((Sugar, 1) \vee (Aspartame, 1)) \wedge (Glycemia, 1)] \rightarrow \mathbf{AF}(Glycemia, 2)$$

For the second formula we show two paths given as sequences of activities (abstracting away from time transitions), one that satisfy the formula and the other that

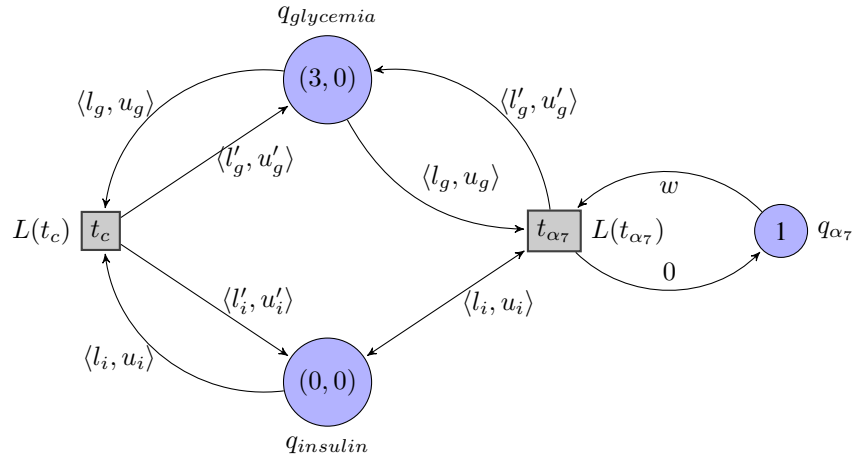


Fig. 8. A portion of the ANDy network of glucose metabolism with an initial marking.

contradicts it. The first one corresponds to the assimilation of sugar. It induces an increase of the production of insulin and an augmentation of the blood glucose levels. Nonetheless the levels of insulin produced are not enough to cause the glycemia to drop and the formula is satisfied.

$$\begin{aligned} & (Sugar, 1), (Aspartame, 0), (Glycemia, 1), (Insulin, 0), (Glucagon, 0) \xrightarrow{\alpha_1} \\ & (Sugar, 1), (Aspartame, 0), (\mathbf{Glycemia, 2}), (Insulin, 1), (Glucagon, 0) \end{aligned}$$

Unlike previous path, the assimilation of aspartame causes only an increase of insulin. Unfortunately, this increment is sufficient to induce a decrease of blood glucose levels thus contradicting the formula above.

$$\begin{aligned} & (Sugar, 0), (Aspartame, 1), (Glycemia, 1), (Insulin, 0), (Glucagon, 0) \xrightarrow{\alpha_2} \\ & (Sugar, 0), (Aspartame, 1), (Glycemia, 1), (Insulin, 1), (Glucagon, 0) \xrightarrow{\alpha_7} \\ & (Sugar, 0), (Aspartame, 0), (\mathbf{Glycemia, 0}), (Insulin, 1), (Glucagon, 0) \end{aligned}$$

This illustrates the toxic behaviour caused by aspartame.