



HAL
open science

Bayesian Estimation of the Multifractality Parameter for Image Texture Using a Whittle Approximation

Sébastien Combrexelle, Herwig Wendt, Nicolas Dobigeon, Jean-Yves Tourneret, Stephen Mclaughlin, Patrice Abry

► **To cite this version:**

Sébastien Combrexelle, Herwig Wendt, Nicolas Dobigeon, Jean-Yves Tourneret, Stephen Mclaughlin, et al.. Bayesian Estimation of the Multifractality Parameter for Image Texture Using a Whittle Approximation. IEEE Transactions on Image Processing, 2015, vol. 24 (n° 8), pp. 2540-2551. 10.1109/TIP.2015.2426021 . hal-01187463

HAL Id: hal-01187463

<https://hal.science/hal-01187463>

Submitted on 26 Aug 2015

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Open Archive TOULOUSE Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible.

This is an author-deposited version published in : <http://oatao.univ-toulouse.fr/>
Eprints ID : 14214

To link to this article : DOI:10.1109/TIP.2015.2426021
URL : <http://dx.doi.org/10.1109/TIP.2015.2426021>

To cite this version : Combrexelle, Sebastien and Wendt, Herwig and Dobigeon, Nicolas and Tournet, Jean-Yves and McLaughlin, Stephen and Abry, Patrice *Bayesian Estimation of the Multifractality Parameter for Image Texture Using a Whittle Approximation*. (2015) IEEE Transactions on Image Processing, vol. 24 (n° 8). pp. 2540-2551. ISSN 1057-7149

Any correspondence concerning this service should be sent to the repository administrator: staff-oatao@listes-diff.inp-toulouse.fr

Bayesian Estimation of the Multifractality Parameter for Image Texture Using a Whittle Approximation

Sébastien Combrexelle, Herwig Wendt, *Member, IEEE*, Nicolas Dobigeon, *Senior Member, IEEE*,
Jean-Yves Tourneret, *Senior Member, IEEE*, Stephen McLaughlin, *Fellow, IEEE*,
and Patrice Abry, *Fellow, IEEE*

Abstract—Texture characterization is a central element in many image processing applications. Multifractal analysis is a useful signal and image processing tool, yet, the accurate estimation of multifractal parameters for image texture remains a challenge. This is due in the main to the fact that current estimation procedures consist of performing linear regressions across frequency scales of the 2D dyadic wavelet transform, for which only a few such scales are computable for images. The strongly non-Gaussian nature of multifractal processes, combined with their complicated dependence structure, makes it difficult to develop suitable models for parameter estimation. Here, we propose a Bayesian procedure that addresses the difficulties in the estimation of the multifractality parameter. The originality of the procedure is threefold. The construction of a generic semiparametric statistical model for the logarithm of wavelet leaders; the formulation of Bayesian estimators that are associated with this model and the set of parameter values admitted by multifractal theory; the exploitation of a suitable Whittle approximation within the Bayesian model which enables the otherwise infeasible evaluation of the posterior distribution associated with the model. Performance is assessed numerically for several 2D multifractal processes, for several image sizes and a large range of process parameters. The procedure yields significant benefits over current benchmark estimators in terms of estimation performance and ability to discriminate between the two most commonly used classes of multifractal process models. The gains in performance are particularly pronounced for small image sizes, notably enabling for the first time the analysis of image patches as small as 64×64 pixels.

Index Terms—Texture characterization, multifractal analysis, wavelet leaders, Bayesian estimation, Whittle approximation, multiplicative cascades, fractional Brownian motion.

I. INTRODUCTION

A. Context and Motivation

SINCE the early origins of digital image processing, texture has been recognized as one of the central characteristic features in images. There is no common definition for texture, and different paradigms have been introduced in the literature [1]. Several authors have proposed to model texture using random fractals, scale invariance or self-similarity [2], [3]. Indeed, it has been reported in the literature that scale invariant processes are relevant and effective models for textures associated with a large class of natural images [4]–[6].

The concepts of scale invariance and self-similarity are deeply tied to the degree of pointwise singular behavior or *local regularity* of the image amplitudes [7], [8]. It has long been recognized that multiscale and wavelet analyzes constitute ideal tools to study data regularity [8]–[12]. It is therefore not surprising that these tools play a central role not only for the study of image contours (edges), but also for texture characterization [13]–[15]. Yet, while contours are essentially isolated singularities, the texture models consist of densely interwoven sets of singularities of different regularity strength. *Multifractal analysis* provides a mathematical framework for the study of such *spatial fluctuations of local regularity* and texture characterization is therefore nowadays often conducted using this tool [16], [17].

Multifractal Analysis: The local regularity of an image X is commonly measured using the so-called *Hölder exponent* $h(\mathbf{t})$ [8], [11]. Qualitatively, the smaller $h(\mathbf{t}_0)$, the rougher X is at spatial location \mathbf{t}_0 and the larger $h(\mathbf{t}_0)$, the smoother X is at \mathbf{t}_0 . The goal of multifractal analysis is the estimation of the *multifractal spectrum* $D(h)$, which provides a *global* description of the spatial fluctuations of $h(\mathbf{t})$. It is defined as the collection of the fractal dimensions of the sets of points for which the Hölder exponent takes the same value [8], [11], cf., Section II-A. Multifractal analysis has recently matured into a standard image processing tool and has been successfully used in a large number of applications including texture classification [5], [6], biomedical applications [18], [19], physics [20], [21] and art investigation [22]–[25].

In most applications, the estimation of $D(h)$ cannot be based directly on its definition [11]. Instead, a so-called *multifractal*

formalism is constructed based on multiresolution coefficients $T_X(a, \mathbf{k})$, essentially capturing the content of the image X around the discrete spatial location \mathbf{k} for a given frequency scale $a = 2^j$. Examples are given by increments, wavelet coefficients and more recently wavelet leaders $\ell(j, \mathbf{k})$ [11] (defined in Section II-B), which yield the current benchmark multifractal formalism. The multifractal formalism provides an expansion of the multifractal spectrum of the image X in terms of the so-called *log-cumulants* c_p , $p \geq 1$ [12], [26]

$$D(h) = 2 + \frac{c_2}{2!} \left(\frac{h - c_1}{c_2} \right)^2 + \frac{-c_3}{3!} \left(\frac{h - c_1}{c_2} \right)^3 + \frac{-c_4 + 3c_3^2/c_2}{4!} \left(\frac{h - c_1}{c_2} \right)^4 + \dots \quad (1)$$

when $c_2 < 0$, while $D(h) = \delta(h - c_1)$ when $c_2 \equiv 0$ (c_2 cannot be positive theoretically [8], [11], [27]).

Estimation of c_2 : The leading order coefficients c_p provide a relevant summary of the multifractal properties of X in applications where it would often not be convenient to handle an entire function $D(h)$ [12], [26]–[28]. The first log-cumulant c_1 , for instance, is the mode of $D(h)$ and can be read as a measure for the “average” smoothness of X . More importantly, the coefficient c_2 , referred to as the *multifractality* or *intermittency* parameter, is directly related to the width of $D(h)$ and captures the multifractal signature (i.e., the fluctuations of the local regularity) of the image X . Its primary importance stems from the fact that it enables the identification of the two major classes of multifractal stochastic processes: self-similar processes for which $c_2 = 0$ and multifractal multiplicative cascade (MMC) based processes for which c_2 is strictly negative [29]. While the former class is tied deeply to additive constructions, the latter is based on multiplicative constructions and is hence linked to fundamentally different physical principles [7], [8], [30]. Moreover, the magnitude of c_2 quantifies the degree of multifractality of an image for the latter class. For an overview and details on scale invariant and multifractal processes, the reader is referred to, e.g., [8], [31] and references therein.

In the seminal contribution [27], it has been shown that the log-cumulants c_p are tied to the quantities $\ell(j, \mathbf{k})$ through the key relation $\text{Cum}_p[\log \ell(j, \mathbf{k})] = c_p^0 + c_p \log 2^j$, where $\text{Cum}_p[\cdot]$ is the p -th order cumulant. In particular

$$C_2(j) \triangleq \text{Var} [\log \ell(j, \mathbf{k})] = c_2^0 + c_2 \log 2^j. \quad (2)$$

Relation (2) leads to the definition of the current standard and benchmark estimator for the parameter c_2 , based on linear regression of the sample variance, denoted by $\widehat{\text{Var}}$, of $\log \ell(j, \mathbf{k})$ over a range of scales $j \in [j_1, j_2]$

$$\hat{c}_2 = \frac{1}{\log 2} \sum_{j=j_1}^{j_2} w_j \widehat{\text{Var}}[\log \ell(j, \cdot)] \quad (3)$$

where w_j are suitably defined regression weights [12], [28].

Limitations: The use of multifractal analysis remains restricted to images of relatively large size (of order 512^2 pixels) because a sufficient number of scales j must be available to perform the linear regression (3). While a

similar issue is encountered for the analysis of 1D signals, it is significantly more severe for images: indeed, modulo border effects of the wavelet transform, the number of available scales is proportional to the logarithm of the number of samples for 1D signals and to the logarithm of the *square root* of the number of pixels for an image. For instance, for a 1D signal with $256 \times 256 = 65536$ samples, $j_2 = 13$ or 14 scales can be computed, while $j_2 = 4$ or 5 for an image of $N \times N = 256 \times 256$ pixels. In addition, the finest scale, $j = 1$, should not be used in (3) [32]. The practical consequences for the multifractal analysis of images are severe: First, images of small size and thus *image patches* cannot be analyzed in practice. Second, (3) yields modest performance for images when compared with 1D signals of equivalent sample size [12], making it difficult to discriminate between $c_2 \equiv 0$ and values $c_2 < 0$ that are encountered in applications (typically, c_2 lies between -0.01 and -0.08). The goal of this work is to propose and validate a novel procedure for the estimation of c_2 for images that addresses these difficulties.

B. Related Works

There are a limited number of reports in the literature that attempt to overcome the limitations of multifractal analysis for images described above. The *generalized method of moments* has been proposed and studied in, e.g., [33]–[35] and formulates parameter inference as the solution (in the least squares sense) of an over-determined system of equations that are derived from the moments of the data. The method depends strongly on fully parametric models and yields, to the best of our knowledge, only limited benefits in practical applications.

Although classical in parameter inference, maximum likelihood (ML) and Bayesian estimation methods have mostly been formulated for a few specific self-similar and multifractal processes [36], [37]. The main reason for this lies in the complex statistical properties of most of these processes, which exhibit marginal distributions that are strongly non-Gaussian as well as intricate algebraically decaying dependence structures that remain poorly studied to date. The same remark is true for their wavelet coefficients and wavelet leaders [38], [39].

One exception is given by the fractional Brownian motion (in 1D) and fractional Brownian fields (in 2D) (fBm), that are jointly Gaussian self-similar (i.e., $c_2 \equiv 0$) processes with fully parametric covariance structure appropriate for ML and Bayesian estimation. Examples of ML and Bayesian estimators for 1D fBm formulated in the spectral or wavelet domains can be found in [36], [37], [40], and [41]. For images, an ML estimator has been proposed in [42] (note, however, that the estimation problem is reduced to a univariate formulation for the rows/columns of the image there).

As far as MMC processes are concerned, Løvstletten and Rypdal [43] proposes an ML approach in the time domain for one specific process. However, the method relies strongly on the particular construction of this process and cannot easily accommodate more general model classes. Moreover, the method is formulated for 1D signals only. Finally, a Bayesian estimation procedure

for the parameter c_2 of multifractal time series has recently been proposed in [44]. Unlike the methods mentioned above, it does not rely on specific assumptions but instead employs a heuristic semi-parametric model for the statistics of the logarithm of wavelet leaders associated with univariate MMC processes. Yet, it is designed for and can only be applied to univariate time series of small sample size.

C. Goals and Contributions

The use of fully parametric models for the data can be very restrictive in many real-world applications. Therefore, the goal and the main contribution of this work is to study a Bayesian estimation procedure for the multifractality parameter c_2 with as few as possible assumptions on the data (essentially, the relation (2)) that can actually be applied to real-world images of small as well as large sizes. To this end, we adopt a strategy that is inspired by [44] and develop the key elements that are required for its formulation for images.

First, we show by means of numerical simulations that the distribution of the logarithm of wavelet leaders $\log \ell(j, \mathbf{k})$ of 2D MMC processes can, at each scale j , be well approximated by a multivariate Gaussian distribution. Inspired by the covariance properties induced by the multiplicative nature of cascade constructions, we propose a new generic radial symmetric model for the variance-covariance of this distribution. This second-order statistical model is parametrized only by the two parameters c_2 and c_2^0 in (2) and enables us to formulate estimation in a Bayesian framework.

Second, we formulate a Bayesian estimation procedure for the parameter c_2 of images that permits to take into account the constraints that are associated with the proposed statistical model. To this end, an appropriate prior distribution is assigned to the parameter vector (c_2, c_2^0) which essentially ensures that the variance (2) is positive. Additional prior information, if available, can easily be incorporated. The Bayesian estimators of c_2 associated with the posterior distribution of interest cannot be evaluated directly because of the constraints that the parameter vector (c_2, c_2^0) has to satisfy. Therefore, we design a suitable Markov chain Monte Carlo (MCMC) algorithm that generates samples that are asymptotically distributed according to the posterior distribution of interest. These samples are in turn used to approximate the Bayesian estimators. More precisely, we propose a random-walk Metropolis-Hastings scheme to explore efficiently the posterior distribution according to the admissible set of values for c_2 and c_2^0 .

Finally, the exact evaluation of the likelihood associated with the proposed model for the log-wavelet leaders requires the computation of the inverse and the determinant of large dense matrices, which is numerically and computationally too demanding for practical applications. To obtain a stable and efficient algorithm that can actually be applied to images, following intuitions developed in the univariate case, e.g., [36], we approximate the exact likelihood with a Whittle-type expansion that is adapted to the proposed model and can be efficiently evaluated in the spectral domain.

The proposed algorithm for the estimation of the multifractality parameter c_2 is effective both for small and

large image sizes. Its performance is assessed numerically by means of Monte Carlo simulations for two classical and representative 2D MMC constructions, the canonical Mandelbrot cascades (CMC) [7] and compound Poisson cascades (CPC) [45], using the most common multipliers, and a large range of process parameters and sample sizes from 64×64 to 512×512 pixels. Complementary results are provided for 2D fBms (that are self-similar but not MMC). Our results indicate that the proposed estimation procedure is robust with respect to different choices of process constructions and greatly outperforms (2), in particular for small images and for identifying a value $c_2 \equiv 0$. It enables, for the first time, a multifractal analysis of images (or image patches) whose sizes are as small as 64×64 pixels.

The remainder of this work is organized as follows. Section II summarizes the main concepts of multifractal analysis and the wavelet leader multifractal formalism. Section III introduces the statistical model and the Bayesian framework underlying the estimation procedure for the parameter c_2 of images, which is formulated in Section IV. Numerical results are given in Section V. In Section VI, the proposed procedure is applied to the patch-wise analysis of a real-world image, illustrating its potential benefits for practical applications. Finally, Section VII concludes this paper and presents some future work.

II. MULTIFRACTAL ANALYSIS OF IMAGES

Let $X : \mathbb{R}^2 \rightarrow \mathbb{R}$ denote the 2D function (image) to be analyzed. The image X is assumed to be locally bounded in what follows (see Section II-B for a practical solution to circumvent this prerequisite).

A. Multifractal Analysis

Hölder Exponent: Multifractal analysis aims at characterizing the image X in terms of the *fluctuations* of its *local regularity*, characterized by the so-called *Hölder exponent*, which is defined as follows [8], [11]. The image X is said to belong to $C^\alpha(\mathbf{t}_0)$ if there exists $\alpha > 0$ and a polynomial $P_{\mathbf{t}_0}$ of degree smaller than α such that

$$\|X(\mathbf{t}) - P_{\mathbf{t}_0}(\mathbf{t})\| \leq C\|\mathbf{t} - \mathbf{t}_0\|^\alpha$$

where $\|\cdot\|$ is the Euclidian norm. The Hölder exponent at position \mathbf{t}_0 is the largest value of α such that this inequality holds, i.e.,

$$h(\mathbf{t}_0) \triangleq \sup\{\alpha : X \in C^\alpha(\mathbf{t}_0)\}. \quad (4)$$

Multifractal Spectrum: For large classes of stochastic processes, the Hölder exponents $h(\mathbf{t})$ can be theoretically shown to behave in an extremely erratic way [11], [26]. Therefore, multifractal analysis provides a *global* description of the spatial fluctuations of $h(\mathbf{t})$ in terms of the *multifractal spectrum* $D(h)$. It is defined as the Hausdorff dimension (denoted \dim_H) of the sets of points at which the Hölder exponent takes the same value, i.e.,

$$D(h) \triangleq \dim_H(E_h = \{\mathbf{t} : h(\mathbf{t}) = h\}). \quad (5)$$

For more details on multifractal analysis and a precise definition of the Hausdorff dimension [11], [26].

B. Wavelet Leader Multifractal Formalism

Historically, multifractal formalisms have been proposed based on increments or wavelet coefficients. These choices of multiresolution quantities lead to both theoretical and practical limitations, see [12], [28] for a discussion. Recently, it has been shown that a relevant multifractal formalism can be constructed from the *wavelet leaders* [11], [26], [28], which are specifically tailored for this purpose.

Wavelet Coefficients: We assume that the image is given in form of discrete sample values $X(\mathbf{k})$, $\mathbf{k} = (k_1, k_2)$. A 2D orthonormal discrete wavelet transform (DWT) can be obtained as the tensor product of 1D DWT as follows. Let $G_0(k)$ and $G_1(k)$ denote the low-pass and high-pass filters defining a 1D DWT. These filters are associated with a mother wavelet ψ , characterized by its number of vanishing moments $N_\psi > 0$. Four 2D filters $G^{(m)}(\mathbf{k})$, $m = 0, \dots, 3$ are defined by tensor products of G_i , $i = 1, 2$. The 2D low-pass filter $G^{(0)}(\mathbf{k}) \triangleq G_0(k_1)G_0(k_2)$ yields the approximation coefficients $D_X^{(0)}(j, \mathbf{k})$, whereas the high-pass filters defined by $G^{(1)}(\mathbf{k}) \triangleq G_0(k_1)G_1(k_2)$, $G^{(2)}(\mathbf{k}) \triangleq G_1(k_1)G_0(k_2)$ and $G^{(3)}(\mathbf{k}) \triangleq G_1(k_1)G_1(k_2)$ yield the wavelet (detail) coefficients $D_X^{(m)}(j, \mathbf{k})$, $m = 1, 2, 3$ as follows: at the finest scale $j = 1$, the $D_X^{(m)}(j, \mathbf{k})$, $m = 0, \dots, 3$ are obtained by convolving the image X with $G^{(m)}$, $m = 0, \dots, 3$, and decimation; for the coarser scales $j \geq 2$ they are obtained iteratively by convolving $G^{(m)}$, $m = 0, \dots, 3$, with $D_X^{(0)}(j-1, \cdot)$ and decimation. For scaling and multifractal analysis purposes, the approximation coefficients $D_X^{(0)}$ are discarded and it is common to normalize the wavelet coefficients according to the L^1 -norm

$$d_X^{(m)}(j, \mathbf{k}) \triangleq 2^{-j} D_X^{(m)}(j, \mathbf{k}), \quad m = 1, 2, 3 \quad (6)$$

so that they reproduce the self-similarity exponent for self-similar processes [17]. For a formal definition and details on (2D) wavelet transforms, the reader is referred to [13] and [46].

Wavelet Leaders: Denote as

$$\lambda_{j, \mathbf{k}} = \{[k_1 2^j, (k_1 + 1) 2^j], [k_2 2^j, (k_2 + 1) 2^j]\}$$

the dyadic cube of side length 2^j centered at $\mathbf{k} 2^j$ and

$$3\lambda_{j, \mathbf{k}} = \bigcup_{n_1, n_2 \in \{-1, 0, 1\}} \lambda_{j, \mathbf{k} + n_1, \mathbf{k} + n_2}$$

the union of this cube with its eight neighbors. The wavelet leaders are defined as the largest wavelet coefficient magnitude within this neighborhood over all finer scales [11]

$$\ell(j, \mathbf{k}) \equiv \ell(\lambda_{j, \mathbf{k}}) \triangleq \sup_{m \in \{1, 2, 3\}, \lambda' \subset 3\lambda_{j, \mathbf{k}}} |d_X^{(m)}(\lambda')|. \quad (7)$$

Wavelet leaders reproduce the Hölder exponent as follows

$$h(\mathbf{t}_0) = \liminf_{j \rightarrow -\infty} (\log \ell(\lambda_{j, \mathbf{k}}(\mathbf{t}_0)) / \log 2^j) \quad (8)$$

where $\lambda_{j, \mathbf{k}}(\mathbf{t}_0)$ denotes the cube at scale j including the spatial location \mathbf{t}_0 [11]. It has been shown that (8) is the theoretical key property required for constructing a multifractal formalism, see [11] for details. In particular, it can be shown that the *wavelet leader multifractal formalism* (WLMF), i.e., the use

of (1) with coefficients c_p estimated using wavelet leaders, is valid for large classes of multifractal model processes, see [12], [28] for details and discussions. The WLMF has been extensively studied both theoretically and in terms of estimation performance and constitutes the benchmark tool for performing multifractal analysis [12], [28].

Negative Regularity: The WLMF can be applied to locally bounded images (equivalently, to images with strictly positive uniform regularity) only, see [12], [28], [47] for precise definitions and for procedures for assessing this condition in practice. However, it has been reported that a large number of real-world images do not satisfy this prerequisite [5], [12]. In these cases, a practical solution consists of constructing the WLMF using the modified wavelet coefficients

$$d_X^{(m), \alpha}(j, \mathbf{k}) \triangleq 2^{\alpha j} d_X^{(m)}(j, \mathbf{k}), \quad \alpha > 0 \quad (9)$$

instead of $d_X^{(m)}$ in (7). When α is chosen sufficiently large, the WLMF holds (see [12] for details about the theoretical and practical consequences implied by this modification).

Finally, note that the above analysis as well as the WLMF are meaningful for *homogeneous multifractal* functions X , for which the multifractal spectra $D(h)$ of different subsets of \mathbf{t} are identical. This excludes the class of *multifractal* models [48], [49], for which the function $h(\mathbf{t})$ is given by a smooth non-stationary evolution. Such models, also of interest in other application contexts, are not considered here, as the focus is on multifractality parameter c_2 which is not relevant to characterize multifractal processes.

III. BAYESIAN FRAMEWORK

In this section, a novel empirical second-order statistical model for the logarithm of wavelet leaders for 2D MMC processes is proposed. This model is the key tool for estimating the multifractality parameter c_2 in a Bayesian framework.

A. Modeling the Statistics of Log-Wavelet Leaders

Marginal Distribution Model: It has recently been observed that for 1D signals the distribution of the *log-wavelet leaders*

$$l(j, \mathbf{k}) \triangleq \log \ell(j, \mathbf{k}) \quad (10)$$

can be reasonably well approximated by a Gaussian distribution [44]. Here, we numerically investigate the marginal distributions of $l(j, \cdot)$ for 2D images. To this end, a representative selection of scaling processes (the MMC processes CMC-LN, CMC-LP, CPC-LN and CPC-LP, as well as fBm, where LN stands for log-Normal and LP for log-Poisson, respectively) have been analyzed for a wide range of process parameters (see Section V-A for a description of these processes). Representative examples of quantile-quantile plots of the standard Normal distribution against empirical distributions of log-wavelet leaders (scale $j = 2$) associated with CPC-LN, CPC-LP and fBm are plotted in Fig. 1 (upper row).

Clearly, the normal distribution provides, within ± 3 standard deviations, a reasonable approximation for the marginal distribution of log-wavelet leaders of images for both members of the MMC class. It is also the case for the fBm, a Gaussian self-similar process that is not a member

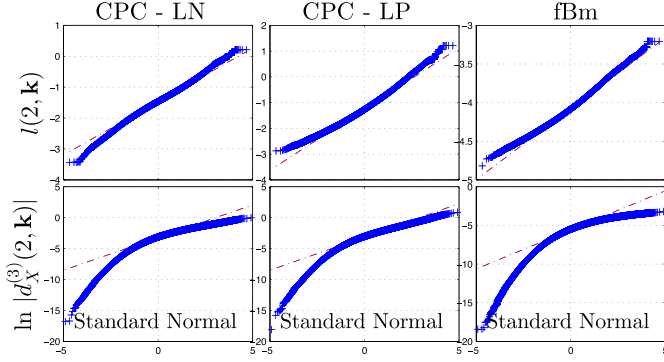


Fig. 1. Quantile-quantile plots of the empirical distributions of the log-wavelet leaders $l(2, \mathbf{k})$ (top) and wavelet coefficients $\log d_X^{(3)}(2, \mathbf{k})$ (bottom) against standard normal for CPC-LN (left column) and CPC-LP (center column) with $c_2 = -0.04$, respectively, and for fBm (right column).

of MMC. Note that the fact that the marginal distributions of the log-wavelet leaders are approximately Gaussian for scale invariant processes confirms the intuitions formulated by Mandelbrot [50]. However, it is not a trivial finding: There is no a priori reason for this property even if the analyzed stochastic process has log-normal marginals (as is the case for CMC-LN, for instance). Indeed, it is *not* the case for the logarithm of the absolute value of wavelet coefficients whose marginal distributions are significantly more complicated and strongly depart from Gaussian, cf., Fig. 1 (bottom row).

Variance-Covariance Model: We introduce a model for the covariance of the logarithm of 2D wavelet leaders for MMC processes at fixed scale j denoted as $\text{Cov}[l(j, \mathbf{k}), l(j, \mathbf{k} + \Delta \mathbf{k})]$. It is motivated by the asymptotic covariance of the logarithm of multiscale quantities generically associated with multiplicative construction (see [7]), studied in detail for wavelet coefficients of 1D random wavelet cascades in [51], and also by recent numerical results obtained for the covariance of the logarithm of 1D wavelet leaders for MMC processes [44]. These results suggest a linear decay of $\text{Cov}[l(j, k), l(j, k + \Delta k)]$ in log coordinates $\log \Delta k$, with slope given by the parameter c_2 . Numerical simulations with 2D MMC processes for a wide range of process parameters (detailed in Section V-A) indicate that the empirical intra-scale covariance is radially symmetric and decays as $c_2 \log \Delta r$ with $\Delta r \triangleq \|\Delta \mathbf{k}\|$ for an intermediary range of values Δr given by $3 < \Delta r \leq \Delta r_j^{\max}$

$$\begin{aligned} \text{Cov}[l(j, \mathbf{k}), l(j, \mathbf{k} + \Delta \mathbf{k})] \\ \approx \varrho_j^{(1)}(\Delta r; c_2) \triangleq \gamma + c_2(\log_2 \Delta r + j) \log 2 \end{aligned} \quad (11)$$

where $\Delta r_j^{\max} = \sqrt{2}(\sqrt{n_j} - 1)$ and $n_j \approx \lfloor N^2/2^{2j} \rfloor$ denotes the number of wavelet leaders at scale 2^j of an $N \times N$ image. The constant γ is found to be well approximated by using the heuristic condition $\varrho_j^{(1)}(\lfloor \sqrt{n_j}/4 \rfloor; c_2) = 0$, where the operator $\lfloor \cdot \rfloor$ truncates to integer values.

The theoretical variance of the log-wavelet leaders is given by $C_2(j) = C_2(j; c_2, c_2^0)$ defined in (2). Finally, the short-term covariance is modeled as a line connecting $C_2(j; c_2, c_2^0)$

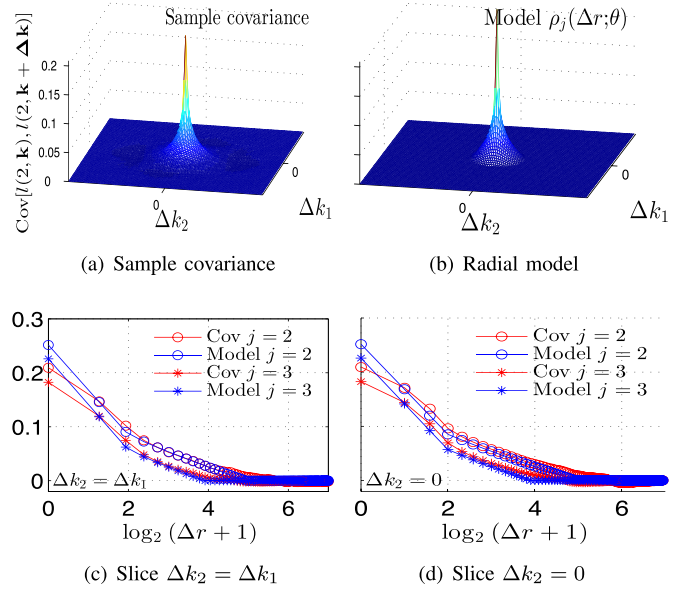


Fig. 2. Fitting between the sample covariance (a), averaged on 100 realizations of CMC-LN ($[N, c_2] = [2^9, -0.04]$), and the parametric covariance (b); (c) and (d) compare the model (blue) and the sample covariance (red) for two slices.

at $\Delta r = 0$ and $\varrho_j^{(1)}(\Delta r; c_2)$ at $\Delta r = 3$ as follows

$$\begin{aligned} \varrho_j^{(0)}(\Delta r; c_2, c_2^0) \\ \triangleq \frac{\log(\Delta r + 1)}{\log 4} [\varrho_j^{(1)}(3; c_2) - C_2(j; c_2, c_2^0)] + C_2(j; c_2, c_2^0). \end{aligned} \quad (12)$$

Combining (2), (11) and (12) yields the following full model for the covariance, parametrized by two parameters $\boldsymbol{\theta} = [c_2, c_2^0]^T$ only

$$\varrho_j(\Delta r; \boldsymbol{\theta}) = \begin{cases} C_2(j; c_2, c_2^0) & \Delta r = 0 \\ \varrho_j^{(0)}(\Delta r; c_2, c_2^0) & 0 \leq \Delta r \leq 3 \\ \max(0, \varrho_j^{(1)}(\Delta r; c_2)) & 3 \leq \Delta r \leq \Delta r_j^{\max}. \end{cases} \quad (13)$$

Here, only the positive portions of $\varrho_j^{(1)}$ are considered for numerical reasons (conditioning of the covariance matrix). The proposed covariance model is illustrated in Fig. 2 for CMC-LN.

The joint Gaussian model with covariance model (13) assumes limited information on the dependence between different scales, essentially the variance (2). The corresponding covariance matrix model for log-wavelet leaders at several scales $j \in [j_1, j_2]$ has thus block-diagonal structure. For convenience and without loss of generality, the formulations given below and in Section IV will be stated in block-diagonal form yet could be extended without difficulty to any other valid covariance matrix model.

B. Likelihood, Prior and Posterior Distributions

We focus on the estimation of the parameter c_2 and therefore work with centered log-wavelet leaders below. Let \mathbf{L}_j denote the vector of the n_j centered coefficients $l(j, \mathbf{k}) - \widehat{\mathbb{E}}[l_X(j, \cdot)]$

at scale $j \in [j_1, j_2]$, organized in lexicographic order, where $\widehat{\mathbb{E}}[\cdot]$ stands for the sample mean. Let $\Sigma_j(\boldsymbol{\theta})$ denote the corresponding $n_j \times n_j$ covariance matrix whose entries are given by the 2D parametric covariance function model (13). For convenience of notation, all coefficients are stacked in a unique zero-mean vector $\mathcal{L} = [\mathbf{l}_{j_1}^T, \dots, \mathbf{l}_{j_2}^T]^T$.

Likelihood: With the above notation and assumptions, the likelihood of \mathbf{l}_j is given by

$$p(\mathbf{l}_j|\boldsymbol{\theta}) \triangleq \frac{\exp\left(-\frac{1}{2}\mathbf{l}_j^T \Sigma_j(\boldsymbol{\theta})^{-1} \mathbf{l}_j\right)}{\sqrt{(2\pi)^{n_j} \det \Sigma_j(\boldsymbol{\theta})}}. \quad (14)$$

Using the independence between $l(j, \mathbf{k})$ and $l(j', \mathbf{k}')$ for $j \neq j'$, the likelihood of \mathcal{L} is given by

$$p(\mathcal{L}|\boldsymbol{\theta}) = \prod_{j=j_1}^{j_2} p(\mathbf{l}_j|\boldsymbol{\theta}). \quad (15)$$

Prior Distribution: The parameter vector $\boldsymbol{\theta}$ must be chosen such that the variances of $l(j, \mathbf{k})$ are positive, $C_2(j) \geq 0$. We define the admissible set

$$\mathcal{A} = (\mathcal{A}^+ \cup \mathcal{A}^-) \cap \mathcal{A}^m \quad (16)$$

where

$$\begin{aligned} \mathcal{A}^- &= \{(c_2, c_2^0) \in \mathbb{R}^2 \mid c_2 < 0 \text{ and } c_2^0 + c_2 j_2 \ln 2 > 0\}, \\ \mathcal{A}^+ &= \{(c_2, c_2^0) \in \mathbb{R}^2 \mid c_2 > 0 \text{ and } c_2^0 + c_2 j_1 \ln 2 > 0\}, \\ \mathcal{A}^m &= \{(c_2, c_2^0) \in \mathbb{R}^2 \mid |c_2^0| < c_2^{0,m}, |c_2| < c_2^m\} \end{aligned}$$

and $c_2^m, c_2^{0,m}$ quantify the largest admissible values for c_2 and c_2^0 , parameters that need to be tuned by practitioners and may depend on the application considered. When no additional prior information is available regarding $\boldsymbol{\theta}$, a uniform prior distribution on the set \mathcal{A} is assigned to $\boldsymbol{\theta}$

$$\pi(\boldsymbol{\theta}) = U_{\mathcal{A}}(\boldsymbol{\theta}) \propto \mathbf{1}_{\mathcal{A}}(\boldsymbol{\theta}). \quad (17)$$

Posterior Distribution and Bayesian Estimators: The posterior distribution of $\boldsymbol{\theta}$ is obtained from the Bayes rule

$$p(\boldsymbol{\theta}|\mathcal{L}) \propto p(\mathcal{L}|\boldsymbol{\theta}) \pi(\boldsymbol{\theta}) \quad (18)$$

and can be used to define the Bayesian maximum a posteriori (MAP) and minimum mean squared error (MMSE) estimators given in (20) and (21) below.

IV. ESTIMATION PROCEDURE

The computation of the Bayesian estimators is not straight-forward because of the complicated dependence of the posterior distribution (18) on the parameters $\boldsymbol{\theta}$. Specifically, the inverse and determinant of Σ_j in the expression of the likelihood (14) do not have a parametric form and hence (18) can not be optimized with respect to the parameters $\boldsymbol{\theta}$. In such situations, it is common to use a Markov Chain Monte Carlo (MCMC) algorithm generating samples that are distributed according to $p(\boldsymbol{\theta}|\mathcal{L})$. These samples are used in turn to approximate the Bayesian estimators.

A. Gibbs Sampler

The following Gibbs sampler enables the generation of samples $\{\boldsymbol{\theta}^{(t)}\}_{t=1}^{N_{mc}}$ that are distributed according to the posterior distribution (18). This sampler consists of successively sampling according to the conditional distributions $p(c_2|c_2^0, \mathcal{L})$ and $p(c_2^0|c_2, \mathcal{L})$ associated with $p(\boldsymbol{\theta}|\mathcal{L})$. To generate the samples according to the conditional distributions, a Metropolis-within-Gibbs procedure is used. The instrumental distributions for the random walks are Gaussian and have variances $\sigma_{c_2}^2$ and $\sigma_{c_2^0}^2$, respectively, which are adjusted to ensure an acceptance rate between 0.4 and 0.6 (to ensure good mixing properties). For details on MCMC methods, the reader is referred to [52].

Sampling According to $p(c_2|c_2^0, \mathcal{L})$: At iteration t , denote as $\boldsymbol{\theta}^{(t)} = [c_2^{(t)}, c_2^{0,(t)}]^T$ the current state vector. A candidate $c_2^{(*)}$ is drawn according to the proposal distribution $p_1(c_2^{(*)}|c_2^{(t)}) = \mathcal{N}(c_2^{(*)}, \sigma_{c_2}^2)$. The candidate state vector $\boldsymbol{\theta}^{(*)} = [c_2^{(*)}, c_2^{0,(t)}]^T$ is accepted with probability $\pi_{c_2} = \min(1, r_{c_2})$ (i.e., $\boldsymbol{\theta}^{(t+\frac{1}{2})} = \boldsymbol{\theta}^{(*)}$) and rejected with probability $1 - \pi_{c_2}$ (i.e., $\boldsymbol{\theta}^{(t+\frac{1}{2})} = \boldsymbol{\theta}^{(t)}$). Here, r_{c_2} is the Metropolis-Hastings acceptance ratio, given by

$$\begin{aligned} r_{c_2} &= \frac{p(\boldsymbol{\theta}^{(*)}|\mathcal{L}) p_1(c_2^{(t)}|c_2^{(*)})}{p(\boldsymbol{\theta}^{(t)}|\mathcal{L}) p_1(c_2^{(*)}|c_2^{(t)})} = \mathbf{1}_{\mathcal{A}}(\boldsymbol{\theta}^{(*)}) \prod_{j=j_1}^{j_2} \sqrt{\frac{\det \Sigma_j(\boldsymbol{\theta}^{(t)})}{\det \Sigma_j(\boldsymbol{\theta}^{(*)})}} \\ &\quad \times \exp\left(-\frac{1}{2}\mathbf{l}_j^T \left(\Sigma_j(\boldsymbol{\theta}^{(*)})^{-1} - \Sigma_j(\boldsymbol{\theta}^{(t)})^{-1}\right) \mathbf{l}_j\right). \quad (19) \end{aligned}$$

Sampling According to $p(c_2^0|c_2, \mathcal{L})$: Similarly, at iteration $t + \frac{1}{2}$, a candidate $c_2^{0,(*)}$ is proposed according to the instrumental distribution $p_2(c_2^{0,(*)}|c_2^{(t)}) = \mathcal{N}(c_2^{0,(*)}, \sigma_{c_2^0}^2)$. The candidate state vector $\boldsymbol{\theta}^{(*)} = [c_2^{(t+\frac{1}{2})}, c_2^{0,(*)}]^T$ is accepted with probability $\pi_{c_2^0} = \min(1, r_{c_2^0})$ (i.e., $\boldsymbol{\theta}^{(t+1)} = \boldsymbol{\theta}^{(*)}$) and rejected with probability $1 - \pi_{c_2^0}$ (i.e., $\boldsymbol{\theta}^{(t+1)} = \boldsymbol{\theta}^{(t+\frac{1}{2})}$). The Metropolis-Hastings acceptance ratio $r_{c_2^0}$ is given by (19) with p_1 replaced by p_2 , c_2 replaced by c_2^0 and t replaced by $t + \frac{1}{2}$.

Approximation of the Bayesian Estimators: After a burn-in period defined by $t = 1, \dots, N_{bi}$, the proposed Gibbs sampler generates samples $\{\boldsymbol{\theta}^{(t)}\}_{t=N_{bi}+1}^{N_{mc}}$ that are distributed according to the posterior distribution (18). These samples are used to approximate the MAP and MMSE estimators

$$\hat{\boldsymbol{\theta}}^{\text{MMSE}} \triangleq \mathbb{E}[\boldsymbol{\theta}|\mathcal{L}] \approx \frac{1}{N_{mc} - N_{bi}} \sum_{t=N_{bi}+1}^{N_{mc}} \boldsymbol{\theta}^{(t)} \quad (20)$$

$$\hat{\boldsymbol{\theta}}^{\text{MAP}} \triangleq \underset{\boldsymbol{\theta}}{\operatorname{argmax}} p(\boldsymbol{\theta}|\mathcal{L}) \approx \underset{t > N_{bi}}{\operatorname{argmax}} p(\boldsymbol{\theta}^{(t)}|\mathcal{L}). \quad (21)$$

B. Whittle Approximation

The Gibbs sampler defined in subsection IV-A requires the inversion of the $n_j \times n_j$ matrices $\Sigma_j(\boldsymbol{\theta})$ in (19) for each sampling step in order to obtain r_{c_2} and $r_{c_2^0}$. These inversion steps are computationally prohibitive even for very modest image sizes (for instance, a 64×64 image would require the inversion of a dense matrix of size $\sim 1000 \times 1000$ at scale $j = 1$ at each sampling step). In addition, it is numerically

instable for larger images (due to growing condition number). To alleviate this difficulty, we propose to replace the exact likelihood (15) with an asymptotic approximation due to Whittle [53], [54]. With the above assumptions, the collection of log-leaders $\{l(j, \cdot)\}$ are realizations of a Gaussian random field on a regular lattice $P_j = \{1, \dots, m_j\}^2$, where $m_j = \sqrt{n_j}$. Up to an additive constant, the Whittle approximation for the negative logarithm of the Gaussian likelihood (14) reads [36], [54]–[56]

$$-\log p(\mathbf{l}_j | \boldsymbol{\theta}) \approx p_W(\mathbf{l}_j | \boldsymbol{\theta}) = \frac{1}{2} \sum_{\boldsymbol{\omega} \in D_j} \log \phi_j(\boldsymbol{\omega}; \boldsymbol{\theta}) + \frac{I_j(\boldsymbol{\omega})}{n_j \phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})} \quad (22)$$

where the summation is taken over the spectral grid $D_j = \{\frac{2\pi}{m_j} \lfloor (-m_j - 1)/2 \rfloor, -1, 1, m_j - \lfloor m_j/2 \rfloor\}^2$. Here $I_j(\boldsymbol{\omega})$ is the 2D standard periodogram of $\{l(j, \mathbf{k})\}_{\mathbf{k} \in P_j}$

$$I_j(\boldsymbol{\omega}) = \left| \sum_{\mathbf{k} \in P_j} l(j, \mathbf{k}) \exp(-i\mathbf{k}^T \boldsymbol{\omega}) \right|^2 \quad (23)$$

and $\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})$ is the spectral density associated with the covariance function $\varrho_j(\Delta r; \boldsymbol{\theta})$, respectively. Without a closed-form expression for $\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})$, it can be evaluated numerically by discrete Fourier transform (DFT)

$$\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta}) = \left| \sum_{\mathbf{k} \in P_j} \varrho_j(\sqrt{k_1^2 + k_2^2}; \boldsymbol{\theta}) \exp(-i\mathbf{k}^T \boldsymbol{\omega}) \right|. \quad (24)$$

Frequency Range: It is commonly reported in the literature that the range of frequencies used in (22) can be restricted. This is notably the case for the periodogram-based estimation of the memory coefficient of long-range dependent time series for which only the low frequencies can be used [36], [57], [58]. Similarly, in the present context, the proposed spectral density model $\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})$ yields an excellent fit at low frequencies and degrades at higher frequencies. This is illustrated in Fig. 3 where the average periodograms of $l(j, \mathbf{k})$ for CPC-LN are plotted together with the model $\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})$. We therefore restrict the summation in (22) to low frequencies $D_j^\dagger(\eta) = \{\boldsymbol{\omega} \in D_j \mid \|\boldsymbol{\omega}\|_2 \leq \sqrt{\eta} \frac{2\pi}{m_j} \lfloor m_j/2 \rfloor\}$ where the fixed parameter η approximately corresponds to the fraction of the spectral grid D_j that is actually used. We denote the approximation of $p_W(\mathbf{l}_j | \boldsymbol{\theta})$ obtained by replacing D_j with D_j^\dagger in (22) by $p_W^\dagger(\mathbf{l}_j | \boldsymbol{\theta})$. The final Whittle approximation of the likelihood (15) is then given by the following equation

$$\begin{aligned} p(\mathcal{L} | \boldsymbol{\theta}) &\approx \exp \left(- \sum_{j=j_1}^{j_2} p_W^\dagger(\mathbf{l}_j | \boldsymbol{\theta}) \right) \\ &= \exp \left(- \sum_{j=j_1}^{j_2} \frac{1}{2} \sum_{\boldsymbol{\omega} \in D_j^\dagger(\eta)} \log \phi_j(\boldsymbol{\omega}; \boldsymbol{\theta}) + \frac{I_j(\boldsymbol{\omega})}{n_j \phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})} \right) \end{aligned} \quad (25)$$

up to a multiplicative constant. It is important to note that the restriction to low frequencies in (25) is not a restriction to a limited frequency content of the image (indeed, scales

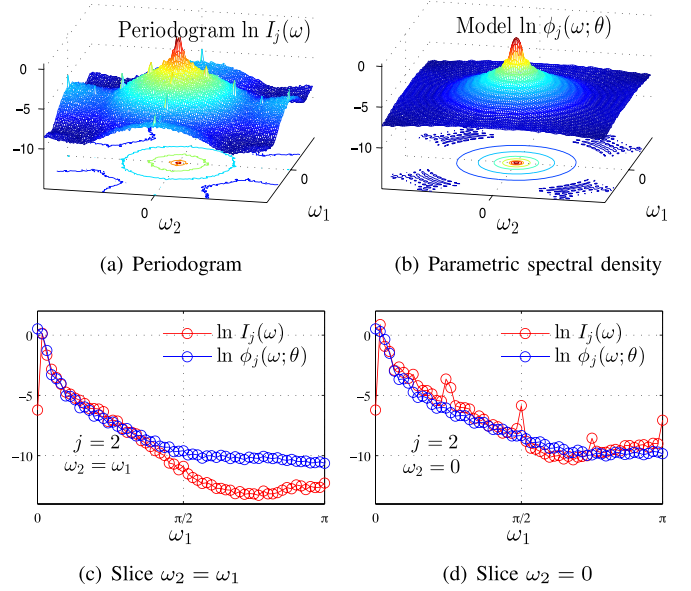


Fig. 3. Fitting between the periodogram (a), averaged on 100 realizations of CMC-LN ($[N, c_2, j] = [2^9, -0.04, 2]$), and the model $\phi_j(\boldsymbol{\omega}; \boldsymbol{\theta})$, obtained from a DFT of $\varrho_j(\Delta r; \boldsymbol{\theta})$. (c) and (d) compare the model (blue) and the periodogram (red) for two slices.

$j \in [j_1, j_2]$ are used) but only concerns the numerical evaluations of the likelihood (15).

V. NUMERICAL EXPERIMENTS

The proposed algorithm is numerically validated for several types of scale invariant and multifractal stochastic processes for different sample sizes and a large range of values for c_2 .

A. Stochastic Multifractal Model Processes

Canonical Mandelbrot Cascade (CMC): CMCs [7] are the historical archetypes of multifractal measures. Their construction is based on an iterative split-and-multiply procedure on an interval; we use a 2D binary cascade for two different multipliers: First, log-normal multipliers $W = 2^{-U}$, where $U \sim \mathcal{N}(m, 2m/\log 2)$ is a Gaussian random variable (CMC-LN); Second, log-Poisson multipliers $W = 2^\gamma \exp(\log(\beta)\pi_\lambda)$, where π_λ is a Poisson random variable with parameter $\lambda = -\frac{\gamma \log 2}{(\beta-1)}$ (CMC-LP). For CMC-LN, the log-cumulants are given by $c_1 = m + \alpha$, $c_2 = -2m$ and $c_p = 0$ for all $p \geq 3$. For CMC-LP, $c_1 = \alpha + \gamma \left(\frac{\log(\beta)}{\beta-1} - 1 \right)$ and all higher-order log-cumulants are non-zero with $c_p = -\frac{\gamma}{\beta-1} (-\log(\beta))^p$, $p \geq 2$. Below, $\gamma = 1.05$ and β is varied according to the value of c_2 .

Compound Poisson Cascade (CPC): CPCs were introduced to overcome certain limitations of the CMCs that are caused by their discrete split-and-multiply construction [4], [45]. In the construction of CPCs, the localization of the multipliers in the space-scale volume follows a Poisson random process with specific prescribed density. We use CPCs with log-normal multipliers $W = \exp(Y)$, where $Y \sim \mathcal{N}(\mu, \sigma)$ is a Gaussian random variable (CPC-LN), or log-Poisson CPCs for which multipliers W are reduced to a constant w (CPC-LP). The first log-cumulants of CPC-LN are given by $c_1 = -(\mu + 1 - \exp(\mu + \sigma^2/2)) + \alpha$, $c_2 = -(\mu^2 + \sigma^2)$,

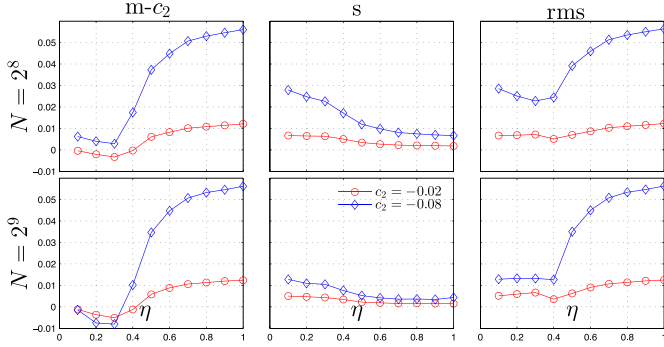


Fig. 4. Influence of the bandwidth parameter, η , on estimation performance for two different sizes of LN-CMC and two different values of c_2 values (-0.02 in red and -0.08 in blue).

and $c_p \neq 0$ for $p \geq 3$. Here, we fix $\mu = -0.1$. For CPC-LP, $c_2 = -\log(w)^2$.

Fractional Brownian Motion (fBm): We use 2D fBms as defined in [59]. fBm is not a CMC process and is based on an additive construction instead. Its multifractal and statistical properties are entirely determined by a single parameter H such that $c_1 = H$, $c_2 = 0$ and $c_p = 0$ for all $p > 2$, and below we set $H = 0.7$.

B. Numerical Simulations

Wavelet Transform: A Daubechies's mother wavelet with $N_\psi = 2$ vanishing moments is used, and $\alpha = 1$ in (9), which is sufficient to ensure positive uniform regularity for all processes considered.

Estimation: The linear regression weights w_j in the standard estimator (3) have to satisfy the usual constraints $\sum_{j_1}^{j_2} j w_j = 1$ and $\sum_{j_1}^{j_2} w_j = 0$ and can be chosen to reflect the confidence granted to each $\widehat{\text{Var}}_{n_j}[\log \ell(j, \cdot)]$ [12], [28]. Here, they are chosen proportional to n_j as suggested in [28]. The linear regression based standard estimator (3) will be denoted LF (for "linear fit") in what follows. The Gibbs sampler is run with $N_{\text{mc}} = 7000$ iterations and a burn-in period of $N_{\text{bi}} = 3000$ samples. The bandwidth parameter η in (25) has been set to $\eta = 0.3$ following preliminary numerical simulations; these are illustrated in Fig. 4 where estimation performance is plotted as a function of η for LN-CMC ($N = 2^8$ top, $N = 2^9$ bottom) with two different values of c_2 (-0.02 in red, -0.08 in blue). As expected, η tunes a classical bias-variance tradeoff: a large value of η leads to a large bias and small standard deviation and vice versa. The choice $\eta = 0.3$ yields a robust practical compromise.

Performance Assessment: We apply the LF estimator (3) and the proposed MAP and MMSE estimators (20) and (21) to $R = 100$ independent realizations of size $N \times N$ each for the above described multifractal processes. A range of weak to strong multifractality parameter values $c_2 \in \{-0.01, -0.02, -0.04, -0.06, -0.08\}$ and sample sizes $N \in \{2^6, 2^7, 2^8, 2^9\}$ are used. The coarsest scale j_2 used for estimation is set such that $n_{j_2} \geq 100$ (i.e., the coarsest available scale is discarded), yielding $j_2 = \{2, 3, 4, 5\}$, respectively, for the considered sample sizes. The finest scale j_1 is commonly set to $j_1 = 2$ in order to avoid pollution from improper initialization of the wavelet transform, see [32]

TABLE I
ESTIMATION PERFORMANCE FOR CMC-LN (a), CPC-LN (b)
CMC-LP (c), CPC-LP (d) FOR SAMPLE SIZES $N = \{2^8, 2^9\}$
AND $j_1 = 2, j_2 = \{4, 5\}$. BEST RESULTS
ARE MARKED IN BOLD

		CMC-LN						
		c_2	-0.01	-0.02	-0.04	-0.06	-0.08	
$N = 2^8$	m	LF	-0.015	-0.027	-0.053	-0.066	-0.087	
		MMSE	-0.014	-0.023	-0.042	-0.060	-0.078	
	s	LF	0.010	0.011	0.015	0.018	0.030	
		MMSE	0.005	0.006	0.013	0.014	0.020	
	rms	LF	0.011	0.014	0.019	0.019	0.030	
		MMSE	0.007	0.007	0.013	0.014	0.020	
$N = 2^9$	m	LF	-0.016	-0.027	-0.049	-0.070	-0.087	
		MMSE	-0.014	-0.025	-0.047	-0.067	-0.087	
	s	LF	0.005	0.006	0.008	0.011	0.016	
		MMSE	0.002	0.004	0.006	0.008	0.012	
	rms	LF	0.008	0.010	0.012	0.015	0.018	
		MMSE	0.005	0.007	0.009	0.011	0.014	
		CPC-LN						
		c_2	-0.01	-0.02	-0.04	-0.06	-0.08	
$N = 2^8$	m	LF	-0.013	-0.025	-0.049	-0.066	-0.089	
		MMSE	-0.007	-0.013	-0.035	-0.054	-0.074	
	s	LF	0.009	0.011	0.017	0.024	0.029	
		MMSE	0.003	0.005	0.011	0.016	0.022	
	rms	LF	0.010	0.012	0.020	0.025	0.031	
		MMSE	0.004	0.008	0.012	0.018	0.023	
$N = 2^9$	m	LF	-0.013	-0.025	-0.045	-0.066	-0.089	
		MMSE	-0.008	-0.015	-0.035	-0.057	-0.079	
	s	LF	0.004	0.005	0.010	0.014	0.015	
		MMSE	0.002	0.003	0.006	0.009	0.013	
	rms	LF	0.005	0.007	0.011	0.015	0.017	
		MMSE	0.003	0.005	0.008	0.009	0.013	
		CMC-LP			CPC-LP			
		c_2	-0.02	-0.04	-0.08	-0.02	-0.04	-0.08
$N = 2^8$	m	LF	-0.019	-0.038	-0.076	-0.043	-0.065	-0.120
		MMSE	-0.017	-0.032	-0.063	-0.029	-0.055	-0.100
	s	LF	0.010	0.014	0.023	0.016	0.035	0.035
		MMSE	0.005	0.009	0.016	0.010	0.012	0.027
	rms	LF	0.010	0.014	0.023	0.028	0.043	0.050
		MMSE	0.006	0.012	0.023	0.013	0.020	0.036
$N = 2^9$	m	LF	-0.020	-0.040	-0.075	-0.037	-0.063	-0.100
		MMSE	-0.019	-0.036	-0.070	-0.031	-0.060	-0.120
	s	LF	0.006	0.009	0.014	0.010	0.014	0.020
		MMSE	0.004	0.006	0.010	0.004	0.007	0.013
	rms	LF	0.006	0.009	0.015	0.020	0.027	0.032
		MMSE	0.004	0.007	0.015	0.012	0.021	0.038

for details. Performance is evaluated using the sample mean, the sample standard deviation and the root mean squared error (RMSE) of the estimates averaged across realizations

$$m = \widehat{\mathbb{E}}[\hat{c}_2], \quad s = \sqrt{\widehat{\text{Var}}[\hat{c}_2]}, \quad \text{rms} = \sqrt{(m - c_2)^2 + s^2}.$$

C. Results

Estimation Performance: Tab. I summarizes the estimation performance of LF and MMSE estimators for CMC-LN, CPC-LN, CMC-LP, CPC-LP (subtables (a)-(d), respectively) and for sample sizes $N = \{2^8, 2^9\}$. The performance of the MAP estimator was found to be similar to the MMSE estimator and therefore is not reproduced here due to space constraints. Note, however, that different (application dependent) priors for θ may lead to different results (here, the non-informative prior (17) is used).

First, it is observed that the proposed algorithm slightly but systematically outperforms LF in terms of bias. This reduction of bias does not depend on a specific choice of the multifractal

TABLE II

ESTIMATION PERFORMANCE FOR CMC-LN (a) AND CPC-LN (b)
FOR SAMPLE SIZES $N = \{2^6, 2^7\}$ AND $j_1 = 1, j_2 = \{2, 3\}$.
BEST RESULTS ARE MARKED IN BOLD

(a)		CMC-LN					
c_2		-0.01	-0.02	-0.04	-0.06	-0.08	
$N = 2^6$	m	LF	-0.042	-0.051	-0.067	-0.082	-0.110
		MMSE	-0.014	-0.022	-0.038	-0.059	-0.078
	s	LF	0.024	0.030	0.042	0.042	0.070
		MMSE	0.010	0.014	0.018	0.026	0.038
rms	LF	0.040	0.043	0.050	0.047	0.076	
	MMSE	0.010	0.014	0.018	0.026	0.038	
$N = 2^7$	m	LF	-0.035	-0.044	-0.064	-0.082	-0.100
		MMSE	-0.013	-0.023	-0.044	-0.064	-0.082
	s	LF	0.010	0.013	0.019	0.024	0.026
		MMSE	0.005	0.008	0.013	0.017	0.018
rms	LF	0.027	0.027	0.031	0.033	0.033	
	MMSE	0.006	0.009	0.014	0.017	0.018	
(b)		CPC-LN					
c_2		-0.01	-0.02	-0.04	-0.06	-0.08	
$N = 2^6$	m	LF	-0.026	-0.054	-0.076	-0.085	-0.100
		MMSE	-0.0082	-0.017	-0.030	-0.050	-0.065
	s	LF	0.024	0.029	0.045	0.068	0.067
		MMSE	0.005	0.011	0.018	0.028	0.033
rms	LF	0.029	0.044	0.058	0.073	0.070	
	MMSE	0.006	0.011	0.021	0.030	0.036	
$N = 2^7$	m	LF	-0.021	-0.047	-0.064	-0.082	-0.110
		MMSE	-0.008	-0.017	-0.035	-0.057	-0.079
	s	LF	0.0091	0.013	0.020	0.024	0.032
		MMSE	0.0032	0.0082	0.012	0.018	0.021
rms	LF	0.014	0.030	0.031	0.033	0.042	
	MMSE	0.004	0.0087	0.013	0.019	0.021	

process or its parameters, or on the sample size. Second, and most strikingly, the proposed Bayesian estimators yield significantly reduced standard deviations, with a reduction of up to a factor of 3 as compared to linear regressions. The standard deviation reduction is more important for small values of $|c_2|$ yet remains above a factor of 1.5 for large values of $|c_2|$.

These performance gains are directly reflected in the overall RMSE values, which remain up to a factor of 2.5 below those of linear fits. Finally, note that the estimation performance for CMCs and CPCs with log-Poisson multipliers are found to be slightly inferior to those with log-normal multipliers. This may be due to an arguably slightly stronger departure from Gaussian for the former, cf. Fig. 2.

Performance for Small Sample Size: For small sample sizes $N \leq 2^7$, the limited number of available scales forces the choice $j_1 = 1$. Results for $N = \{2^6, 2^7\}$ (for which $j_2 = \{2, 3\}$, respectively) are reported in Tab. II. They indicate that the performance gains of the proposed Bayesian estimators with respect to LF estimators are even more pronounced for small sample size, both in terms of bias and standard deviations, yielding a reduction of RMSE values of up to a factor of 4. In particular, note that LF yields biases that are prohibitively large to be useful in real-world applications due to the use of the finest scale $j = 1$ [12]. Notably, values $c_2 = 0$ cannot be reliably detected with LF. In contrast, the proposed Bayesian procedure yields sufficiently small bias and standard deviations to enable the estimation of the multifractality parameter c_2 even for very small images (or image patches) of size 64×64 . The reported performance gains come at the price of an increased computational cost, with computation times of the order of 8s ($N = 64$) to 50s ($N = 512$) per image, respectively, on a standard desktop

TABLE III

fBm ESTIMATION PERFORMANCE FOR SAMPLE SIZES $N = \{2^7, 2^8, 2^9\}$
AND $j_1 = 2, j_2 = \{3, 4, 5\}$. BEST RESULTS
ARE MARKED IN BOLD

		N	2^7	2^8	2^9
m	LF		0.0034	0.0047	0.0037
	MMSE		-0.0020	-0.0008	-0.0003
s	LF		0.0170	0.0089	0.0056
	MMSE		0.0093	0.0010	0.0002
rms	LF		0.0180	0.0100	0.0067
	MMSE		0.0095	0.0012	0.0004

computer, which is two orders of magnitude larger than the computational cost of the LF estimator.

Performance for Fractional Brownian Motion: Self-similar fBms with $c_2 = 0$ do not belong to the class of MMC processes for which the proposed estimation procedure was designed. The correlation structure of the wavelet coefficients of fBms has been studied in [60]. This correlation is weak, i.e., it goes to zero fast with the distance between wavelet coefficients in the time-scale plane. Fbm results are summarized in Tab. III. They indicate that the performance of the LF estimator is comparable to the case $c_2 = -0.01$ reported in Tab. I. In contrast, the proposed Bayesian estimators are practically unbiased and have standard deviations and RMSE values that significantly outperform those of LF by up to a factor 10. Therefore, it is much more likely to be able to identify a model for which $c_2 = 0$ when using the proposed Bayesian procedure instead of the classical LF.

VI. ILLUSTRATION FOR REAL-WORLD DATA

We illustrate the proposed Bayesian estimation procedure for the multifractal analysis of a real-world image in Fig. 5(a). The image of size 960×1952 pixels is the channel #20 of a hyperspectral datacube corresponding to a forested area near a city that was acquired by the Hypspec hyperspectral scanner over Villelongue, France, during the Madonna project [61]. Estimates of c_2 are computed for 29×60 overlapping patches of size 64×64 pixels.

The estimates are plotted in Fig. 5 for MMSE (c) and LF (d), subfigure (b) provides a magnification (indicated by a red frame) on the square of patches of rows 11-19/columns 16-24. Visual inspection indicates that the Bayesian estimates are much better reproducing the spatial structure of the image texture than the classical LF (cf., Fig. 5(a), (c) and (d)). Specifically, the zoom in Fig. 5(b) (equivalently, the corresponding textures in Fig. 5(a) and (c)), shows that the Bayesian estimates are spatially strongly homogeneous for the forested regions with visually homogeneous texture (e.g., upper right portions in Fig. 5(b)), indicating a weak yet non-zero multifractality for these regions. Similar observations are obtained for other homogeneous vegetation patches (e.g., bottom left corners in Fig. 5(b)). Moreover, the zones of mixed vegetation (e.g., upper left corner in Fig. 5(b)) also yield spatially coherent and consistent estimates of c_2 , with more negative values (stronger multifractality). The LF based estimates display a strong variability throughout the image. Indeed, even for the homogeneous texture in the forested regions, LF yields strongly spatially

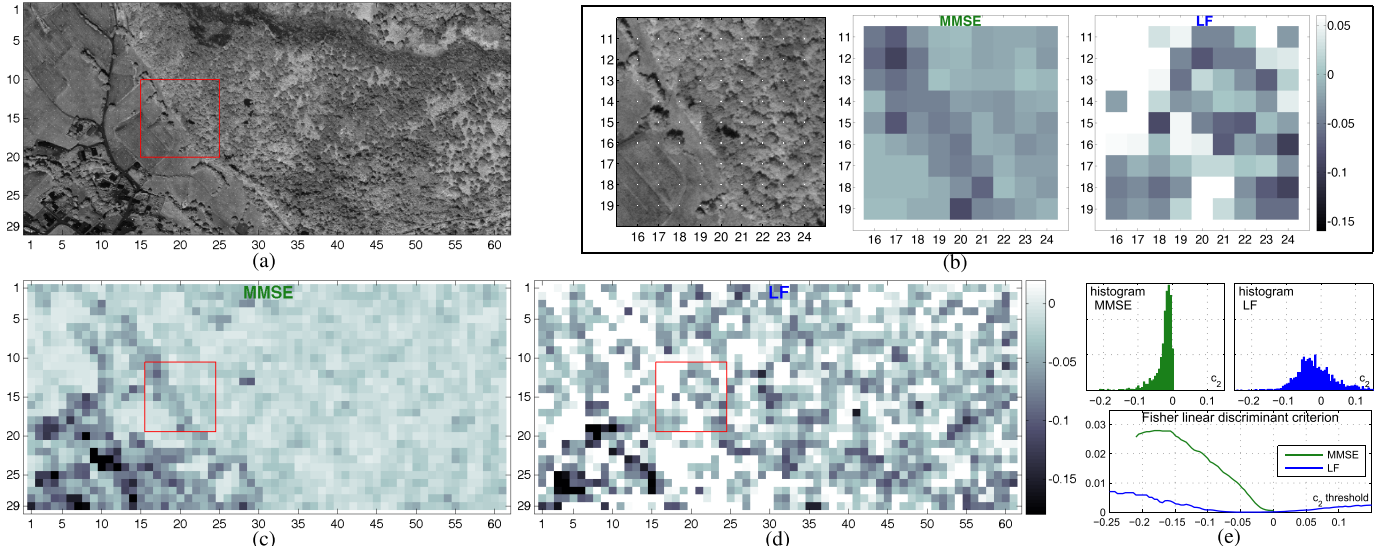


Fig. 5. Band #20 of a hyperspectral datacube (a); estimates of c_2 for overlapping 64×64 pixel patches obtained by MMSE (c) and LF (d); zooms on the patches indicated by a red frame (b); the centers of the image patches are indicated by white dots in the original image, the distance between two of the dots corresponds to one half of the patch size, axis labels indicate patch numbers. Histograms and Fisher linear discriminant criteria for estimates of c_2 obtained by MMSE and LF (e).

varying estimates. Finally, note that the strongly negative values of c_2 observed for both MMSE and LF in the bottom left corner of Fig. 5(c) correspond to regions consisting of both (textured) vegetations and of roofs of buildings (with close to zero amplitudes and no texture).

Although no ground truth is available for this illustration, a more quantitative analysis of the relative quality of estimates of c_2 obtained with MMSE and LF is proposed here. First, the reference-free image quality indicator of [62], which quantifies the image sharpness by approximating a contrast-invariant measure of its phase coherence [63], is calculated for the maps of c_2 in Fig. 5(c) and (d). These sharpness indexes are 10.8 for MMSE and a considerably smaller value of 4.6 for LF, hence reinforcing the visual inspection-based conclusions of improved spatial coherence for MMSE described above. Second, Fig. 5(e) (top) shows histograms of the estimates of c_2 obtained with MMSE and LF, which confirm the above conclusions of significantly larger variability (variance) of LF as compared to MMSE. Moreover, LF yields a large portion of estimates with positive values, which are not coherent with multifractal theory since necessarily $c_2 < 0$, while MMSE estimates are consistently negative. Finally, the Fisher linear discriminant criterion [64, Ch. 3.8] is calculated for c_2 obtained with MMSE and with LF, as a function of a threshold for c_2 separating two classes of textures. The results, plotted in Fig. 5(e) (bottom), indicate that the estimates obtained with MMSE have a far superior discriminative power than those obtained with LF.

VII. CONCLUSIONS

This paper proposed a Bayesian estimation procedure for the multifractality parameter of images. The procedure relies on the use of novel multiresolution quantities that have recently been introduced for regularity characterization and multifractal analysis, i.e., wavelet leaders. A Bayesian inference scheme was enabled through the formulation of an empirical yet

generic semi-parametric statistical model for the logarithm of wavelet leaders. This model accounts for the constraints imposed by multifractal theory and is designed for a large class of multifractal model processes. The Bayesian estimators associated with the posterior distribution of this model were approximated by means of samples generated by a Metropolis-within-Gibbs sampling procedure, wherein the practically infeasible evaluation of the exact likelihood was replaced by a suitable Whittle approximation. The proposed procedure constitutes, to the best of our knowledge, the first operational Bayesian estimator for the multifractality parameter that is applicable to real-world images and effective both for small and large sample sizes. Its performance was assessed numerically using a large number of multifractal processes for several sample sizes. The procedure yields improvements in RMSE of up to a factor of 4 for multifractal processes, and up to a factor of 10 for fBms when compared to the current benchmark estimator. The procedure therefore enables, for the first time, the reliable estimation of the multifractality parameter for images or image patches of size equal to 64×64 pixels. It is interesting to note that the Bayesian framework introduced in this paper could be generalized to hierarchical models, for instance, using spatial regularization for patch-wise estimates. In a similar vein, future work will include the study of appropriate models for the analysis of multivariate data, notably for hyperspectral imaging applications.

REFERENCES

- [1] R. M. Haralick, "Statistical and structural approaches to texture," *Proc. IEEE*, vol. 67, no. 5, pp. 786–804, May 1979.
- [2] J. M. Keller and S. Chen, "Texture description and segmentation through fractal geometry," *Comput. Vis., Graph., Image Process.*, vol. 45, no. 2, pp. 150–166, Feb. 1989.
- [3] B. Pesquet-Popescu and J. L. V  hel, "Stochastic fractal models for image processing," *IEEE Signal Process. Mag.*, vol. 19, no. 5, pp. 48–62, Sep. 2002.
- [4] P. Chainais, "Infinitely divisible cascades to model the statistics of natural images," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 29, no. 12, pp. 2105–2119, Dec. 2007.

- [5] H. Wendt, P. Abry, S. Jaffard, H. Ji, and Z. Shen, "Wavelet leader multifractal analysis for texture classification," in *Proc. 16th IEEE Int. Conf. Image Process. (ICIP)*, Cairo, Egypt, Nov. 2009, pp. 3829–3832.
- [6] Y. Xu, X. Yang, H. Ling, and H. Ji, "A new texture descriptor using multifractal analysis in multi-orientation wavelet pyramid," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, San Francisco, CA, USA, Jun. 2010, pp. 161–168.
- [7] B. B. Mandelbrot, "Intermittent turbulence in self-similar cascades: Divergence of high moments and dimension of the carrier," *J. Fluid Mech.*, vol. 62, no. 2, pp. 331–358, Jan. 1974.
- [8] R. Riedi, "Multifractal processes," in *Theory and Applications of Long-Range Dependence*, P. Doukhan, G. Oppenheim, and M. S. Taqqu, Eds. Basel, Switzerland: Birkhäuser, 2003, pp. 625–717.
- [9] J. F. Muzy, E. Bacry, and A. Arneodo, "The multifractal formalism revisited with wavelets," *Int. J. Bifurcation Chaos*, vol. 4, no. 2, pp. 245–302, 1994.
- [10] P. Abry, R. Baraniuk, P. Flandrin, R. Riedi, and D. Veitch, "Multiscale nature of network traffic," *IEEE Signal Process. Mag.*, vol. 3, no. 19, pp. 28–46, May 2002.
- [11] S. Jaffard, "Wavelet techniques in multifractal analysis," in *Fractal Geometry and Applications: A Jubilee of Benoît Mandelbrot*, vol. 72, M. Lapidus and M. van Frankenhuysen, Eds. Providence, RI, USA: AMS, 2004, pp. 91–152.
- [12] H. Wendt, S. G. Roux, S. Jaffard, and P. Abry, "Wavelet leaders and bootstrap for multifractal analysis of images," *Signal Process.*, vol. 89, no. 6, pp. 1100–1114, Jun. 2009.
- [13] S. Mallat, *A Wavelet Tour of Signal Processing*, 3rd ed. San Francisco, CA, USA: Academic, 2008.
- [14] T. Chang and C.-C. J. Kuo, "Texture analysis and classification with tree-structured wavelet transform," *IEEE Trans. Image Process.*, vol. 2, no. 4, pp. 429–441, Oct. 1993.
- [15] M. Unser, "Texture classification and segmentation using wavelet frames," *IEEE Trans. Image Process.*, vol. 4, no. 11, pp. 1549–1560, Nov. 1995.
- [16] J. Lévy Véhel, P. Mignot, and J. Berroir, "Multifractals, texture, and image analysis," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Champaign, IL, USA, Jun. 1992, pp. 661–664.
- [17] A. Arneodo, N. Decoster, P. Kestener, and S. G. Roux, "A wavelet-based method for multifractal image analysis: From theoretical concepts to experimental applications," in *Advances in Imaging and Electron Physics*, vol. 126. San Francisco, CA, USA: Academic, 2003, pp. 1–92.
- [18] C. L. Benhamou *et al.*, "Fractal analysis of radiographic trabecular bone texture and bone mineral density: Two complementary parameters related to osteoporotic fractures," *J. Bone Mineral Res.*, vol. 16, no. 4, pp. 697–704, Apr. 2001.
- [19] P. Kestener, J. M. Lina, P. Saint-Jean, and A. Arneodo, "Wavelet-based multifractal formalism to assist in diagnosis in digitized mammograms," *Image Anal. Stereol.*, vol. 20, no. 3, pp. 169–174, 2001.
- [20] L. Ponsou *et al.*, "Anisotropic self-affine properties of experimental fracture surfaces," *J. Fract.*, vol. 140, nos. 1–4, pp. 27–36, Jul. 2006.
- [21] S. G. Roux, A. Arneodo, and N. Decoster, "A wavelet-based method for multifractal image analysis. III. Applications to high-resolution satellite images of cloud structure," *Eur. Phys. J. B*, vol. 15, no. 4, pp. 765–786, Jun. 2000.
- [22] K. Jones-Smith and H. Mathur, "Fractal analysis: Revisiting Pollock's drip paintings," *Nature*, vol. 444, no. 7119, pp. E9–E10, Nov. 2006.
- [23] J. Coddington, J. Elton, D. Rockmore, and Y. Wang, "Multifractal analysis and authentication of Jackson Pollock paintings," *Proc. SPIE*, vol. 6810, p. 68100F, Feb. 2008.
- [24] P. Abry, S. Jaffard, and H. Wendt, "When Van Gogh meets Mandelbrot: Multifractal classification of painting's texture," *Signal Process.*, vol. 93, no. 3, pp. 554–572, Mar. 2013.
- [25] C. R. Johnson *et al.*, "Pursuing automated classification of historic photographic papers from raking light images," *J. Amer. Inst. Conservation*, vol. 53, no. 3, pp. 159–170, Aug. 2014.
- [26] S. Jaffard, P. Abry, and H. Wendt, "Irregularities and scaling in signal and image processing: Multifractal analysis," in *Benoit Mandelbrot: A Life in Many Dimensions*, M. Frame, Ed. Singapore: World Scientific, 2015.
- [27] B. Castaing, Y. Gagne, and M. Marchand, "Log-similarity for turbulent flows?" *Phys. D, Nonlinear Phenomena*, vol. 68, nos. 3–4, pp. 387–400, Oct. 1993.
- [28] H. Wendt, P. Abry, and S. Jaffard, "Bootstrap for empirical multifractal analysis," *IEEE Signal Process. Mag.*, vol. 24, no. 4, pp. 38–48, Jul. 2007.
- [29] H. Wendt, S. Jaffard, and P. Abry, "Multifractal analysis of self-similar processes," in *Proc. IEEE Workshop Statist. Signal Process. (SSP)*, Ann Arbor, MI, USA, Aug. 2012, pp. 69–72.
- [30] U. Frisch, *Turbulence: The Legacy of A. N. Kolmogorov*. Cambridge, U.K.: Cambridge Univ. Press, 1995.
- [31] S. B. Lowen and M. C. Teich, *Fractal-Based Point Processes*. New York, NY, USA: Wiley, 2005.
- [32] D. Veitch, M. S. Taqqu, and P. Abry, "Meaningful MRA initialization for discrete time series," *Signal Process.*, vol. 80, no. 9, pp. 1971–1983, Sep. 2000.
- [33] R. Liu, "Multivariate multifractal models: Estimation of parameters and applications to risk management," Ph.D. thesis, Christian-Albrechts-Universität, Kiel, Germany, 2008.
- [34] T. Lux, "The Markov-switching multifractal model of asset returns," *J. Bus. Econ. Statist.*, vol. 26, no. 2, pp. 194–210, 2008.
- [35] E. Bacry, A. Kozhemyak, and J.-F. Muzy, "Continuous cascade models for asset returns," *J. Econ. Dyn. Control*, vol. 32, no. 1, pp. 156–199, Jan. 2008.
- [36] J. Beran, *Statistics for Long-Memory Processes* (Monographs on Statistics and Applied Probability), vol. 61. New York, NY, USA: Chapman & Hall, 1994.
- [37] G. W. Wornell and A. V. Oppenheim, "Estimation of fractal signals from noisy measurements using wavelets," *IEEE Trans. Signal Process.*, vol. 40, no. 3, pp. 611–623, Mar. 1992.
- [38] M. Ossiander and E. C. Waymire, "Statistical estimation for multiplicative cascades," *Ann. Statist.*, vol. 28, no. 6, pp. 1533–1560, 2000.
- [39] B. Vedel, H. Wendt, P. Abry, and S. Jaffard, "On the impact of the number of vanishing moments on the dependence structures of compound Poisson motion and fractional Brownian motion in multifractal time," in *Dependence in Probability and Statistics* (Lecture Notes in Statistics), P. Doukhan, G. Lang, D. Surgailis, and G. Teysnière, Eds. Berlin, Germany: Springer-Verlag, 2010, pp. 71–101.
- [40] N. H. Chan and W. Palma, "Estimation of long-memory time series models: A survey of different likelihood-based methods," *Adv. Econ.*, vol. 20, no. 2, pp. 89–121, 2006.
- [41] E. Moulines, F. Roueff, and M. S. Taqqu, "A wavelet Whittle estimator of the memory parameter of a nonstationary Gaussian time series," *Ann. Statist.*, vol. 36, no. 4, pp. 1925–1956, 2008.
- [42] T. Lundahl, W. J. Ohley, S. Kay, and R. Siffert, "Fractional Brownian motion: A maximum likelihood estimator and its application to image texture," *IEEE Trans. Med. Imag.*, vol. 5, no. 3, pp. 152–161, Sep. 1986.
- [43] O. Løvsletten and M. Rypdal, "Approximated maximum likelihood estimation in multifractal random walks," *Phys. Rev. E*, vol. 85, no. 4, p. 046705, Apr. 2012.
- [44] H. Wendt, N. Dobigeon, J.-Y. Tourneret, and P. Abry, "Bayesian estimation for the multifractality parameter," in *Proc. IEEE Int. Conf. Acoust., Speech, Signal Process. (ICASSP)*, Vancouver, BC, Canada, May 2013, pp. 6556–6560.
- [45] J. Barral and B. B. Mandelbrot, "Multifractal products of cylindrical pulses," *Probab. Theory Rel. Fields*, vol. 124, no. 3, pp. 409–430, Nov. 2002.
- [46] J.-P. Antoine, R. Murenzi, P. Vandergheynst, and S. T. Ali, *Two-Dimensional Wavelets and Their Relatives*. Cambridge, U.K.: Cambridge Univ. Press, 2004.
- [47] P. Abry, S. Jaffard, and H. Wendt, "A bridge between geometric measure theory and signal processing: Multifractal analysis," in *Operator-Related Function Theory and Time-Frequency Analysis*, K. Gröchenig, Y. Lyubarskii, and K. Seip, Eds. Berlin, Germany: Springer-Verlag, 2015, pp. 1–56.
- [48] A. Ayache, S. Cohen, and J. L. Véhel, "The covariance structure of multifractional Brownian motion, with application to long range dependence," in *Proc. IEEE Int. Conf. Acoust., Speech, Signal Process. (ICASSP)*, vol. 6. Istanbul, Turkey, Jun. 2000, pp. 3810–3813.
- [49] A. M. Atto, Z. Tan, O. Alata, and M. Moreaud, "Non-stationary texture synthesis from random field modeling," in *Proc. IEEE Int. Conf. Image Process. (ICIP)*, Paris, France, Oct. 2014, pp. 4266–4270.
- [50] B. B. Mandelbrot, "Limit lognormal multifractal measures," in *Proc. Landau Memorial Conf. Frontiers Phys.*, 1990, pp. 309–340.
- [51] A. Arneodo, E. Bacry, and J. F. Muzy, "Random cascades on wavelet dyadic trees," *J. Math. Phys.*, vol. 39, no. 8, pp. 4142–4164, 1998.
- [52] C. Robert and G. Casella, *Monte Carlo Statistical Methods*. New York, NY, USA: Springer-Verlag, 2005.
- [53] P. Whittle, "Estimation and information in stationary time series," *Arkiv Matematik*, vol. 2, no. 5, pp. 423–434, Aug. 1953.
- [54] P. Whittle, "On stationary processes in the plane," *Biometrika*, vol. 41, nos. 3–4, pp. 434–449, Dec. 1954.

- [55] M. Fuentes, "Approximate likelihood for large irregularly spaced spatial data," *J. Amer. Statist. Assoc.*, vol. 102, no. 477, pp. 321–331, Mar. 2007.
- [56] V. V. Anh and K. E. Lunney, "Parameter estimation of random fields with long-range dependence," *Math. Comput. Model.*, vol. 21, no. 9, pp. 67–77, May 1995.
- [57] C. Velasco and P. M. Robinson, "Whittle pseudo-maximum likelihood estimation for nonstationary time series," *J. Amer. Statist. Assoc.*, vol. 95, no. 452, pp. 1229–1243, 2000.
- [58] P. M. Robinson, "Gaussian semiparametric estimation of long range dependence," *Ann. Statist.*, vol. 23, no. 5, pp. 1630–1661, 1995.
- [59] M. L. Stein, "Fast and exact simulation of fractional Brownian surfaces," *J. Comput. Graph. Statist.*, vol. 11, no. 3, pp. 587–599, Sep. 2002.
- [60] P. Flandrin, "Wavelet analysis and synthesis of fractional Brownian motion," *IEEE Trans. Inf. Theory*, vol. 38, no. 2, pp. 910–917, Mar. 1992.
- [61] D. Sheeren, M. Fauvel, S. Ladet, A. Jacquin, G. Bertoni, and A. Gibon, "Mapping ash tree colonization in an agricultural mountain landscape: Investigating the potential of hyperspectral imagery," in *Proc. IEEE Int. Geosci. Remote Sens. Symp. (IGARSS)*, Vancouver, BC, Canada, Jul. 2011, pp. 3672–3675.
- [62] G. Blanchet and L. Moisan, "An explicit sharpness index related to global phase coherence," in *Proc. IEEE Int. Conf. Acoust., Speech, Signal Process. (ICASSP)*, Kyoto, Japan, Mar. 2012, pp. 1065–1068.
- [63] G. Blanchet, L. Moisan, and B. Rougé, "Measuring the global phase coherence of an image," in *Proc. 15th IEEE Int. Conf. Image Process. (ICIP)*, Oct. 2008, pp. 1176–1179.
- [64] R. O. Duda, P. E. Hart, and D. G. Stork, *Pattern Classification*. New York, NY, USA: Wiley, 2012.



analysis, image texture, and Bayesian estimation.

Sébastien Combrexelle was born in Villefranche sur-Saône, France, in 1989. He received the Engineering degree from ISAE-Ensica, Toulouse, in 2013. He is currently pursuing the Ph.D. degree in signal processing with the National Polytechnic Institute of Toulouse (University of Toulouse, INP-ENSEEIH) in the Signal and Communication Group of the IRIT Laboratory. His Ph.D. was supported by the Direction Générale de l'Armement, French Ministry of Defense. His research interests include scale invariance phenomena, multifractal



tifique, Signal and Communications Group, IRIT Laboratory, University of Toulouse. He is also an Affiliated Faculty Member of the TeSA Laboratory.

Herwig Wendt received the M.S. degree in electrical engineering and telecommunications from the Vienna University of Technology, Austria, in 2005, and the Ph.D. degree in physics and signal processing from the Ecole Normale Supérieure de Lyon, in 2008. From 2008 to 2011, he was a Post-Doctoral Research Associate with the Department of Mathematics and the Geomathematical Imaging Group, Purdue University, West Lafayette, IN, USA. Since 2012, he has been a Tenured Research Scientist with the Centre National de Recherche Scientifique, Signal and Communications Group, IRIT Laboratory, University of Toulouse. He is also an Affiliated Faculty Member of the TeSA Laboratory.



puter Science, University of Michigan, Ann Arbor, MI, USA, from 2007 to 2008. Since 2008, he has been with INP Toulouse, University of Toulouse, Toulouse, where he is currently an Associate Professor. He conducts his research with the Signal and Communications Group, IRIT Laboratory. He is also an Affiliated Faculty Member of the TeSA Laboratory. His recent research activities have been focused on statistical signal and image processing, with a particular interest in Bayesian inverse problems, with applications to remote sensing, biomedical imaging, and genomics.

Nicolas Dobigeon (S'05–M'08–SM'13) was born in Angoulême, France, in 1981. He received the bachelor's degree in electrical engineering from ENSEEIHT, Toulouse, France, in 2004, and the M.Sc. degree in signal processing, the Ph.D. degree, and the Habilitation à Diriger des Recherches degree in signal processing from the National Polytechnic Institute of Toulouse (INP), Toulouse, in 2004, 2007, and 2012, respectively.

He was a Post-Doctoral Research Associate with the Department of Electrical Engineering and Computer Science, University of Michigan, Ann Arbor, MI, USA, from 2007 to 2008. Since 2008, he has been with INP Toulouse, University of Toulouse, Toulouse, where he is currently an Associate Professor. He conducts his research with the Signal and Communications Group, IRIT Laboratory. He is also an Affiliated Faculty Member of the TeSA Laboratory. His recent research activities have been focused on statistical signal and image processing, with a particular interest in Bayesian inverse problems, with applications to remote sensing, biomedical imaging, and genomics.



Jean-Yves Tourneret (SM'08) received the Ingénieur degree in electrical engineering from ENSEEIHT, Toulouse, France, in 1989, and the Ph.D. degree from the National Polytechnic Institute of Toulouse (INP), Toulouse, in 1992.

He is currently a Professor with ENSEEIHT, University of Toulouse, and a member of the IRIT Laboratory (UMR 5505 of the CNRS). His research activities are centered around statistical signal and image processing with a particular interest to Bayesian and Markov Chain Monte Carlo methods.

He has been involved in the organization of several conferences, including the European Conference on Signal Processing, the Program Chair in 2002; the IEEE International Conference on Acoustics, Speech, and Signal Processing in 2006 (Plenaries); the IEEE Statistical Signal Processing Workshop (2012, International Liaison; 2014, special sessions); the IEEE International Workshop on Computational Advances in Multisensor Adaptive Process (CAMSAP) in 2013 (local arrangements); and the IEEE Workshop on Machine Learning for Signal Processing in 2014 (special sessions). He has been the General Chair of the Centre International de Mathématiques et Informatique de Toulouse Workshop on Optimization and Statistics in Image Processing in 2013 (with F. Malgouyres and D. Kouamé) and of CAMSAP in 2015 (with P. Djuric). He has been a member of different technical committees, including the Signal Processing Theory and Methods Committee of the IEEE Signal Processing Society (2001–2007, 2010 to present) and has been serving as an Associate Editor of IEEE TRANSACTION ON SIGNAL PROCESSING (2008–2011) and EURASIP *Signal Processing* (since 2013).



Stephen McLaughlin (F'11) was born in Clydebank, U.K., in 1960. He received the B.Sc. degree in electronics and electrical engineering from the University of Glasgow, in 1981, and the Ph.D. degree from the University of Edinburgh, in 1989.

He was a Development Engineer in industry, from 1981 to 1984, involved in the design and simulation of integrated thermal imaging and fire control systems. From 1984 to 1986, he was involved in the design and development of high-frequency data communication systems.

In 1986, he joined the Department of Electronics and Electrical Engineering, University of Edinburgh, as a Research Fellow, where he studied the performance of linear adaptive algorithms in high noise and nonstationary environments. In 1988, he joined the Academic Staff at Edinburgh, and from 1991 to 2001, he held a Royal Society University Research Fellowship to study nonlinear signal processing techniques. In 2002, he was awarded a personal Chair in Electronic Communication Systems with the University of Edinburgh.

His research interests lie in the fields of adaptive signal processing and nonlinear dynamical systems theory and their applications to biomedical, geophysical, imaging, and communication systems. He is a fellow of the Royal Academy of Engineering, the Royal Society of Edinburgh, and the Institute of Engineering and Technology. He is currently with the School of Engineering and Physical Sciences, Heriot-Watt University, Edinburgh, U.K.



Patrice Abry (F'11) received the Professeur-Agrégé de Sciences Physiques degree from the Ecole Normale Supérieure de Cachan, in 1989, and the Ph.D. degree in physics and signal processing from Claude-Bernard University, Lyon, France, in 1994. He is currently a CNRS Senior Scientist with the Physics Department, École Normale Supérieure de Lyon, where he is in charge of the Signal, Systems and Physics Research Team. His current research interests include wavelet-based analysis and modeling of scaling phenomena and related topics. Beyond theoretical contributions in multifractal analysis, he shows a strong interest into real-world applications, ranging from hydrodynamic turbulence to the analysis of computer network teletraffic, heart rate variability, and neurosciences. He has authored a book *Wavelet, Scale Invariance, and Hydrodynamic Turbulence* and co-edited a book entitled *Scaling, Fractals, and Wavelets*. He received the AFCET-MESR-CNRS Prize for the best Ph.D. in signal processing for 1993–1994.

He has been involved in the organization of several conferences, including the European Conference on Signal Processing, the Program Chair in 2002; the IEEE International Conference on Acoustics, Speech, and Signal Processing in 2006 (Plenaries); the IEEE Statistical Signal Processing Workshop (2012, International Liaison; 2014, special sessions); the IEEE International Workshop on Computational Advances in Multisensor Adaptive Process (CAMSAP) in 2013 (local arrangements); and the IEEE Workshop on Machine Learning for Signal Processing in 2014 (special sessions). He has been the General Chair of the Centre International de Mathématiques et Informatique de Toulouse Workshop on Optimization and Statistics in Image Processing in 2013 (with F. Malgouyres and D. Kouamé) and of CAMSAP in 2015 (with P. Djuric). He has been a member of different technical committees, including the Signal Processing Theory and Methods Committee of the IEEE Signal Processing Society (2001–2007, 2010 to present) and has been serving as an Associate Editor of IEEE TRANSACTION ON SIGNAL PROCESSING (2008–2011) and EURASIP *Signal Processing* (since 2013).