

A Bayesian framework for speech motor control

Jean-François Patri, Julien Diard, Pascal Perrier, Jean-Luc Schwartz

▶ To cite this version:

Jean-François Patri, Julien Diard, Pascal Perrier, Jean-Luc Schwartz. A Bayesian framework for speech motor control. Workshop: Probabilistic Inference and the Brain, Stanislas Dehaene (CEA, Inserm, Collège de France - France) Alain Destexhe (EITN CNRS-UNIC - France) Wolfgang Maass (Graz University - Austria) Florent Meyniel (CEA - France), Sep 2015, Paris, France. hal-01297922

HAL Id: hal-01297922

https://hal.science/hal-01297922

Submitted on 6 Apr 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



A BAYESIAN FRAMEWORK FOR SPEECH MOTOR CONTROL



Jean-François Patri¹, Julien Diard², Pascal Perrier¹, Jean-Luc Schwartz¹


GIPSA-lab, UMR 5216 - CNRS & Université Grenoble Alpes, France ² LPNC, UMR 5105 - CNRS & Université Grenoble Alpes, France



Introduction

Speech is a skilled motor task achieving time series of goals within a timing that does not allow any online cortical processing of feedback signals. In addition, redundancy of the speech motor system makes the inference of motor commands an "ill-posed" inverse problem. Speech planning has been classically modeled within an optimal motor control framework by considering a feedforward control scheme coupled with a feedback controller. However optimal control schemes fail at accounting for token-to-token speech variability. In this context we proposed an alternative approach by formulating feedforward optimal control in a Bayesian modeling framework. We consider this approach to be appropriate for solving the ill-posed problem while accounting for the observed token-to-token variability in a principled way, and preserving the basic principles underlying the search for optimality without being explicitly driven by the minimization of a cost.

Context Biomechanical model of the Tongue Inferior **Anterior Posterior Styloglossus** Hyoglossus **Verticalis** Longitudinalis **Genioglossus** Genioglossus **Control Scheme for a single phoneme** Sensory variable **Phonemic Variable Motor-Control Variable** 3 first Formants (peaks of Units of speech 6 λ -parameters spectral energy) controlling activation of 6 muscles **Target categorization** (Perceptual constraint) Internal model 0 Radial Basis Function Network (e) (RBF) 00 F2 [Hz] (reversed)

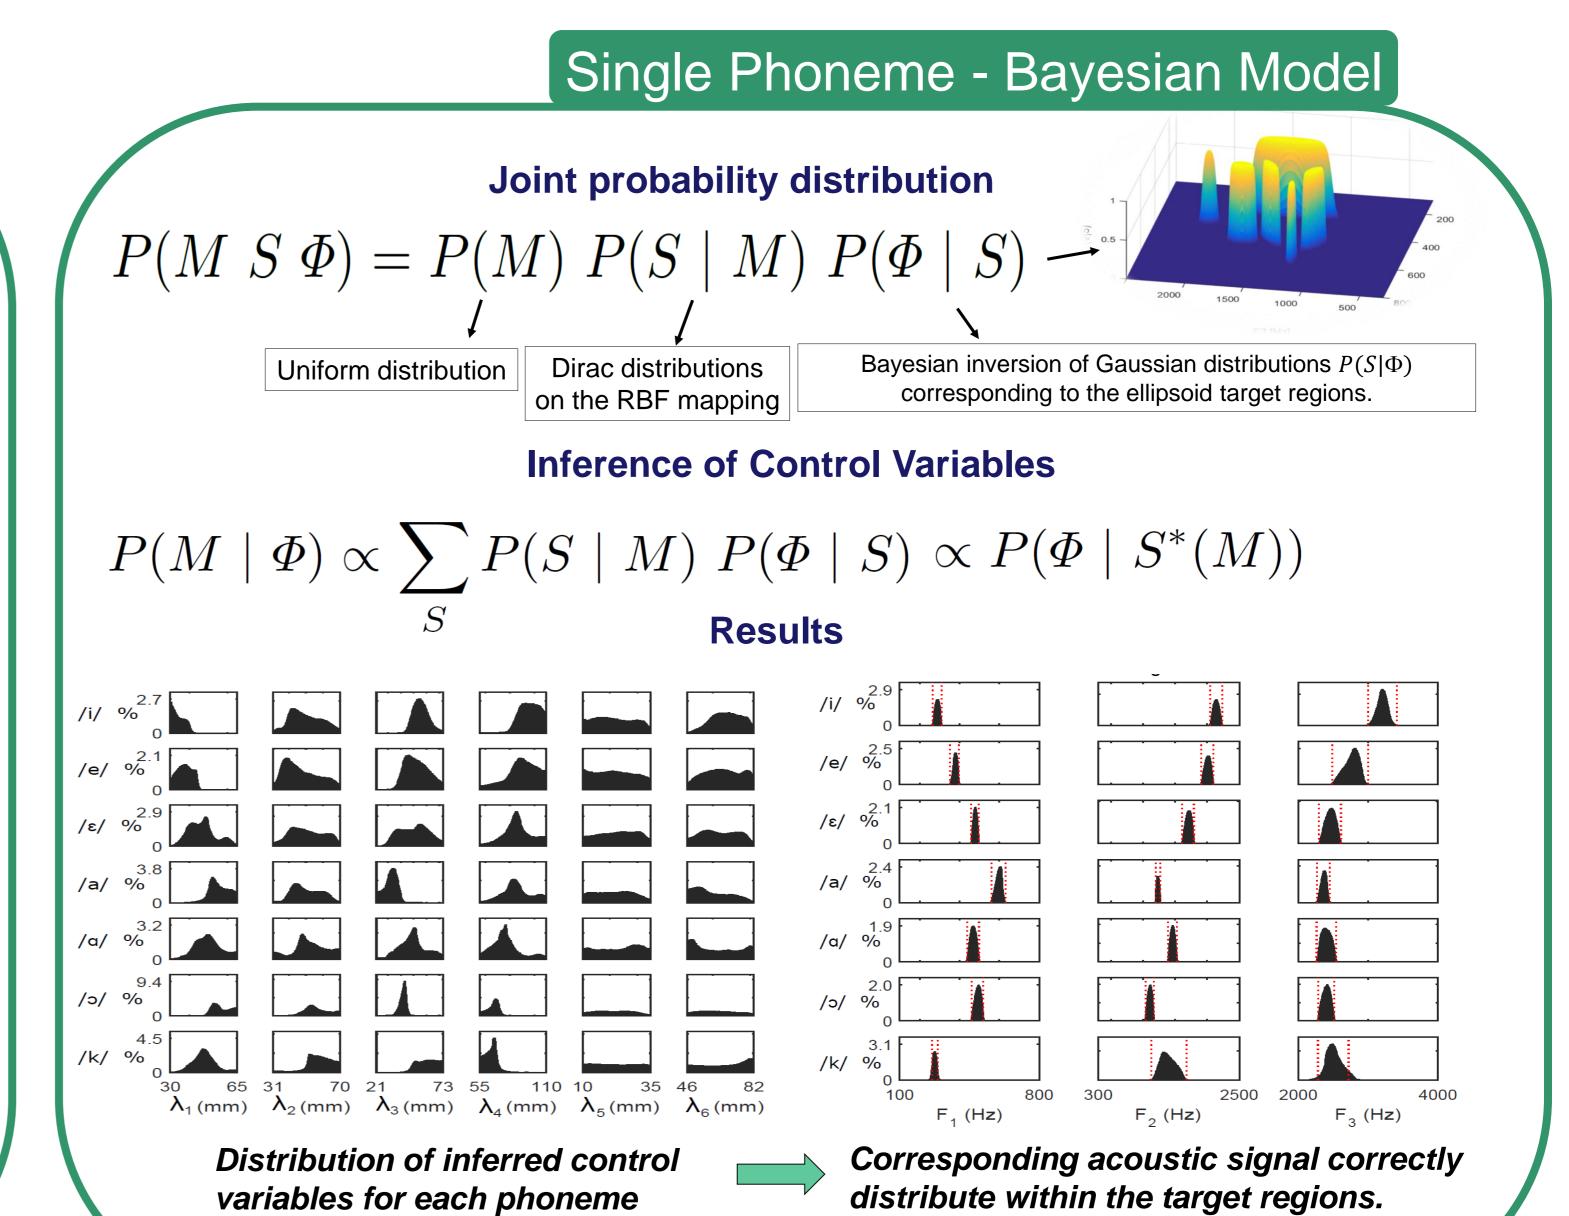

Sequence Planning - Bayesian Model

Assumptions

Control variables in sequence planning are selected in order to satisfy 2 constraints:

- Perceptual constraint: The corresponding acoustic output should correspond to the desired phonemic target
- Motor constraint: Laziness assumption: selected control variables should be as close as possible (for a 3 phoneme sequence: minimize the perimeter of the triangle that they define).

Joint probability distribution for a sequence of 3 phonemes

$$P(M^{1:3} \ S^{1:3} \ \Phi^{1:3} \ C_m) = P(M^1) \ P(S^1 \mid M^1) \ P(\Phi^1 \mid S^1)$$

$$P(M^2) \ P(M^2) \ P(S^2 \mid M^2) \ P(\Phi^2 \mid S^2)$$

$$P(M^3) \ P(S^3 \mid M^3) \ P(\Phi^3 \mid S^3)$$

$$P(C_m \mid M^3 \ M^2 \ M^1)$$

 C_m is a binary variable that constrain control variables to be close when its state is L ("Lazy").

$$P([C_m=L] \mid M^3M^2M^1 = e^{-\kappa_M(|M^2-M^1|+|M^2-M^3|+|M^3-M^1|)} \\ \frac{\kappa_{\rm M} \text{ is a parameter modulating the strength of the motor constraint}}$$


Inference of control variables

$$P(M^{1:3} \mid \Phi^{1:3} \mid C_m = L) \propto P([C_m = L] \mid M^3 M^2 M^1) \prod_{i=1:3} P(\Phi^i \mid S^*(M^i))$$

Comparison with an optimal control model


 GEPPETO is an Optimal Control Model that solves the same planning task under the same assumptions. It is based on the minimization of a cost function and leads to a unique solution

The Bayesian Model leads to a distribution of solutions that are in agreement with the

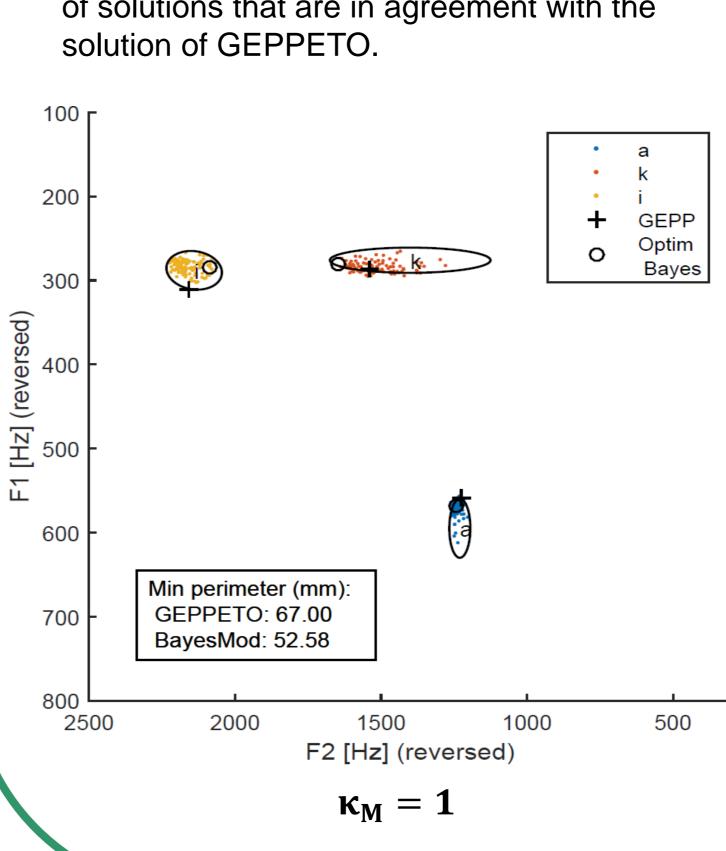

• κ_M modulates the strength of the motor constraint. Relaxing the constraint leads to a decrease on coarticulation effect.

Results

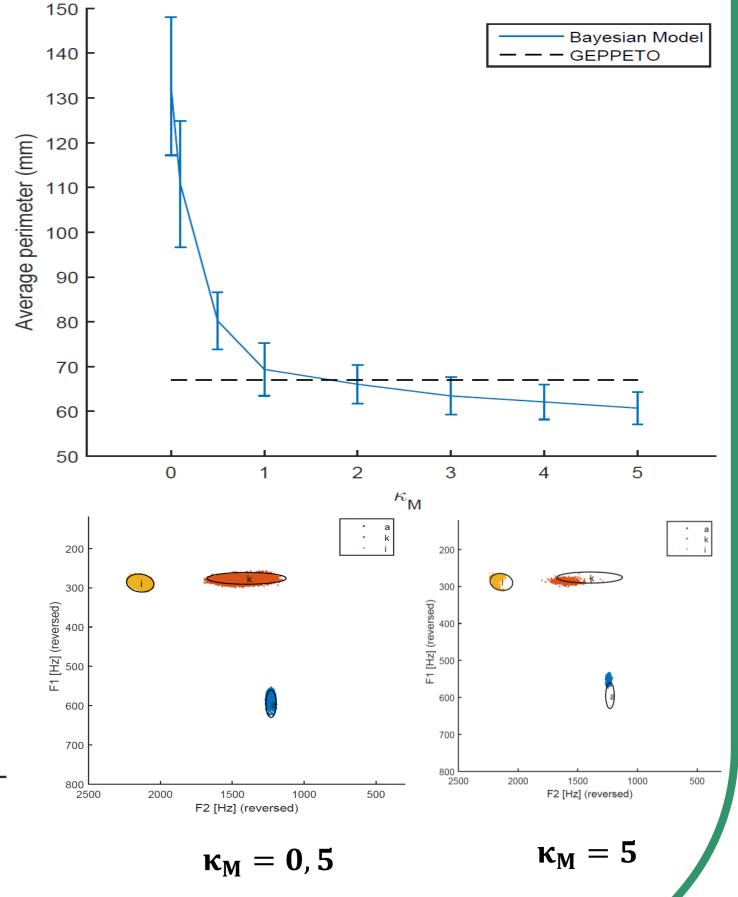

Discussion

Equivalence of Models

• Both the Bayesian and optimal control models correctly infer control variables satisfying the constraints of the speech task.

In addition, results are consistent with each other and indeed it can be shown that the Bayesian model includes GEPPETO as a special case.

Addressing redundancy and variability in formal terms

- The optimal control approach solves the redundancy problem with the specification of a unique and stereotyped solutions and leads to the elimination of all variability.
- The Bayesian approach does not solve indeterminacy by suppressing all solutions but one, instead it characterizes every possible configuration by its probability to achieve the task. Redundancy is then solved by randomly selecting motor control variables under the corresponding probability distribution. The optimal achievement of the task is ensured in average.
- Variability is an inherent consequence of the formalism. Furthermore, the variability generated with this approach has a specific structure that could be compared with experimental data.

The research leading to these results has received funding from the European Research Council under the European Community's Seventh Framework Programme (FP7/2007- 2013 Grant Agreement no. 339152, \Speech Unit(e)s", PI: Jean-Luc-Schwartz).