



HAL
open science

Automatic semigroups vs automaton semigroups

Matthieu Picantin

► **To cite this version:**

| Matthieu Picantin. Automatic semigroups vs automaton semigroups. 2016. hal-01373972v2

HAL Id: hal-01373972

<https://hal.science/hal-01373972v2>

Preprint submitted on 6 Dec 2016 (v2), last revised 16 Jan 2017 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Automatic semigroups vs automaton semigroups *

Matthieu Picantin

IRIF, UMR 8243 CNRS & Univ. Paris Diderot, 75013 Paris, France
picantin@irif.fr

Abstract

We develop an effective and natural approach to interpret any semigroup admitting a special language of greedy normal forms as an automaton semigroup, namely the semigroup generated by a Mealy automaton encoding the behaviour of such a language of greedy normal forms under one-sided multiplication. The framework embraces many of the well-known classes of (automatic) semigroups: free semigroups, free commutative semigroups, trace or divisibility monoids, braid or Artin-Tits or Krammer or Garside monoids, Baumslag-Solitar semigroups, etc. Like plactic monoids or Chinese monoids, some neither left- nor right-cancellative automatic semigroups are also investigated, as well as some residually finite variations of the bicyclic monoid. It provides what appears to be the first known connection from a class of automatic semigroups to a class of automaton semigroups. It is worthwhile noting that, in all these cases, "being an automatic semigroup" and "being an automaton semigroup" become dual properties in a very automata-theoretical sense.

1998 ACM Subject Classification F.1.1 Models of Computation, F.4.3 Formal Languages.

Keywords and phrases Mealy machine, semigroup, rewriting system, automaticity, selfsimilarity.

Digital Object Identifier 10.4230/LIPIcs.X.2016.23


1 Introduction

The half century long history of the interactions between (semi)group theory and automata theory went through a pivotal decade from the mid-eighties to the mid-nineties. Concomitantly and independently, two new theories truly started to develop and thrive: automaton (semi)groups on the one hand with the works of Aleshin [2, 3] and Grigorchuk [25, 26] and the book [44], and automatic (semi)groups on the other hand with the work of Cannon and Thurston and the book [21]. We refer to [50] for a clear and short survey on the known interactions groups/automata. A deeper and more extended one by Bartholdi and Silva can be found out in two chapters [5, 6] of the forthcoming *AutoMathA* handbook. We can refer to [12, 42] for automaton semigroups and to [15, 30] for automatic semigroups.

As their very name indicates, automaton (semi)groups and automatic (semi)groups share a same defining object: the *automaton* or the letter-to-letter transducer in this case. Beyond this common origin, these two topics until now happened to remain largely distant both in terms of community and in terms of tools or results. Typically, any paper on one or the other topic used to contain a sentence like "it should be emphasized that, despite their similar names, the notions of automaton (semi)groups are entirely separate from the notions of automatic (semi)groups". This was best evidenced by the above-mentioned valuable handbook chapter [5] which splits into exactly two sections (automatic groups and automaton groups) without any reference between one and the other appearing explicitly.

* This work was partially supported by the French *Agence Nationale pour la Recherche*, through the project MealyM ANR-JS02-012-01.



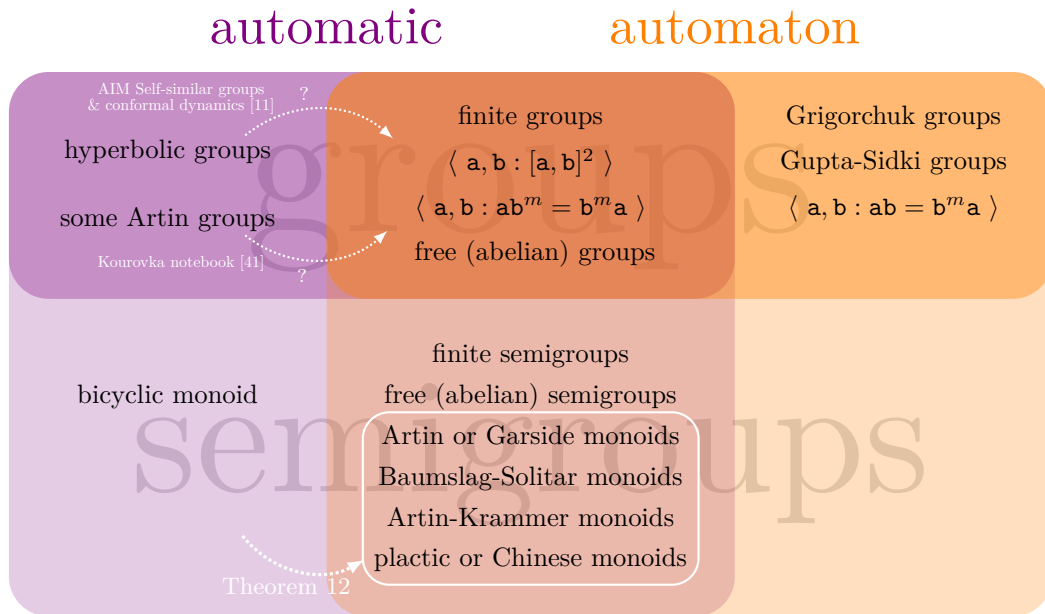

■ **Figure 1** The big picture: comparing the classes of automatic *vs* automaton (semi)groups.

A significant problem is to recognize whether a given (semi)group is self-similar, that is, an automaton (semi)group. Amongst the unsolved problems in group theory of the Kourovka Notebook [41], there is the one (with number 16.84) asked by Sushchanskii (see also [37]):

Can the n -strand braid group \mathbf{B}_n act faithfully on a regular rooted tree by finite-state automorphisms?

This amounts to ask whether the braid group is a subgroup of some automaton group. Amongst the thirty-odd listed problems from [11], we can pick the one with the number 1.1:

It seems quite difficult to show whether a given group is self-similar.

- Are Gromov hyperbolic groups self-similar?
- Find obstructions to self-similarity.

All these questions could as well be rephrased in terms of semigroups or monoids.

Our aim here is to establish a possible connection between being an automatic semigroup and being an automaton semigroup. Preliminary observations are that these classes intersect non trivially and that none is included in the other (see Figure 1). Like the Grigorchuk group for instance, many automaton groups are infinite torsion groups, hence cannot be automatic groups. By contrast, it is an open question whether every automatic group is an automaton group. The latter is related to the question whether every automatic group is residually finite, which remains open despite the works by Wise [52] and Elder [20]. Like the bicyclic monoid, some automatic semigroups are not residually finite, hence cannot be automaton semigroups (see [12] for instance).


As for the intersection, we know that at least finite semigroups, free semigroups (of rank at least 2, see [9, 10]), free abelian semigroups happen to be both automatic semigroups and automaton semigroups. We propose here a new and natural way to interpret algorithmically each semigroup from a wide class of automatic semigroups—encompassing all the above-mentioned classes—as an automaton semigroup (Theorem 12). Furthermore, it is worthwhile

noting that, in all these cases, "being an automatic semigroup" and "being an automaton semigroup" become dual properties in a very automata-theoretical sense (Corollary 15).

The structure of the paper is as follows. As a simple preliminary, Section 2 illustrates in a deliberately informal manner how a single Mealy automaton can be used in order to define both selfsimilar structures and automatic structures (via a principle of duality). In Section 3, we set up the notation for Mealy automata and recall necessary notions of dual automaton, cross-diagram, and selfsimilar structure. In Section 4, we recall basics about normal forms and automatic structures, and we give necessary notions of quadratic normalisation, square-diagram and Garside family. Section 5 is devoted to our main result (Theorem 12 and Corollary 15), while Section 6 finally gathers several carefully selected examples and counterexamples.

2 A preliminary example

As their very name indicates, automaton (semi)groups and automatic (semi)groups share a same defining object. In both cases, a *Mealy automaton* (see Definition 1) basically allows to transform words into words.

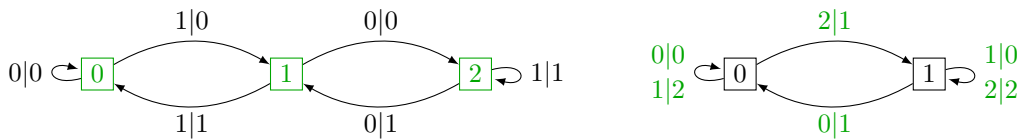

■ **Figure 2** Two (dual) Mealy automata: the left-hand one computes the division by 3 in base 2 (most significant digit first) *vs* the right-hand one computes the multiplication by 2 in base 3 (least significant digit first).

The example displayed on Figure 2 (left) became one of the most classical transducers (see [48] for instance): when starting from the state 0 and reading any binary word \mathbf{u} (most significant digit first), it computes the division by 3 in base 2 by outputting the (quotient) binary word \mathbf{v} (most significant digit first) satisfying

$$(\mathbf{u})_2 = 3 \times (\mathbf{v})_2 + f \tag{1}$$

where $f \in \{0, 1, 2\}$ corresponds to the arrival state of the run, and where $(\mathbf{w})_b$ conventionally denotes the number that is represented by \mathbf{w} in base b .

Let us now focus on this basic example and consider the following two different viewpoints. On the one hand, it seems natural to consider the set of those functions thus associated to each state, then to compose them with each other, and finally to study the (semi)group thus generated by such functions.

For instance, the function associated with the state 0 can be squared, cubed, and so on, to obtain functions, which can be again interpreted as the division by 9, 27, ... (in base 2 with most significant digit first). One can show here that the generated semigroup is the rank 3 free semigroup $\{0, 1, 2\}^+$ (provided that the three states and the induced functions are identified).

This simple idea coincides with the notion of automaton (semi)groups or selfsimilar structures (see Definition 2). With this crucial standpoint, we can compute (semi)group operations by manipulating the corresponding Mealy automaton (see [4, 5, 32, 43]), and

23:4 From automatic semigroups to automaton semigroups

hopefully foresee some combinatorial and dynamical properties by examining its shape (see [7, 8, 16, 23, 22, 24, 31, 34, 35, 51] for instance).

On the other hand, it may be also natural to simply iterate the runs. The starting language is again over the (input/output) alphabet, now the image of the transformations is some language over the stateset.

For instance, restarting again from the state 0 , the previously output word \mathbf{v} (satisfying Equation (1)) can be read in turn, and so on. The successive arrival states can be then collected and concatenated in order to obtain here the decomposition of $(\mathbf{u})_2$ in base 3 (least significant digit first).

This second idea coincides with the fundamental notion of automatic (semi)groups (see Definition 3).

To conclude this preliminary section, note that states and letters of any Mealy automaton play a symmetric role, and several properties can be beneficially derived from the so-called *dual (Mealy) automaton*, obtained by exchanging the stateset and the alphabet.

For instance, Figure 2 displays a pair of dual automata. The right-hand automaton essentially computes the multiplication by 2 in base 3 (least significant digit first). More precisely, its state 0 induces the function $x \mapsto 2 \times x$, while its state 1 induces the function $x \mapsto 2 \times x + 1$: they together generate the free rank 2 semigroup. Now, the induced functions happen to be invertible and generate a group which is isomorphic with the so-called Baumslag-Solitar group $\mathbf{BS}(2, 1) = \langle \alpha, \delta : \alpha^2 \delta = \delta \alpha \rangle$ (see [7] for details).

Besides, such a Mealy automaton can be used to compute the base 2 from the base 3 representation of the fractional part of any non-negative real number, by iterating runs as explained above. For instance, iterated runs from the state 0 and the initial word 12 produce the word $(11000)^\omega$, both words representing the real $(\frac{7}{9})_{10}$ in the base 3 and 2 respectively.

This innocuous example allows to illustrate the quite simple machineries associated both with automaton semigroups and with automatic semigroups. It also aims to give an informal glimpse on their behaviours through the duality principle: for instance, division *vs* multiplication, factor *vs* base, least *vs* most significant digit first.

3 Mealy automata and selfsimilar structures

We first recall the formal definition of an automaton.


► **Definition 1.** A (*finite, deterministic, and complete*) automaton is a triple $(Q, \Sigma, \tau = (\tau_i : Q \rightarrow Q)_{i \in \Sigma})$, where the *stateset* Q and the *alphabet* Σ are non-empty finite sets, and where the τ_i 's are functions.

A *Mealy automaton* is a quadruple $(Q, \Sigma, \tau = (\tau_i : Q \rightarrow Q)_{i \in \Sigma}, \sigma = (\sigma_x : \Sigma \rightarrow \Sigma)_{x \in Q})$ such that both (Q, Σ, τ) and (Σ, Q, σ) are automata.

In other terms, a Mealy automaton is a complete, deterministic, letter-to-letter transducer with the same input and output alphabet.

The graphical representation of a Mealy automaton is standard, see Figures 2, 8, and 11.

In a Mealy automaton $\mathcal{A} = (Q, \Sigma, \tau, \sigma)$, the sets Q and Σ play dual roles. So we may consider the *dual (Mealy) automaton* defined by $\mathfrak{d}(\mathcal{A}) = (\Sigma, Q, \sigma, \tau)$:



We view $\mathcal{A} = (Q, \Sigma, \tau, \sigma)$ as an automaton with an input and an output tape, thus defining mappings from input words over Σ to output words over Σ . Formally, for $x \in Q$, the map $\sigma_x: \Sigma^* \rightarrow \Sigma^*$, extending $\sigma_x: \Sigma \rightarrow \Sigma$, is defined recursively by:

$$\forall i \in \Sigma, \forall \mathbf{s} \in \Sigma^*, \quad \sigma_x(i\mathbf{s}) = \sigma_x(i)\sigma_{\tau_i(x)}(\mathbf{s}). \quad (2)$$

Equation (2) can be easier to understood if depicted by a *cross-diagram* (see [1]):

$$\begin{array}{ccc} & i & \mathbf{s} \\ & \downarrow & \downarrow \\ x & \xrightarrow{\tau_i(x)} & \tau_{\mathbf{s}}(\tau_i(x)) \\ & \downarrow & \downarrow \\ & \sigma_x(i) & \sigma_{\tau_i(x)}(\mathbf{s}) \end{array}$$

By convention, the image of the empty word is itself. The mapping σ_x for each $x \in Q$ is length-preserving and prefix-preserving. We say that σ_x is the *production function* associated with (\mathcal{A}, x) . For $\mathbf{x} = x_1 \cdots x_n \in Q^n$ with $n > 0$, set $\sigma_{\mathbf{x}}: \Sigma^* \rightarrow \Sigma^*$, $\sigma_{\mathbf{x}} = \sigma_{x_n} \circ \cdots \circ \sigma_{x_1}$. Denote dually by $\tau_i: Q^* \rightarrow Q^*$, $i \in \Sigma$, the production functions associated with the dual automaton $\mathfrak{d}(\mathcal{A})$. For $\mathbf{s} = s_1 \cdots s_n \in \Sigma^n$ with $n > 0$, set $\tau_{\mathbf{s}}: Q^* \rightarrow Q^*$, $\tau_{\mathbf{s}} = \tau_{s_n} \circ \cdots \circ \tau_{s_1}$.

► **Definition 2.** The semigroup of mappings from Σ^* to Σ^* generated by $\{\sigma_x, x \in Q\}$ is called the *semigroup generated by \mathcal{A}* and is denoted by $\langle \mathcal{A} \rangle^+$. When \mathcal{A} is invertible, its production functions are permutations on words of the same length and thus we may consider the group of mappings from Σ^* to Σ^* generated by $\{\sigma_x, x \in Q\}$. This group is called the *group generated by \mathcal{A}* and is denoted by $\langle \mathcal{A} \rangle$. In both cases, the term *selfsimilar* is used as a synonym.

4 Quadratic normalisations and automatic structures

This section gathers the definitions of some classical notions like normal form or automatic structure, together with the little more specific notions of a quadratic normalisation (see [19]) and a Garside family (see [17, 18]).

For any set \mathcal{Q} , we denote by \mathcal{Q}^+ the free semigroup over \mathcal{Q} (*resp.* by \mathcal{Q}^* the free monoid and by 1 the empty word) and call its elements *\mathcal{Q} -words*. We write $\|\mathbf{w}\|$ for the length of a \mathcal{Q} -word \mathbf{w} , and $\mathbf{w}\mathbf{w}'$ for the product of two \mathcal{Q} -words \mathbf{w} and \mathbf{w}' .

► **Definition 3.** Let S be a semigroup with a generating subset \mathcal{Q} . A *normal form* for (S, \mathcal{Q}) is a (set-theoretic) section of the canonical projection EV from the language of \mathcal{Q} -words onto S , that is, a map NF that assigns to each element of S a distinguished representative \mathcal{Q} -word:

$$\begin{array}{ccc} \text{EV} : \mathcal{Q}^+ & \xrightarrow{\quad} & S \\ & \xleftarrow{\quad \text{NF} \quad} & \end{array}$$

Whenever $\text{NF}(S)$ is regular, it provides a *right-automatic structure* for S if the language $\mathcal{L}_q = \{ (\text{NF}(a), \text{NF}(aq)) : a \in S \}$ is regular for each $q \in \mathcal{Q}$. The semigroup S then can be called a *(right-)automatic semigroup*.

We mention here the thorough and precious study in [29] of the different notions (right- or left-reading *vs* right- or left-multiplication) of automaticity for semigroups.

23:6 From automatic semigroups to automaton semigroups

► **Remark.** In his seminal work [21, Chapter 9], Thurston shows how the set of these different automata \mathcal{L}_q recognizing the multiplication—that is, recognizing the languages of those pairs of normal forms of elements differing by a right factor $q \in \mathcal{Q}$ —in Definition 3 can be replaced with advantage by a single letter-to-letter transducer (see Definition 14) that computes the normal forms via iterated runs, each run both providing one brick of the final normal form and outputting a word still to be normalised.

One will often consider the associated normalisation $N = NF \circ EV$.


► **Definition 4.** A *normalisation* is a pair (\mathcal{Q}, N) , where \mathcal{Q} is a set and N is a map from \mathcal{Q}^+ to itself satisfying, for all \mathcal{Q} -words $\mathbf{u}, \mathbf{v}, \mathbf{w}$:

- $\|N(\mathbf{w})\| = \|\mathbf{w}\|$,
- $\|\mathbf{w}\| = 1 \Rightarrow N(\mathbf{w}) = \mathbf{w}$,
- $N(\mathbf{u}N(\mathbf{w})\mathbf{v}) = N(\mathbf{u}\mathbf{w}\mathbf{v})$.

A \mathcal{Q} -word \mathbf{w} satisfying $N(\mathbf{w}) = \mathbf{w}$ is called *N-normal*. If S is a semigroup, we say that (\mathcal{Q}, N) is a *normalisation for S* if S admits the presentation

$$\langle \mathcal{Q} : \{ \mathbf{w} = N(\mathbf{w}) \mid \mathbf{w} \in \mathcal{Q}^+ \} \rangle^+.$$

Following [18], we associate with every element $q \in \mathcal{Q}$ a q -labeled edge and with a product the concatenation of the corresponding edges and represent equalities in the ambient semigroup using commutative diagrams, what we called here *square-diagram*: for instance, the following square illustrates an equality $q_1q_2 = q'_1q'_2$.



For a normalisation (\mathcal{Q}, N) , we denote by \bar{N} the restriction of N to \mathcal{Q}^2 and, for $i \geq 1$, by \bar{N}_i the (partial) map from \mathcal{Q}^+ to itself that consists in applying \bar{N} to the entries in position i and $i + 1$. For any finite sequence $\mathbf{i} = i_1 \cdots i_n$ of positive integers, we write $\bar{N}_{\mathbf{i}}$ for the composite map $\bar{N}_{i_n} \circ \cdots \circ \bar{N}_{i_1}$ (so \bar{N}_{i_1} is applied first).

► **Definition 5.** A normalisation (\mathcal{Q}, N) is *quadratic* if the two conditions hold:


- a \mathcal{Q} -word \mathbf{w} is N -normal if, and only if, every length-two factor of \mathbf{w} is;
- for every \mathcal{Q} -word \mathbf{w} , there exists a finite sequence \mathbf{i} of positions, depending on \mathbf{w} , such that $N(\mathbf{w})$ is equal to $\bar{N}_{\mathbf{i}}(\mathbf{w})$.

► **Definition 6.** As illustrated on Figure 3, to any quadratic normalisation (\mathcal{Q}, N) is associated its *breadth* (d, p) (called minimal left and right classes in [17, 19]) defined as:

$$d = \max_{(q_1, q_2, q_3) \in \mathcal{Q}^3} \min \{ \ell : N(q_1q_2q_3) = \underbrace{\bar{N}_{212 \dots}}_{\text{length } \ell}(q_1q_2q_3) \}, \text{ and}$$

$$p = \max_{(q_1, q_2, q_3) \in \mathcal{Q}^3} \min \{ \ell : N(q_1q_2q_3) = \underbrace{\bar{N}_{121 \dots}}_{\text{length } \ell}(q_1q_2q_3) \}.$$

Such a breadth is ensured to be finite provided that \mathcal{Q} is finite. For $d \leq 4$ and $p \leq 3$, (\mathcal{Q}, N) is said to satisfy Condition (\blacklozenge) , corresponding to the so-called *domino rule* in [17, 18, 19] but with a different reading direction.

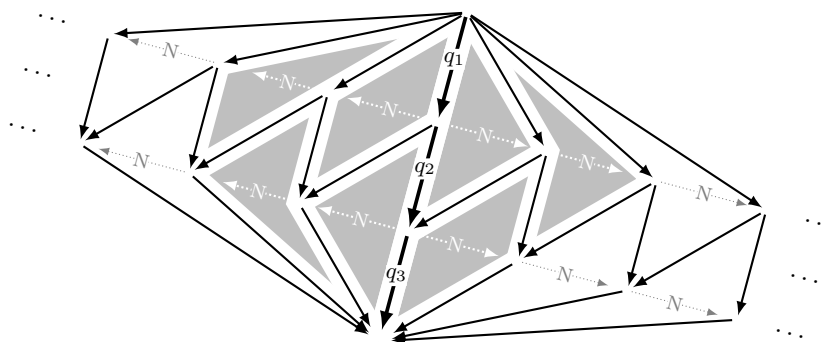

■ **Figure 3** From an initial \mathcal{Q} -word $q_1q_2q_3$, one applies normalisations on the first or the second 2-factors alternatively up to stabilisation, beginning on the first 2-factor q_1q_2 (on the right-hand side here) or on the second q_2q_3 . The gray zone corresponds to Condition (\blacklozenge) as defined in Definition 6.

The rest of the current section describes a tiny fragment of Garside theory (see [18] for its foundations). Garside families were recently introduced as a general framework guaranteeing the existence of normal forms. Even if this notion is not necessary for the understanding of the main result of Section 5 and its proof, several examples of Section 6 could rely on it.

Let S be a monoid. For $a, b, c \in S$, a is a *left-divisor* of b or, equivalently, b is a *right-multiple* of a if $b = ab'$ holds for some $b' \in S$; moreover, b is a minimal common right-multiple, or *right-mcm*, of a and c if b is a right-multiple of a and c , and no proper left-divisor of b is a right-multiple of a and c .

Furthermore, S is said to be *right-cancellative* whenever, for all $a, b, c \in S$, $ab = cb$ implies $a = c$, and S admits no nontrivial *invertible element* whenever $ab = 1$ implies $a = b = 1$. *Right-divisor*, *left-mcm*, and *left-cancellativity* are defined symmetrically.

► **Definition 7.** If S is a right-cancellative monoid with no nontrivial invertible element, a *(right-)Garside family* for S is a generating set closed under left-divisor and under left-mcm.

Various practical characterisations of Garside families are known, depending in particular on the specific properties of the considered monoid. The following is especially relevant here.

► **Proposition 8.** [19] *Assume that S is a right-cancellative monoid with no nontrivial invertible element and with a finite (right-)Garside family \mathcal{Q} . Then the normalisation $(\mathcal{Q}, \mathbb{N})$ defined by $\mathbb{N}(ab) = cd$ for $a, b, c, d \in \mathcal{Q}$ with d maximal, satisfies Condition (\blacklozenge) .*

5 From an automatic structure to a selfsimilar structure

All the ingredients are now in place to effectively and naturally interpret as an automaton monoid any automatic monoid admitting a special language of normal forms—namely, a quadratic normalisation satisfying Condition (\blacklozenge) . The point is to construct a Mealy automaton encoding the behaviour of its language of normal forms under one-sided multiplication.

► **Definition 9.** Assume that S is a semigroup admitting a normalisation $(\mathcal{Q}, \mathbb{N})$. We define the Mealy automaton $\mathcal{M}_{S, \mathcal{Q}, \mathbb{N}} = (\mathcal{Q}, \mathcal{Q}, \tau, \sigma)$ such that, for every $(a, b) \in \mathcal{Q}^2$, $\sigma_b(a)$ is the rightmost element of \mathcal{Q} in the normal form $\mathbb{N}(ab)$ of ab and $\tau_a(b)$ is the left one:


$$\mathbb{N}(ab) = \tau_a(b)\sigma_b(a).$$

23:8 From automatic semigroups to automaton semigroups

The latter correspondence can be simply interpreted via square-diagram *vs* cross-diagram:




Then, for $N(s) = s_n \cdots s_1$ and $N(sq) = q_n s'_n \cdots s'_1$, we obtain diagrammatically:

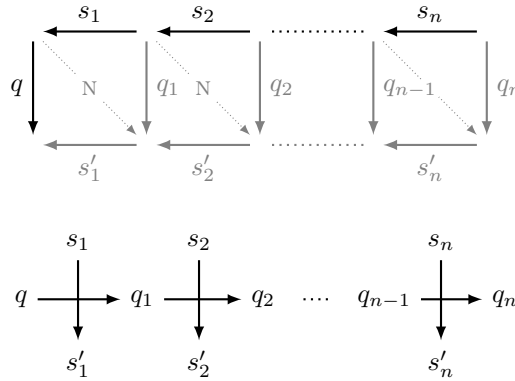

We choose on purpose to always draw a normalisation square-diagram backward, such that it coincides with the associated cross-diagram. The function induced by the state q maps any normal form (read backward) to the normal form of the right-product by q (read backward).

The first point is that, without any extra assumption (except $1 \in \mathcal{Q}$) on the quadratic normalisation $(\mathcal{Q}, \mathcal{N})$, we obtain that the Mealy automaton $\mathcal{M}_{S, \mathcal{Q}, \mathcal{N}}$ generates a somehow coarse approximation of S , in which any relation comes from S as well, now some relations could be missing.

► **Lemma 10.** *Assume that S is a monoid with a quadratic normalisation $(\mathcal{Q}, \mathcal{N})$. Then the Mealy automaton $\mathcal{M}_{S, \mathcal{Q}, \mathcal{N}}$ generates a monoid of which S is a quotient.*

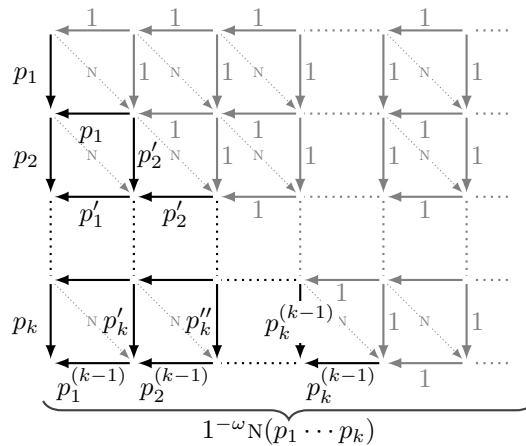

■ **Figure 4** Proof of Lemma 10: the normal forms of those \mathcal{Q} -words inducing a same action coincide.

Proof. Let $\mathcal{M}_{S,\mathcal{Q},N} = (\mathcal{Q}, \mathcal{Q}, \tau, \sigma)$ as in Definition 9. It suffices to prove that any relation in $\langle \mathcal{M}_{S,\mathcal{Q},N} \rangle^+$ is a relation in S . Let $\sigma_{p_1} \cdots \sigma_{p_k} = \sigma_{q_1} \cdots \sigma_{q_\ell}$ be some relation in $\langle \mathcal{M}_{S,\mathcal{Q},N} \rangle^+$ with $p_i \in \mathcal{Q}$ for $1 \leq i \leq k$ and $q_j \in \mathcal{Q}$ for $1 \leq j \leq \ell$. Any word \mathbf{w} over \mathcal{Q} admits hence the same image under $\sigma_{p_1} \cdots \sigma_{p_k}$ and under $\sigma_{q_1} \cdots \sigma_{q_\ell}$. By taking $\mathbf{w} = 1^\omega$ (or any sufficiently long power of 1, precisely any word from $1^{\max(k,\ell)} 1^*$), such a common image corresponds to their normal forms by very definition of $\mathcal{M}_{S,\mathcal{Q},N}$ (see Figure 4). Therefore the resulting letterwise equality $1^{-\omega N}(p_1 \cdots p_k) = 1^{-\omega N}(q_1 \cdots q_\ell)$ (where $1^{-\omega}$ denotes the left-infinite word $\cdots 111$) implies that the two corresponding \mathcal{Q} -words $p_1 \cdots p_k$ and $q_1 \cdots q_\ell$ represent a same element in S by definition of N . \blacktriangleleft

► **Remark.** The monoidal assumption $1 \in \mathcal{Q}$ cannot be simply omitted. The rank 1 free semigroup $\langle \mathbf{a} : \rangle^*$ admits the quadratic normalisation $(\{\mathbf{a}\}, N)$ with $N(\mathbf{a}\mathbf{a}) = \mathbf{a}\mathbf{a}$. According to Definition 9, $\mathcal{M}_{\langle \mathbf{a} : \rangle^*, \{\mathbf{a}\}, N}$ is the trivial automaton: one state \mathbf{a} with one loop labeled $\mathbf{a}|\mathbf{a}$. The latter generates the trivial semigroup $\langle \mathbf{a} : \mathbf{a}^2 = \mathbf{a} \rangle^*$, hence Lemma 10 does not hold in that case. Any extra hypothesis like $\|\mathcal{Q}\| > 1$ would not help: for $\|\mathcal{Q}\| = 2$ there exist (non-minimized) examples failing Lemma 10, while, for $\|\mathcal{Q}\| > 2$, one can find minimized examples, like the infinite semigroup $\mathbf{P} = \langle \mathbf{a}, \mathbf{b}, \mathbf{c} : \mathbf{a}^2 = \mathbf{b}^2 = \mathbf{a}\mathbf{c}, \mathbf{b}\mathbf{a} = \mathbf{c}\mathbf{a} = \mathbf{a}\mathbf{b}, \mathbf{c}^2 = \mathbf{c}\mathbf{b} \rangle^*$ whose associated Mealy automaton generates a semigroup of order 51.

This strengthens the idea that there is a nontrivial gap in the study of automaton monoids and automaton semigroups (see [10]). Nevertheless, in the general semigroup case, checking the necessary and sufficient condition

$$\sigma_{ab} = \sigma_{cd} \implies \begin{cases} \tau_a(b) = \tau_c(d) \\ \sigma_b(a) = \sigma_d(c) \end{cases} \quad (\blacksquare)$$

for all $(a, b, c, d) \in \mathcal{Q}^4$ can be done very efficiently in any case via a single minimisation of the square of $\mathcal{M}_{S,\mathcal{Q},N}$ [32]. For instance, in the square of the Mealy automaton associated with \mathbf{P} , one can detect the equivalent states \mathbf{a}^2 and $\mathbf{b}\mathbf{a}$ that fail to satisfy Condition (\blacksquare) .

The previous straightforward proof relies only on the definition of a quadratic normalisation and on the well-fitted associated Mealy automaton (Definition 9). For the converse statement, we consider an extra assumption, which happens to be necessary and sufficient.

► **Proposition 11.** *Assume that S is a semigroup with a quadratic normalisation (\mathcal{Q}, N) . Then the Mealy automaton $\mathcal{M}_{S,\mathcal{Q},N}$ generates a semigroup quotient of S if and only if (\mathcal{Q}, N) satisfies Condition (\blacklozenge) .*


Proof. Let $S = \mathcal{Q}^+ / \equiv_N$ and $\mathcal{M}_{S,\mathcal{Q},N} = (\mathcal{Q}, \mathcal{Q}, \tau, \sigma)$. Assume that there exists $(a, b, c, d) \in \mathcal{Q}^4$ satisfying $ab \equiv_N cd$. We have to prove $\sigma_{ab} = \sigma_{cd}$. Without loss of generality, the word ab can be supposed to be N -normal, that is, $N(ab) = N(cd) = ab$ holds.

Let $\mathbf{w} = q\mathbf{w}' \in \mathcal{Q}^n$ for some $n > 0$ and $q \in \mathcal{Q}$. We shall prove both $\sigma_{ab}(\mathbf{w}) = \sigma_{cd}(\mathbf{w})$ (coordinatewise) and $\tau_{\mathbf{w}}(ab) \equiv_N \tau_{\mathbf{w}}(cd)$ by induction on $n > 0$. For $n = 1$, we obtain the two square-diagrams on Figure 5 (left). With these notations, we have to prove $q''_0 = q''_1$ and $a'b' \equiv_N c'd'$, the latter meaning $N(a'b') = N(c'd')$, that is, with the notations from Figure 5, the conjunction of $a'' = c''$ and $b'' = d''$. Now these three equalities hold if and only if (\mathcal{Q}, N) satisfies Condition (\blacklozenge) , as shown on Figure 5 (right).

This allows to proceed the induction and to prove the equivalence. \blacktriangleleft

Gathering Lemma 10 and Proposition 11, we obtain the following main result.

► **Theorem 12.** *Assume that S is a monoid with a quadratic normalisation (\mathcal{Q}, N) satisfying Condition (\blacklozenge) . Then the Mealy automaton $\mathcal{M}_{S,\mathcal{Q},N}$ generates a monoid isomorphic to S .*

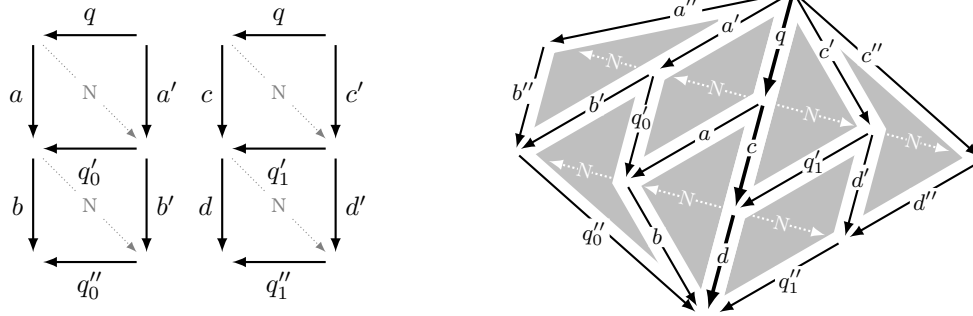

■ **Figure 5** Proof of Proposition 11: initial data (left) can be pasted into Condition (◆) (right).

Proof. By construction, S and $\langle \mathcal{M}_{S, \mathcal{Q}, \mathcal{N}} \rangle^+$ share a same generating subset \mathcal{Q} . Now, any defining relation for S maps to a defining relation for $\langle \mathcal{M}_{S, \mathcal{Q}, \mathcal{N}} \rangle^+$ by Proposition 11, and conversely by Lemma 10. ◀

► **Corollary 13.** Any monoid with a quadratic normalisation satisfying Condition (◆) is residually finite.

To conclude this main section, we come back to that remark (following Definition 3) about the transducer approach by Thurston.

► **Definition 14.** To any quadratic normalisation $(\mathcal{Q}, \mathcal{N})$ is associated its *Thurston transducer* defined as the Mealy automaton $\mathcal{T}_{\mathcal{Q}, \mathcal{N}}$ with stateset \mathcal{Q} , alphabet \mathcal{Q} , and transitions as follows:



► **Corollary 15.** Assume that S is a monoid with a quadratic normalisation $(\mathcal{Q}, \mathcal{N})$ satisfying Condition (◆). The Thurston transducer $\mathcal{T}_{\mathcal{Q}, \mathcal{N}}$ and the Mealy automaton $\mathcal{M}_{S, \mathcal{Q}, \mathcal{N}}$ being dual automaton, S possesses both the explicitly dual properties of automaticity and selfsimilarity.


6 Examples and counterexamples

Our very first example is straightforward, but enlightening.


► **Example 16.** Every finite monoid \mathcal{F} (in particular every finite group) is an automatic monoid. Consider its quadratic normalisation $(\mathcal{F}, \mathcal{N})$ with $\mathcal{N}(ab) = 1(ab)$ for every $(a, b) \in \mathcal{F}^2$. Figure 6 shows how to compute its breadth $(3, 2)$, witness of Condition (◆) for applying Theorem 12.

As mentioned in Section 1 and appearing on Figure 1, there exist automatic semigroups that cannot be automaton semigroups.

► **Example 17.** The bicyclic monoid $\mathbf{B} = \langle a, b : ab = 1 \rangle^+$ is known to be automatic and not residually finite, hence cannot be an automaton monoid. Choose for \mathbf{B} the quadratic normalisation $(\{a, b, 1\}, \mathcal{N})$ with $\mathcal{N}(ab) = 11$, $\mathcal{N}(x1) = 1x$ for $x \in \{a, b\}$, and $\mathcal{N}(xy) = xy$ otherwise. Figure 7 illustrates the computation (on the witness word xab with $x \in \{a, b\}$) of

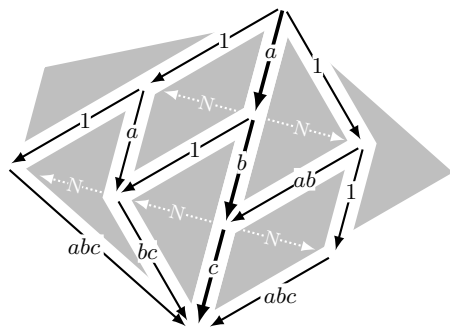

■ **Figure 6** Computing the breadth (3, 2) for any finite monoid \mathcal{F} as in Example 16.

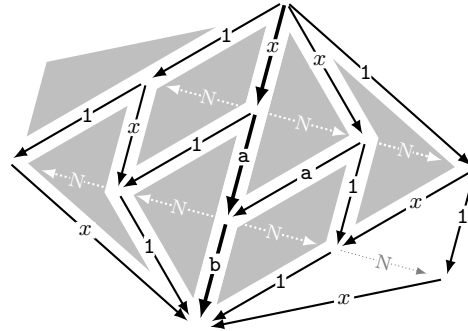


■ **Figure 7** Computing the breadth (3, 4) for the bicyclic monoid \mathbf{B} from Example 17.

its breadth (3, 4). The Condition (\blacklozenge) is hence not satisfied and Theorem 12 cannot apply. Precisely, according to the proof of Proposition 11 and Figure 5, we have $\sigma_{ab}(x) = 1 \neq x = \sigma_{11}(x)$ for $x \in \{a, b\}$, hence $\sigma_{ab} \neq \sigma_1 = \sigma_{11}$.

By contrast, one of the simplest nontrivial examples could be the following.

► **Example 18.** The automatic (right-cancellative) monoid $\langle a, b : ab = a \rangle^+$ admits $\mathcal{Q} = \{1, a, b\}$ as a (right-)Garside family. According to Proposition 8 and Theorem 12, it is therefore an automaton monoid. The corresponding Mealy automaton is displayed on Figure 8. The latter happens to be the common smallest nontrivial member of the family of Baumslag-Solitar semigroups (see [29] for instance), namely $\mathbf{BS}^+(1, 0)$, and of a wide family of right-cancellative semigroups, that we readily call *Artin-Krammer* monoids and that have been introduced and studied in [36] (see also [27, 28, 45]), namely $\mathbf{AK}^+(\Gamma)$ associated with the Coxeter-like matrix $\Gamma = \begin{bmatrix} 1 & 1 \\ 2 & 1 \end{bmatrix}$.

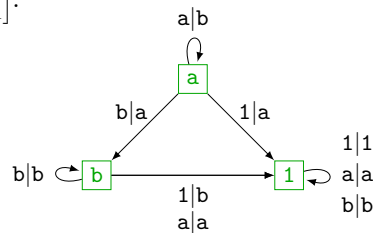

■ **Figure 8** The Mealy automaton associated with the monoid $\langle a, b : ab = a \rangle^+$ from Example 18.

Examples 19 and 20 describe important members from both these families.

► **Example 19.** The following Artin-Krammer monoid is emblematic:


$$\mathbf{AK}^+\left(\begin{bmatrix} 1 & 3 & 2 \\ 4 & 1 & 3 \\ 2 & 4 & 1 \end{bmatrix}\right) = \left\langle a, b, c : \begin{array}{l} \mathbf{a}bab = aba \\ \mathbf{a}c = ca \\ \mathbf{b}cbc = bcb \end{array} \right\rangle^+.$$

As displayed on Figure 9, its minimal Garside family forms like a flint which encodes its whole combinatorics and, according to Theorem 12, makes it an automaton monoid.

► **Example 20.** Consider the Baumslag-Solitar monoid $\mathbf{BS}^+(3, 2) = \langle a, b : ab^3 = b^2a \rangle^+$. Displayed on Figure 10, its minimal Garside family contains eight elements (orange vertices) and makes it an automaton monoid. This is an example of a group-embeddable automaton



■ **Figure 9** The minimal Garside family of the monoid $\mathbf{AK}^+ \left(\begin{pmatrix} 1 & 3 & 2 \\ 4 & 1 & 3 \\ 2 & 4 & 1 \end{pmatrix} \right)$ from Example 19.

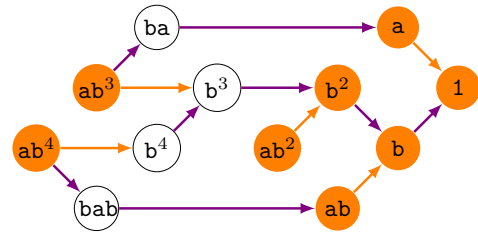

■ **Figure 10** The minimal Garside family of the monoid $\mathbf{BS}^+(3, 2)$ from Example 20.

monoid whose enveloping group is not an automaton group. Indeed, the Baumslag-Solitar group $\mathbf{BS}(3, 2)$ is precisely known as an example of non-residually finite group, hence cannot be an automaton group. The question remains open for those automaton semigroups whose enveloping group is a group of fractions.

► **Question 21.** *Is the group of fractions of an automaton monoid an automaton group?*

Concerning again group-embeddability, the following gives now an example of a cancellative automaton semigroup which is not group-embeddable.

► **Example 22.** The monoid $\mathbf{T} = \langle a, b, c, d, a', b', c', d' : ab = cd, a'b' = c'd', a'd = c'b \rangle^+$ is known (by Malcev work [38, 39, 40]) to be cancellative but not group-embeddable: from these three relations, we cannot deduce the fourth $ad' = cb'$. The quadratic normalisation $(\{a, b, c, d, a', b', c', d'\}, N)$ defined by $N(ab) = cd$, $N(a'b') = c'd'$, and $N(a'd) = c'b$ for instance has breadth $(3, 3)$, hence satisfies Condition (◆) and Theorem 12 applies. This answers in particular a question by Cain [13].

Some classes of neither left- nor right-cancellative monoids have been studied and shown to admit nice normal forms yielding biautomatic structures (see [14]):

► **Example 23.** According to Schützenberger [49], plactic monoids are among the most fundamental monoids. The rank 2 plactic monoid is $\mathbf{P}_2 = \langle a, b : aba = baa, bab = bba \rangle^+$. As noted in [17, 19], \mathbf{P}_2 admits the quadratic normalisation (\mathcal{Q}, N) with $\mathcal{Q} = \{1, a, b, ba\}$, $N(ba) = 1(ba)$, $N((ba)a) = a(ba)$, $N((ba)b) = b(ba)$, $N(1x) = x1$ for $x \in \mathcal{Q}$, and $N(xy) = xy$ otherwise. The latter has a breadth $(3, 3)$, hence satisfies Condition (◆) and Theorem 12 ensures that \mathbf{P}_2 is an automaton monoid. Note that, for a higher rank plactic monoid \mathbf{P}_X , it suffices similarly to take for \mathcal{Q} the set of *columns*, that is, the strictly decreasing products of elements of X . Chinese monoids [14] admit also quadratic normalisations with breadth $(4, 3)$, hence satisfy Condition (◆), and Theorem 12 ensures that they are selfsimilar as well.


To conclude, we would like to completely illustrate the duality between "being an automatic semigroup" and "being an automaton semigroup" by highlighting a paradigmatic example.

► **Example 24.** The braid monoids were used by Thurston [21, Chapter 9] to describe his idea to build a single transducer that computes the now-called Adjan-Garside-Thurston normal form via iterated runs. The 3-strand braid monoid is

$$\mathbf{B}_3^+ = \langle \overbrace{\times}^{\curvearrowright}, \overbrace{\times}^{\curvearrowleft} : \overbrace{\times}^{\curvearrowright} \overbrace{\times}^{\curvearrowleft} \overbrace{\times}^{\curvearrowright} = \overbrace{\times}^{\curvearrowleft} \overbrace{\times}^{\curvearrowright} \overbrace{\times}^{\curvearrowleft} \rangle^+.$$

According to Corollary 15, its Thurston transducer and its Mealy automaton are displayed on Figure 11: these dual automata make \mathbf{B}_3^+ both an automatic and an automaton monoid. Such an approach may hopefully shed some light on the question of whether or not the braid groups are selfsimilar.



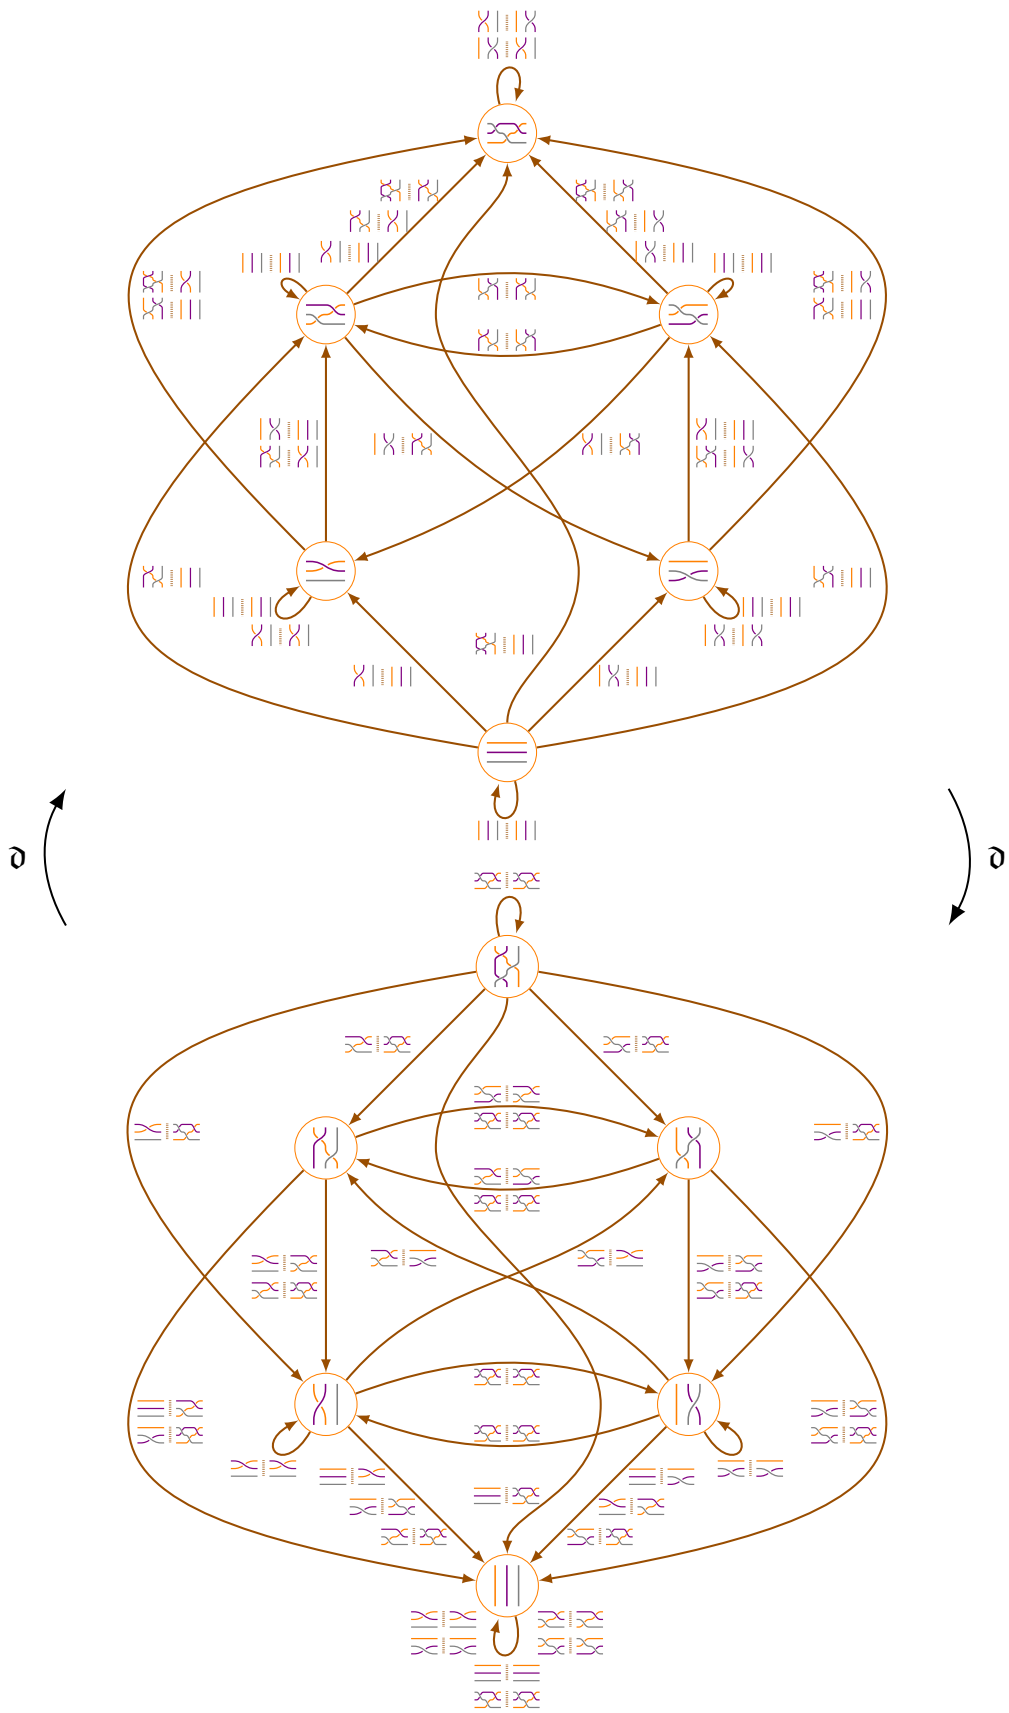

■ **Figure 11** The Thurston transducer (top) *vs* the Mealy automaton (bottom) for the 3-strand braid monoid B_3^+ from Example 24.

References

- 1 Ali Akhavi, Ines Klimann, Sylvain Lombardy, Jean Mairesse, and Matthieu Picantin. On the finiteness problem for automaton (semi)groups. *Internat. J. Algebra Comput.*, 22(6):1–26, 2012.
- 2 Stanislas V. Alěšin. Finite automata and the Burnside problem for periodic groups. *Mat. Zametki*, 11:319–328, 1972.
- 3 Stanislav V. Alěšin. A free group of finite automata. *Vestnik Moskov. Univ. Ser. I Mat. Mekh.*, 4:12–14, 1983.
- 4 Laurent Bartholdi. *FR – GAP package “Computations with functionally recursive groups”, Version 2.1.1*, 2014. URL: <http://www.gap-system.org/Packages/fr.html>.
- 5 Laurent Bartholdi and Pedro V. Silva. Groups defined by automata. In J.-É. Pin, editor, *AutoMathA Handbook*. Europ. Math. Soc., 2010. "cs.FL/1012.1531".
- 6 Laurent Bartholdi and Pedro V. Silva. Rational subsets of groups. In J.-É. Pin, editor, *AutoMathA Handbook*. Europ. Math. Soc., 2010. "cs.FL/1012.1532".
- 7 Laurent Bartholdi and Zoran Šuník. Some solvable automaton groups. In *Topological and asymptotic aspects of group theory*, volume 394 of *Contemp. Math.*, pages 11–29. Amer. Math. Soc., Providence, RI, 2006.
- 8 Ievgen V. Bondarenko, Natalia V. Bondarenko, Saïd N. Sidki, and Flavia R. Zapata. On the conjugacy problem for finite-state automorphisms of regular rooted trees. *Groups Geom. Dyn.*, 7(2):323–355, 2013. With an appendix by Raphaël M. Jungers.
- 9 Tara Brough and Alan J. Cain. Automaton semigroup constructions. *Semigroup Forum*, 90(3):763–774, 2015.
- 10 Tara Brough and Alan J. Cain. Automaton semigroups: new constructions results and examples of non-automaton semigroups. Preprint, 2016. URL: <http://arxiv.org/abs/1601.01168>.
- 11 Kai-Uwe Bux et al. Selfsimilar groups and conformal dynamics - Problem List. URL: <http://www.aimath.org/WWN/selfsimgroups/selfsimgroups.pdf>.
- 12 Alan J. Cain. Automaton semigroups. *Theoret. Comput. Sci.*, 410(47-49):5022–5038, 2009.
- 13 Alan J. Cain. Personal communication, 2016.
- 14 Alan J. Cain, Robert D. Gray, and António Malheiro. Rewriting systems and biautomatic structures for Chinese, hypoplactic, and Sylvester monoids. *Internat. J. Algebra Comput.*, 25(1-2):51–80, 2015.
- 15 Colin M. Campbell, Edmund F. Robertson, Nikola Ruškuc, and Richard M. Thomas. Automatic semigroups. *Theoret. Comput. Sci.*, 250(1-2):365–391, 2001.
- 16 Daniele D’Angeli, Thibault Godin, Ines Klimann, Matthieu Picantin, and Emanuele Rodaro. Boundary action of automaton groups without singular points and Wang tilings. Submitted, 2016. URL: <http://arxiv.org/abs/1604.07736>.
- 17 Patrick Dehornoy. Garside and quadratic normalisation: a survey. In *19th International Conference on Developments in Language Theory (DLT 2015)*, volume 9168 of *LNCS*, pages 14–45, 2015.
- 18 Patrick Dehornoy et al. *Foundations of Garside theory*. Europ. Math. Soc. Tracts in Mathematics, volume 22, 2015. URL: <http://www.math.unicaen.fr/~garside/Garside.pdf>.
- 19 Patrick Dehornoy and Yves Guiraud. Quadratic normalization in monoids. *Internat. J. Algebra Comput.*, 26(5):935–972, 2016.
- 20 Murray Elder. *Automaticity, almost convexity and falsification by fellow traveler properties of some finitely presented groups*. PhD thesis, Univ Melbourne, 2000.
- 21 David B. A. Epstein, James W. Cannon, Derek F. Holt, Silvio V. F. Levy, Michael S. Paterson, and William P. Thurston. *Word processing in groups*. Jones and Bartlett Publishers, Boston, MA, 1992.

- 22 Pierre Gillibert. The finiteness problem for automaton semigroups is undecidable. *Internat. J. Algebra Comput.*, 24(1):1–9, 2014.
- 23 Thibault Godin. Knapsack problem for automaton groups. Submitted, September 2016. URL: <https://hal.inria.fr/hal-01373796>.
- 24 Thibault Godin, Ines Klimann, and Matthieu Picantin. On torsion-free semigroups generated by invertible reversible Mealy automata. In *9th International Conference on Language and Automata Theory and Applications (LATA 2015)*, pages 328–339, 2015.
- 25 Rostislav I. Grigorchuk. On Burnside’s problem on periodic groups. *Funktsional. Anal. i Prilozhen.*, 14(1):53–54, 1980.
- 26 Rostislav I. Grigorchuk. Degrees of growth of finitely generated groups and the theory of invariant means. *Izv. Akad. Nauk SSSR Ser. Mat.*, 48(5):939–985, 1984.
- 27 Alexander Hess. *Factorable monoids: resolutions and homology via discrete Morse theory*. PhD thesis, Univ Bonn, 2012. URL: <http://hss.ulb.uni-bonn.de/2012/2932/2932.pdf>.
- 28 Alexander Hess and Viktoriya Ozornova. Factorability, string rewriting and discrete morse theory. Submitted. URL: <http://arxiv.org/abs/1412.3025>.
- 29 Michael Hoffmann. *Automatic Semigroups*. PhD thesis, Univ Leicester, 2001.
- 30 Michael Hoffmann and Richard M. Thomas. Biautomatic semigroups. In *Fundamentals of computation theory*, volume 3623 of *LNCS*, pages 56–67. 2005.
- 31 Ines Klimann. The finiteness of a group generated by a 2-letter invertible-reversible Mealy automaton is decidable. In *30th International Symposium on Theoretical Aspects of Computer Science (STACS 2013)*, volume 20 of *LIPIcs*, pages 502–513, 2013.
- 32 Ines Klimann, Jean Mairesse, and Matthieu Picantin. Implementing computations in automaton (semi)groups. In *17th International Conference on Implementation and Application of Automata (CIAA 2012)*, volume 7381 of *LNCS*, pages 240–252, 2012.
- 33 Ines Klimann and Matthieu Picantin. Automaton (semi)groups: Wang tilings and Schreier tries. In Valérie Berthé and Michel Rigo, editors, *Sequences, Groups, and Number Theory*. Trends in Mathematics, 2017.
- 34 Ines Klimann, Matthieu Picantin, and Dmytro Savchuk. A connected 3-state reversible mealy automaton cannot generate an infinite burnside group. In *19th International Conference on Developments in Language Theory (DLT 2015)*, volume 9168 of *LNCS*, pages 313–325, 2015.
- 35 Ines Klimann, Matthieu Picantin, and Dmytro Savchuk. Orbit automata as a new tool to attack the order problem in automaton groups. *J. Algebra*, 445:433–457, 2016.
- 36 Daan Krammer. An asymmetric generalisation of Artin monoids. *Groups Complex. Cryptol.*, 5:141–168, 2013.
- 37 Yaroslav Lavrenyuk, Volodymyr Mazorchuk, Andriy Oliynyk, and Vitaliy Sushchansky. Faithful group actions on rooted trees induced by actions of quotients. *Comm. Algebra*, 35(11):3759–3775, 2007.
- 38 Anatoly I. Malcev. On the immersion of an algebraic ring into a field. *Math. Ann.*, 113(1):686–691, 1937.
- 39 Anatoly I. Malcev. Über die Einbettung von assoziativen Systemen in Gruppen. *Rec. Math. [Mat. Sbornik] N.S.*, 6 (48):331–336, 1939.
- 40 Anatoly I. Malcev. Über die Einbettung von assoziativen Systemen in Gruppen. II. *Rec. Math. [Mat. Sbornik] N.S.*, 8 (50):251–264, 1940.
- 41 Victor D. Mazurov and Evgeny I. Khukhro. Unsolved problems in group theory. The Kourovka notebook. No 18. URL: <http://arxiv.org/abs/1401.0300>.
- 42 David McCune. *Groups and Semigroups Generated by Automata*. PhD thesis, Univ Nebraska-Lincoln, 2011.

- 43 Yevgen Muntyan and Dmytro Savchuk. *AutomGrp – GAP package for computations in self-similar groups and semigroups, Version 1.2.4*, 2014. URL: <http://www.gap-system.org/Packages/automgrp.html>.
- 44 Volodymyr V. Nekrashevych. *Self-similar groups*, volume 117 of *Mathematical Surveys and Monographs*. American Mathematical Society, Providence, RI, 2005.
- 45 Viktoriya Ozornova. *Factorability, discrete Morse theory, and a reformulation of $K(\pi, 1)$ -conjecture*. PhD thesis, Univ Bonn, 2013. URL: <http://hss.ulb.uni-bonn.de/2013/3117/3117.pdf>.
- 46 Matthieu Picantin. Finite transducers for divisibility monoids. *Theoret. Comput. Sci.*, 362(1-3):207–221, 2006.
- 47 Matthieu Picantin. Tree products of cyclic groups and hnn extensions. *Being finalized*, 2013.
- 48 Jacques Sakarovitch. *Elements of Automata Theory*. Cambridge University Press, New York, NY, USA, 2009.
- 49 Marcel-Paul Schützenberger. Pour le monoïde plaxique. *Math. Inform. Sci. Humaines*, 140:5–10, 1997.
- 50 Pedro V. Silva. Groups and automata: A perfect match. In *Descriptive Complexity of Formal Systems*, volume 7386 of *LNCS*, pages 50–63. 2012.
- 51 Pedro V. Silva and Benjamin Steinberg. On a class of automata groups generalizing lamplighter groups. *Internat. J. Algebra Comput.*, 15(5-6):1213–1234, 2005.
- 52 Daniel T. Wise. A non-Hopfian automatic group. *J. Algebra*, 180(3):845–847, 1996.