

# Quantification of gas phase methyl iodide using H 3 O + as the reagent ion in the PTR-MS technique

Majda Mekić, Brice Temime-Roussel, Anne Monod, Rafal Strekowski

## ▶ To cite this version:

Majda Mekić, Brice Temime-Roussel, Anne Monod, Rafal Strekowski. Quantification of gas phase methyl iodide using H  $_3$  O  $_+$  as the reagent ion in the PTR-MS technique. International Journal of Mass Spectrometry, 2018, 424 (24), pp.10 - 15.  $_10.1016$ , ijms.2017.11.004 . hal-01774479

HAL Id: hal-01774479

https://hal.science/hal-01774479

Submitted on 23 Apr 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Quantification of gas phase methyl iodide using $H_3O^+$ as the reagent ion in the PTR-MS technique

Majda Mekić, Brice Temime-Roussel, Anne Monod, Rafal S. Strekowski\*

Aix-Marseille Université, CNRS, LCE UMR 7376, 13331 Marseille, France

#### Abstract

In this work, the proton transfer reaction between the hydronium ion (H<sub>3</sub>O<sup>+</sup>) and methyl iodide (CH<sub>3</sub>I) is studied to investigate if consistent quantification of the gas phase CH<sub>3</sub>I is possible in humid air. The neutral CH<sub>3</sub>I molecule was chosen because this compound is of environmental importance in the field of nuclear power plant safety and nuclear energy. Water was used as a reagent ion source in a conventional Insbruck PTR-MS to produce H<sub>3</sub>O<sup>+</sup> reagent ions. The use of H<sub>3</sub>O<sup>+</sup> ions allows for fast, sensitive and specific detection of gas phase  $CH_3I$  via a proton-transfer reaction  $H_3O^+ + CH_3I \rightarrow [CH_3I-H]^+ + H_2O$ . The instrument response was linear in the tested 5 to 96 ppbV range and the PTR-MS sensitivity was observed to be humidity dependent. The observed sensitivity was in found to range between 1.6 to 3.3 cps/ppb at relative humidity between 63 and 15% at  $T=23^{\circ}C$ . A typical  $H_3O^+$  primary ion signal was 10<sup>7</sup> cps and the normalized sensitivity was in the range between 0.16 and 0.33 ncps/ppb. The instrument  $\mathrm{CH_{3}IH^{+}}$  ion background rate was  $6.8\pm1.4$  cps and the dwell time was 1 second. The detection limit was calculated as 3 times the standard deviation of the background level and ranged between 1.3 and 3.8 ppb. The theoretical collision rate based on the dipole moment and molecular polarizability is calculated. The theoretical collision rate is compared with the experimentally obtained values. The results indicate that the PTR-MS technique is a good analytical method to detect and quantify gas phase CH<sub>3</sub>I concentrations. Keywords: Methyl iodide, CH<sub>3</sub>I, H<sub>3</sub>O<sup>+</sup>, PTR-MS, collision rate

## 1. Introduction

The atmospheric importance of molecular iodine and alkyl iodides was first suggested by Chameides and Davis (1982).[1] It is now well understood that iodine and iodine containing volatile organic compounds play an important role in the oxidizing capacity of the troposphere [2], aerosol formation and in the ozone depleting cycles in the troposphere [3, 4] and stratosphere.[5] In addition to atmospheric interest, the presence of organic iodides has gained an increased interest in the field of nuclear industry safety to better understand chemical processes responsible for the formation of different fission products if a major nuclear power plant accident type Three Mile Island (U.S.A.) [6], Chernobyl (Ukraine) [7] and Fukushima (Japan) [8] were to occur, again. It is now known that iodine and methyl iodide are two of the more critical fission products that are released from UO<sub>2</sub> feul during a major nuclear power plant accident in light water reactors due to their volatility and radiological health impact.[9] Methyl iodide is a particularly volatile

Email address: rafal.strekowski@univ-amu.fr (Rafal S. Strekowski)

<sup>\*</sup>Corresponding author

form of the fission product iodine  $(I_2)$  that is difficult to retain by post-accident filtration systems.[10] Further, methyl iodide is currently used in the nuclear industry field to test the organic iodine capture ability and ageing on the performance of emergency charcoal filters.[11, 12] Methyl iodide has additional applications in the agriculture industry where it has been introduced as a fumigant pesticide used to control insects, plant parasitic metabolites, soil-bome pathogens and weed seeds.[13]

To date, most environmental CH<sub>3</sub>I measurements are based on gas chromatographic (GC) separation equipped with a mass spectrometer (MS) or an electron capture detector (ECD). A more recent atmospheric CH<sub>3</sub>I measurement method is based on resonant fluorescence (RF) spectroscopy.[14] While GC-ECD (LD~10 ppt) and GC-MS (LD~100 ppt) methods are two very sensitive analytical techniques used to detect gas phase CH<sub>3</sub>I in the laboratory and field settings, they do not offer the time resolution and response needed to measure rapid flux or concentration changes in the gas phase. The newer RF technique used to detect gas phase CH<sub>3</sub>I in the laboratory and more recently in the field is fast, sensitive and selective but remains a research-grade instrument that requires advanced technical expertise and skills. The chemical ionization mass spectrometric (CIMS) technique has the potential for fast, sensitive, specific and real time CH<sub>3</sub>I measurements when rapid changes in the gas phase mixing ratios need to be known or monitored continuously.

The proton-transfer-reaction mass spectrometry (PTR-MS) is a type of CIMS instrument. The PTR-MS combines the concept of chemical ionization [15] with the flow-drift-tube technique. [16] While protontransfer-reaction mass spectrometry (PTR-MS) is often used for sensitive detection of volatile organic compounds (VOCs), it can be applied only to gas-phase compounds with proton affinities (PA) higher than that of water,  $PA(H_2O) = 691.0 \pm 3 \text{ kJ mol}^{-1}$  [17, 18], and the proton transfer from  $H_3O^+$  to the analyte molecule is efficient if the difference in proton affinities is larger than  $\sim 35 \text{ kJ mol}^{-1}$ .[19] The proton affinity of  $CH_3I$ ,  $PA(CH_3I) = 691.7 \text{ kJ mol}^{-1}$ , [17, 18] is only slightly higher than that of water. Since the difference in proton affinities between water and methyl iodide is very small, the CIMS technique based on proton transfer reaction of hydronium (H<sub>3</sub>O<sup>+</sup>) reagent ions with CH<sub>3</sub>I has only been used once [20] in a laboratory setting to detect methyl iodide. Further, the one previous work has been carried out in dry helium flow only. In this work it is shown that H<sub>3</sub>O<sup>+</sup> ions may still be employed to detect gas phase CH<sub>3</sub>I. The use of water (H<sub>2</sub>O) as a source of reagent ions in the PTR-MS instrument to detect CH<sub>3</sub>I is proposed. H<sub>3</sub>O<sup>+</sup> reagent ions are used for sensitive and specific detection of gas phase CH<sub>3</sub>I in humidified and dry air. H<sub>3</sub>O<sup>+</sup> ion is shown to be a good proton source and soft chemical ionization reagent. The proposed PTR-MS technique appears to be a good tool for online analyses of relatively fast changing concentrations of methyl iodide.

## 2. Experimental

The proton transfer reaction between the H<sub>3</sub>O<sup>+</sup> ions and CH<sub>3</sub>I was studied using a commercial quadrupole PTR-MS mass analyzer (Ionicon Analytik GmbH, Innsbruck, Austria). The experimental details that are particularly relevant to this work are given below.

Generation of gas phase CH<sub>3</sub>I. The gas phase CH<sub>3</sub>I concentration was generated using the gas saturation method, one of the oldest and most versatile ways of studying heterogeneous equilibria involving low

vapor pressure compounds, first developed by Regnault in 1845.[21] The gas saturation method used in this work is similar to the one described originally by Markham (1940).[22] Briefly, nitrogen carrier gas was allowed to flow though the volume containing the CH<sub>3</sub>I sample that itself was mixed with glass beads and supported on a fritted glass surface. The saturator volume itself was immersed in a temperature controlled fluid and kept at a constant temperature using a thermostat with an accuracy of  $\pm 0.1$ K. The temperature inside the saturator volume was measured using a Type-J thermocouple (Omega) with an accuracy of  $\pm 0.1$ K. The carrier gas was allowed to enter the saturator volume, equilibrate with the sample and was then allowed to exit through a capillary passageway and allow to flow through a glass tube. The geometry of the exiting glass tube was such that the diameter of the glass tube increased with increasing length. This was done to avoid any sample condensation as the sample and the carrier gas were allowed to leave the saturator system. Concentration of CH<sub>3</sub>I at the exit of the saturation system was calculated from the given vapor pressure, mass flow rates, pressure within the saturator and the total pressure. The Antoine type equation used to calculate the vapor pressure of CH<sub>3</sub>I is  $\log p = -20.3718 - 1253.6/T + 13.645 \log T - 2.6955 \times 10^{-2}T + 1.6389 \times 10^{-5}T^2$  where the pressure p is in units of mmHg and the temperature T is in Kelvin and in the range from 207.7K to 528.00K.[23]. Under normal operating conditions, the saturator was kept at T=268 K. At this temperature, the vapor pressure of CH<sub>3</sub>I within the saturator was calculated to be 109.31 mmHg. This vapor pressure was then further diluted using nitrogen gas carrier gas and a system of mass flow controllers to obtain the desired concentration.

PTR-MS instrument. A commercial PTR-MS (Ionicon Analytic GmbH, Innsbruck, Austria) was used to study the  $H_3O^+$  reagent ion ionization process with  $CH_3I$ .[24, 25] The reaction chamber pressure ( $p_{drift}$ ) was 2.11 mbar, drift tube voltage was 601V and the drift tube temperature was approximately 310K, albeit it was not controlled. The corresponding E/N ratio was 134 Td ( $1Td=10^{-17}$  Vcm<sup>2</sup>) where E is the electric field strength (E) applied to the drift tube and N is the buffer gas density. This E/N ratio value was chosen to limit clustering of the  $H_3O^+$  reagent ions with  $H_2O$  because it is known that the resulting cluster ions (m/Q=37.0501 and m/Q=55.0395) may act as reagent ions, and, as a result, limit signal intensity.[24, 25] The effect of the water cluster ion formation on signal intensity [26] was assessed by changing the water content within the carrier gas. Here, nitrogen gas was allowed to pass through a bubbler filled with deionized water at room temperature. The resulting relative humidity (%RH) was measured at the inlet of the PTR-MS using a temperature-humidity mini probe (HygroClip-SC04, Rotronic International). The relative humidity was varied between 0 and 60%.

Data analysis. PTR-MS data files were imported using the Technical Data Management (TDM) Excel add-in for Microsoft Excel. Mass spectra were recorded up to m/Q 200 and the integration rate was 1s. No specific mass calibration was performed. However, stability of the hydronium ion signal at m/Q 19 was checked. The Excel raw data files were exported and analyzed using Igor Pro 6.37 commercial software.

Materials. The nitrogen carrier gase used in this study was generated using the N2LCMS 1 Nitrogen Generator (Claind S.r.l., Italy). Iodomethane was purchased at Acros Organics (Belgium) and the stated minimum purity was 99%. To limit any photo-catalytic or thermal decomposition during storage, CH<sub>3</sub>I

original container bottles were stored under dark conditions at T = 6°C. Deionized water with a resistivity greater than 18M was prepared by allowing tap water to pass first through a reverse osmosis demineralization filter (ATS Groupe Osmose) and then through a commercial deionizer (Milli-pore, Milli-Q).

#### 3. Results

## 3.1. Experimental determination of $k_{(H_3O^++CH_3I)}$

Based on the original work of Lindinger and coworkers (1998) [25], the CH<sub>3</sub>I gas phase concentration may be calculated using the following equation.

$$[CH_{3}I]_{cm^{-3}} = \frac{1}{kt} \cdot \frac{CH_{3}I - H^{+}}{H_{3}O^{+}} \cdot \frac{Tr_{H_{3}O^{+}}}{Tr_{CH_{3}I - H^{+}}}$$
(1)

In the equation (1) above, CH<sub>3</sub>I-H<sup>+</sup> and H<sub>3</sub>O<sup>+</sup> are the ion count rates, k is the rate coefficient of the proton transfer reaction of the H<sub>3</sub>O<sup>+</sup> reagent ion with CH<sub>3</sub>I and t is the residence or reaction time of the ion within the drift tube ( $\sim 100 \ \mu s$ ).[27] The reaction time t is calculated using the length of the drift tube l, ion mobility  $\mu$ , electric field E and the electric potential applied to the drift tube  $U_{drift}$ . Given that

$$\frac{l}{t} = \mu \cdot E = \mu \cdot \frac{U_{\text{drift}}}{l} \tag{2}$$

therefore,

$$t = \frac{l^2}{\mu \cdot U_{\text{drift}}} \tag{3}$$

The length of the drift tube l = 9.3 cm and  $U_{\text{drift}}$  is in units of Volts. The ion mobility  $\mu$  listed in equations 2 and 3 is calculated using the following equation 4

$$\mu = \mu_0 \cdot \frac{p_0}{p_{\text{drift}}} \cdot \frac{T_{\text{drift}}}{T_0} \tag{4}$$

where the reduced mobility  $\mu_0 = 2.8 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$ , pressure  $p_0 = 1013.25 \text{ mbar}$ , and temperature at standard conditions  $T_0 = 273.15 \text{ K}$ . As a result, the reaction time within the drift-tube may be calculated using the following equation (5)

$$t = \frac{l^2}{\mu_0 \cdot U_{\text{drift}}} \cdot \frac{T_0}{T_{\text{drift}}} \cdot \frac{p_0}{p_{\text{drift}}}$$
 (5)

where  $T_{\text{drift}}$  is the drift-tube temperature in Kelvin and  $p_{\text{drift}}$  is the drift-tube pressure in millibar. Using the ideal gas law, the number of air molecules per cm<sup>3</sup> within the drift-tube volume may be calculated using the following equation 6

$$\operatorname{air}_{\mathrm{cm}^{-3}} = \frac{N_A}{22400} \cdot \frac{T_0}{T_{\mathrm{drift}}} \cdot \frac{p_0}{p_{\mathrm{drift}}} \tag{6}$$

where the Avogadro's number  $N_A = 6.022 \times 10^{23}$  mole<sup>-1</sup>. As a result, the mixing ration of CH<sub>3</sub>I in the gas phase detected by the PTR-MS may be determined using the following equation.

$$[\text{CH}_{3}\text{I}]_{\text{ppbV}} = \frac{10^{9}}{k} \cdot \frac{22400 \cdot \mu_{0} \cdot U_{\text{drift}}}{N_{A} \cdot l^{2}} \cdot \frac{T_{\text{drift}}^{2}}{T_{0}^{2}} \cdot \frac{p_{0}^{2}}{p_{\text{drift}}^{2}} \cdot \frac{\text{CH}_{3}\text{I} - \text{H}^{+}}{\text{H}_{3}\text{O}^{+}} \cdot \frac{\text{Tr}_{\text{H}_{3}\text{O}^{+}}}{\text{Tr}_{\text{CH}_{3}\text{I} - \text{H}^{+}}}$$
(7)

The equation (7) may be simplified by including the constant factors listed above to give the following equation 8.

$$[\text{CH}_{3}\text{I}]_{\text{ppbV}} = 1.657 \times 10^{-11} \cdot \frac{U_{\text{drift}} \cdot T_{\text{drift}}^{2}}{k \cdot p_{\text{drift}}^{2}} \cdot \frac{\text{CH}_{3}\text{I} - \text{H}^{+}}{\text{H}_{3}\text{O}^{+}} \cdot \frac{\text{Tr}_{\text{H}_{3}\text{O}^{+}}}{\text{Tr}_{\text{CH}_{3}\text{I} - \text{H}^{+}}}$$
(8)

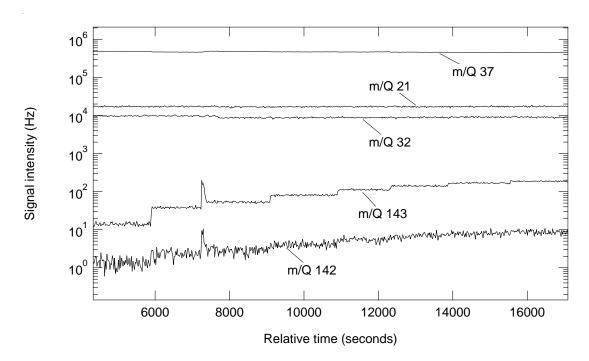


Figure 1: Typical signal ion counts (Hz) of selected ions.

If the rate coefficient for the proton transfer reaction of the  $H_3O^+$  ion with  $CH_3I$  is known, the gas phase mixing ratio of methyl iodide may be determined using the PTR-MS technique without prior calibration by simply using MS signal ion counts and given operating instrument parameters. To the best of our knowledge, there is no rate coefficient listed in the literature for the proton transfer reaction between  $H_3O^+$  ion and  $CH_3I$ . As a result, the k value has been determined experimentally and theoretically. The equation (8) above may be rewritten in the following form to give  $k_{\rm exp}$ , that is, the experimental rate coefficient for the proton transfer  $H_3O^+ + CH_3I$  reaction.

$$k_{\rm exp} = 1.657 \times 10^{-11} \cdot \frac{U_{\rm drift} \cdot T_{\rm drift}^2}{[\text{CH}_3\text{I}]_{\rm ppbV} \cdot p_{\rm drift}^2} \cdot \frac{\text{CH}_3\text{I} - \text{H}^+}{\text{H}_3\text{O}^+} \cdot \frac{\text{Tr}_{\text{H}_3\text{O}^+}}{\text{Tr}_{\text{CH}_3\text{I} - \text{H}^+}}$$
(9)

Equation (9) may then be used to determine k if  $CH_3I$  mixing ratio is known.

A typical signal intensity profile of selected ions is shown in Figure 1. As shown in Figure 1, m/Q 21 refers to the hydronium ion  $H_3^{18}O^+$ , m/Q 37 refers to the water complex ion  $H_3O^+(H_2O)$  (other water clusters have been ignored [28]), m/Q 143 refers to the  $CH_3I^+$  ion and m/Q 142 refers to the  $CH_3I^+$  ion. The primary ions  $H_3O^+$  at m/Q 19 were not detected but were calculated based on the ion count rates of  $H_3^{18}O^+$  at m/Q 21 using equation 10.

count rate m/Q 19 = 
$$\frac{\text{(count rate m/Q 21)} \times 500}{\text{Transmission H}_3^{18}\text{O}^+ \text{ ion}}$$
(10)

In equation 10 above, the constant 500 is the isotope ratio that reflects the isotope ratio of  $H_3^{18}O^+$  to  $H_3^{16}O^+$  and the intensity of the  $H_3^{18}O^+$  ion is corrected by its transmission efficiency. Product ions of reactions caused by minor impurities, namely  $NO^+$  and  $O_2^+$ , have been shown to have negligible intensities as compared to all other product ions and were not considered.[28] The ion signal intensity at m/Q 143 shown in Figure 1 is used to relate the PTR-MS response to methyl iodide mixing ratio. A typical calibration plot is shown in Figure 2. As shown in Figure 2, the MS response is linear for the given

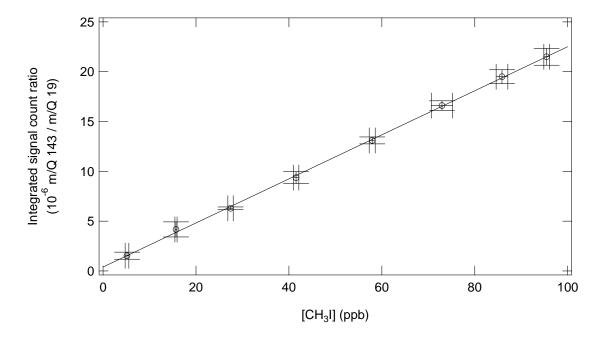


Figure 2: Plot of the methyl iodide calibration results. The m/Q CH<sub>3</sub>I signal has been normalized by m/Q 19. The solid line is obtained from a linear least squares analysis; its slope is  $(2.21 \pm 0.04) \times 10^{-7}$  and the intercept is  $(3.85 \pm 2.5) \times 10^{-7}$  (Errors are  $2\sigma$ , precision only).

methyl iodide mixing ratios. Under the typical experimental conditions used, no fragmentation of the product ion was observed. That is, only the mother ion at m/Q 143 that refers to the CH<sub>3</sub>I-H<sup>+</sup> ion was detected. The difference in proton affinities between water and methyl iodide is very small. As a result, there is no sufficient excess of energy to fragment the product ion during the proton transfer ionization process. However, as shown in Figure 1 the signal intensity of the m/Q 142 that refers to the CH<sub>3</sub>I<sup>+</sup> ion was observed to increase slightly with increasing methyl iodide mixing ratio. It is not believed that the m/Q 142 is a result of the fragmentation of the methyl iodide mother ion. It is known that a small amount of the  $O_2^+$  ion is always present within the drift tube (see Figure 1). The  $O_2^+$  reagent ion will react with methyl iodide via an electron transfer to produce m/Q 142 ion signal that refers to the CH<sub>3</sub>I<sup>+</sup> ion. Comparison of reported measured rate coefficients for the proton transfer reaction between H<sub>3</sub>O<sup>+</sup> and CH<sub>3</sub>I at different humidities is shown in Table 1. The methyl iodide mixing ratio, [CH<sub>3</sub>I]<sub>saturator</sub>, shown in Table 1 was determined at the exit of the saturation system and calculated from the given temperature, vapor pressure, mass flow rates, pressure within the saturator and total pressure.

## 3.2. Theoretical determination of $k_{(H_3O^++CH_3I)}$

The theoretical value of the collision rate constant for the proton transfer reaction between  $H_3O^+$  and  $CH_3I$  was calculated using the average dipole orientation (ADO) theory.[29, 30] The ADO rate coefficient,  $k_{ADO}$ , is given by

$$k_{\text{ADO}} = q \sqrt{\frac{\pi \alpha}{\mu \varepsilon_0}} + C \frac{q\mu_{\text{D}}}{\varepsilon_0} \sqrt{\frac{1}{2\pi \mu k_{\text{B}} T}}$$
 (11)

where  $\mu_{\rm D}$  and  $\alpha$  are the dipole moment and polarizability of the neutral molecule, respectively, q is the fundamental charge,  $\varepsilon_0$  is the permittivity of the free space,  $\mu$  is the reduced mass of the colliding partners

Table 1: Comparison of the measured rate coefficients for the proton transfer reaction between  $H_3O^+$  and  $CH_3I$  at different humidities

$[\mathrm{CH_3I}]_{\mathrm{saturator}}$ range $^a$	%RH <sup>b</sup>	$k_{\rm exp}^{\ a,c}$	$k_{\rm exp}/k_{ m ADO}$ d
5 - 94	dry	$4.90 \pm 1.70$	0.021
75	11.4	$4.55\pm1.02$	0.020
75	15.5	$3.53 \pm 0.41$	0.015
5 - 96	20.1	$2.54 \pm 1.57$	0.011
5 - 95	21.5	$2.69 \pm 2.37$	0.012
5 - 96	22.6	$2.05 \pm 0.40$	0.008
75	23.3	$2.97 \pm 0.54$	0.013
75	30.5	$2.55 \pm 0.22$	0.011
75	36.5	$2.34 \pm 0.25$	0.010
75	62.8	$1.79 \pm 0.20$	0.008

 $<sup>^</sup>a$  Units: [CH<sub>3</sub>I]<sub>saturator</sub>: ppbV,  $k_{\rm exp}$ :  $10^{-11}~{\rm cm}^3~{\rm s}^{-1},$ 

(here,  $H_3O^+$  and  $CH_3I$ ), T is the temperature within the drift-tube and  $k_B$  is the Boltzmann constant. The dipole locking constant C is between 0 and 1 and is a function of  $\mu_D/\sqrt{\alpha}$  and temperature.[31]

The structure of methyl iodide was taken from NIST database.[18] In this work, the dipole moment  $\mu_{\rm D}=1.620$  Debye and polarizability  $\alpha=7.325$  Å $^3$ .[18] The theoretical rate constant for the proton-transfer reaction between H<sub>3</sub>O<sup>+</sup> and CH<sub>3</sub>I is calculated to be  $k_{\rm ADO}=2.28\times10^{-9}~{\rm cm}^3~{\rm s}^{-1}$ .

## 4. Discussion

## 4.1. MS ion signal

It was observed that the ion signal sensitivity decreased as a function of relative humidity. The relationship between sensitivity and relative humidity is shown in Figure 3. As shown in Figure 3, the  $CH_3IH^+$  ion signal was normalized to the signal of  $H_3O^+$  ion  $(m/Q \ 19)$  because the reagent ion also changes with humidity. Since the  $CH_3IH^+$  ion signal is proportional to the  $H_3O^+$  ion abundance, it needs to be taken into account to show the humidity dependence of the  $CH_3IH^+$  ion. The observed drop is sensitivity with increasing relative humidity is best explained by the water cluster formation at low drift-tube E/N ratios. For example, the plot of the fraction of the dihydrate cluster in the drift tube as a function of relative humidity and drift-tube E/N value is shown in Figure 4. It can be seen in Figure 4 that a low drift-tube E/N value promotes clustering of  $H_3O^+$  ions with  $H_2O$ . The formation of water clusters may be problematic since they may act as reagent ions. To limit cluster formation within the drift-tube, all experiments were performed at  $E/N = 140 \ \text{Td}$ . In a similar study, Cappellin et al. (2012) [32] reported that under high electric field strength values, the protonated water cluster ion formation is strongly suppressed. Further, since the proton transfer reaction between the  $H_3O^+$  ion and  $CH_3I$  is only

<sup>&</sup>lt;sup>b</sup> Experimental uncertainty in %RH values is  $\pm 0.5$ %RH

<sup>&</sup>lt;sup>c</sup> Uncertainty is  $\pm 2\sigma$ , precision only

 $<sup>^{</sup>d} k_{\rm ADO} = 2.28 \times 10^{-9} \ {\rm cm}^{3} {\rm s}^{-1}$ 

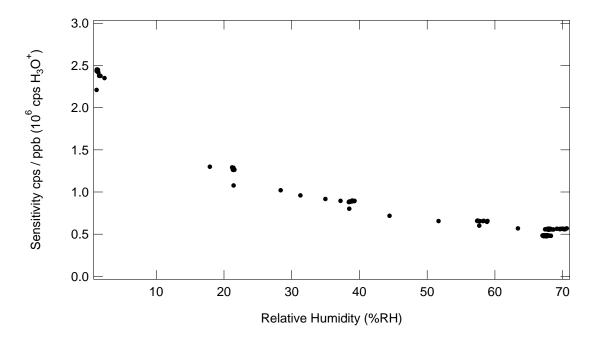


Figure 3: Plot of the signal ion sensitivity as a function of relative humidity.

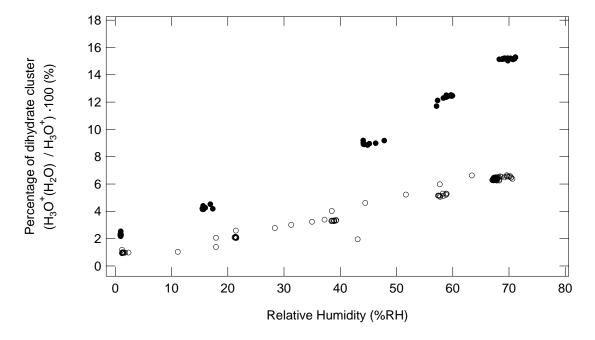


Figure 4: Plot of the fraction of the dihydrate cluster in the drift tube versus relative humidity. Experimental conditions:  $T=298\mathrm{K},~\mathrm{E/N}=140\mathrm{Td}$  (open circles  $\circ$ ),  $\mathrm{E/N}=127\mathrm{Td}$  (closed circles  $\bullet$ ). The percentage data of dihydrate clusters were calculated using the following equation:  $\frac{[\mathrm{H_2O-H_3^{18}O^+}]\times250}{[\mathrm{H_3^{18}O^+}]\times500}\times100$ 

slightly exothermic, and possibly endothermic given the uncertainties in the proton affinities, the proton transfer reaction between the water cluster and CH<sub>3</sub>I will most likely not occur. For example, the water dimer (H<sub>2</sub>O)<sub>2</sub>, has a proton affinity of  $808 \pm 6$ kJ mol<sup>-1</sup>. As a result, the increased affinity of the water cluster means that some reactions that occur with H<sub>3</sub>O<sup>+</sup> ions will not take place with H<sub>3</sub>O<sup>+</sup>(H<sub>2</sub>O) ions.

## 75 4.2. Rate constants

The agreement between the theoretical value for the rate constant for the proton-transfer reaction between  $\rm H_3O^+$  and  $\rm CH_3I$  ( $k_{\rm ADO}$ ) and the experimental value ( $k_{\rm exp}$ ) is very bad (see Table 1). This is not surprising given that the proton-transfer reaction  $\rm H_3O^+ + \rm CH_3I$  is only slightly exothermic ( $\Delta \rm PA = 0.7~kJ~mol^{-1}$ ). Further, given the uncertainties in proton affinities ( $\pm 3~kJ~mol^{-1}$ ), the reaction itself may be endothermic. It has been argued that the proton-transfer from  $\rm H_3O^+$  to the analyte molecule in the drift-tube of the PTR-MS is efficient only when the molecule has a higher proton affinity and that the difference in proton affinities is larger than 35 kJ  $\rm mol^{-1}$ .[19] The experimental values for the proton transfer reaction between  $\rm H_3O^+$  and  $\rm CH_3I$  are summarized in Table 1. The experimental values range from  $1.79 \times 10^{-11}~\rm cm^3 s^{-1}$  to  $4.90 \times 10^{-11}~\rm cm^3 s^{-1}$  as a function of relative humidity. On the other hand  $k_{\rm ADO} = 2.25 \times 10^{-9}~\rm cm^3 s^{-1}$ . The reaction efficiency  $k_{\rm exp}/k_{\rm ADO}$  is calculated to range from 0.008 (62%RH) to 0.021 in dry nitrogen flow. In this work,  $k_{\rm exp}/k_{\rm ADO}$  is equal to [CH<sub>3</sub>I]<sub>saturator</sub>/[CH<sub>3</sub>I]<sub>PTR-MS</sub> ratio, where [CH<sub>3</sub>I]<sub>PTR-MS</sub> is the theoretically predicted CH<sub>3</sub>I mixing ratio estimated by the PTR-MS measurements (assuming  $k_{\rm ADO} = 2.28 \times 10^{-9}~\rm cm^3 s^{-1}$  [33]) and [CH<sub>3</sub>I]<sub>saturator</sub> is the CH<sub>3</sub>I mixing ratio determined at the exit of the saturation system and calculated from the given vapor pressure, mass flow rates, pressure within the saturator and total pressure.

The possible explanation for the low  $k_{\rm exp}/k_{\rm ADO}$  ration is a reverse reaction of the product CH<sub>3</sub>I-H<sup>+</sup> ion with the molecules of H<sub>2</sub>O even under low humidity conditions present within the drift-tube. This hypothesis is supported by the data shown in Figure 3.

The proton transfer reaction between  $H_3O^+$  and  $CH_3I$  has been studied briefly by Spanel and Smith (1999).[20] These authors calculated the  $k_{\rm exp}/k_{\rm collision}=0.5$ , where  $k_{\rm collision}$  is the collision rate constant in dry helium carrier gas calculated based on the work of Su and Chesnavich (1982).[34] In the work presented here, the  $k_{\rm exp}/k_{\rm ADO}=0.02$  in dry synthetic air. At this point, we cannot determine the discrepancy between the two values. Since Spanel and Smith (1999) do not list their electric field strength (E/N) values nor which collision rate constant they calculate nor the polarizability nor the dipole moment values, it is difficult to compare the two studies. It is known that the kinetics of the ion-molecule reactions are controlled by drift-tube temperature and pressure, drift tube E/N, reactant molecule dipole moment and polarizability.

In a scenario similar to this work, Cappellin and coworkers (2014) [35] determined the rate coefficient for the reaction of ethylene with  $H_3O^+$ . Similar to the results obtained in this work, Cappellin and coworkers' theoretical value  $k_{\rm ADO}$  for the ethylene +  $H_3O^+$  reaction does not agree with the  $k_{\rm exp}$  value. These authors reported the experimental reaction rate coefficient between  $1.7 \times 10^{-11}$  cm<sup>3</sup>s<sup>-1</sup> and  $3.4 \times 10^{-11}$  cm<sup>3</sup>s<sup>-1</sup>, far below the collision rate  $(1.4 \times 10^{-9} \text{ cm}^3 \text{s}^{-1})$ .[35] Similar to the results observed in this work, the reaction of ethylene with  $H_3O^+$  is very inefficient. The authors attribute the observed inefficiency to the (quasi)

reaction endothermicity. The results obtained in this work for the proton-transfer reaction of  $H_3O^+$  with methyl iodide are consistent with the results obtained by Cappellin and coworkers [35].

In this work, the observed difference in  $k_{\text{exp}}$  and  $k_{\text{ADO}}$  for the  $\text{H}_3\text{O}^+ + \text{CH}_3\text{I}$  reaction does not imply that the PTR-MS technique is a poor method of choice to be used to detect gas phase  $\text{CH}_3\text{I}$ . As shown in Figures 1 and 2, with a good calibration curve, the PTR-MS technique is a perfect analytical method to detect and quantify rapid changes in the  $\text{CH}_3\text{I}$  gas phase concentrations.

## 5. Conclusion

A commercial Ionicon Analytic PTR-MS was used to study the  $\rm H_3O^+$  reagent ion ionization process with methyl iodide. The proton transfer reaction between the  $\rm H_3O^+$  reagent ion and CH<sub>3</sub>I produces a specific ion at m/Q 142 (CH<sub>3</sub>I-H<sup>+</sup>) that allows for fast and sensitive detection of gas phase methyl iodide. The instrument response for CH<sub>3</sub>I was shown to be linear in the 5 - 96 ppbV range. The calculated collision rate,  $k_{\rm ADO}$  is calculated based on a dipole moment  $\mu({\rm CH_3I}) = 1.620$  D [18] and a molecular polarizability  $\alpha({\rm CH_3I}) = 7.325$  Å<sup>3</sup> [18] and gives  $k_{\rm ADO} = 2.28 \times 10^{-9}$  cm<sup>3</sup> s<sup>-1</sup>. The experimental collision rate,  $k_{\rm exp}$  for the proton transfer reaction  ${\rm H_3O^+} + {\rm CH_3I} \rightarrow {\rm [CH_3I-H]^+} + {\rm H_2O}$  is in the range  $(1.79-4.90)\times 10^{-11}$  cm<sup>3</sup> s<sup>-1</sup>. The observed difference in the theoretical and experimental values of the rate constant is assumed to be the result of the fact that the proton transfer reaction between the hydronium ions and methyl iodide is only slightly exothermic and given the uncertainties in the proton affinities may be even endothermic.

## Acknowledgement

This research was supported by the Mitigation of Releases to the Environment (MiRE) project launched by the *Institut de Radioprotection et de Sûreté Nucléaire* (IRSN) and funded by the the French National Research Agency (ANR) under the convention number 11-RSNR-0013. We gratefully acknowledge this support.

## References

- [1] W. L. Chameides, D. D. Davis, Iodine: Its possible role in tropospheric photochemistry, Journal of Geophysical Research: Oceans 85 (C12) (1980) 7383–7398. doi:10.1029/JC085iC12p07383.
- [2] W. J. Bloss, J. D. Lee, G. P. Johnson, R. Sommariva, D. E. Heard, A. Saiz-Lopez, J. M. C. Plane, G. McFiggans, H. Coe, M. Flynn, P. Williams, A. R. Rickard, Z. L. Fleming, Impact of halogen monoxide chemistry upon boundary layer oh and ho<sub>2</sub> concentrations at a coastal site, Geophysical Research Letters 32 (6) (2005) L06814. doi:10.1029/2004GL022084.
- [3] D. Davis, J. Crawford, S. Liu, S. McKeen, A. Bandy, D. Thomton, Potential impact of iodine on tropospheric levels of ozone, Journal of Geophysical Research 101 (D1) (1996) 2135–2147.

- [4] G. McFiggans, J. Plane, B. J. Allan, L. J. Carpenter, H. Coe, C. O'Dowd, A modeling study of iodine chemistry in the marine boundary layer, Journal of Geophysical Research: Atmospheres 105 (D11) (2000) 14371–14385.
- [5] S. Solomon, R. R. Garcia, A. Ravishankara, On the role of iodine in ozone depletion, Journal of
   Geophysical Research: Atmospheres 99 (D10) (1994) 20491–20499.
  - [6] J. Cline, P. Roy, J. Hollcroft, J. Houbaugh Jr, T. McVey, C. Thomas Jr, C. Pelletier, P. Voilleque, Measurements of <sup>129</sup>I and radioactive particulate concentrations in the TMI-2 containment atmosphere during and after the venting, Tech. rep., Science Applications (1981).
  - [7] H. Noguchi, M. Murata, Physicochemical speciation of airborne 131i in japan from chernobyl, Journal of Environmental Radioactivity 7 (1) (1988) 65–74.

250

- [8] N. Kinoshita, K. Sueki, K. Sasa, J.-i. Kitagawa, S. Ikarashi, T. Nishimura, Y.-S. Wong, Y. Satou, K. Handa, T. Takahashi, et al., Assessment of individual radionuclide distributions from the fukushima nuclear accident covering central-east japan, Proceedings of the National Academy of Sciences 108 (49) (2011) 19526–19529.
- [9] J. Hala, J. D. Navratil, Radioactivity, Ionizing Radiation, and Nuclear Energy, 1st Edition, Konvoj, Brno, 2003.
  - [10] J. Ball, G. Glowa, D. Boulianne, J. Mitchell, Behaviour of iodine project: Final report on organic iodide studies, Nuclear Energy Agency, Atomic Energy of Canada Limited: Chalk River, Ontario, Canada.
- <sup>260</sup> [11] D. Nacapricha, C. G. Taylor, Quality control of nuclear charcoals: Particle size effect and trapping mechanism, Carbon 34 (2) (1996) 155–163.
  - [12] J. C. Wren, C. J. Moore, M. T. Rasmussen, K. R. Weaver, Methyl iodide trapping efficiency of aged charcoal samples from bruce-a emergency filtered air discharge systems, Nuclear Technology 125 (1) (1999) 28–39.
- [13] M. Waggoner, H. Ohr, C. Adams, J. Sims, D. Gonzalez, Methyl iodide: an alternative to methyl bromide for insectary fumigation, Journal of Applied Entomology 124 (2) (2000) 113–117.
  - [14] C. S. Bale, T. Ingham, R. Commane, D. E. Heard, W. J. Bloss, Novel measurements of atmospheric iodine species by resonance fluorescence, Journal of atmospheric chemistry 60 (1) (2008) 51–70.
- [15] F. Field, N. Munson, Chemical ionization mass spectrometry. i. general information, J. Amer. Chem.
   Soc 88 (1966) 2621.
  - [16] M. McFarland, D. Albritton, F. Fehsenfeld, E. Ferguson, A. Schmeltekopf, Flow-drift technique for ion mobility and ion-molecule reaction rate constant measurements. ii. positive ion reactions of N<sup>+</sup>, O<sup>+</sup>, and H<sub>2</sub><sup>+</sup> with O<sub>2</sub> and O<sup>+</sup> with N<sub>2</sub> from thermal to [inverted lazy s] 2 ev, The Journal of Chemical Physics 59 (12) (1973) 6620–6628.

- <sup>275</sup> [17] E. P. Hunter, S. G. Lias, Evaluated gas phase basicities and proton affinities of molecules: an update, Journal of Physical and Chemical Reference Data 27 (3) (1998) 413–656.
  - [18] Webbook de chimie NIST, http://webbook.nist.gov/chemistry/, accessed: 2017.
  - [19] G. Bouchoux, J.-Y. Salpin, D. Leblanc, A relationship between the kinetics and thermochemistry of proton transfer reactions in the gas phase, International journal of mass spectrometry and ion processes 153 (1) (1996) 37–48.
  - [20] P. Spanel, D. Smith, Selected ion flow tube studies of the reactions of h3o+, no+, and o2+ with several aromatic and aliphatic monosubstituted halocarbons, International Journal of Mass Spectrometry 189 (2) (1999) 213 223. doi:https://doi.org/10.1016/S1387-3806(99)00103-7.
    URL http://www.sciencedirect.com/science/article/pii/S1387380699001037
- [21] M. Regnault, études sur l'hygrométrie, Annales de Chimie et de Physique Séries 3, Tome 15 (1845) 129–136.
  - [22] A. E. Markham, A compact gas saturator, Industrial & Engineering Chemistry Analytical Edition 12 (2) (1940) 112–112. doi:10.1021/ac50142a020.
  - [23] C. L. Yaws, Chemical properties handbook: physical, thermodynamic, environmental, transport, safety, and health related properties for organic and inorganic chemicals, McGraw-Hill, 1999.
    - [24] A. Hansel, A. Jordan, R. Holzinger, P. Prazeller, W. Vogel, W. Lindinger, Proton transfer reaction mass spectrometry: on-line trace gas analysis at the ppb level, International Journal of Mass Spectrometry and Ion Processes 149 (1995) 609–619.
- [25] W. Lindinger, A. Hansel, A. Jordan, On-line monitoring of volatile organic compounds at pptv levels by means of proton-transfer-reaction mass spectrometry (ptr-ms) medical applications, food control and environmental research, International Journal of Mass Spectrometry and Ion Processes 173 (3) (1998) 191–241.
  - [26] J. A. de Gouw, P. D. Goldan, C. Warneke, W. C. Kuster, J. M. Roberts, M. Marchewka, S. B. Bertman, A. A. P. Pszenny, W. C. Keene, Validation of proton transfer reaction-mass spectrometry (PTR-MS) measurements of gas-phase organic compounds in the atmosphere during the new england air quality study (NEAQS) in 2002, Journal of Geophysical Research: Atmospheres 108 (D21) (2003) ACH 10-1 ACH 10-18, 4682. doi:10.1029/2003JD003863.

300

305

- [27] L. Cappellin, M. Probst, J. Limtrakul, F. Biasioli, E. Schuhfried, C. Soukoulis, T. D. Mrk, F. Gasperi, Proton transfer reaction rate coefficients between H<sub>3</sub>O<sup>+</sup> and some sulphur compounds, International Journal of Mass Spectrometry 295 (12) (2010) 43 48. doi:http://doi.org/10.1016/j.ijms. 2010.06.023.
- [28] K. Schwarz, W. Filipiak, A. Amann, Determining concentration patterns of volatile compounds in exhaled breath by ptr-ms, Journal of Breath Research 3 (2) (2009) 027002. URL http://stacks.iop.org/1752-7163/3/i=2/a=027002

- [29] T. Su, M. T. Bowers, Ion-polar molecule collisions: the effect of ion size on ion-polar molecule rate constants; the parameterization of the average-dipole-orientation theory, International Journal of Mass Spectrometry and Ion Physics 12 (4) (1973) 347–356.
  - [30] T. Su, M. T. Bowers, Theory of ion-polar molecule collisions. comparison with experimental charge transfer reactions of rare gas ions to geometric isomers of difluorobenzene and dichloroethylene, The Journal of Chemical Physics 58 (7) (1973) 3027–3037.

315

320

- [31] T. Su, M. T. Bowers, Parameterization of the average dipole orientation theory: temperature dependence, International Journal of Mass Spectrometry and Ion Physics 17 (2) (1975) 211–212.
- [32] L. Cappellin, T. Karl, M. Probst, O. Ismailova, P. M. Winkler, C. Soukoulis, E. Aprea, T. D. Mark, F. Gasperi, F. Biasioli, On quantitative determination of volatile organic compound concentrations using proton transfer reaction time-of-flight mass spectrometry, Environmental Science & Technology 46 (4) (2012) 2283–2290.
- [33] W. Lindinger, A. Hansel, A. Jordan, Proton-transfer-reaction mass spectrometry (ptr-ms): on-line monitoring of volatile organic compounds at pptv levels, Chemical Society Reviews 27 (5) (1998) 347–375.
- [34] T. Su, W. J. Chesnavich, Parametrization of the ion-polar molecule collision rate constant by trajectory calculations, The Journal of Chemical Physics 76 (10) (1982) 5183–5185.
  - [35] L. Cappellin, S. Makhoul, E. Schuhfried, A. Romano, J. S. del Pulgar, E. Aprea, B. Farneti, F. Costa, F. Gasperi, F. Biasioli, Ethylene: Absolute real-time high-sensitivity detection with PTR/SRI-MS. the example of fruits, leaves and bacteria, International Journal of Mass Spectrometry 365 (2014) 33–41.