



# Generic Attribute Deviation Metric for Assessing Mesh Simplification Algorithm Quality

Michael Roy, Sebti Foufou, Frederic Truchetet

## ► To cite this version:

Michael Roy, Sebti Foufou, Frederic Truchetet. Generic Attribute Deviation Metric for Assessing Mesh Simplification Algorithm Quality. IEEE International Conference on Image Processing (ICIP'02), Sep 2002, Rochester, United States. hal-01938350

**HAL Id: hal-01938350**

**<https://hal.science/hal-01938350>**

Submitted on 28 Nov 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# GENERIC ATTRIBUTE DEVIATION METRIC FOR ASSESSING MESH SIMPLIFICATION ALGORITHM QUALITY

Michaël ROY, Sebti FOUFOU and Frédéric TRUCHETET

Le2i - Université de Bourgogne - 12 rue de la fonderie  
71200 Le Creusot - France

## ABSTRACT

This paper describes an efficient method to compare two triangular meshes. Meshes considered here contain geometric features as well as other surface attributes such as material colors, texture, temperature, radiation, etc. Two deviation measurements are presented to assess the differences between two meshes. The first measurement, called *geometric deviation*, returns geometric differences. The second measurement, called *attribute deviation*, returns attribute differences regardless of the attribute type. In this paper we present an application of this method to the Mesh Simplification Algorithm (MSA) quality assessment according to the appearance attributes. This assessment allows the appreciation of local quality and the computation of global quality statistics of a simplified mesh.

## 1. INTRODUCTION

Many applications (geometric modelers, 3D scanning, etc.) generate very complex meshes that contain geometric data as well as appearance data. Geometric data describe the surface and the dimension of the mesh. Appearance data, called *attributes*, represent information describing the aspect of the mesh such as colors, texture, ... High quality meshes usually contain a high number of vertices and faces that cause non interactive rendering or high storage space. Some results have been presented in the last few years in order to reduce the mesh surface complexity. The methods proposed simplify meshes either by merging/collapsing elements or by re-sampling vertices. MSAs use different error criteria to measure the fitness of the approximated surfaces. Usually, MSAs do not return measurements of the error introduced while simplifying the mesh. A measurement tool would be useful to precisely compare different simplification algorithms or parameters. In literature some methods are presented to assess the quality of a simplified mesh compared with the original one. We present a new, generic metric to assess mesh attribute quality after a simplification process by comparison between the original and its simplified representation. The method is suitable for numerical models from real scenes and for synthetic models.

It can be used for many applications: mesh simplification, multiresolution analysis (comparison between different levels of detail), reverse engineering (comparison between a CAD model and a numerical model of a real object), mesh segmentation, etc.

## 2. SIMPLIFICATION ALGORITHMS AND ERROR METRICS

MSAs use their own error metrics to guide the simplification process. These metrics are either local or global. Cignoni *et al.*[1] has presented the various techniques used to evaluate and bound the error introduced by the mesh simplification process.

Most of these metrics use geometric measurements of distance or curvature. Schroeder *et al.*[2] use a vertex-to-plane distance as decimation criterion. Reddy [3] uses a function based on curvature to guide its simplification process. Klein *et al.*[4] use an error metric based on the Hausdorff distance. Ronfard *et al.*[5] use two energy functions: local tessellation error and local geometric error. Guéziec [6] uses a tolerance volume as an error bound measure. Rossignac [7] uses an error bound metric based on distances to supporting planes. Lindstrom *et al.*[8] use an area and a volume metric.

These algorithms simplify the geometry and ignore the distortion caused due to surface attributes (colors, texture, normals, ...). Thus, more complete algorithms are needed to manage mesh attributes during the simplification process. Hoppe [9] uses energy functions, which preserve surface geometry, scalar attributes and discontinuity curves. Cohen *et al.*[10] use no error measure but only a geometric construction, called simplification envelopes, to minimize the surface deviation. Garland *et al.*[11, 12] use a quadric error metric giving vertex-to-plane distances; this metric works for meshes with attributes. Hoppe [13] has improved this technique for meshes with attributes.

Toubin *et al.*[14] have presented a new method for simplifying numerical models from real scenes. This method works with multi-modal models containing several types of appearance information (such as several textures, one for

each wavelength band). Mesh simplification is performed by the quicunx wavelet transform. This method allows the conservation of important data in terms of geometric or appearance data. Thus, the original mesh is simplified according to the pre-defined important data. If the important data are appearance attributes, we need a tool to verify that these data are conserved.

Cohen [15] has proposed a texture deviation metric to assess the texture coordinate distortion introduced during a simplification process. Given two meshes  $M_a$  and  $M_b$ , their respective surface  $S_a$  and  $S_b$ , and a point  $p_i \in S_a$ , the texture deviation  $T(p_i, S_b)$  between  $p_i$  and  $S_b$  is defined as:

$$T(p_i, S_b) = d(p_i, F_b^{-1}(F_a(p_i))) \quad (1)$$

where  $F_a(p_i) = (u, v)$  is the texture coordinates of the vertex  $p_i$  on the surface  $S_a$ , and  $F_b^{-1}(s, t) = p_j$  the point on the surface  $S_b$  with the texture coordinates  $(u, v)$ . The texture deviation is the distance between a given point on  $S_a$  and the point on  $S_b$  with the same texture coordinates. The measurement of texture deviation was made to guide a simplification process. However, it is not suitable for assessing simplification quality. We propose a more general method to assess surface attribute distortion after a simplification process. This method does not depend on the attribute type.

Currently there is no tool to measure error introduced on attribute data by a simplification process. The purpose of this work is to define a method to assess MSA quality according to appearance attributes.

### 3. MESH COMPARISON METRICS

#### 3.1. Geometric deviation

Simplification usually implies a local geometric difference between the original surface and the simplified surface. We call this difference: *geometric deviation*.

Given two meshes  $M_a$  and  $M_b$ , their respective surfaces  $S_a$  and  $S_b$ , and a point  $p_i \in S_a$ , the geometric deviation  $d_g(p_i, S_b)$  between  $p_i$  and  $S_b$  is defined as:

$$d_g(p_i, S_b) = \min_{p_j \in S_b} d(p_i, p_j) \quad (2)$$

with  $d(p_i, p_j)$  the Euclidian distance between two points. The geometric deviation is defined as the distance between a point  $p_i$  on the surface  $S_a$  and the nearest point on the surface  $S_b$ . This metric is based on the geometric error used by Metro tool [16].

#### 3.2. Attribute deviation

Attributes are data defined at each vertex of a mesh (diffuse color, normal, texture coordinates). They are essential elements to numerical models of real scenes. The number

of attributes per vertex changes according to the context. Geometric simplification of a mesh implicitly introduces a modification of the attributes. Thus, we can measure the local difference of the attributes between the original mesh and the simplified mesh. We call this difference: *attribute deviation*.

Given two meshes  $M_a$  and  $M_b$ , their respective surfaces  $S_a$  and  $S_b$ , and a point  $p_i \in S_a$ , the attribute deviation  $d_a(p_i, S_b)$  between  $p_i$  and  $S_b$  is defined as:

$$d_a(p_i, S_b) = d(A(p_i), A(N(p_i, S_b))) \quad (3)$$

where  $A(p)$  is the attribute at the point  $p$  and  $N(p, S) = p'$  the nearest point to  $p$  on the surface  $S$ . The attribute deviation is defined as the distance between the attribute of the point  $p_i$  and the attribute of the nearest point to  $p_i$  on the surface  $S_b$ . There may be many nearest points on the surface  $S_b$  with the same distance to the point  $p_i$ . In that case, the attribute distance is the minimum distance between the attribute of  $p_i$  and the attribute of the nearest points. The attributes are considered as vectors in the Euclidian space.

#### 3.3. Discussion

The deviation measurements are not symmetric. Given two meshes  $M_a$  and  $M_b$ , deviations are measured from a point  $p_i$  on the surface of  $M_a$  to the surface of  $M_b$ . If meshes are inverted, deviation measurement may give different results. For our investigation we measure the deviations both ways: from  $M_a$  to  $M_b$  and from  $M_b$  to  $M_a$ . Both measurements give different information but results are relatively close.

Geometric deviation is the main measurement because the mesh simplification process is essentially a geometric simplification. Attribute deviation is useful to assess appearance modification of the simplified mesh. When an important simplification is proceeded (90% or more reduced faces), we usually note important attribute modifications. Attribute deviation can be computed either for one attribute type or for all attribute types. If there are several attribute types (e.g. normal + diffuse color), the global deviation is a vector containing the deviation for each attribute type.

These two mesh simplification quality metrics (geometric and attribute deviations) are measured for a set of points  $p_i$  given on the surface of the mesh  $M_a$ . This allows great liberty for the choice of  $p_i$  points. Usually deviations are measured for the entire mesh. Thus, the  $p_i$  points may be the mesh vertices. The measurement resolution can be increased using a surface sampling technique.

### 4. RESULTS

Figure 1 shows geometric and texture deviation measurement. Figures 1(e) and 1(f) show results obtained with the texture deviation measurement proposed by Cohen *et al.*

[15]. With low texture deviation (Figure 1(e)), Cohen's texture deviation measurement has the same visual results as the geometric deviation measurement. Nevertheless, both measurements cannot be numerically compared. The geometric deviation is based on the nearest neighbor distance, whereas Cohen's texture deviation is based on the corresponding point distance. Figures 1(g) and 1(h) show results obtained with attribute deviation, where considered attributes are the texture coordinates. The attribute deviation gives better results than Cohen's texture deviation. If no real texture deviation does exist, Cohen's measure indicates a deviation coming from strictly geometrical distortion.

Figure 2 shows a comparison between the three simplification software programs for different face simplification percentages. *QSLim* is Michael Garland's simplification software using quadric error metric. *Jade* is simplification software developed by the Visual Computing Group using a global error metric. *ProgMesh* is an implementation of Hoppe's progressive meshes. Figure 2(a) shows mean geometric deviation in terms of simplification percent. Figure 2(b) shows mean deviation of normals in terms of simplification percent. *QSLim* software has obtained the best results on our test mesh.

## 5. CONCLUSION AND FUTURE WORK


We have described two measurements for assessing MSA quality. Each measurement manages a specific data group: the geometry and the appearance attributes. The local measurement allows one to precisely view simplified regions on the mesh. As the simplification process is primarily a geometric simplification, geometric deviation measurement is the most important measure. Attribute deviation measurement is efficient to measure appearance modification. Our experimentation software is available online<sup>1</sup>.

We are testing different simplification software packages including professional software using different kinds of meshes (digital elevation maps, synthetic meshes). This test will allow the comparison of MSA algorithm quality according to appearance attributes.


## 6. REFERENCES

- [1] P. Cignoni, C. Rocchini, and R. Scopigno, "Comparison of mesh simplification algorithms," *Computer and Graphics*, vol. 22, no. 1, pp. 37–54, 1998.
- [2] W.J. Schroeder, J.A. Zarge, and W.E. Lorensen, "Decimation of triangle meshes," in *Proceedings of SIGGRAPH*, June 1992, pp. 65–70.
- [3] M. Reddy, "Scrooge: Perceptually-driven polygon reduction," *Computer Graphics Forum*, vol. 15, no. 4, pp. 191–203, 1996.
- [4] R. Klein, G. Liebich, and W. Straer, "Mesh reduction with error control," in *Proceedings of IEEE Visualization*, October 1996, pp. 311–318.
- [5] R. Ronfard and J. Rossignac, "Full-range approximation of triangulated polyhedra," in *Proceedings of EUROGRAPHICS*, 1996, pp. 67–76.
- [6] A. Guéziec, "Surface simplification inside a tolerance volume," in *Second Annual International Symposium on Medical Robotics and Computer Aided Surgery*, November 1995, pp. 132–139.
- [7] J. Rossignac, "Geometric simplification and compression," in *SIGGRAPH Course Notes 25*, 1997.
- [8] P. Lindstrom and G. Turk, "Fast and memory efficient polygonal simplification," in *Proceedings of IEEE Visualization*, October 1998, pp. 279–286.
- [9] H. Hoppe, "Progressive meshes," in *Proceedings of SIGGRAPH*, August 1996, pp. 99–108.
- [10] J. Cohen, A. Varshney, D. Manocha, G. Turk, H. Weber, P. Agarwal, F. Books, and W. Wright, "Simplification envelopes," in *Proceedings of SIGGRAPH*, August 1996, pp. 119–128.
- [11] M. Garland and P. Heckbert, "Surface simplification using quadric error metrics," in *Proceedings of SIGGRAPH*, August 1997, pp. 209–216.
- [12] M. Garland and P. Heckbert, "Simplifying surfaces with color and texture using quadric error metrics," in *Proceedings of IEEE Visualization*, 1998, pp. 263–270.
- [13] H. Hoppe, "New quadric metric for simplifying meshes with appearance attributes," in *Proceedings of IEEE Visualization*, October 1999, pp. 59–66.
- [14] M. Toubin, David Page, Christophe Dumont, Frédéric Truchetet, and Mongi Abidi, "Multiresolution wavelet analysis for simplification and visualization of multi-textured meshes," in *Proceedings of SPIE*, January 2000, vol. 3960, pp. 155–163.
- [15] J. Cohen, M. Olano, and D. Manocha, "Appearance-preserving simplification," in *Proceedings of SIGGRAPH*, August 1998, pp. 115–122.
- [16] P. Cignoni, C. Rocchini, and R. Scopigno, "Metro : Measuring error on simplified surfaces," *Computer Graphics Forum*, vol. 17, no. 2, pp. 167–174, June 1998.

<sup>1</sup><http://meshdev.sourceforge.net>

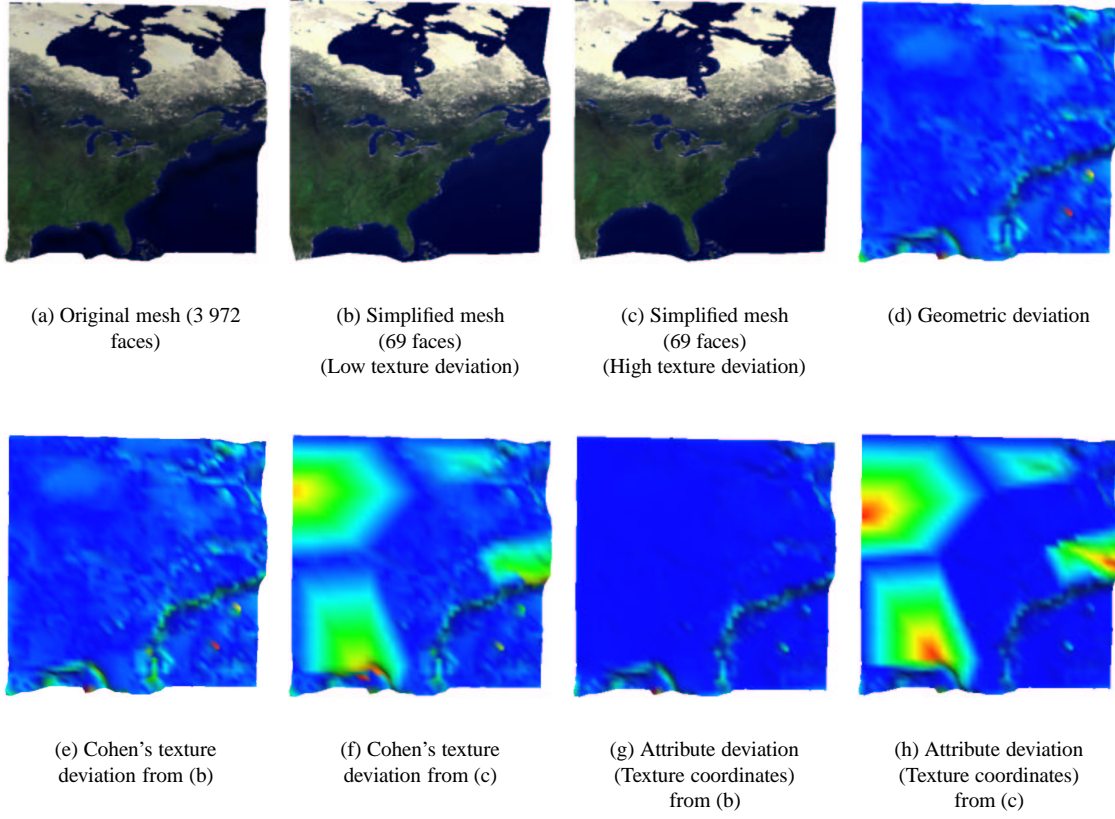

**Fig. 1.** Deviation assessment results. Comparison between results from the Cohen *et al.* algorithm [15] (e,f) and our algorithm (g,h).

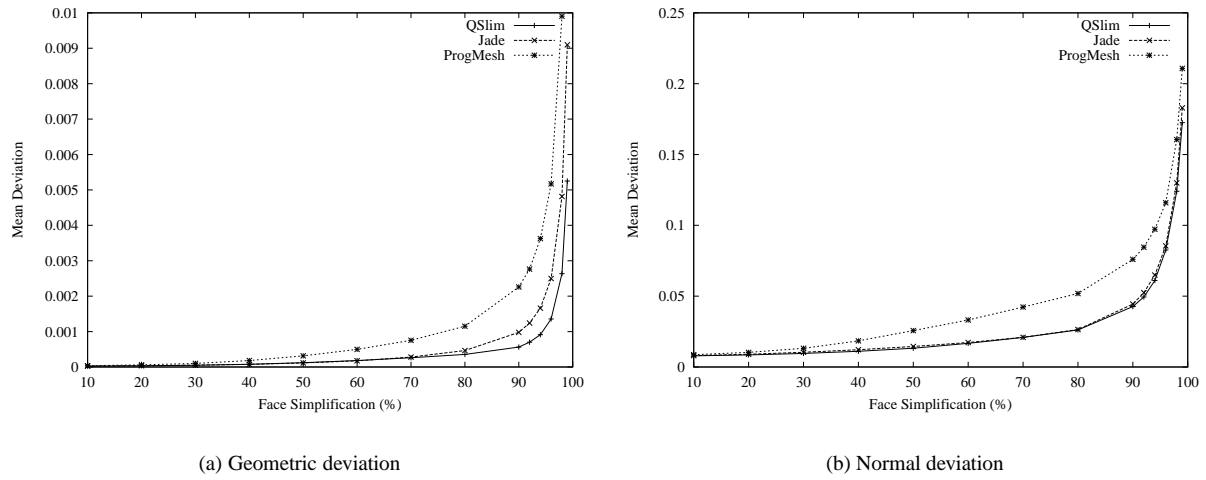

**Fig. 2.** Simplification software comparison.