



HAL
open science

Long-term, low technicality sewage sludge amendment and irrigation with treated wastewater under Mediterranean climate: impact on agronomical soil quality

Rabia Cherfouh, Yves Lucas, Arezki Derridj, Patricia Merdy

► To cite this version:

Rabia Cherfouh, Yves Lucas, Arezki Derridj, Patricia Merdy. Long-term, low technicality sewage sludge amendment and irrigation with treated wastewater under Mediterranean climate: impact on agronomical soil quality. *Environmental Science and Pollution Research*, 2018, 25 (35), pp.35571-35581. 10.1007/s11356-018-3463-3. hal-02183972

HAL Id: hal-02183972

<https://hal.science/hal-02183972>

Submitted on 16 Mar 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

[Click here to view linked References](#)

1 **Long term, low technicality sewage sludge amendment and irrigation with treated**
2 **wastewater under Mediterranean climate: impact on agronomical soil quality.**

3
4
5
6
7 4 Rabia Cherfouh^a, Yves Lucas^b, Arezki Derridj^b, Patricia Merdy^a

8
9
10 5
11
12 6 ^a Université Mouloud Mammeri, BP 17 RP, 15000 Tizi-Ouzou, Algeria

13
14
15 7 ^b Université de Toulon, CS 60584, 83041 Toulon Cedex 9, France

16
17
18 8 Corresponding author: Patricia Merdy - merdy@univ-tln.fr

19 9
20
21 10 **Abstract**

22
23 11
24
25
26 12 We evaluated the agronomic quality of loam to clay-loam soils from a Mediterranean area, that have been
27
28 13 submitted for more than 10 years to irregular and poorly controlled treated wastewater (TWW) irrigation and
29
30 14 sewage sludge (SS) amendment, both TWW and SS issuing from a domestic effluent treatment plant. A soil was
31
32 15 submitted to SS-amendment only, another to TWW-irrigation only, another to both treatments and another was
33
34 16 not submitted to any of these treatments. We found that the agronomic quality of the treated soils has not
35
36 17 decreased. In treated soils it was observed a slight increase of pH, an increase of the CEC, no change of either
37
38 18 salinity or electrical conductivity. *SAR* and *ESP* remained satisfactory, below 13 and 15, respectively, and no
39
40 19 infiltration problems were observed, indicating that rainwater percolation was sufficient to leach the salt brought
41
42 20 by SS or TWW. The soil organic matter (SOM) increased in all SS-amended and/or TWW-irrigated soils, the
43
44 21 increase being higher in SS-amended soils. The SOM kept a satisfactory C/N ratio, lower than 15; the SUVA
45
46 22 and E2/E3 index showed normal characteristics of the water-extracted organic matter (WEOC). Both SS
47
48 23 amendment and TWW irrigation brought high amounts of nutrients in the considered soils and increased the
49
50 24 nutrients disponibility, especially regarding K and P, as shown by the nutrient concentrations in the soil water
51
52 25 extracts. The pH increase does not seem to be a problem for the bioavailability of trace elements, at least
53
54 26 regarding Cu, Zn, Co and Fe. Complementary studies should be undertaken for Ni. These observations highlight
55
56 27 the potential agronomical benefits of application of wastewater and sewage sludge, even without great
57
58 28 technicality, the better results being obtained using both SS amendment and TWW irrigation.



29

30 **Keywords:** Wastewater reuse, sewage sludge reuse, Mediterranean zones, soil quality, water-extractible
31 nutrients, metal bioavailability

32

33 **Acknowledgments**

34 We thank the Algerian Ministry of High Education and Scientific Research (MESRS) and the Mouloud
35 Mammeri University for the doctoral scholarship and facilities that allowed this work.

36

37 **Introduction**

38

39 In Algeria, the quantity of sewage sludge (SS) currently produced from wastewater treatment plants is
40 around 250 000 tons per year; it is estimated that the quantities of sludge will reach 450 000 tons in 2020. The
41 treatment techniques applied for sludge are incineration, landfill, composting or spreading on agricultural land. A
42 large part of the sludge is deposited along rivers or in domestic waste disposal sites, while only 25% are spread
43 on agricultural lands.

44 Moreover, the volume of treated wastewater (TWW) in Algeria is estimated at 560 000 cubic meters and
45 65% of this water are used for the irrigation of cultivated lands (Hannachi et al. 2014). The scarcity of water
46 resources has increasingly encouraged recycled wastewater as suitable resource substitute (Pereira et al. 2002;
47 Qadir et al. 2010) since this practice offers various advantages: the reuse of TWW avoids their direct discharge
48 into streams, supports fresh water resources protection, recycles nutrients and minimizes water and soil pollution
49 with regard to uncontrolled disposal (Rehman et al. 2013). However, wastewater irrigation also involves
50 potential risks to soil quality and to the quality of crops production, because of the presence of various inorganic
51 substances, including potential toxic elements (Cr, Cd, Pb, Ni and Hg) (Rehman, et al. 2013; Elifantz, et al.
52 2011), and to high levels of Na, which in the long term could degrade the physical properties of the soils (e.g.
53 Halliwell et al. 2001; Stevens et al. 2003). These risks must be taken into account and evaluated.

54 The sludge spreading practice on agricultural lands is considered as the easiest and economically cheapest
55 disposal procedure (Pedrero et al 2010; Fytili and Zabaniotou 2008). As generally admitted wastewater and
56 sludge are attractive alternatives for water and fertilizers because they provide the nutrients and water necessary



57 for crop growth. Application of unprocessed wastewater sludge and wastewater sludge have been reported as
58 beneficial organic fertilizers (Singh and Agrawal 2008; Roca-Perez et al. 2009). Wastewater irrigation and
59 sludge spreading lead to higher yields than usual for most crops and reduce the requirements for fertilizers,
60 resulting in net cost savings for farmers (Warman and Termeer 2005; Zebarth et al. 2000; Hussain et al. 2002).
61 The sludge is a source of major nutrients such as P, K, S, Ca, Mg, micro nutrients and organic matter. Sludge
62 applications usually improve the physico-chemical and biological soil properties, such as porosity, field capacity
63 pH, organic matter content, available phosphorus (Mtshali et al. 2014; Delibacak et al. 2009; Tarchouna et al.
64 2010). For these reasons, the sludge is considered as an interesting alternative as fertilizer in agricultural lands
65 and as the tool to maintain the soil carbon stock. On the other hand, sludge produced after wastewater treatment
66 are particularly difficult to manage due to the increasing quantities produced and the potential pathogenic
67 organisms and metal contents present in the sludge. The great variability in the sludge composition requires a
68 specific analysis before use.

69 In Algeria, the application of sludge and waste water on agricultural land has been developed only recently
70 and is spreading rapidly. The research and scientific contributions that address the above issues are scarce and
71 only considered the agronomic value of sludges (Ramdani et al 2015; Benmouffouk 1994; Igoud 2001). Our
72 informal discussions have shown that local farmers in Algeria have observed a significant increase in yields after
73 using sludge or TWW, but no data are available.

74 In the absence of regulatory requirements in Algeria and as the agricultural use of SS and TWW began
75 empirically, without prior local agronomic experiment and without precise control of the quantities brought, our
76 objective is to verify that the existing recovery routes for sewage sludge and TWW are both economically viable
77 on the long-term and safe in terms of health. Planning efforts toward this goal should include the evaluation of
78 potential changes in soil quality when amended with SS or irrigated with TWW and the understanding of the
79 related agronomic and environmental issues.

80 This part of the study is focused on the impact of 10-years wastewater irrigation and sludge amendments on
81 soil agronomic quality, in a context where the application of SS amendment or TWW irrigation is irregular and
82 relatively poorly controlled. The potential contamination with potentially toxic elements will be considered in a
83 further publication.

84



85 Study Site

1
2 86
3

4
5 87 The study area is located in northern Algeria, in the Corso city territory (district of Boumerdes). The
6
7 88 geological substrate is an upper Pliocene compact red sand that recovers an older marl. The region climate is
8
9 89 Mediterranean, characterized by hot and dry summer followed by a relatively cold and rainy season, from
10
11 90 November to May, with an annual average rainfall of 650mm.

12
13 91 The use of sewage SS and TWW issued from the Boumerdes wastewater plant had begun in 2002 on
14
15 92 agricultural land cultivated for table grape (Dattier de Beyrouth variety). The sludge is spread once a year at an
16
17 93 estimated dose between 15 and 20 tons per hectare, while the drop-irrigation with TWW is practiced from May
18
19 94 to October to compensate for the hydric shortages.

20
21
22 95 A specific pipeline network transports daily 5200m³ of TWW for irrigation of 70 hectares. It was very
23
24 96 difficult to obtain reliable information about the use of fertilizer in the selected farms. Commonly used fertilizers
25
26 97 are ammonium nitrate NH₄NO₃ 33.5% N; urea 46% N; sulphate of potash K₂SO₄ 50% K₂O and superphosphate
27
28 98 Ca(H₂PO₄)₂.CaSO₄ 20% P₂O₅. Unfortunately, applied quantities remain unknown by the farmers themselves.

29
30 99 We sampled five representative vineyards soils, similar in terms of parent rock, soil type, topographical
31
32 100 situation and technical farming. They differentiate only for the use of SS, TWW and river water applications. The
33
34 101 map (Fig.1) locates the sampling sites, situated about 1km from the sea coast. The different treatments to the soil
35
36 102 surface have been applied for 14 years and the samples collected were representative of each of them. We
37
38 103 collected a soil receiving sewage sludge (S-SS), a soil irrigated with TWW (S-TW), a soil receiving both sludge
39
40 104 and TWW (S-STW), and a reference soil that did not received neither sludge or TWW (S-NA). Some farms use
41
42 105 river water to irrigate vineyards in summer; so we also sampled a farm (S-WR) that have been using for 5 years
43
44 106 river water issued from the Corso River, which is issued from the Keddara dam, in order to compare with sludge
45
46 107 and TWW applications. Unlike the other studied soils, however, the S-WR soil received organic amendments of
47
48 108 cattle manure.

49
50
51 109 The sewage sludge (SS) and the treated wastewater (TWW) were sampled at the Boumerdes wastewater
52
53 110 Treatment Plant.

54
55
56 111
57
58
59
60
61
62
63
64
65



112 **Materials and methods**

113

114 **Soil Sampling**

115

116 The sampling was performed in April 2013 at three depths (P1: 0-10cm; P2: 10-25cm; P3: 25-40cm). The
117 soil samples were taken during the same month in order to take into account the turn-over process that can lead
118 to carbon content variability. At each site, and for each depth, five cores were sampled at the corners and at the
119 center of a 1m square plot of 60cm deep with an auger. A composite soil sample was generated by thoroughly
120 mixing together the five subsamples from a given depth. Samples were air-dried and sieved at 2 mm. Aliquots of
121 the <2 mm soil fraction were ground in an agate mortar and stored in polyethylene containers at 4°C until
122 analysis. The dry bulk density (ρ_d) was determined using the ring method.

123

124 **Analysis**

125

126 All solutions were prepared with high purity water (resistivity $\approx 18 \mu\text{s}\cdot\text{cm}^{-1}$, Milli-Q Plus system, Millipore
127 Corporation, USA) and analytical grade (Merck). For sludge and soil samples, pH was determined at a 1:5 soil-
128 to-water ratio. The soil texture was determined with the Robinson pipet method. In the literature, water-
129 extractable organic carbon or major species are measured on water-extracts obtained using a soil-to-water ratio
130 ranging from 1:2 (Zsolnay 2003) to 1:10 or more (Zeng et al. 2015). Here we choose a 1:10 soil-to-water ratio,
131 agitation for 24 h and filtration at 0.45 μm . Organic carbon and total nitrogen of solid samples (soils and SS)
132 were determined using a CHNS apparatus (Shimadzu, Flash2000) after H_3PO_4 pretreatment (Pastor et al. 2011).
133 For liquid samples (TWW and water extracts) dissolved organic carbon was determined using a TOC analyser
134 (TOC-V CSH, Shimadzu) after acidification and nitrogen purging. At least three sample replicates and three
135 analysis replicates for each sample were performed in order to meet statistical acceptance requirements. The soil
136 organic matter (SOM) was calculated from the soil organic carbon (SOC) using the formula:

$$137 \text{ SOM (\%)} = \text{SOC (\%)} \times 1.72$$

138 Cation exchange capacity (CEC) was determined for sludge and soil samples by the cobaltihexamine
139 procedure (Tarchouna et al. 2010). Metal contents were quantified by ICP-AES (inductively coupled plasma



140 atomic emission spectrophotometry) while ions concentrations in solution (nutrients and other major species)
141 were determined by ionic chromatography (Dionex-DX-120). The electrical conductivity EC was determined on
142 a 1:10 soil-to-water ratio using a conductimeter. In order to compare with the literature data, we calculated the
143 EC corresponding to saturated paste extract (EC_{SP}) from the value measured on the 1:10 extract ($EC_{1:10}$) using
144 the following correlation equation (de Souza et al. 2013) where EC_{SP} and $EC_{1:10}$ are expressed in $mS\ cm^{-1}$:

$$EC_{SP} = 23.654 EC_{1:10} - 0.2664$$

146 The exchangeable sodium percentage (*ESP*) was calculated using the CEC and the Na concentration in the
147 1:10 soil extract. The sodium adsorption ratio (*SAR*), widely used to evaluate probable risks of irrigation water
148 on the soil structure and the sodicity hazard of a soil, was calculated using the formula

$$SAR = \frac{[Na^+]}{\sqrt{\frac{[Ca^{2+}] + [Mg^{2+}]}{2}}}$$

151 where $[Na^+]$, $[Ca^{2+}]$ and $[Mg^{2+}]$ $mmol_c\ L^{-1}$ concentrations in the 1:5 water extract (He et al. 2015).

152 The organic matter in the water extract (WEOC, water extractable organic matter) was characterized by
153 UV-visible spectrometry to calculate the SUVA 254 index (UV absorbance at 254 nm normalized for dissolved
154 organic carbon concentration, here expressed in $L.mgC^{-1}\ m^{-1}$) and the E2/E3 ratio (ratio of UV absorbance at 250
155 and 365 nm). The SUVA 254 index is indicative of the organic matter aromaticity, usually related to
156 humification (Weishaar et al. 2003), and the E2/E3 ratio is positively related to low-molecular-weight
157 compounds (Peuravouri and Pihlaja 1997).

158 Bioavailability of trace elements likely to cause deficiencies in soils with basic pH (Cu, Zn, Mn, Co, Ni) was
159 evaluated by water- and sodium acetate extractions. Water-extraction was performed at a 1:5 soil-to-water ratio,
160 agitation for 24 h and filtration at $0.45\ \mu m$. Sodium acetate extraction was performed by introducing 2 g soil or
161 sludge in 20mL $KNO_3\ 1M$, shaking for 16 h, adding 16mL of $CH_3COONa\ 1M$, shaking 3h and filtrating at
162 $0.2\ \mu m$. Bioavailability of iron was evaluated by quantifying the amorphous iron phase by citrate/ascorbate
163 extraction: 3g of soil was suspended in 60mL of a $NaHCO_3\ 0.024M$, $C_6H_9Na_3O_9\ 0.02M$, $C_6H_8O_6\ 0.003M$
164 solution adjusted to pH 8 by N purging, shaken for 24 h and filtrated at $0.2\ \mu m$. Metal contents were quantified
165 by ICP-AES.



166 Principal components analysis (PCA) were performed using XLSTAT 2017 on various set of the obtained
167 data. PCA project multidimensional data cloud to subspace such as maximize the residual variance, choosing the
168 most relevant directions (principal components) in the data (Jolliffe 2002). We chose a correlation-type PCA on
169 standardized variables to avoid sensitivity to the scaling of the variables.

171 **Results and discussion**

173 **Main agronomical characteristics of the studied soils, sludge and wastewater**

175 The Tables 1 and 2 gives the main agronomical characteristics of the soils, SS and TWW. Regarding soils,
176 values given in Table 1 refer to the 0-40cm soil layer as they were calculated as the mean of the values obtained
177 over the three sampled depths weighted by the thickness of the sampled layers.

178 The SS contained high contents of organic matter (OM) and total nitrogen, with a low C/N ratio (6.4). The
179 SS water extract showed high concentrations of dissolved OM (3826 mg.L⁻¹), but also of N (mainly as nitrites
180 and ammonium, 25.4 and 9.2 mg kg⁻¹, respectively, corresponding to 0.55 and 0.51 mmol kg⁻¹, respectively), Ca,
181 Mg, K and P. Its high SO₄²⁻ value may be related to the possible use of ferric sulfate or chlorosulfate during the
182 wastewater treatment process, which was expected with regard to their high solubility. The TWW brought those
183 elements in the same relative proportions than the ones in SS water extract, but Na⁺ and Cl⁻ had relative higher
184 values than in SS. The given values for nutrients confirm the potentially positive agronomical effect of spreading
185 sludge or irrigating with TWW. We must ensure, however, that beneficial impacts are observed without negative
186 consequences on soil quality parameters in order to maintain long-term high yields and environmental quality.
187 The details of the composition of the soils depth by depth are given in Table 2.

188 *Granulometry and dry bulk density* – The five studied soils showed similar mineral particles size
189 distribution. According to the texture triangle, S-SS is loam, S-TW and S-NA are silt-loam, S-STW and S-WR
190 are clay loam, this variability being consistent with the natural variability of the red sand parent material. Values
191 of dry bulk density are in the range expected for this type of soil. They remained lower in the topsoil than in
192 depth, indicating that the use of SS or TWW did not lead to a collapse of the porosity of the surface horizons as
193 frequently observed after such applications (Singh et al. 2008). Here no infiltration problems were related,
194 However, attention should be paid since these observations, even if numerous, are not general. As observed in a



195 Mediterranean soil irrigated with TWW by Tarchouna et al (2010), saturated hydraulic conductivity remained
196 high enough to allow water percolation during rainy periods and subsequent leaching of accumulated salts,
197 preventing soil salinization.

198 Soil pH – All soils exhibited a neutral to slightly alkaline pH (USDA 1993): pH of all samples was
199 comprised between 6.93 and 7.70. With regard to the reference S-NA soil, the application of SS, TWW and
200 SS+TWW raised the average soil pH from 7.0 to 7.5, 7.2 and 7.6, respectively, which is slight but significant.
201 Most studies showed for non-acidic soils that sludge application results in a pH decrease presumably due to
202 humic substances decomposition or accelerated nitrification (Ahmed et al. 2010 ; Brallier et al. 1996). Each case,
203 however, is dependent on the initial soil pH and the composition of the amendment. Here the high K^+ , Ca^{2+} and
204 Mg^{2+} basic cations input from SS and TWW combined to a low soil OM contents is likely to increase the soil
205 alkalinity and subsequently the soil pH. In agricultural soils, pH should preferentially be between 6 and 7
206 because higher values, especially >7.5 , result in reduced availability of several nutrients or micronutrients,
207 particularly P, Fe, Mn, Cu, Zn, Co and Ni (Jones 2012). Here the pH observed in soils SS-amended and/or
208 TWW-irrigated remained compatible with good soil quality and crop production.

209 *Cation exchange capacity CEC* – CEC values are in the range usually observed for this type of soils. They
210 were higher in SS-amended and/or TWW-irrigated soils than in the S-NA reference soil, which can be related to
211 the lower clay and organic matter content of the latter. There is no significant change in CEC between SS-
212 amended and/or TWW-irrigated soils that can be attributed to the type of amendment or irrigation.

213 *Electrical conductivity EC* – The EC value for TWW indicated a good quality with regard to salinity
214 according to Fipps (1996). The $EC_{1:10}$ values in all studied soils extracts remained below $70 \mu S cm^{-1}$ and values
215 were below or comparable to the values observed for the reference soil. The corresponding EC_{SP} values were
216 lower than $2 mS cm^{-1}$, indicating a low salt rank and very little chance of injury on all plants (Lamond and
217 Whitney 1992). It was observed in several studies that sludge application induces an EC increase (Clapp et al
218 1986). Here the maintenance of low EC values in SS and STW soils despite the fact that SS extract
219 exhibited significant conductivity ($677 \mu S cm^{-1}$) indicates sufficient leaching by annual deep drainage of
220 the soluble species brought in, especially Na^+ and Cl^- .

221 *Sodium adsorption ratio (SAR) and exchangeable sodium percentage (ESP)* – Notwithstanding the fact that
222 the TWW has a SAR around 15, all studied soils exhibited a SAR below 13 and a ESP below 15 (Table 1),



223 indicating good soil structural conditions (US Salinity Lab Staff 1954) and confirming a sufficient leaching of
1 Na⁺.
2
3

4 *Organic matter (SOM)* – Because soil organic matter (SOM) can be associated with different soil chemical,
5
6 physical and biological processes, it has been widely considered as one of the best soil quality indicator. The
7
8 SOM impacts, among others, soil structural stability, nutrient cycling, water retention and microorganism
9
10 dynamics, which is related to SOM mineralization. Here the SOM content of the upper horizon is low (1.6%) in
11
12 the S-NA reference soil, as expected for a Mediterranean soil where high temperature and low rainfall favor
13
14 organic matter mineralization (Fantappiè et al. 2011). The higher value (4.0 %) in the S-SS topsoil can be related
15
16 to the high OM content of the sludge, as frequently observed (Haynes 1998; Gerzabek et al. 2001; Fernandez et
17
18 al. 2006; Triberti et al. 2016). The S-TW and S-STW topsoils showed intermediate values (2.2 and 2.8 %,
19
20 respectively). Although the S-STW soil received sludge, its lower SOM content compared to S-SS is likely
21
22 related to a priming effect due to TWW-enhanced mineralization of the sludge organic matter. The high SOM
23
24 content observed in the S-WR soil was directly related to cattle manure amendments. In all soils but S-WR, the
25
26 C/N ratio was lower than 15, indicating a potentially good release of N during SOM decomposition process. The
27
28 high C/N observed for the S-WR soil was likely related to wheat straw mixture with cattle manure.
29
30

31 *Water extractable fraction of SOC (WEOC)* – Although the WEOC is only a small percentage of SOC, it
32
33 has a critical role in soils properties. It is sensitive to soil management, easily bioavailable for microorganisms
34
35 and plants, and therefore a primary source of mineralizable C, N, P, and S, and exhibits a rapid turnover (minutes
36
37 to months) (Ćirić et al. 2015). Its greater mobility can impact the transfers of contaminants, especially heavy
38
39 metals. The relationships between WEOC and SOM are given in Fig. 2. The WEOC values ranged from 49 to
40
41 215 mg kg⁻¹, in the range of values usually observed in cultivated soils (Chantigny 2003). A positive correlation
42
43 (R²=0.88) was observed between SOM and WEOC in SS-amended and/or TWW-irrigated soils. The S-NA soil
44
45 points, however, were outside this correlation, indicating (1) probable differences between WEOC in S-NA and
46
47 WEOC in SS-amended and/or TWW-irrigated soils, (2) that the increase in SOM due to SS amendment does not
48
49 increase the SOM mobility. The S-WR soil, despite high SOM contents, showed low WEOC values, confirming
50
51 that the application of manure does not necessarily increase the soil WEOC (Angers et al. 2006).
52
53

54 SUVA₂₅₄ index, positively related to humification, and the E2/E3 index, positively related to low-
55
56 molecular-weight compounds, were 6.9 and 8.5, respectively, for the TWW and 0.8 and 6.0, respectively, for the
57
58 SS water extract. The SUVA₂₅₄ value was high in TWW with regard to usually observed (Michael-Kordatou et
59
60 al. 2015) but in the usual range for the SS water extract (Xing et al. 2012). These values of SUVA and E2/E3,
61
62
63
64
65



253 however, can not be expected to have a significant impact on SS-amended and/or TWW-irrigated soils because
1
2 254 of the high biological activity in the topsoil modifying the SOM after SS amendment or TWW irrigation. In the
3
4 255 soil WEOC the SUVA and E2/E3 were in the usual range (Guigue et al. 2015). The SS-amended and/or TWW-
5
6 256 irrigated soils showed a decrease of SUVA with depth, as frequently observed (Hassouna et al. 2010), due to a
7
8 257 higher proportion of lignin derivative in the topsoil.

9
10 258

11 12 13 259 **Water extractable nutrients**

14
15 260

16
17
18 261 Nutrient concentration in TWW and in water extracts from SS and from the top 0-40 cm of the studied soils
19
20 262 are given on Fig. 3. The sewage sludge had high amounts of leachable Ca^{2+} , Mg^{2+} , K^+ and SO_4^{2-} and lower, but
21
22 263 non-negligible, concentrations for the sum of nitrogen species and PO_4^{3-} . The TWW brought also significant
23
24 264 concentrations of Ca^{2+} , Mg^{2+} and K^+ , but is poor in nitrogen. These characteristics are likely related to the high
25
26 265 K^+ , SO_4^{2-} and PO_4^{3-} values observed for the S-SS, S-TW and S-STW soils when compared to the reference S-
27
28 266 WR and S-NA soils. The higher value of the ΣN (sum of nitrogen species) in the S-SS soil (0.2 % w/w) can also
29
30 267 be related to N input by SS (3.5 % w/w). The lower concentrations of ΣN in the water extracts of the S-TW and
31
32 268 S-STW soils with regard to the S-SS soil is more difficult to explain, it can be due to increased leaching of native
33
34 269 soil organic N because of an higher hydraulic loading from the effluent irrigation (Barton et al. 2005; Belaid et
35
36 270 al. 2012). Nitrogen species were mainly NO_2^- and NH_4^+ in SS and TWW and mainly NO_3^{2-} in soils, indicating
37
38 271 rapid oxidation of N species in the soil, in accordance to other studies on organic-waste mineralization in soils
39
40 272 (Odlare et al. 2011). Variations with depth of the water extractable nutrients (Fig. 4) showed that the impact of
41
42 273 the amendments is higher in the surface horizons. In conclusion, it was proved that SS-amendment or TWW-
43
44 274 irrigation increased the nutrients disponibility, especially regarding K and P, in accordance with previous studies
45
46 275 with manure applied to soils (Laird 2008; Lehmann et al. 2003) or sludge from wastewater (He et al. 2001).

47
48
49 276

50 51 277 **Bioavailability of trace elements**

52
53 278

54
55
56 279 As sludge and/or TWW application resulted in a pH raise, the final pH being comprised between 7.2 and
57
58 280 7.7, there may be the question of the bioavailability of iron and of the trace-elements that are usually poorly
59
60 281 soluble in alkaline soils (Cu, Zn, Mn, Co, Ni) (Brallier et al. 1996; Kabata-Pendias and Pendias 2001). On the



282 other hand, the sludge brought around 155, 370, 19 and 200 mg kg⁻¹ for Cu, Zn, Co and Ni, respectively. The
283 TWW brought around 14 µg L⁻¹ of Cu, the other trace elements being below the detection limit.

284 Results of water- and sodium-acetate extractions from soil material are given on Table 3, unfortunately Mn
285 results were unreliable so that they are not given. The water-extraction gives the element concentration likely to
286 be found in the soil solution after a rainfall, the sodium-acetate extraction gives an evaluation of the element
287 bioavailability in the rhizosphere, were complexing compounds released by roots or associated micro-organisms
288 can solubilize adsorbed or precipitated elements (Hinsiger 1998). Here Cu and Zn were more bioavailable in the
289 SS-amended and/or TWW-irrigated soils than in the reference S-NA soil. Concerning Ni, however,
290 concentrations in most extracts from the SS-amended and/or TWW-irrigated soils were below the detection
291 limit, and below the values found for the reference S-NA soil.

292 Regarding iron, the amorphous solid phase is the more likely to be dissolved by complexing compounds in
293 the rhizosphere, as usual low-weight carboxylic acids or microbial siderophore (Kraemer 2006). Here the
294 amorphous iron phase extracted by a citrate/ascorbate solution corresponded to 1633, 373, 617 and 415 mg kg⁻¹
295 for the S-SS, S-TW, S-STW and S-NA soils, respectively. There was a slight diminution of the potentially
296 bioavailable Fe in the soil that received TWW only, but a significative increase in soil that received sludge,
297 likely because of the iron brought by the sludge where the Fe content is usually higher than 500 mg kg⁻¹ (Sahoun
298 et al. 2012).

299

300 **Principal components analysis (PCA)**

301

302 Results of the PCA are given on Fig. 5. In this representation, positive correlation between variables is the
303 higher when the variable representative points are close together and close to the circle, negative correlation the
304 higher when points are opposite with regard to the circle center and close to the circle. When the variable
305 representative points are orthogonal with regard to the circle center, they are uncorrelated. The two first factorial
306 axes encompassed 66% of the total variance, indicating a satisfactory separation of the variables in the
307 corresponding projection. The projection confirms and clarifies most of the conclusions given above. Water-
308 extracted main nutrients (N, P, K, Mg) were correlated one to another and their weight on the first axis was
309 driven by the SS-amended and/or TWW-irrigated soils, overall their upper horizons. There was no relationship
310 between these parameters and SOC and CEC, that were more driven by the specificity of the S-WR and S-NA



311 soils. There was no correlation between water-extracted main nutrient and water-extracted Na and Cl,
1 312 confirming the sufficient leaching of salt in SS-amended and/or TWW-irrigated soils. The negative correlation
2 313 between water-extracted main nutrients and density confirmed the negligible effect of the inputs on soil
3 314 compaction.
4 315

8 316

11 316 **Conclusion**

13 317

16 318 On Mediterranean areas that have been submitted for more than 10 years to irregular and relatively poorly
17 319 controlled TWW irrigation and SS amendments, the agronomic quality of the soils has not decreased. Both SS
18 320 amendment and TWW irrigation increased the nutrients amounts and availability, without altering other soil
19 321 quality parameters such as CEC, salinity, *SAR*, *ESP*, SOM content or SOM C/N ratio. Soil permeability and trace
20 322 elements bioavailability remained also satisfactory. SOM and total N were higher in soils that received SS only,
21 323 likely because no priming effect or leaching. These observations highlight the potential benefits of application of
22 324 wastewater and sewage sludge for improving the agronomical properties of the soils, even without quite
23 325 restrictive procedures. From an environmental point of view, however, a potential contamination of soils with
24 326 heavy metals needs to be evaluated; it will be the subject of a second part of this study.
25 327

35 327

37 328 **References**

40 329

- 42 330 Ahmed HK, Fawy HA, Abdel-Hady ES (2010) Study of sewage sludge use in agriculture and its effect on plant
43 331 and soil. *Agr Biol J N Am* 1:1044–1049 . <https://doi.org/10.5251/abjna.2010.1.5.1044.1049>
- 47 332 Angers DA, Chantigny MH, Rochette P, Gagon B (2006) Dynamics of soil water-extractable organic C
48 333 following application of dairy cattle manures. *Can J Soil Sci* 86:851–858 <https://doi.org/10.4141/S05-092>
- 51 334 Barton L, Schipper LA (2005) Land application of domestic effluent onto four soil types: plant uptake and
52 335 nutrient leaching. *J Environ Qual* 34:635–643. <https://doi.org/10.2134/jeq2005.0635>
- 56 336 Belaid N, Catherine N, Monem K, Tarek A, Abdelmoneim A, Michel B (2012) Long term effects of treated
57 337 wastewater irrigation on calcisol fertility: A case study of Sfax-Tunisia. *Agricultural Science* 3:702–713.
58 338 <https://doi.org/10.4236/as.2012.35085>



- 339 Benmouffouk A (1994) Caractérisation et valorisation agricole des boues résiduaires de Draa Ben Khedda
1 340 (Algérie). Cah Agric 3:295–299. <http://revues.cirad.fr/index.php/cahiers->
2
3 341 [agricultures/article/view/29849/29609](http://revues.cirad.fr/index.php/cahiers-agricultures/article/view/29849/29609)
4
5
6 342 Brallier S, Harrison RB , Henry CL , Dongsen X (1996) Liming effects on availability of Cd, Cu, Ni and Zn in a
7
8 343 soil amended with sewage sludge 16 years previously. *Wat Air Soil Poll* 86:195–206.
9
10 344 <https://doi.org/10.1007/BF00279156>
11
12
13 345 Chantigny MH (2003) Dissolved and water-extractable organic matter in soils: a review on the influence of land
14
15 346 use and management practices. *Geoderma* 113:357–380. [https://doi.org/10.1016/S0016-7061\(02\)00370-1](https://doi.org/10.1016/S0016-7061(02)00370-1)
16
17 347 Ćirić V, Belić M, Nešić L, Šeremešić S, Pejić B, Bezdán A, Manojlović M (2016) The sensitivity of water
18
19 348 extractable soil organic carbon fractions to land use in three soil types. *Arch Agron Soil Sci* 62:1654–1664.
20
21 349 <https://doi.org/10.1080/03650340.2016.1165345>
22
23
24 350 Clapp CE, Stark SA, Clay DE, Larson WE (1986) Sewage Sludge Organic Matter and Soil Properties. *Dev Plant*
25
26 351 *Soil Sci* 25:209–253. https://doi.org/10.1007/978-94-009-4426-8_10
27
28
29 352 Delibacak A, Okur EA, Ogun R (2009) Influence of treated sewage sludge applications on temporal variations of
30
31 353 plant nutrients and heavy metals in a typical Xerofluent soil. *Nutr Cycl Agroecosyst* 83:249–257.
32
33 354 <https://doi.org/10.1007/s10705-008-9215-x>
34
35 355 Elifantz H, Kautsky L, Mor-Yosef M, Tarchitzky J, Bar-Tal A, Chen YN, Minz D (2011) Microbial activity and
36
37 356 organic matter dynamics during 4 years of irrigation with treated wastewater. *Microb Ecol* 62:973–981.
38
39 357 <https://doi.org/10.1007/s00248-011-9867-y>
40
41
42 358 Fantappiè M, L'Abate G, Costantini EAC (2011) The influence of climate change on the soil organic carbon
43
44 359 content in Italy from 1961 to 2008. *Geomorph* 135:343–352. <https://doi.org/10.1016/j.geomorph.2011.02.006>
45
46 360 Fernández JM, Plaza C, Hernández D, Polo A (2007) Carbon mineralization in an arid soil amended with
47
48 361 thermally-dried and composted sewage sludges. *Geoderma* 137:497–503.
49
50 362 <https://doi.org/10.1016/j.geoderma.2006.10.013>
51
52
53 363 Fipps G (1996) Irrigation water quality standards and salinity management strategies. Texas Agricultural
54
55 364 Extension Service B-1667, Texas A&M University System, College Station
56
57
58 365 Fyttili D, Zabaniotou A (2008) Utilization of sewage sludge in EU application of old and new methods – A
59
60 366 review. *Renew Sustain Energ Rev* 12:116–140. <https://doi.org/10.1016/j.rser.2006.05.014>
61
62
63
64
65



- 367 Gerzabek MH, Haberhauer G, Kirchmann H (2001) Soil organic matter pools and carbon-13 natural abundances
1 in particle-size fractions of a long-term agricultural field experiment receiving organic amendments. *Soil Sci*
2
3
4 369 *Soc Am J* 65:352–358. doi:10.2136/sssaj2001.652352x
5
- 6 370 Guigue J, Lévêque J, Mathieu O, Schmitt-Kopplin P, Lucio M, Arrouays D, Jolivet C, Dequiedt S, Chemidlin
7
8 371 Prévost-Bouré N, Ranjard L (2015) Water-extractable organic matter linked to soil physico-chemistry and
9
10 372 microbiology at the regional scale. *Soil Biol Biochem* 84:158–167.
11
12 373 <https://doi.org/10.1016/j.soilbio.2015.02.016>
13
14
- 15 374 Halliwell DJ, Barlow KM, Nash DM (2001) A review of the effects of wastewater sodium on soil physical
16
17 375 properties and their implications for irrigation systems. *Austr J Soil Res* 39:1259–1267.
18
19 376 <https://doi.org/10.1071/SR00047>
20
- 21 377 Hannachi A, Gharzouli R, Djellouli Tabet Y (2014) Gestion et valorisation des eaux usées en Algérie. *Larhyss J*
22
23 378 19:51–62.
24
25
- 26 379 Hassouna M, Massiani C, Dudal Y, Pech N, Theraulaz F (2010) Changes in water extractable organic matter
27
28 380 (WEOM) in a calcareous soil under field conditions with time and soil depth. *Geoderma* 155:75–85.
29
30 381 <https://doi.org/10.1016/j.geoderma.2009.11.026>
31
32
- 33 382 Haynes R J, Naidu R (1998) Influence of lime, fertilizer and manure applications on soil organic matter content
34
35 383 and soil physical conditions: a review. *Nutr Cycl Agroecosyst* 51:123–137.
36
37 384 <https://doi.org/10.1023/A:1009738307837>
38
- 39 385 He Y, DeSutter TM, Hopkins DG, Wysocki DA, Clay DE (2015) Relationship between 1:5 soil/water and
40
41 386 saturated paste extract sodium adsorption ratios by three extraction methods. *Soil Sci Soc Am J* 79:681–687.
42
43 387 <https://doi.org/10.2136/sssaj2014.09.0384>
44
45
- 46 388 Hinsinger P (1998) How do plant roots acquire mineral nutrients? Chemical processes involved in the
47
48 389 rhizosphere. *Adv Agron* 64:225–265. [https://doi.org/10.1016/S0065-2113\(08\)60506-4](https://doi.org/10.1016/S0065-2113(08)60506-4)
49
- 50 390 Hussain I, Raschid L, Hanjra MA, Marikar F, van der Hoek W (2002) Wastewater use in agriculture: review of
51
52 391 impacts and methodological issues in valuing impacts. Working Paper 37, International Water Management
53
54 392 Institute, Colombo
55
56
- 57 393 Igoud S (2001) Valorisation des Boues Résiduelles Issues des Stations d'Épuration Urbaines par leur Épandage
58
59 394 dans les Plantations Forestières. *Rev Energ Ren : Production et Valorisation – Biomasse*, 69–74.
60
61
62
63
64
65



- 395 Jolliffe IT (2002) *Principal component analysis*. 2nd ed, Springer-Verlag, New York
- 1
2 396 Jones JB (2012) *Plant Nutrition and Soil Fertility Manual*. 2nd ed, CRC Press, Boca Raton
- 3
4 397 Kabata-Pendias A, Pendias H (2001) *Trace elements in soils and plants*. 3rd ed, CRC Press, Boca Raton
- 5
6
7 398 Kraemer SM, Crowley DE, Kretzschmar R (2006) Geochemical aspect of phytosiderophore-promoted iron
8
9 399 acquisition by plants. *Adv Agron* 91:1–46. [https://doi.org/10.1016/S0065-2113\(06\)91001-3](https://doi.org/10.1016/S0065-2113(06)91001-3)
- 10
11 400 Laird DA (2008) The Charcoal Vision: a win–win–win scenario for simultaneously producing bioenergy,
12
13 401 permanently sequestering carbon, while improving soil and water quality. *Agron J* 100:178–181.
14
15 402 <https://doi.org/10.2134/agronj2007.0161>
- 16
17
18 403 Lamond R, Whitney DA (1992) *Management of saline and sodic soils*. Department of Agronomy MF-1022,
19
20 404 Kansas State University, Mahattan
- 21
22
23 405 Lehmann J, da Silva JP Jr, Steiner C, Nehls T, Zech W, Glaser B (2003) Nutrient availability and leaching in an
24
25 406 archaeological Anthrosol and a Ferralsol of the Central Amazon basin: fertilizer, manure and charcoal
26
27 407 amendments. *Plant Soil* 249:343–357. <https://doi.org/10.1023/A:1022833116184>
- 28
29
30 408 Michael-Kordatou I, Michael C, Duan X, He X, Dionysiou DD, Mills MA, Fatta-Kassinos D (2015) Dissolved
31
32 409 effluent organic matter: Characteristics and potential implications in wastewater treatment and reuse
33
34 410 applications. *Water Res* 77:213–248. <https://doi.org/10.1016/j.watres.2015.03.011>
- 35
36 411 Mtshali JS, Tiruneh AT, Fadiran AO (2014) Characterization of sewage sludge generated from wastewater
37
38 412 treatment plants in Swaziland in relation to agricultural uses. *Resour Environ* 4:190–199.
39
40 413 <https://doi.org/10.5923/j.re.20140404.02>
- 41
42
43 414 Pastor L, Cathalot C, Deflandre B, Viollier E, Soetaert K, Meysman FJR, Ulses C., Metzger E., Rabouille, C
44
45 415 (2011) Modeling biogeochemical processes in sediments from the Rhône River prodelta area (NW
46
47 416 Mediterranean Sea. *Biogeosciences* 8: 1351-1366. <https://doi.org/10.5194/bg-8-1351-2011>
- 48
49
50 417 Pedrero F, Kalavrouziotis I, Alarcón JJ, Koukoulakis P, Asano T (2010) Use of treated municipal wastewater in
51
52 418 irrigated agriculture – Review of some practices in Spain and Greece. *Agric Water Manag* 97:1233–1241.
53
54 419 <https://doi.org/10.1016/j.agwat.2010.03.003>
- 55
56 420 Pereira LS, Oweis T, Zairi A (2002) Irrigation management under water scarcity. *Agric Water Manag* 57:175–
57
58 421 206. [https://doi.org/10.1016/S0378-3774\(02\)00075-6](https://doi.org/10.1016/S0378-3774(02)00075-6)
- 59
60
61
62
63
64
65




- 422 Peuravuori J, Pihlaja K (1997) Molecular size distribution and spectroscopic properties of aquatic humic
1 substances. *Anal Chim Acta* 337:133–149. [https://doi.org/10.1016/S0003-2670\(96\)00412-6](https://doi.org/10.1016/S0003-2670(96)00412-6)
2
3
4 424 Qadir M, Wichelns D, Raschid-Sally L, McCornick PG, Drechsel P, Bahri A, Minhas PS (2010) The challenges
5 of wastewater irrigation in developing countries. *Agric Water Manag* 97:561–568.
6
7
8 426 <https://doi.org/10.1016/j.agwat.2008.11.004>
9
10
11 427 Ramdani N, Hamou A, Lousdad A, Al-Douri Y (2015) Physicochemical characterization of sewage sludge and
12 green waste for agricultural utilization. *Environ Technol* 36:1594–1604.
13
14
15 429 <https://doi.org/10.1080/09593330.2014.998716>
16
17
18 430 Rehman K, Ashraf S, Rashid U, Ibrahim M, Hina S, Iftikhar T, Ramzan S (2013) Comparison of proximate and
19 heavy metal contents of vegetables grown with fresh and wastewater. *Pak J Bot* 45:391–400.
20
21
22 432 Roca-Pérez L, Martínez C, Marcilla P, Boluda R (2009) Composting rice straw with sewage sludge and compost
23 effects on the soil–plant system. *Chemosphere* 76:781–787.
24
25
26 434 <https://doi.org/10.1016/j.chemosphere.2008.12.058>
27
28
29 435 Sahnoun AY, Tidjani AEB, Iddou A (2012) Comparative study of the characteristics of three types of sludge
30 from wastewater treatment plant. *Energ Procedia* 18:99–109. <https://doi.org/10.1016/j.egypro.2012.05.022>
31
32
33 437 Singh RP, Agrawal M (2008) Potential benefits and risks of land application of sewage sludge. *Waste Manag*
34 28:347–358. <https://doi.org/10.1016/j.wasman.2006.12.010>
35
36
37
38 439 de Souza ER, de Melo HF, de Almeida BG, de Melo DVM (2013) Comparação de métodos de extração da
39 solução do solo. *Rev Bras Eng Agri Ambiental* 17:510–517.
40
41
42 441 <http://www.agriambi.com.br/revista/v17n05/v17n05a07.pdf>
43
44
45 442 Stevens DP, McLaughlin MJ, Smart MK (2003) Effects of long-term irrigation with reclaimed water on soils of
46 the Northern Adelaide Plains, South Australia. *Austr J Soil Res* 41:933–948.
47
48
49 444 <https://doi.org/10.1071/SR02049>
50
51
52 445 Tarchouna LG, Merdy P, Raynaud M, Pfeifer HR, Lucas Y (2010) Effects of long-term irrigation with treated
53 wastewater Part I: Evolution of soil physico-chemical properties. *Appl Geochem* 25:1703–1710.
54
55
56 447 <https://doi.org/10.1016/j.apgeochem.2010.08.018>
57
58
59 448 Triberti L, Nastro A, Baldoni G (2016) Long-term effects of crop rotation, manure and mineral fertilisation on
60 carbon sequestration and soil fertility. *Eur J Agron* 74:47–55. <https://doi.org/10.1016/j.eja.2015.11.024>
61
62
63
64
65




- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
- 450 USDA (1993) Soil survey manual Soil Conservation Service. USDA Handbook 18, Government Printing Office,
451 Washington DC
- 452 US Salinity Lab Staff (1954) Diagnosis and Improvement of Saline and Alkali Soils. USDA Handbook 60,
453 Government Printing Office, Washington DC
- 454 Warman PR, Termeer WC (2005) Evaluation of sewage sludge, septic waste and sludge compost applications to
455 corn and forage: yields, and N, P and K content of crops and soils. *Biores Technol* 96:955–961.
456 <https://doi.org/10.1016/j.biortech.2004.08.003>
- 457 Weishaar JL, Aiken GR, Bergamaschi BA, Fram MS, Fujii R, Mopper K (2003) Evaluation of Specific
458 Ultraviolet Absorbance as an Indicator of the Chemical Composition and Reactivity of Dissolved Organic
459 Carbon. *Env Sci Technol* 37: 4702-4708. <https://doi.org/10.1021/es030360x>
- 460 Xing M, Li X, Yang J, Huang Z, Lu Y (2012) Changes in the chemical characteristics of water-extracted organic
461 matter from vermicomposting of sewage sludge and cow dung. *J Hazard Mat* 205-206:24–31.
462 <https://doi.org/10.1016/j.jhazmat.2011.11.070>
- 463 Zebarth BJ, McDougall R, Neilsen G, Neilsen D (2000) Availability of nitrogen from municipal sewage sludge
464 for dryland forage grass. *Can J Plant Sci* 80:575-582. <https://doi.org/10.1016/j.jhazmat.2011.11.070>
- 465 Zeng G, Wu H, Liang J, Guo S, Huang L, Xu P, Liu Y, Yuan Y, He X, He Y (2015) Efficiency of biochar and
466 compost (or composting) combined amendments for reducing Cd, Cu, Zn and Pb bioavailability, mobility
467 and ecological risk in wetland soil. *RSCAdv.* 5: 34541-34548. <https://doi.org/10.1039/C5RA04834F>
- 468 Zsolnay A (2003) Dissolved organic matter: artefacts, definitions, and functions. *Geoderma* 113: 187-209.
469 [https://doi.org/10.1016/S0016-7061\(02\)00361-0](https://doi.org/10.1016/S0016-7061(02)00361-0)




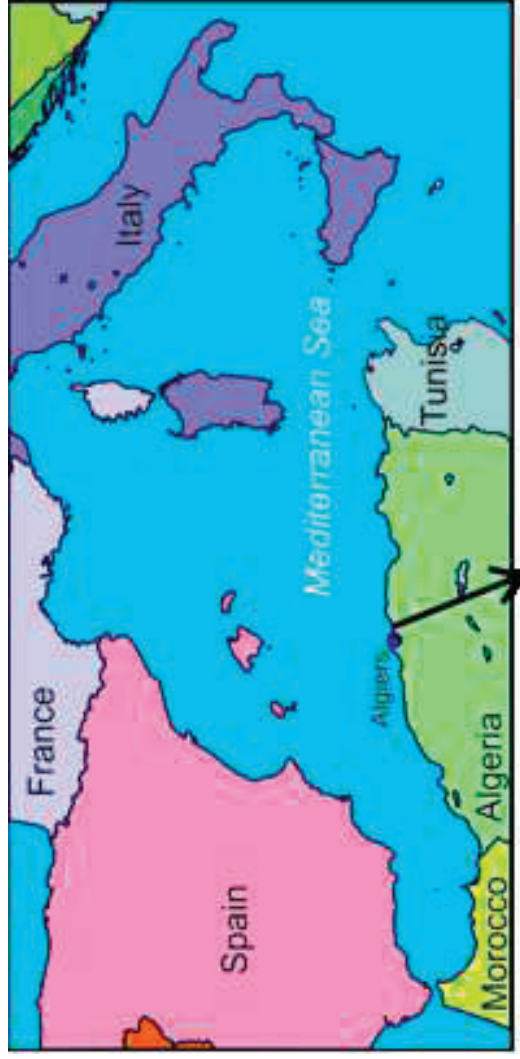

Figure

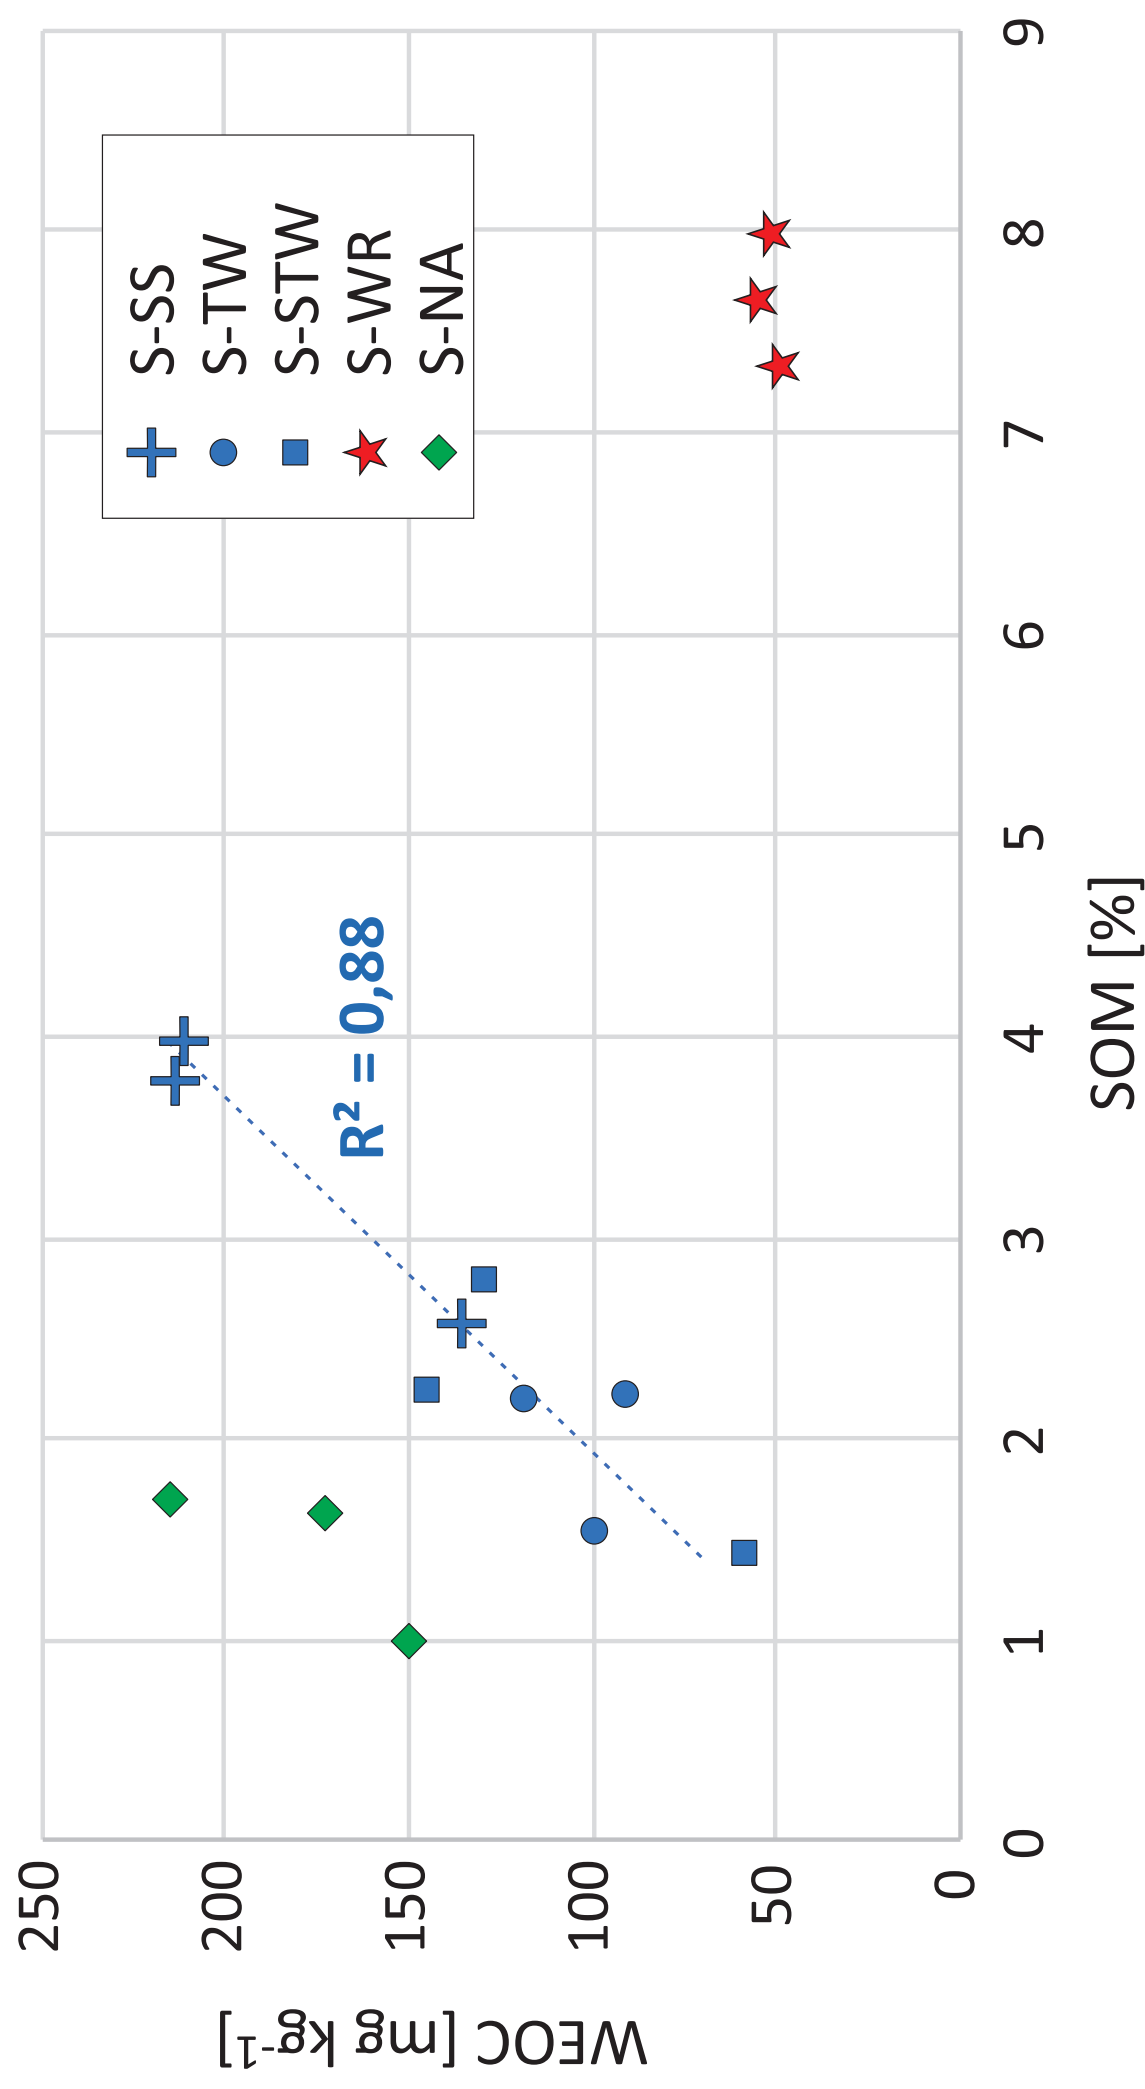


Figure

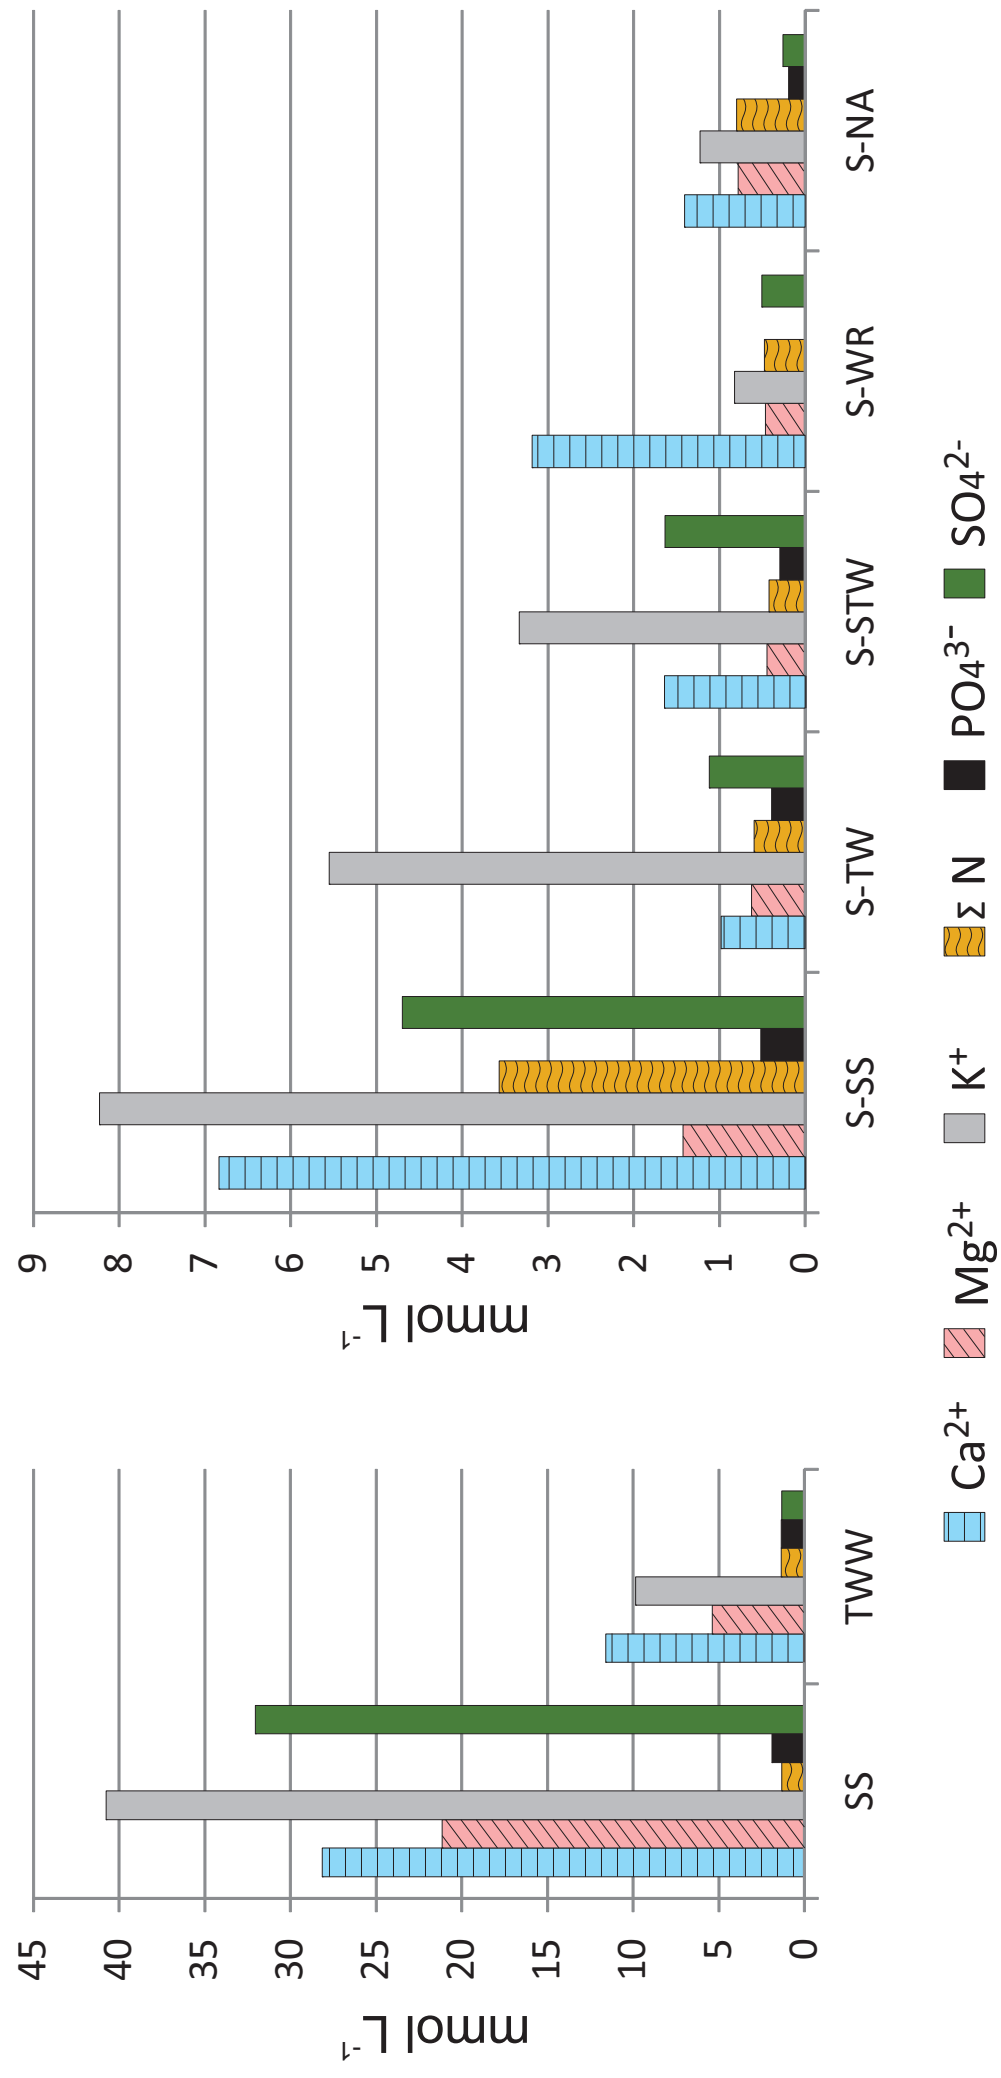

Figure

Biplot (F1 and F2 : 64.61 %)

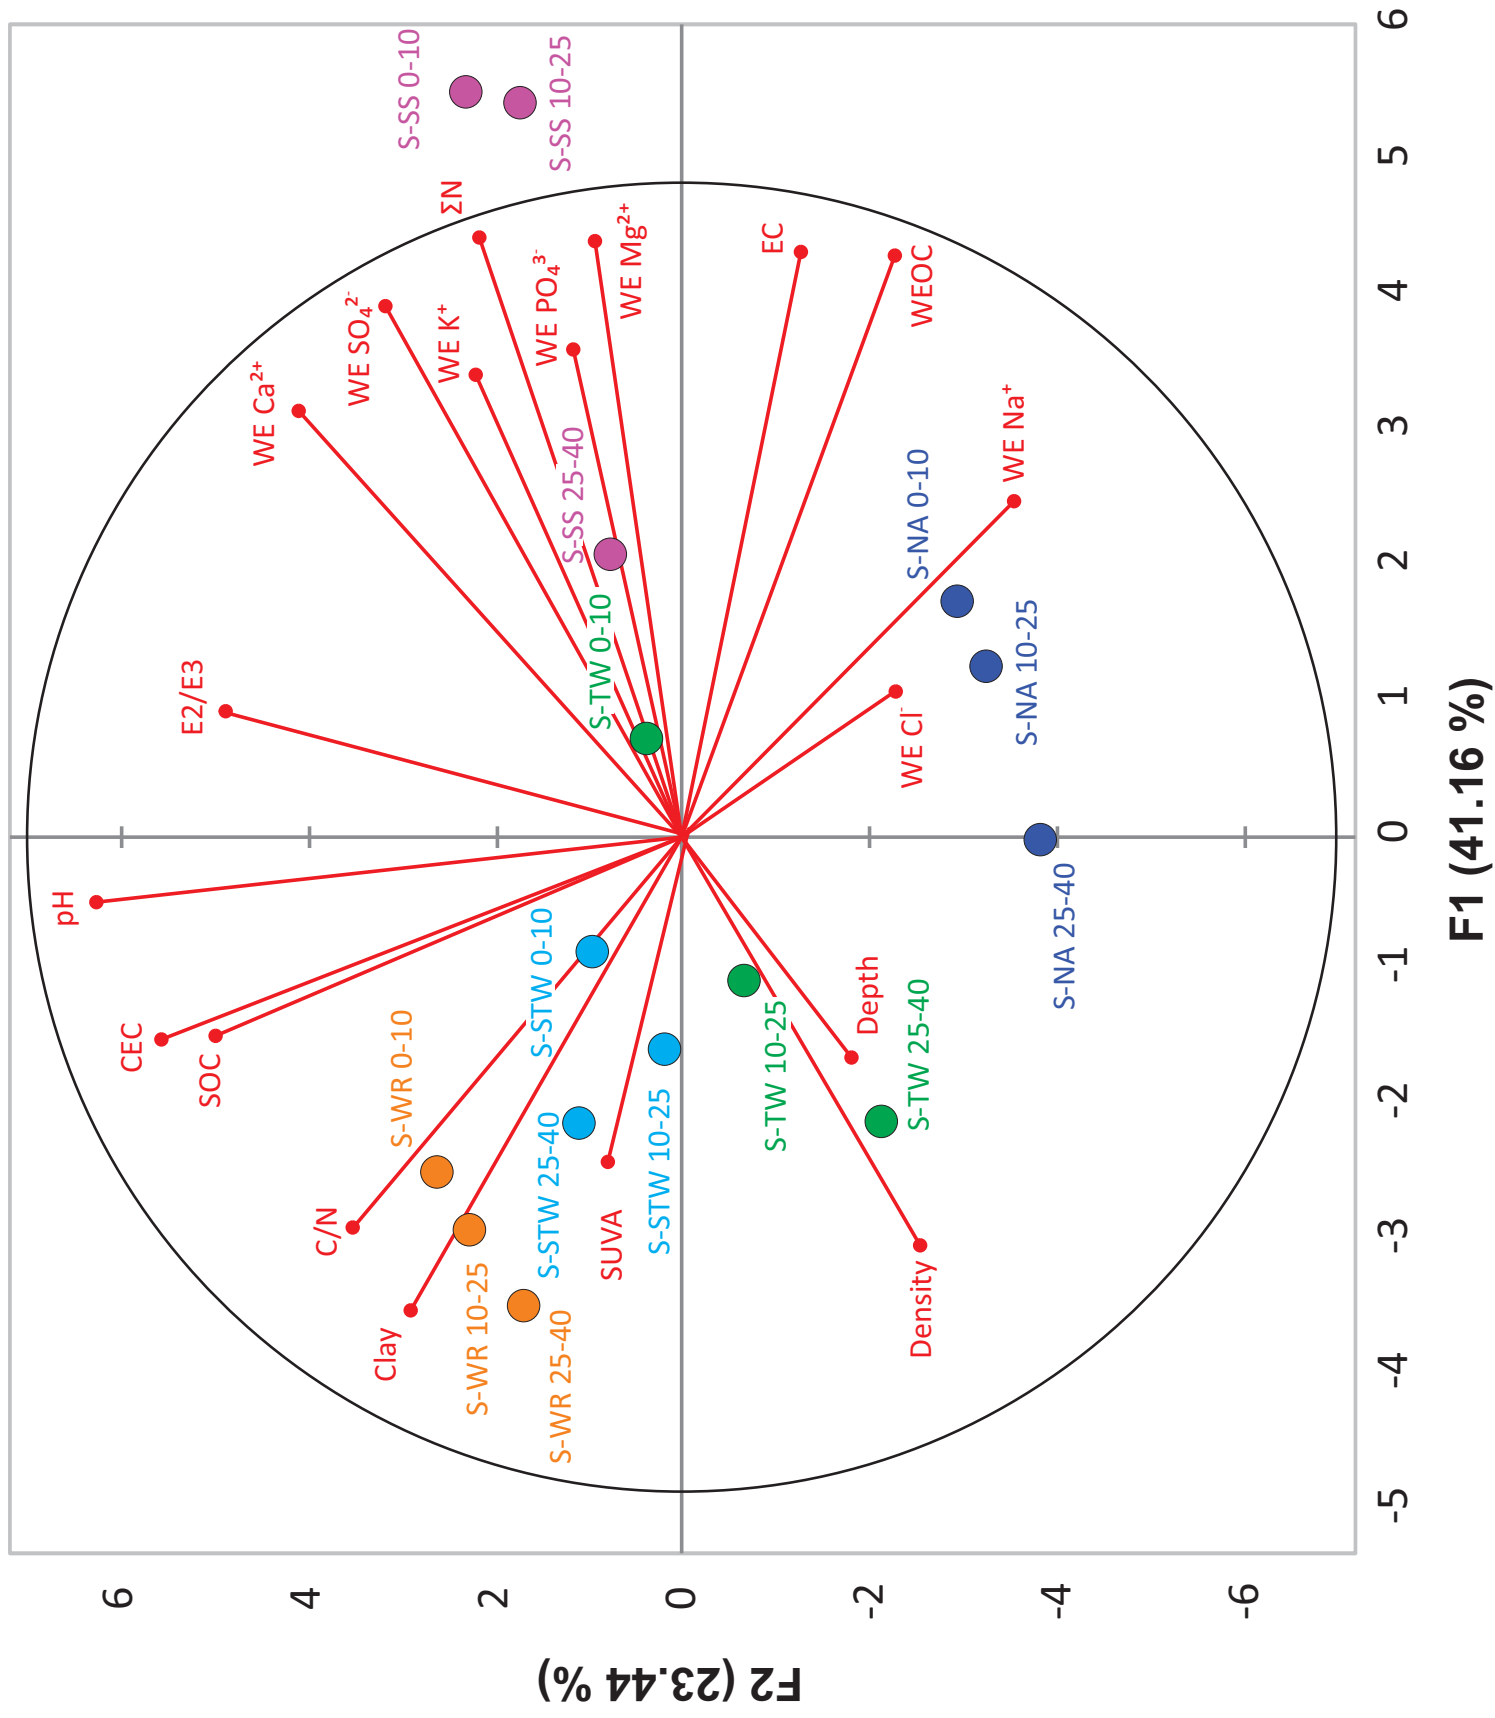

Figure

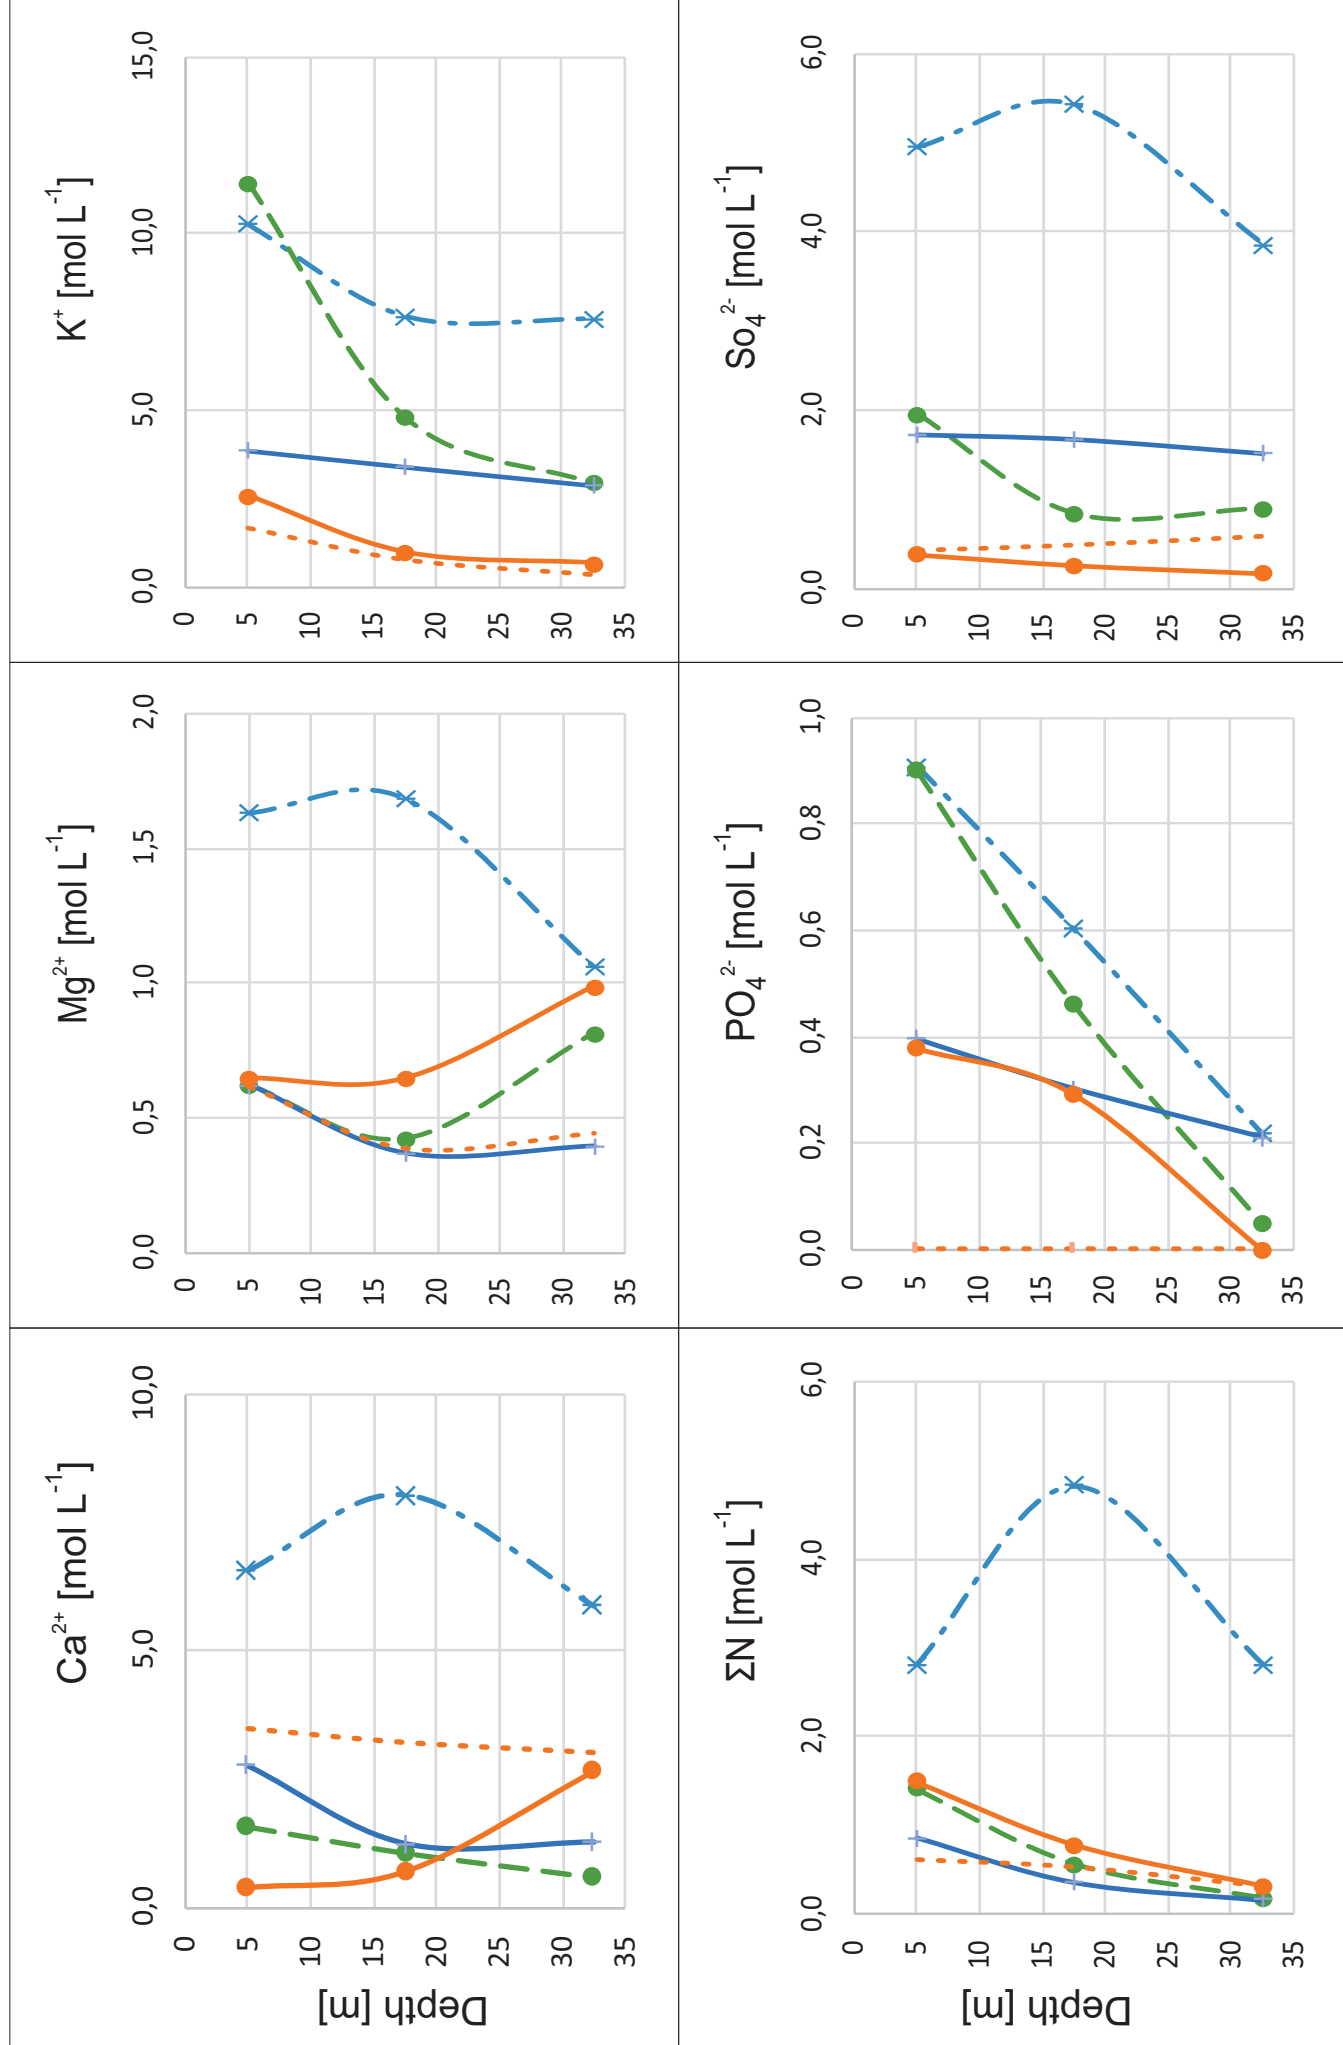


Table 1. Agronomic parameters for sludge, TWW and soils. Weighted average values for the 0-40 cm soil layer.

Parameter	Unit	S-SS	S-TW	S-STW	S-WR	S-NA	SS	TWW
Clay	%, w/w	17.4	21.6	36.8	30.9	12.7	#	#
Silt	%, w/w	44.9	51.3	30.1	42.8	55.8	#	#
Sand	%, w/w	37.7	27.2	33.1	26.3	31.5	#	#
ρ_d	g cm ⁻³	1.3	1.4	1.5	1.4	1.4	#	#
CEC	meq 100g ⁻¹	15.8	11.4	19.4	19.6	9.8	38.2	#
SOC	%, w/w	2.0	1.1	1.2	4.4	0.8	22.5	#
N total	%, w/w	0.2	0.1	0.1	0.1	0.1	3.5	#
C/N		9.7	13.2	10.7	45.0	9.3	6.4	#
pH		7.5	7.2	7.6	7.7	7.0	8.1	7.8
EC	$\mu\text{S cm}^{-1}$	#	#	#	#	#	#	296
EC _{1:10}	$\mu\text{S cm}^{-1}$	67	27	29	33	55	677	#
EC _{SP}	$\mu\text{S cm}^{-1}$	1585	643	693	769	1296	16014	#
SAR	(mmolc L ⁻¹) ^{0.5}	1.4	1.2	2.2	1.2	3.8	4.5	15.2
ESP		2.5	1.3	1.6	1.2	5.8	8.4	#
Dissolved species in water extract for soils and SS and in TWW								
WEOC	mg kg ⁻¹	181.8	104.8	110.5	52.0	179.4	3826.0	3.8
Ca ²⁺	mg kg ⁻¹	274.1	39.4	65.8	127.6	56.4	1128.6	465.2
Mg ²⁺	mg kg ⁻¹	34.6	15.2	10.9	11.3	19.0	513.8	130.8
K ⁺	mg kg ⁻¹	321.8	217.0	130.5	32.2	47.9	1593.1	385.2
Na ⁺	mg kg ⁻¹	90.2	34.5	72.8	53.1	130.9	733.7	1439.9
Cl ⁻	mg kg ⁻¹	150.4	114.6	99.5	141.2	208.0	967.5	2061.7
F ⁻	mg kg ⁻¹	3.8	1.6	8.1	5.3	11.6	8.3	2.0
NO ₃ ⁻	mg kg ⁻¹	179.7	28.3	16.7	22.4	26.3	14.6	1.9
NO ₂ ⁻	mg kg ⁻¹	4.8	1.4	4.8	2.3	1.8	25.4	0.0
NH ₄ ⁺	mg kg ⁻¹	1.3	0.6	<dl	<dl	4.7	9.2	24.2
PO ₄ ³⁻	mg kg ⁻¹	49.2	37.5	28.0	0.0	18.6	181.8	130.1
SO ₄ ²⁻	mg kg ⁻¹	450.9	107.1	156.7	48.4	24.7	3075.9	126.6



Table 2. Variation with depth of soil main characteristics.

Depth [cm]	SOM [% w/w]	WEOC in SOC			EC [$\mu\text{S cm}^{-1}$]	pH	CEC [$\text{cmol}_c \text{k}^{-1}$]	Clay	Silt	Sand	ρ_d [g cm^{-3}]
		% of SOC	SUVA ₂₅₄	E2/E3							
S-SS											
0-10	4.0	0.91	3.9	6.1	72.0	7.7	16.7	15.6	52.6	31.9	1.1
10-25	3.8	0.97	3.7	6.4	71.8	7.5	16.4	13.5	48.6	37.7	1.3
25-40	2.6	0.90	3.6	6.3	58.8	7.5	14.5	22.5	36.0	41.5	1.3
S-TW											
0-10	2.2	0.71	4.6	5.9	38.7	7.3	11.8	18.6	52.8	28.5	1.3
10-25	2.2	0.93	2.9	3.1	25.6	7.3	12.3	19.3	53.3	26.9	1.4
25-40	1.6	1.11	2.2	2.9	21.0	7.0	10.4	25.6	47.8	26.4	1.5
S-STW											
0-10	2.8	0.80	7.2	5.1	38.9	7.6	19.9	40.0	25.7	34.3	1.3
10-25	2.2	1.12	4.7	4.2	26.4	7.5	19.7	36.7	28.3	35.1	1.6
25-40	1.4	0.7	5.1	9.0	25.8	7.6	18.6	34.7	35.0	30.3	1.5
S-WR											
0-10	8.0	0.11	6.6	6.8	34.4	7.8	19.4	31.0	46.0	23.0	1.3
10-25	7.7	0.12	6.6	3.2	32.0	7.8	19.7	30.0	36.0	34.0	1.3
25-40	7.3	0.12	7.5	3.6	31.8	7.5	19.5	31.0	46.0	20.0	1.4
S-NA											
0-10	1.6	1.83	3.7	2.4	78.2	7.1	9.6	7.3	55.5	37.2	1.3
10-25	1.7	1.7	5.1	2.3	65.6	7.0	10.4	7.7	60.7	34.4	1.4
25-40	1.0	1.0	8.3	2.5	54.8	6.9	9.3	21.6	52.8	25.6	1.5
SS											
			0.8	6							
TWW											
			6.9	8.5							



Table 3. Trace element extraction, average in the 0-40 horizons, values in mg kg⁻¹. W-ex.: water-extractable; Na-ac-ex.: sodium acetate extractable.

		S-SS	S-TW	S-STW	S-WR	S-NA
Cu	W-ex	0,39	1,03	0,76	0,14	0,41
	Na-ac-ex	2,03	10,86	4,90	0,28	0,74
Zn	W-ex	0,02	0,07	0,18	0,16	0,16
	Na-ac-ex	5,94	0,74	1,39	0,29	0,60
Co	W-ex	<dl	0,03	0,04	0,11	0,00
	Na-ac-ex	0,14	0,08	0,12	0,12	0,00
Ni	W-ex	<dl	<dl	0,03	0,07	0,06
	Na-ac-ex	<dl	<dl	<dl	<dl	0,11



Figure captions

Fig. 1. Location of the sampling sites in the Boumerdes region, Northern Algeria. The point in the view is N 36°45'34.56", E 3°25'24.96". View from Google Earth, 2017.

Fig. 2. Water extractible organic carbon versus soil organic matter. The regression line concerns the S-SS, S-TW and S-STW points.

Fig. 3. Nutrients in TWW and in the water extract of SS and of the studied soils (average for the 0-40 cm topsoil).

Fig. 4. Variation with depth of water extracted nutrients.

Fig. 5. PCA correlation circle, variables (points) and samples (circles). Percent on each factorial axis gives the explained variance. WE: water extractible.

