



**HAL**  
open science

## Tracing the seismic history of Sant'Agata del Mugello (Italy, Tuscany) through a cross-disciplinary approach

Arnaud Montabert, Helene Dessales, Andrea Arrighetti, Julien Clément,  
Maria Lancieri, H Lyon-Caen

### ► To cite this version:

Arnaud Montabert, Helene Dessales, Andrea Arrighetti, Julien Clément, Maria Lancieri, et al.. Tracing the seismic history of Sant'Agata del Mugello (Italy, Tuscany) through a cross-disciplinary approach. *Journal of Archaeological Science: Reports*, 2020, 33, pp.102440. 10.1016/j.jasrep.2020.102440 . hal-02944920

**HAL Id: hal-02944920**

**<https://hal.science/hal-02944920v1>**

Submitted on 23 Sep 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - NoDerivatives 4.0 International License

# Tracing the seismic history of Sant'Agata del Mugello (Italy, Tuscany) through a cross-disciplinary approach.

Arnaud MONTABERT<sup>\*1,4,5</sup>, Hélène DESSALES<sup>2</sup>, Andrea ARRIGHETTI<sup>3</sup>, Julien CLEMENT<sup>4</sup>, Maria LANCIERI<sup>5</sup>, and Hélène LYON-CAEN<sup>1</sup>

<sup>1</sup>Ecole normale supérieure, PSL University, CNRS, U.M.R.8538-Laboratoire de Géologie, 24 Rue Lhomond, 75005 Paris

<sup>2</sup>Ecole normale supérieure, PSL University, U.M.R.8546-AOrOc, 45 rue d'Ulm 75005 Paris

<sup>3</sup>University of Siena, DSSBC, Palazzo San Galgano, via Roma, 47 - 53100 Siena - Italia

<sup>4</sup>Institut de Radioprotection et de Sécurité Nucléaire (IRSN), PSN-EXP/SES/LMAPS, 31, avenue de la Division Leclerc, BP 17, 92262 Fontenay-aux-Roses, CEDEX, France

<sup>5</sup>Institut de Radioprotection et de Sécurité Nucléaire (IRSN), PSE-ENV/SCAN/BERSIN, 31, avenue de la Division Leclerc, BP 17, 92262 Fontenay-aux-Roses, CEDEX, France

---

## Abstract

Historical seismicity is mainly defined from historical sources which are not always available. Yet historical buildings are an unique opportunity to record and study effects of past earthquakes at a given place. An innovative methodology is defined to improve knowledge of local historical seismicity. Such a methodology is based on an interdisciplinary approach combining : analysis of historical sources, stratigraphic analysis and structural analysis of an historical building. The church of Sant'Agata del Mugello (Italy, Tuscany) is considered as a case of study. The stratigraphic analysis is performed by identifying the repairs using the RECAP methodology. 80 repairs units using 13 building techniques are identified in the church. The identified repairs are associated with unknown events, earthquakes or routine reconstructions. When post-earthquake reconstructions are found, damage mechanisms are associated with them. 13 constructive phases of the church have been traced combining stratigraphic analysis and historical sources. A proto-church was built before 948 A.D. and is nowadays below the current one. The first phase of the current church appears between the 9<sup>th</sup> and the 12<sup>th</sup> century. A significant event of unknown origin occurred during the 12<sup>th</sup> century which probably led to an important collapse and then a significant reconstruction of the church. The church is then deeply affected by the 1542 seismic event (epicentral macroseismic intensity 9, deduced magnitude 6.02) which resulted in the collapse of the upper part of the bell tower and the two lateral chapels as well as the overturning of the front wall and of the two lateral walls of the nave. The 1611 seismic event (epicentral macroseismic intensity 7, deduced magnitude 5.1) damaged the upper part of the bell tower as described in historical records. In spite of the confirmed occurrence of seismic events in the area from the middle of the 17<sup>th</sup> century and the beginning of the 20<sup>th</sup> century, no information relating seismic damage of the church has been found in historical records nor in the stratigraphic analysis. The most important earthquake which struck the area on June 19<sup>th</sup>, 1919, produced only some small cracks in the church (magnitude 6.38).

**Keywords**— historical seismicity, historical sources, building stratigraphy, architecture, structural analysis, damage mechanisms, Central Italy

---

## Highlights

- Combining stratigraphic analysis and historical records to trace the evolution of an edifice
- To identify the origin of a repair unit (post-earthquake or routine work)
- To identify and quantify damage mechanisms from identified repairs units

---

<sup>0</sup>Preprint submitted to "Journal of Archaeological science : Reports" in accepted form 10 June 2020

\*Corresponding author. E-mail adress : montabert@geologie.ens.fr.

# 1 Introduction

Historical seismicity is mainly known from historical records. However, such documents do not always exist or can be subject to misinterpretation (Ambraseys [1971], Albini et al. [2017]). New information is hence required to gain constraints on historical seismicity. Amongst them, historical buildings witnessed natural catastrophes like earthquakes which are recorded in their walls as structural disorders and restorations. Tracing the seismic history and the constructive evolution of an historical edifice is of great interest for human and architectural sciences, earthquake engineering and seismology. From a human sciences perspective, the study of historic buildings provides a better understanding of the seismic resilience in ancient societies (Bradtmöller et al. [2017], Nigro [2014], Samson et al. [2015], Torrence and Grattan [2003]) including how they adapted building techniques to reinforce edifices in seismic area (Forlin and Gerrard [2017], Stiros [1995], Bankoff [2015], Hinzen and Montabert [2017]). From an architectural point of view, the identification of the building techniques as well as the related constructive phases is important for vulnerability analysis, restoration process and also to a better understanding of the building itself and its evolution along the time (Arrighetti [2019], Fontani [1802], Alessio Marchetti et al. [2017], Ortega et al. [2017], Papa et al. [2011]). In the case of earthquake engineering studies, the identification of past damage mechanisms allows to understand the seismic response of the cultural heritage building as well as how to reinforce it (Lagomarsino and Boato [2010], Binda et al. [2006]). From a seismological point of view, a local description of the damage level of an historical building for each past earthquake improves the knowledge of epicentral macroseismic intensities<sup>1</sup> which are fundamental data for seismic hazard assessment (Volant et al. [2009], Sintubin and Stewart [2008]). In this paper, an innovative methodology is introduced combining information from historical records with a stratigraphic analysis of historic buildings in a seismic context. The stratigraphic analysis is based on the RECAP method ("REconstruire Après un tremblement de terre : Expériences antiques et innovations à Pompéii"; Rebuilding after an earthquake. Ancient experiments and innovations in Pompeii, ANR-14-CE31-0005, 2015-2019: see <http://recap.huma-num.fr>), developed as part of the study of post-earthquake reconstruction in Pompeii. The RECAP method focused on the identification of architectural repairs and can be decomposed in four distinctive parts : identifying the repair; identifying the damage; identifying the nature of the repair, and chronological relations between repairs. Such chronological relations can be improved by historical records. In some cases, the stratigraphic analysis contributes to a more precise interpretation of historical records. The cross-disciplinary approach described in this paper aims :

- To retrace the evolution of the constructive phases of an historic building and of the used material over time;
- To associate damage mechanisms with post-earthquake reconstruction units.

The Sant'Agata del Mugello church is chosen as a case study. The Romanesque church is located in the Mugello basin (Italy, Tuscany) and suffered from many earthquakes at least from 1542 (Io 9, M 6.02). The Parish church has been partially studied in preliminary studies (Arrighetti [2015]) according to the so-called 'archaeologia dell'architettura' method (Brogiolo [2002], Mannoni [1984], Cagnana and Mannoni [2000], Mannoni [2005], Parenti [2002]). The previous stratigraphic analysis included the facade of the church, the north-facing outside wall of the nave and the west-facing outside wall of the bell tower. The work is extended to the entire church in the present study using the RECAP method described below. The historical building is composed of a church and a squared cloister (Figure 1). But here we only focus on the church. There are indeed only a few documents describing the cloister history and the walls are nowadays covered with plasters making difficult any stratigraphic analysis.

---

<sup>1</sup>epicentral macroseismic intensity (Io): measure of the effects of an earthquake on buildings located near the seismic source projection on the earth surface.

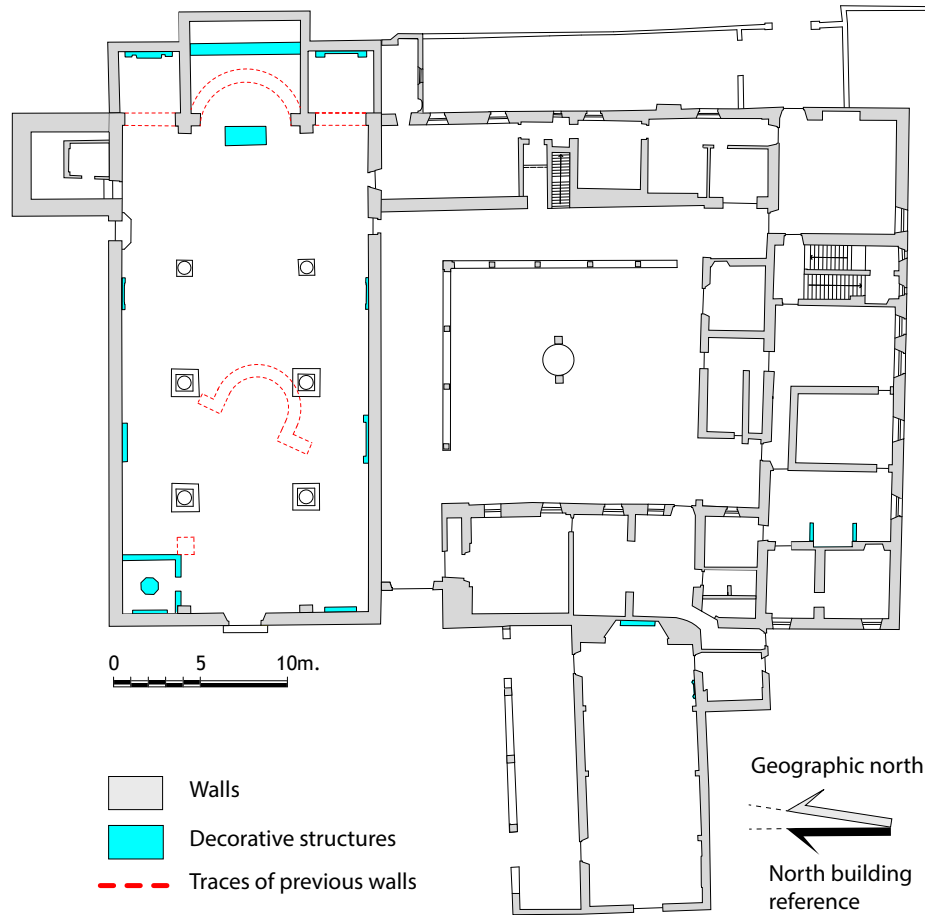


Figure 1: Plan of the historical building of Sant'Agata del Mugello including the church and the cloister

## 2 Seismotectonic context

The church is located in the northern portion of the Mugello area (Italy, Tuscany) characterized by an intermontane asymmetric basin trending WNW-ESE and filled with Pliocene-Pleistocene alluvial and lacustrine deposits (Benvenuti [2003], Sani et al. [2009], Bonini et al. [2016]). The basin is inferred to have developed under a compressive regime in Late Pliocene-Early Pleistocene related to the contemporary Northern Apennine active thrust (50 km away from the basin). The basin was then affected by NE-SW extension and normal faulting when the compressive regime ceased around the Early-Middle Pleistocene period (Sani et al. [2009]) in relation with the opening of the northern Tyrrhenian Sea. The church is located  $\sim 10$  km south of the large SSW-dipping normal fault system ( $\sim 25 - 30$  km long) referred to as the 'Ronta fault system' which affects the north-eastern basin margin (Sani et al. [2009]). The 'Sieve fault system' of N-dipping antithetic normal faults bounds the southwestern margin of the basin (Sani et al. [1997], Sani et al. [2009]). This scarcely visible fault system is assumed to control the asymmetric location of the Sieve River located in the southern part of the basin (Sani et al. [1997]). Some studies described this southern normal fault system as the master fault of the Mugello basin (Martini and Sagri [1993]), which would be connected to the regional NE-dipping low-angle Etrurian normal fault system (Boncio et al. [2000]). Instrumental seismicity has recently allowed the recognition of another normal fault system in the north-western Mugello basin margin activated in 2008 interpreted as a steep NNE-dipping seismogenic normal fault (Amato et al. [2008], Ripepe et al. [2008]) and the 2009 seismic events interpreted as a steep SSW-dipping seismogenic normal fault as a northwards extension of the Ronta fault system where macroseismic epicentres associated with the 1542 and the 1919 events have been located (Rovida et al. [2016]). The Mugello sector is thus characterized by a rather moderate seismicity with several historical earthquakes (blue box in Figure 2). Some of them having the largest macroseismic magnitude of 6.02 in 1542 and of 6.38 in 1919 (Rovida et al. [2016]). The identification of the faults responsible for the

historical earthquakes is still a matter of debate since several faults may potentially produce earthquakes in the Mugello area as described above. On one hand, following the hypothesis that the southern fault system is controlling the tectonics of the basin, the DISS Working Group (DISS Working Group [2018]) subdivided the southwestern basin margin into a north-western and a south-eastern fault segment (yellow box in Figure 2). The former and the latter are inferred to have ruptured respectively during the 1542 and the 1919 seismic events (Donne [2005]). On the other hand, Bonini et al. [2016] consider the Ronta fault system as the most likely origin of the largest historical earthquakes on the basis of the length, lateral continuity, morphological evidence and recent instrumental seismicity.

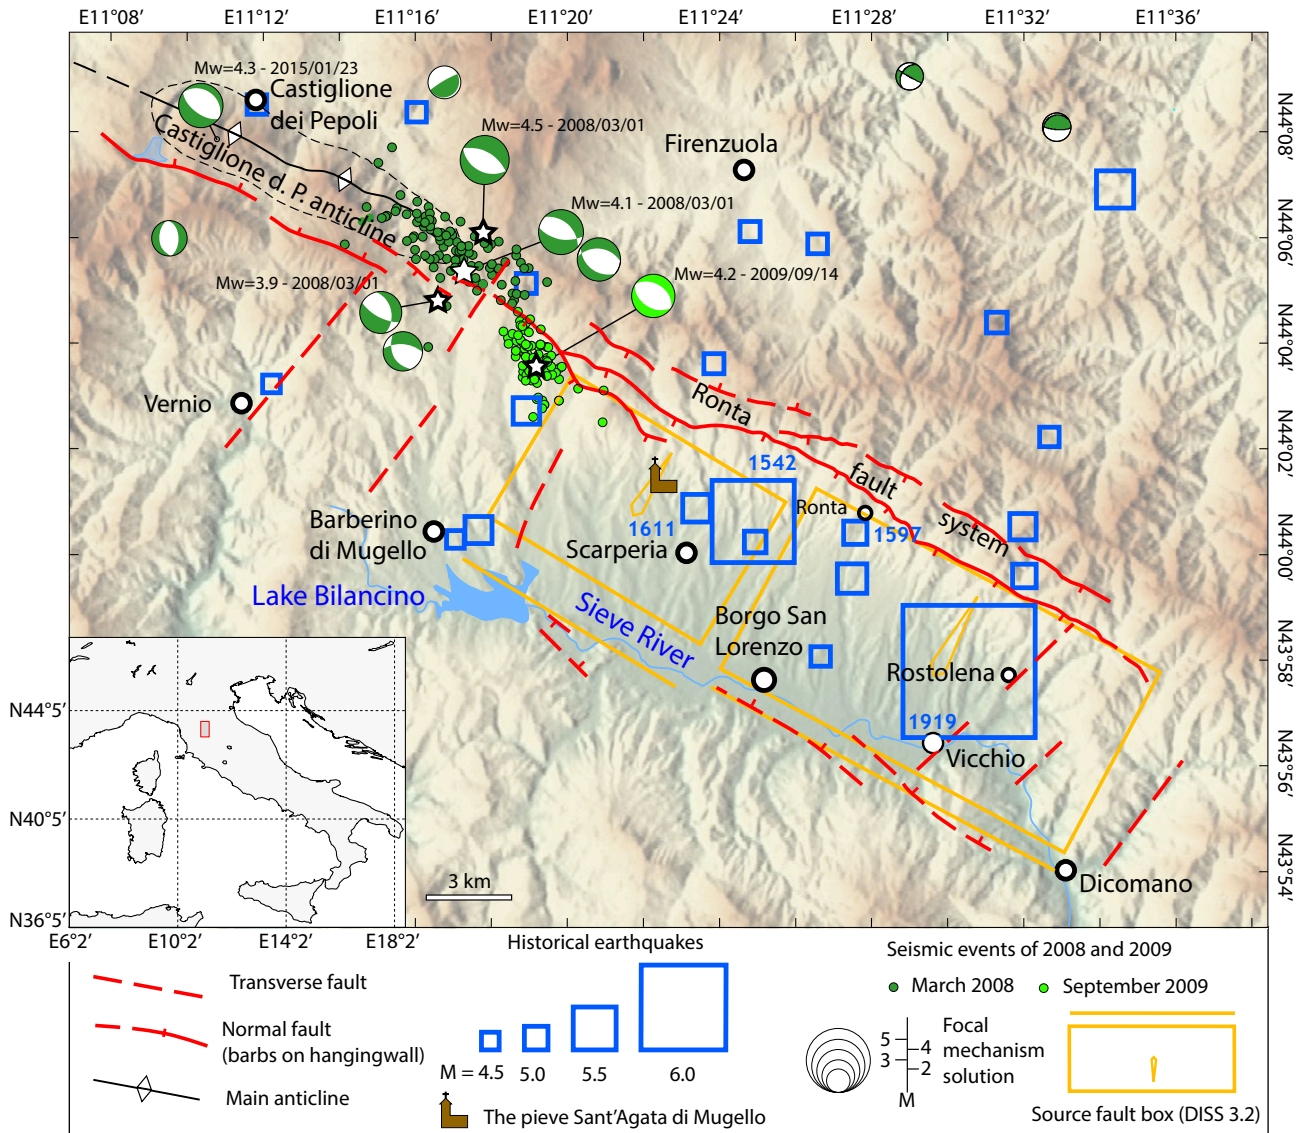


Figure 2: Seismotectonic context of the Mugello area (adapted from Bonini et al. [2016]). The active faults are compiled from various sources (Donne [2005], Sani et al. [2009]). Historical earthquakes are from the CPTI15 catalogue (Rovida et al. [2016]). The main shocks of 2008 and 2009 are from Amato et al. [2008].

## 3 Materials and Methods

### 3.1 Collecting and processing historical sources

Studying historical seismicity requires an exhaustive search of all historical records. Furthermore, the nature of the documents (primary or secondary source) plays an important role in interpreting the impact of the earthquake and the resulting uncertainty (Albini et al. [2017]). Hereinafter, it will be stated whether the used document is a primary or a secondary source. The used written records are of various types : parochial register, anonymous testimony, log book or journal paper. We collect both historical information describing the impact of past earthquakes on the church and that describing routine maintenance works that changed the building geometry and the use of new material over time.

#### 3.1.1 The "Libro Campione V" of the Sant'Agata church : an exceptional source

The "Libro Campione V" of the church of Sant'Agata is an unique document describing with a high degree of accuracy maintenance works done in the church (Brunori Cianti [2011]). This record provided some information for the 1542 seismic event and describes the 1611 earthquake very precisely. The log book was initiated in 1596 by the priest Raffaele Sbaccheri (1595-1605) (Brunori Cianti [2011]) and continued from 1608 to 1630 by the priest Tolomeo Nozzolini (1569 - 1643) who was previously known as logics, physics and mathematics professor at the university of Pisa and the preceptor of the Medici family. In 1608, he found the church of Sant'Agata highly damaged that he interpreted as the consequence of the 1542 seismic event. He gathered first hand information about the 1542 seismic event that he did not witness. He described with accuracy the repairs he led in the church including the type of damage as well as a detailed description of the repairs like the quality and the quantity of material used; the cost of material and workers. He witnessed the 1611 seismic event which induced new damage in the church. In this paper, we consider both extracts from the original text (primary source) and the text transcribed by Lia Brunori Cianti (Brunori Cianti [2011], secondary source).

### 3.2 Collecting and processing stratigraphic data

A stratigraphic analysis was performed on the internal and external facings of the church. For such a study, the building is divided into technical groups as walls (MR), columns (C), pilaster (PL), and arches (ARC) as presented in Figure 17.

The stratigraphic analysis is performed using a method developed and implemented in the framework of the RECAP program. The method is focused on the analysis of post-earthquake reconstruction inventoried in the OPUR database<sup>2</sup> (Dessales and Tricoche [2018]). The OPUR database is organized in four steps. The first step is to identify the repair in terms of number, location on site and technical groups (MR, C, PL, ARC). The repair is linked to the identified building technique inventoried in the ACoR database according to an ID number (<https://acor.huma-num.fr/>, [Dessales, 2020]). Each building technique is described in terms of morphology, materials, stone dimensions, layout of the materials (Figures 4-7). As a second step, the nature of the damage is determined according to the following disorders : inclination; deformation; fracture; crack; supposed collapse; settling. In case of post-earthquake reconstruction, a failure mechanism can thus be identified depending on the nature of the damage. Because repairs are not necessarily associated with natural disaster but could be explained by building expansion/reconfiguration, the origin of the damage is discussed and then probabilized (very low, low, strong, very strong). The third step is the description of the repair nature.

The description can be done in written form or by filling in a certain number of criteria (crack filling, reconstruction, buttress construction, ...), the dimension of the repair (length, width, height, thickness, ...), the type of technique used (masonry, metallic ties, ...) and the full description of the material used. The fourth and final step is the identification of chronological relations, which are twofold : the chronology of the construction technique used in the repair is defined in relation to the other construction techniques

---

<sup>2</sup>"Outil Pour Unités de Réparation"; Tool for Repair Units in free access from the site RECAP <http://recap.huma-num.fr/webpublic/#recherche/slide3>

present in the building inventoried in the ACoR database (or other any reference, indicating, by means of a code, the types of construction techniques defined); a chronology between the identified repairs into the OPUR database is also done. Thus, a repair can be posterior, anterior, or contemporary to one or more types of construction techniques. By establishing these relationships, it is possible to develop a statistical approach to identify the most damaged types of techniques, as well as the types of techniques most commonly used in the case of repairs.

In the case of the Sant'Agata del Mugello church study, the data recorded in the OPUR database are available at the following link ([https://github.com/MArnaud/OPUR\\_SantAgata/](https://github.com/MArnaud/OPUR_SantAgata/)) or in an exported form in appendix.

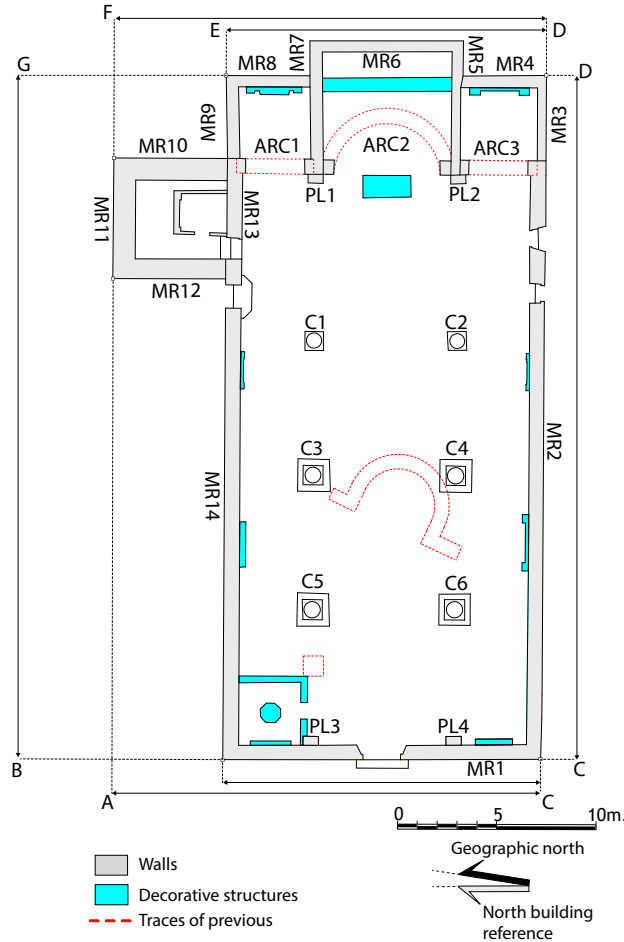


Figure 3: Plan of the church with the location of technical groups: MR for wall, PL for pilaster, C for column and ARC for arch. Labeled lines (AC, CD, ...) are related to interpreted orthophotos presented thereafter.

### 3.3 Merging information of historical records and the stratigraphic analysis

An in-depth study of archives delivers information about the identified repairs and their origins. Thus, merging this information with information from the stratigraphic analysis helps to classify the repairs as resulting from seismic damage, or from other origins (routine maintenance work). When both information are available, each stratigraphic information is compared with the information in the available texts. Stratigraphic analysis can be complementary to historical information but can also be contradictory. A time line (presented in Figure 23) is then constructed by entering the origin of the information (historical document or stratigraphic analysis). Their complementarity or antonymy is specified. The chronological relationships between the different repairs identified in both cases allow to define construction phases. In the case of post-earthquake reconstruction, damage mechanisms are then identified and specified.

# 4 Description of the building techniques

16 building techniques are identified in the church and described in Figures 4-7. The used materials are mainly limestone (Pietra Albarese and Formazione di Silano), sandstone (Pietra Serena), serpentinite (Marmo di Monte Verdi) and bricks.

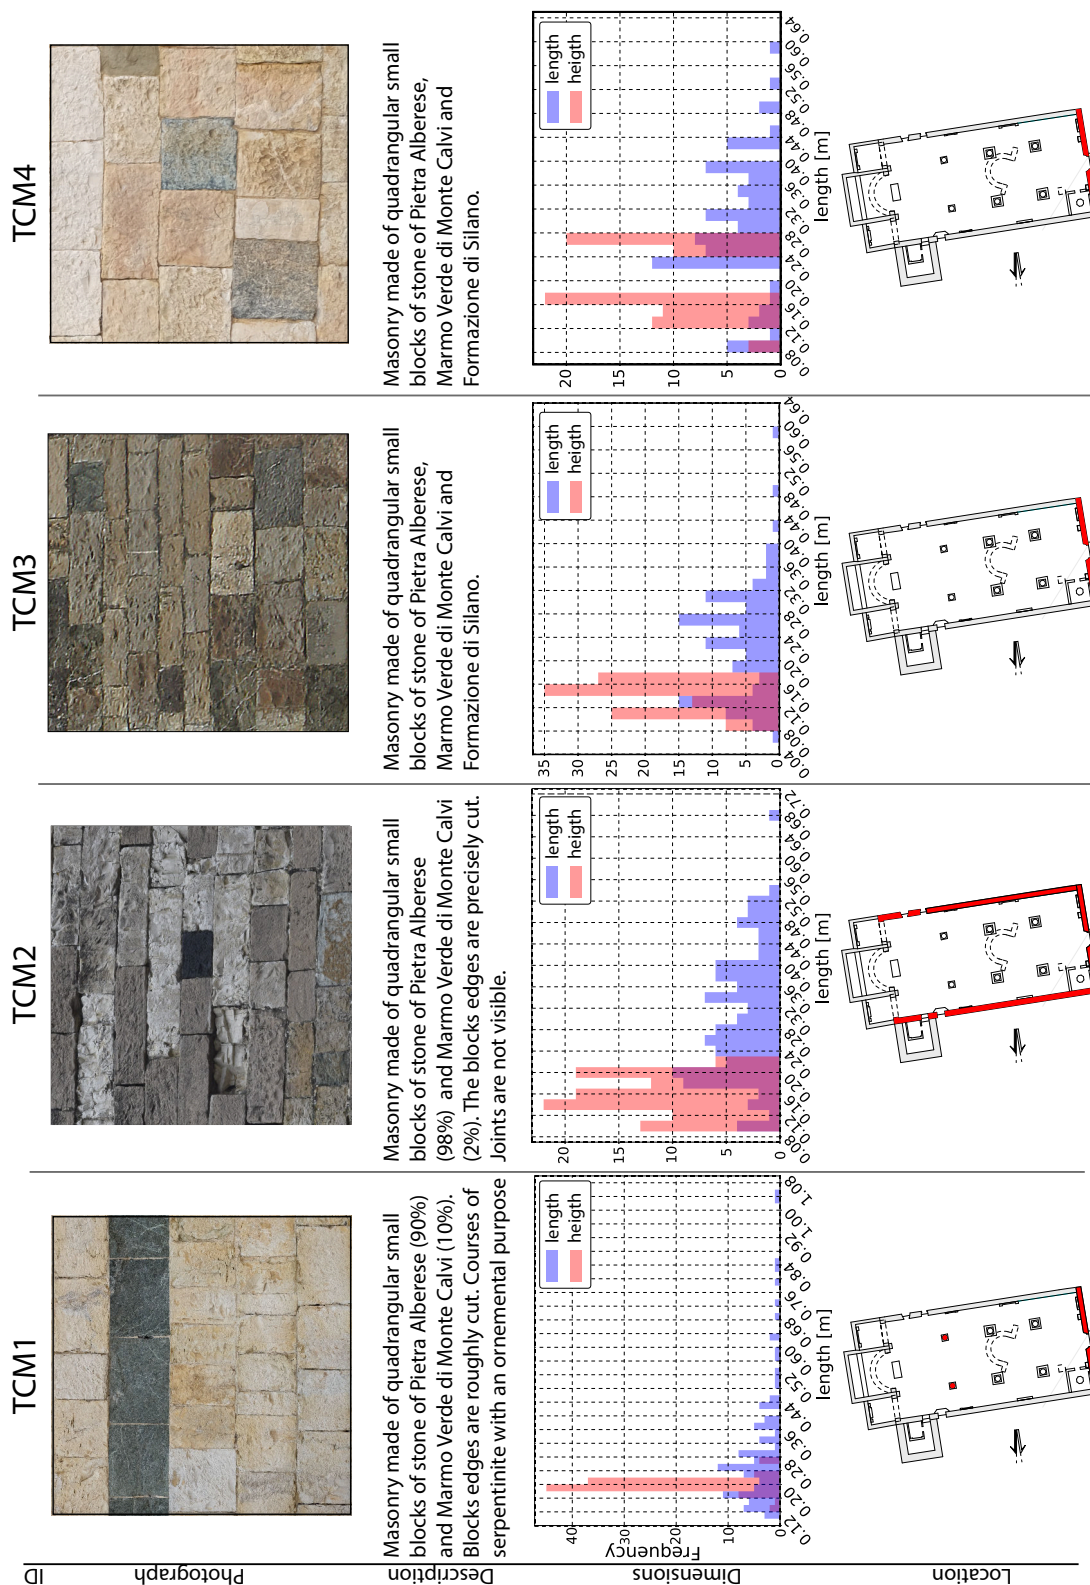


Figure 4: Presentation of the technique of construction TCM1, TCM2, TCM3 and TCM4 found in the church.



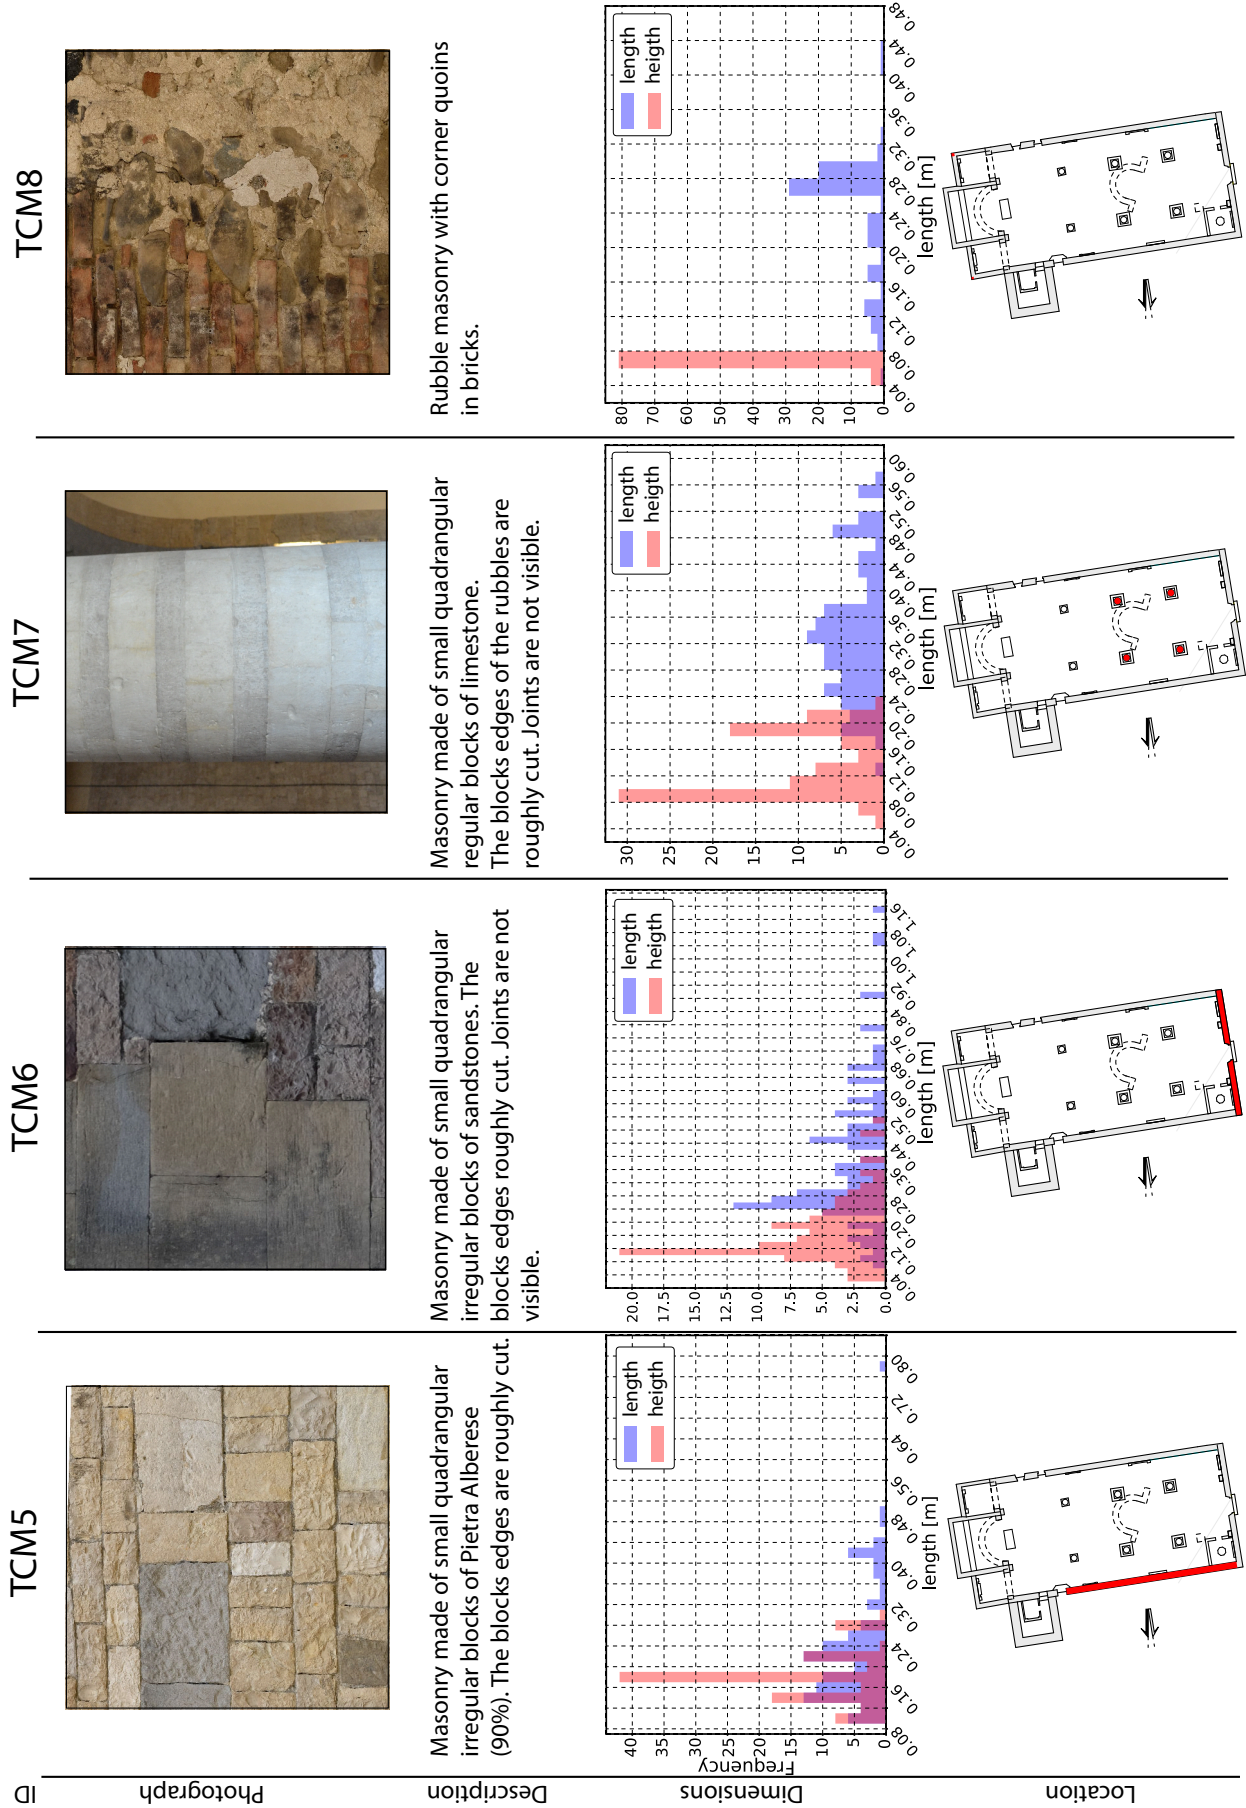


Figure 5: Presentation of the technique of construction TCM5, TCM6, TCM7 and TCM8 found in the church.

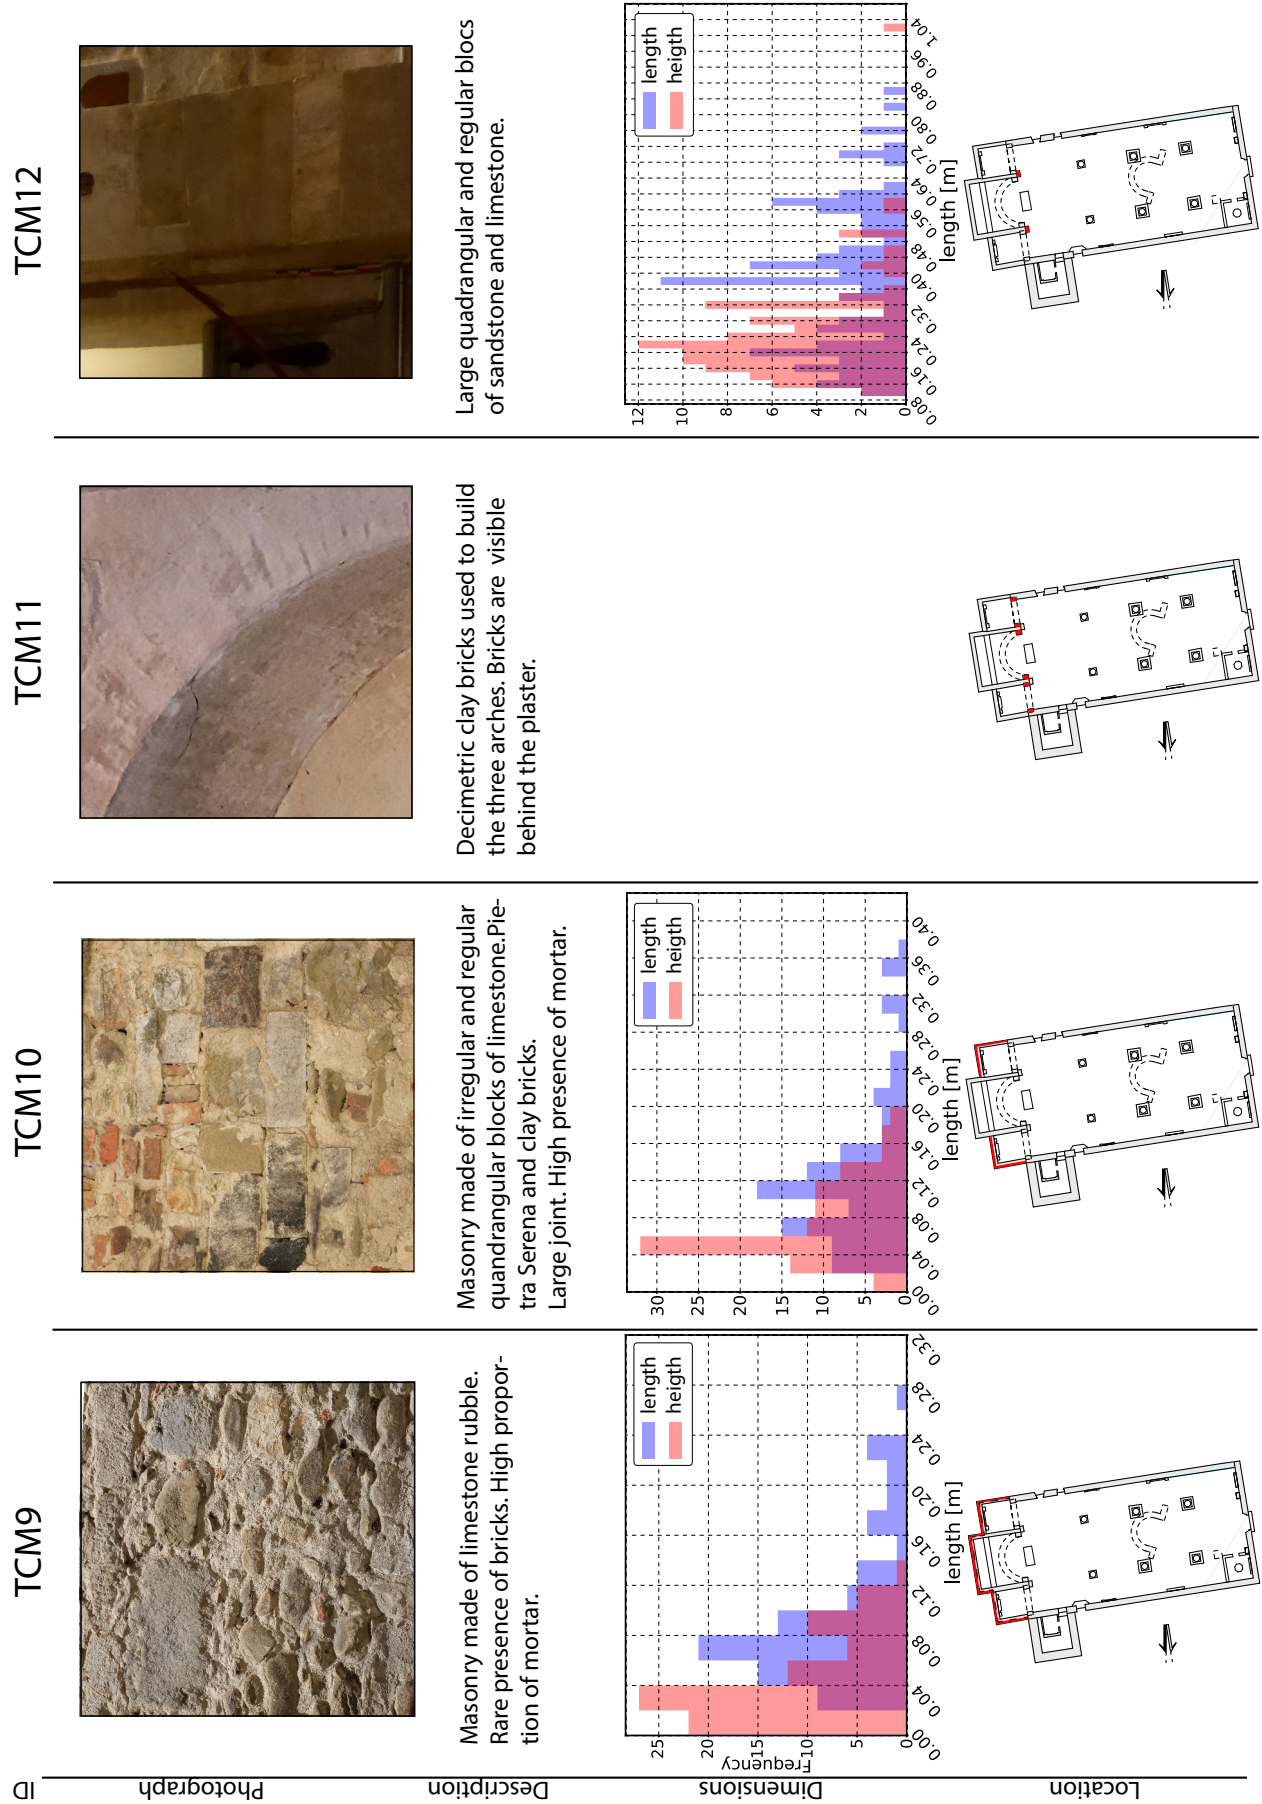


Figure 6: Presentation of the technique of construction TCM9, TCM10, TCM11 and TCM12 found in the church.

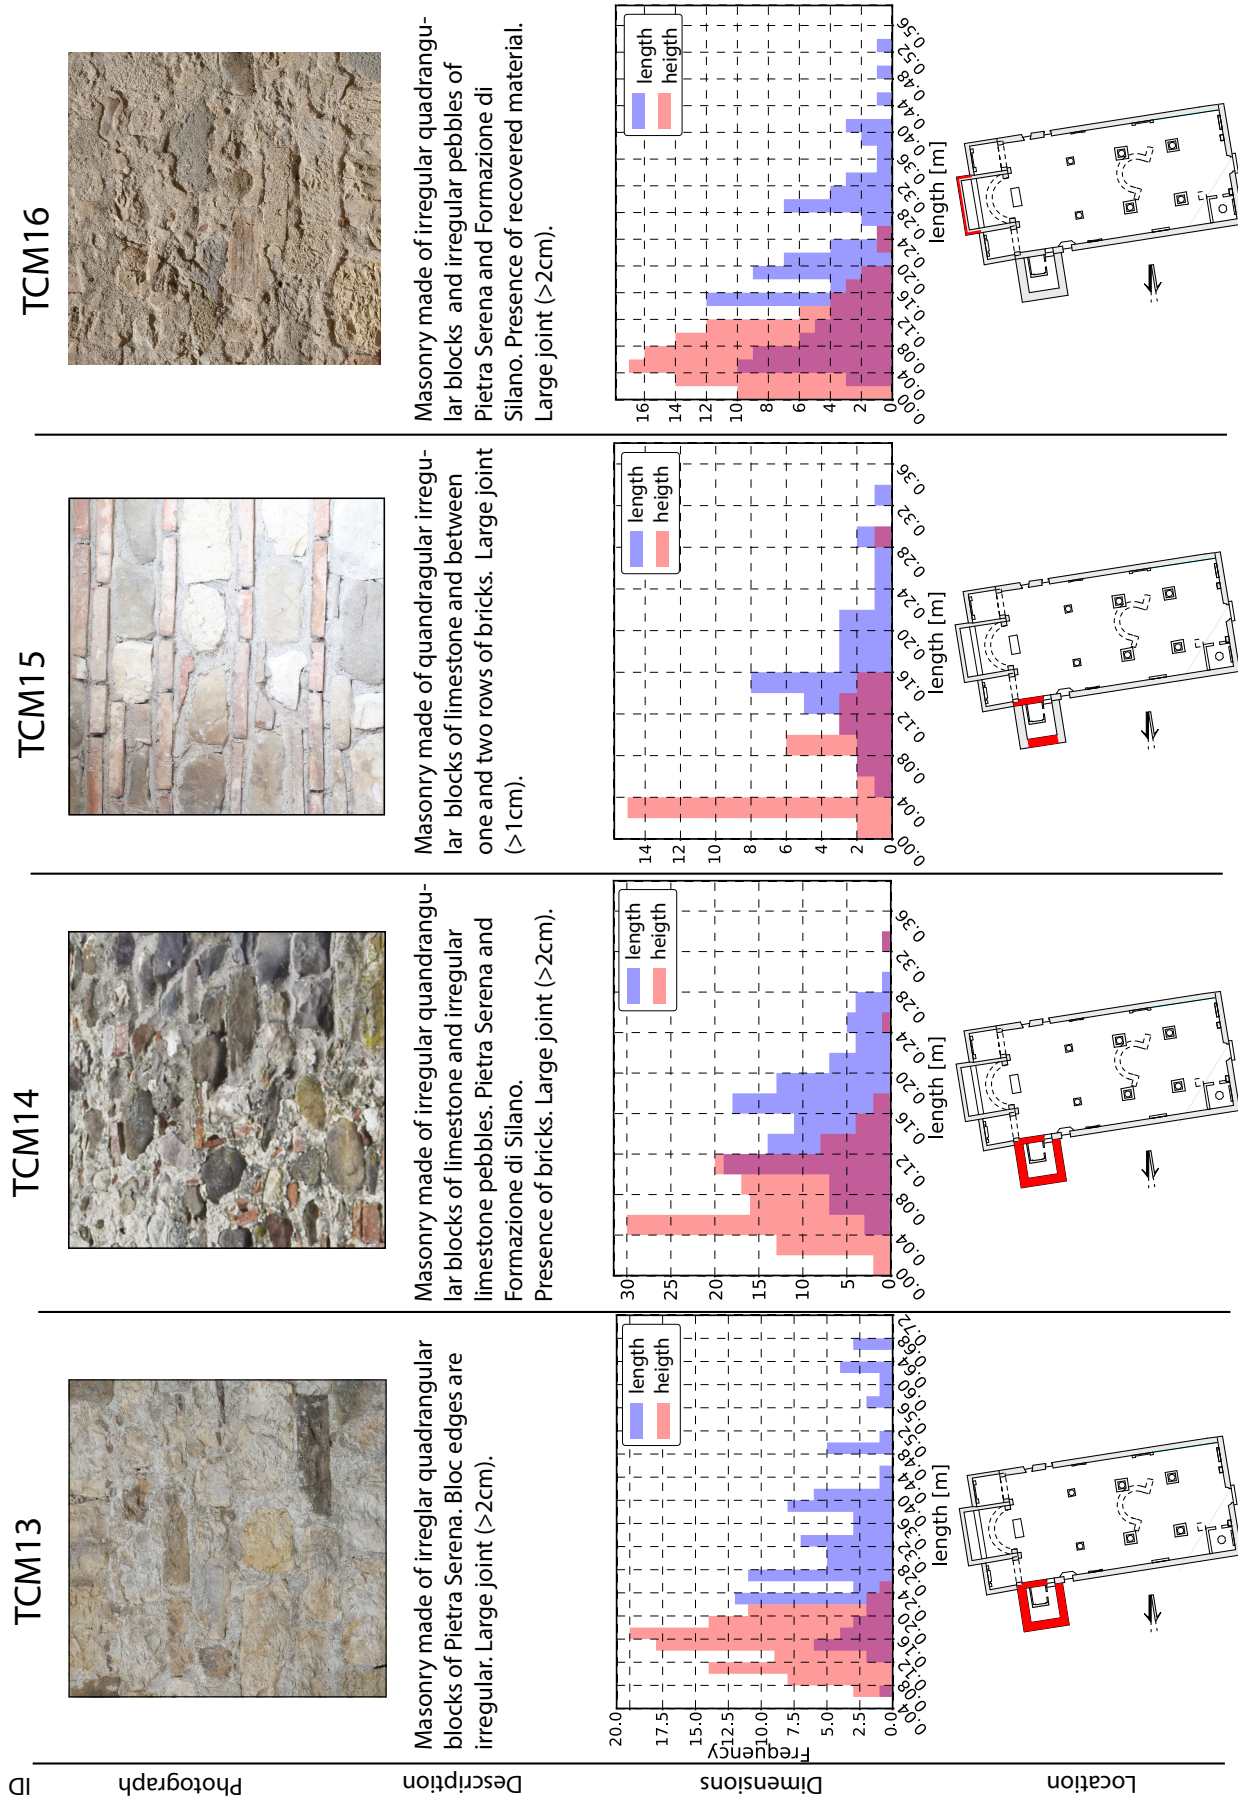


Figure 7: Presentation of the technique of construction TCM13, TCM14, TCM15 and TCM16 found in the church.

# 5 Description of the constructive phases in the light of historical sources

## 5.1 Phase 0

In 1963-1967 archaeological excavations inside the church have revealed the remains of an ancient mono apse church oriented NW-SE as shown in Figure 17 (Soprintendenza [1980]). The width of this first church is half of the current one. The use of paving stones of different colours indicate the previous location of the proto-church on the ground. Furthermore, the very first written evidence of the church dating from 984 A.D. has been found in Bullettone dell'Arcivescovado Fiorentino at page XI (Ajazzi [1887]) which probably corresponds to the current church. The phase 0 corresponding of the proto-church is estimated before 984 A.D..

## 5.2 Phase 1 and phase 2

There is no historical information about the evolution of the church between 984 and 1497. However, stratigraphic analysis shows significant repair operations during this period. Figure 8 and Figure 9 show both the external and internal west-facing wall of the church (MR1 in Figure 17).

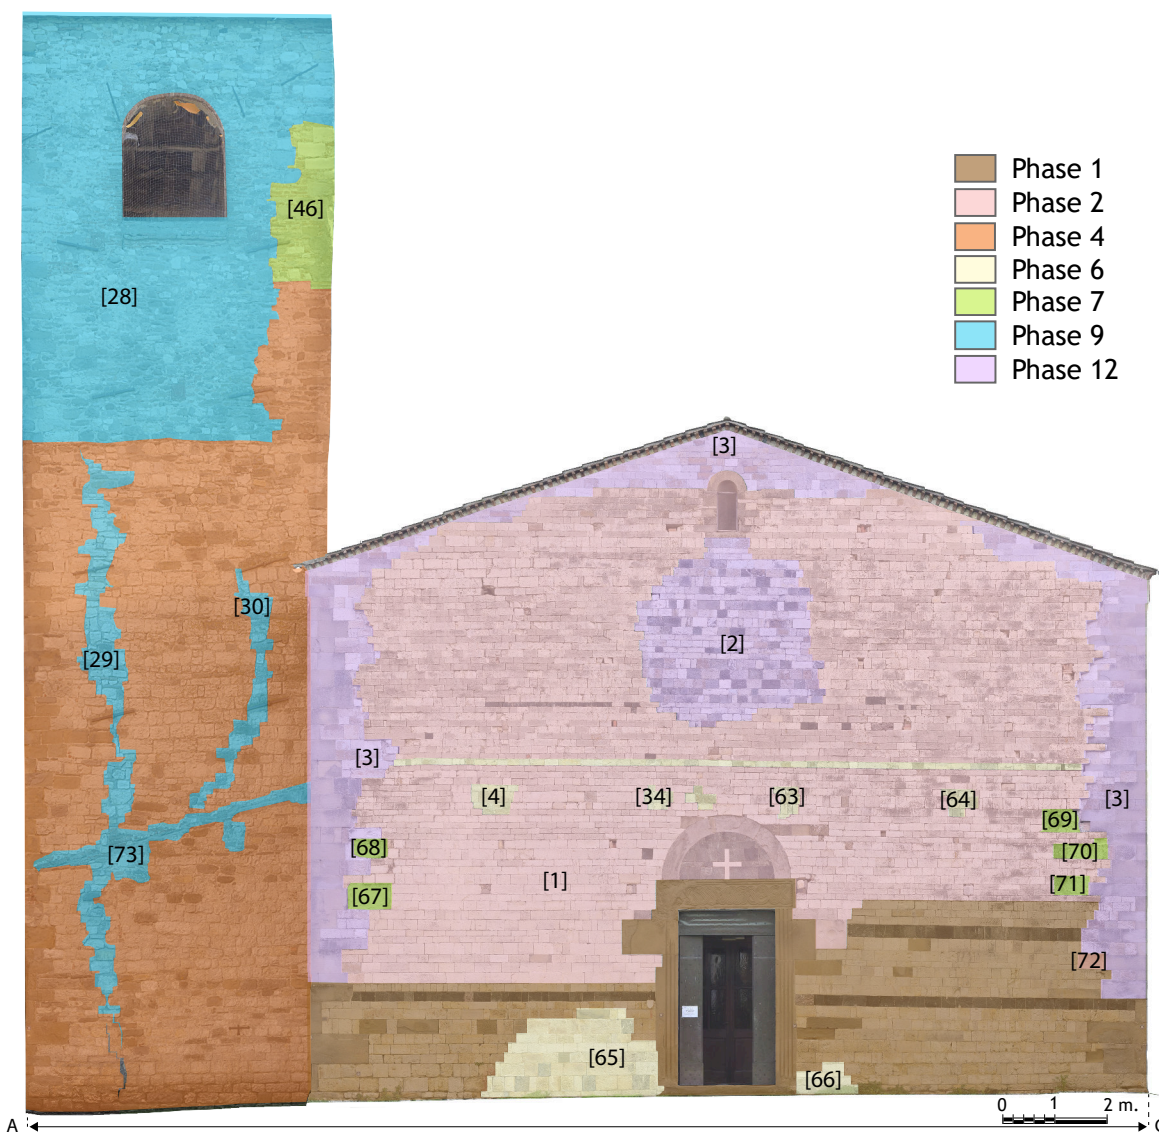


Figure 8: Stratigraphy of the front wall (MR1, external west-facing of the church and MR12, external west-facing of the bell tower) showing phase 1, phase 2, phase 7, phase 8 and phase 13. Phase 1 corresponds to the original construction of the current Romanesque church. Phase 2 is identified as a repair of phase 1.

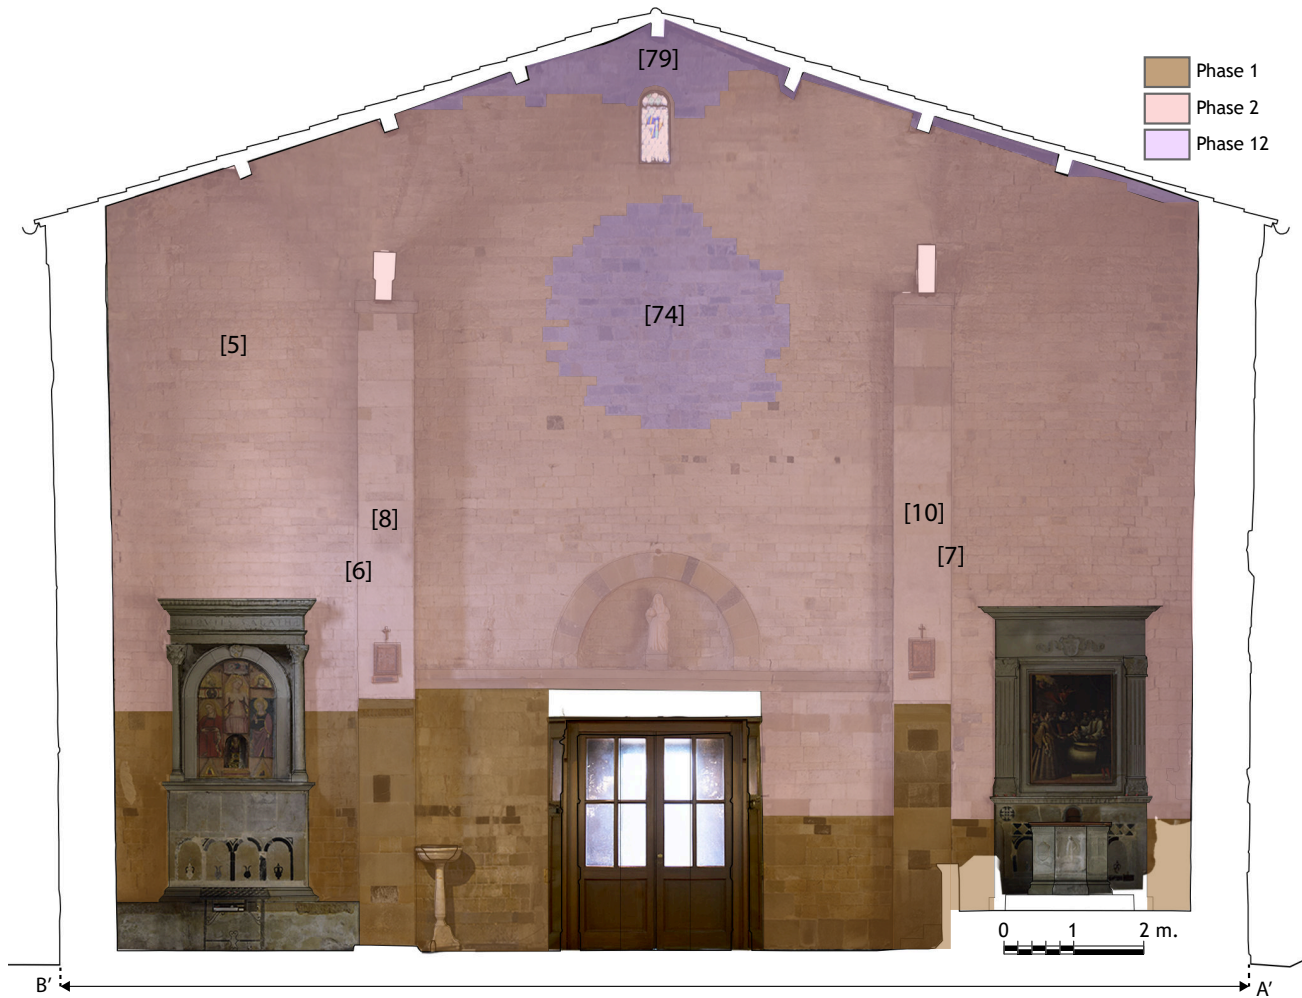


Figure 9: Stratigraphy of the facade (MR1, internal west-facing of the church) showing phase 1, phase 2 and phase 13. Phase 1 corresponds to the original construction of the Romanesque church. Phase 2 is identified as a repair of phase 1.

At the bottom, we distinguish a clear and irregular limit between two building techniques : TCM1 and TCM2. Differences between both techniques are described in Figure 4. One of them is the use of a serpentinite course in the first phase. TCM2 is the most present technique in the current nave of the church (MR1, MR2, MR14, C3, C4, C5, C6, PL1, PL2, located in Figure 17) as it is shown in Figure 8, 9, 11, 12, 13.

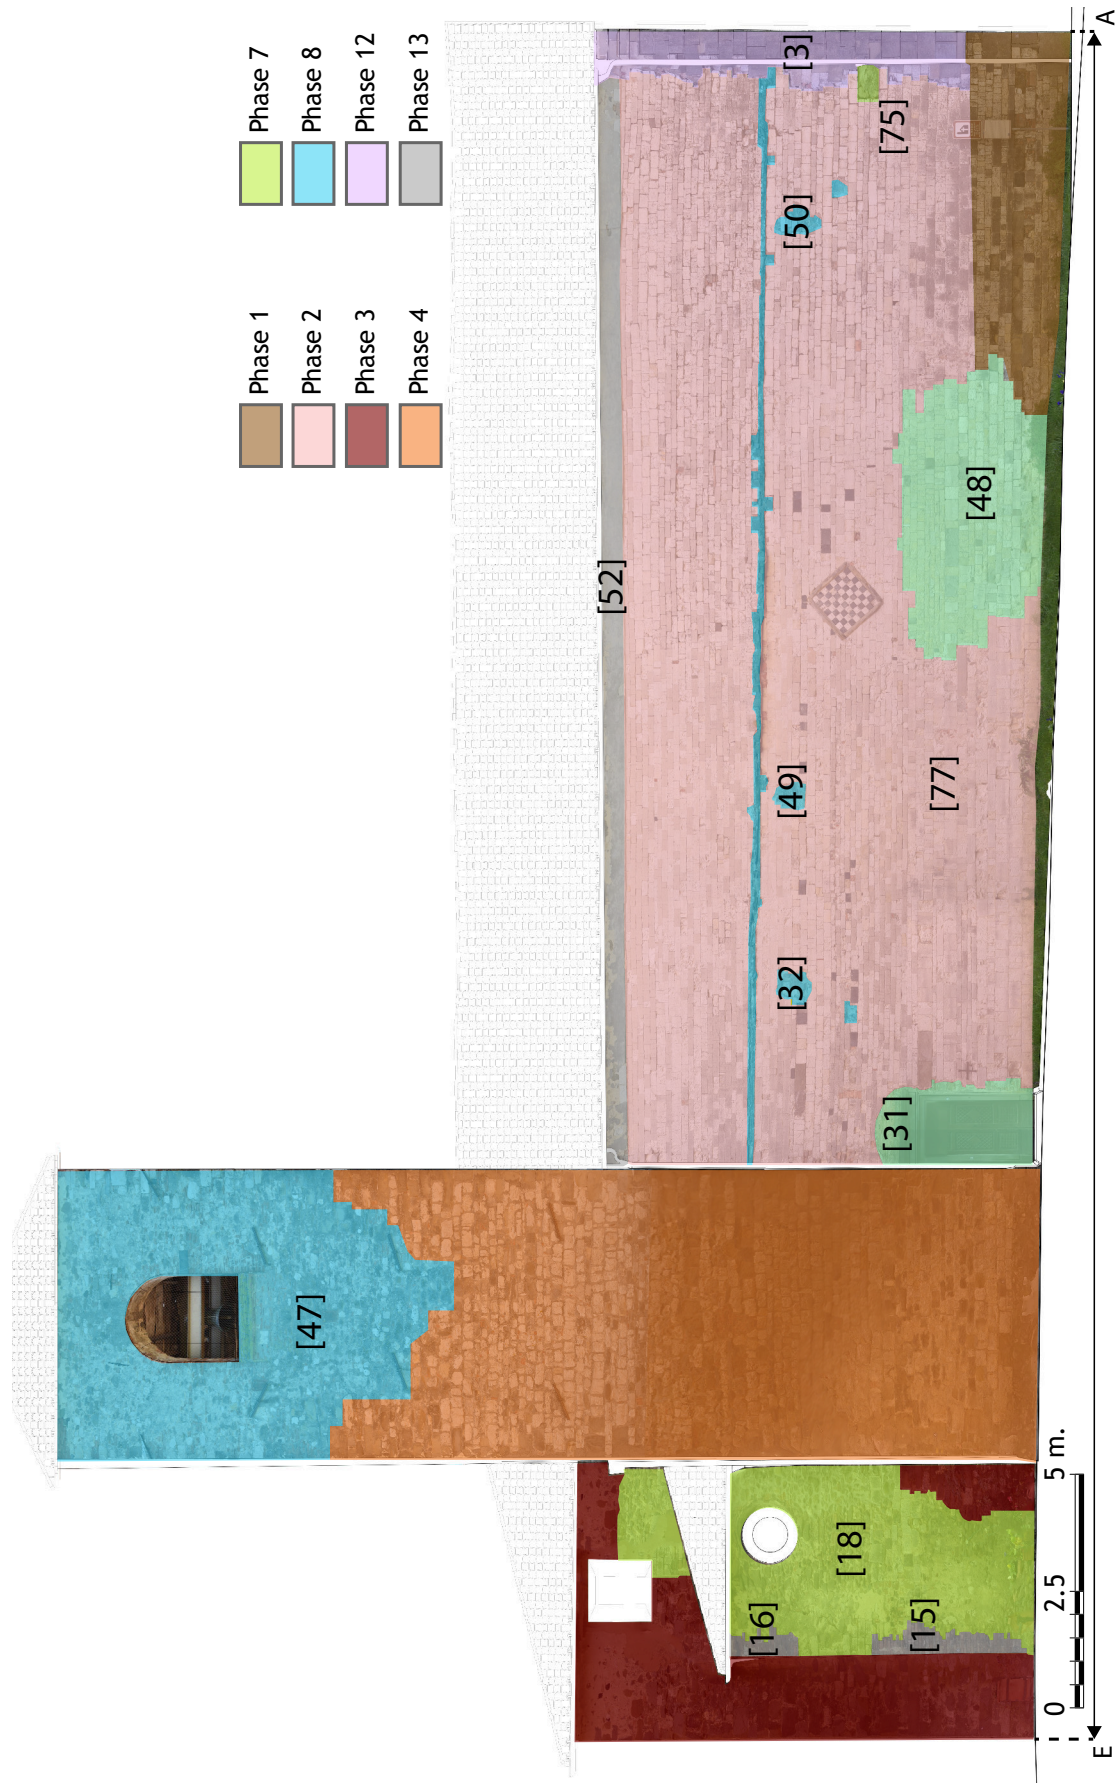


Figure 10: Stratigraphy of the external north-facing of the church (MR14) including the nave (on the right), the bell tower (on the middle) and the north lateral chapel. Phase 1, phase 2, phase 3, phase 4, phase 7, phase 8, phase 12, and phase 13 are identified.



Figure 11: Stratigraphy of the internal north-facing of the church (MR14) including the nave (on the right), the bell tower (on the middle) and the north lateral chapel. Phase 2, phase 4, phase 7, phase 8, and phase 13 are identified.

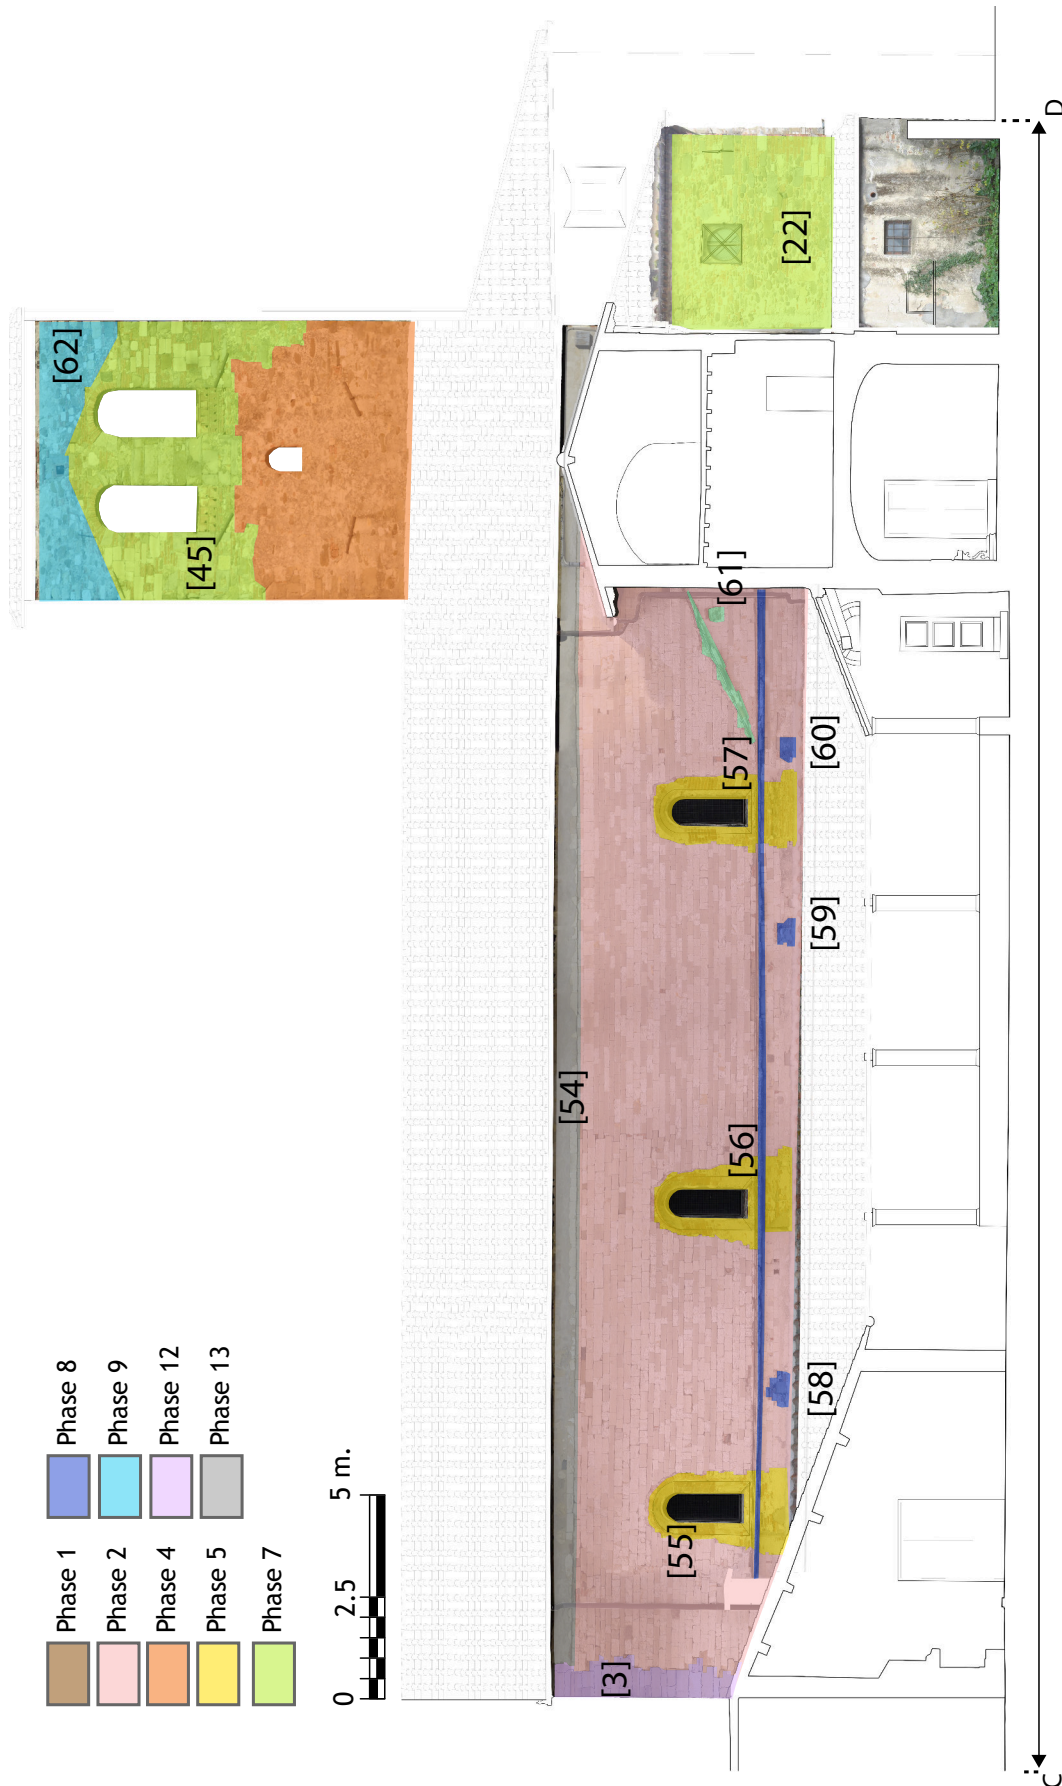


Figure 12: Stratigraphy of the external south-facing of the church (MR2) including the nave (on the left), the bell tower (on the middle) and the south lateral chapel. Phase 2, phase 4, phase 5, phase 7, phase 8, phase 9, phase 12, and phase 13 are identified.



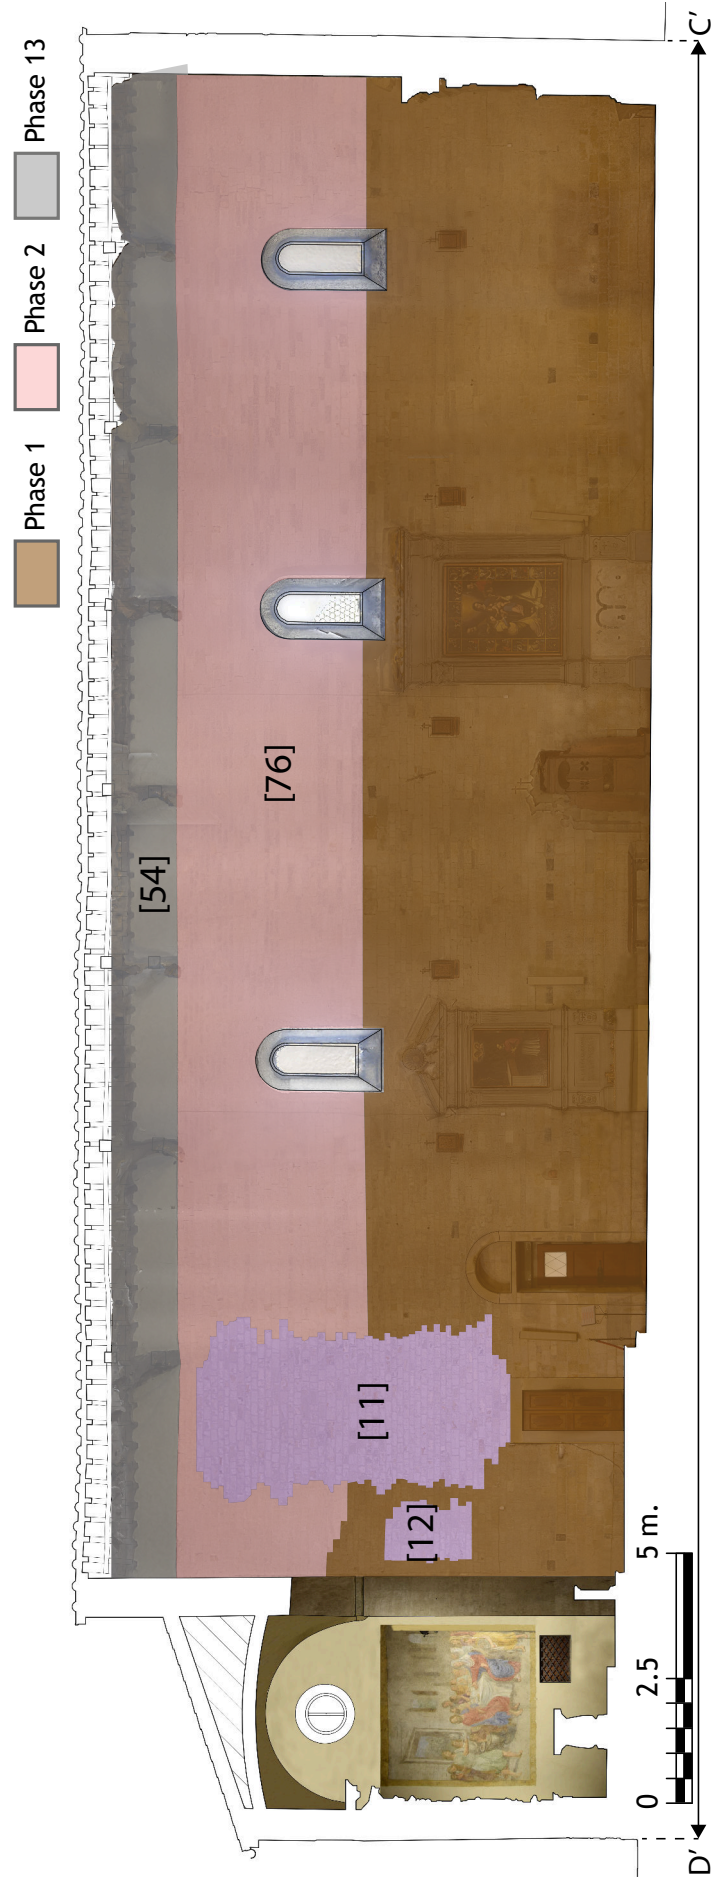


Figure 13: Stratigraphy of the internal south-facing of the church (MR2). Phase 1, phase 2, phase 7 and phase 13 are identified.

In the external part, the wall as well as the corners quoins using technique TCM1 are repaired using technique TCM2 (Figure 8). We note the particular case of the south wall corner. The wall corner of phase 1 is repaired using a block of sandstone (in pink in Figure 8) belonging to phase 2. This quoin is nowadays isolated because of a third repair identified as phase 13 described below (phase 13 is associated with a second repair of the corner quoins). In the internal facing (MR1), such a limit is visible on the wall as well as on both pilasters PL3 and PL4 (Figure 9). The use of the technique TCM2 indicates the limit between the first and second constructive phase. Although the limit between phase 1 and phase 2 is mainly reported on the front wall, it is also observed in the external north facing wall of the nave (MR14 shown in Figure 10) at the bottom right. Phase 1 is not visible on the north wall inside the church (Figure 11) not only because the ground is higher but also because this part of the wall has not been repaired. This is an indication of the typology of masonry using the "sacco" technique (this technique corresponds to the filling between two wall claddings). Inside the church, we note that both columns C1 and C2 use TCM1 in the lower part and TCM2 in the upper part. Reminding that the technique of construction TCM2 is dated from the 13<sup>th</sup> century (Arrighetti [2017]), we date the second phase of the building between 984 and the 13<sup>th</sup> century. In the absence of historical data, it is difficult to determine an origin to such a deep reconstruction of the church (anthropogenic origin, fire, natural disaster, ...).

### 5.3 Phase 3

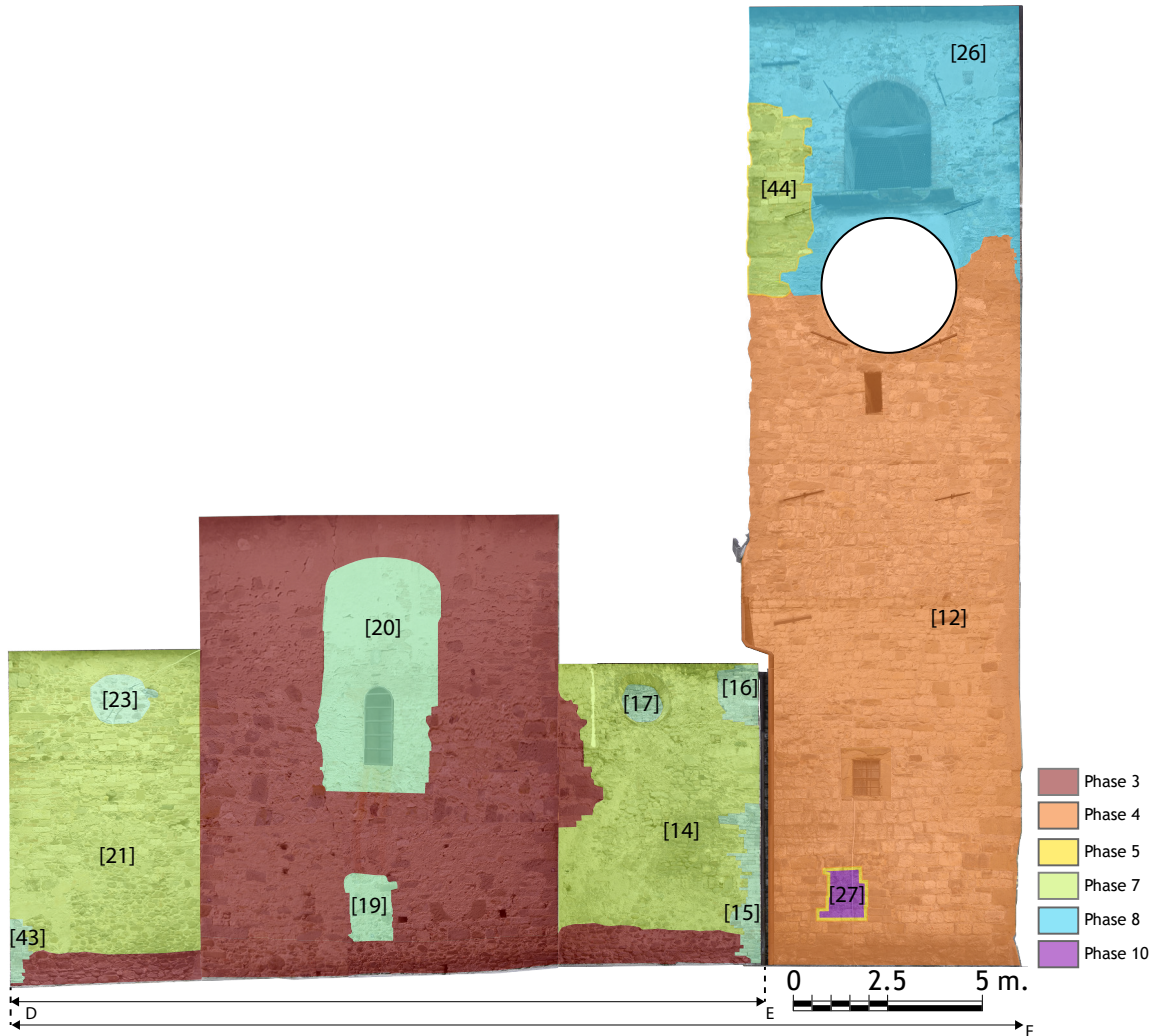


Figure 14: Stratigraphy of the external east-facing of the church (MR4, MR6, MR8) including the bell tower (on the right), the central apse and both lateral chapels. Phase 3, phase 4, phase 5, phase 7, phase 8, and phase 10 are identified.

Phase 3 is related to the construction of the central apse (MR5, MR6, MR7) and the two lateral chapels (MR3, MR4 and MR8, MR9) using technique TCM9 for their foundations visible at the bottom of each wall and technique TCM16 for the walls. The stratigraphic analysis reveals the use of TCM16 in the edges of MR8 and MR9 of the northern chapel (Figures 10, 14 and 17) which implies that the central apse and the lateral chapels belong to the same building phase. However they are not necessary built at the same moment. Indeed, Lia Brunori Cianti mentioned the construction of both lateral rectangular chapels during the second half on the 15<sup>th</sup> century (p. 49, Brunori Cianti [2011]).

The delayed construction of both chapels is confirmed by the analysis of the church plan. In Figure 15, we firstly note the angular misalignment of 1.8° between the wall MR9 of the northern chapel and the wall MR13 of the nave (represented in red line and collinear to the central apse walls MR5 and MR7).

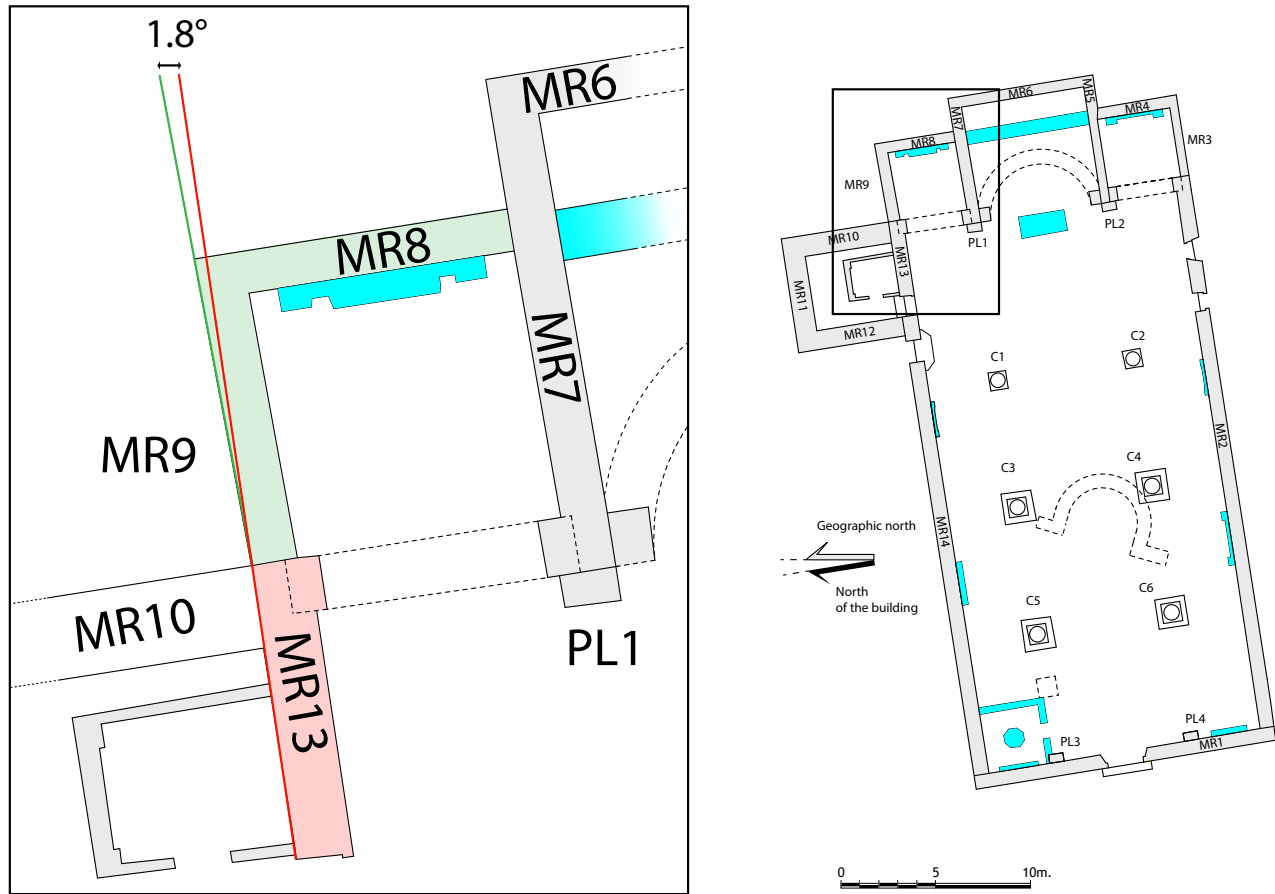


Figure 15: Zoom in the northeast lateral apse. A misalignment is observed between MR9 and MR13.

The thickness of both walls at the bottom is different as shown in Figure 16 (77 cm for MR13 and 61 cm for MR9).

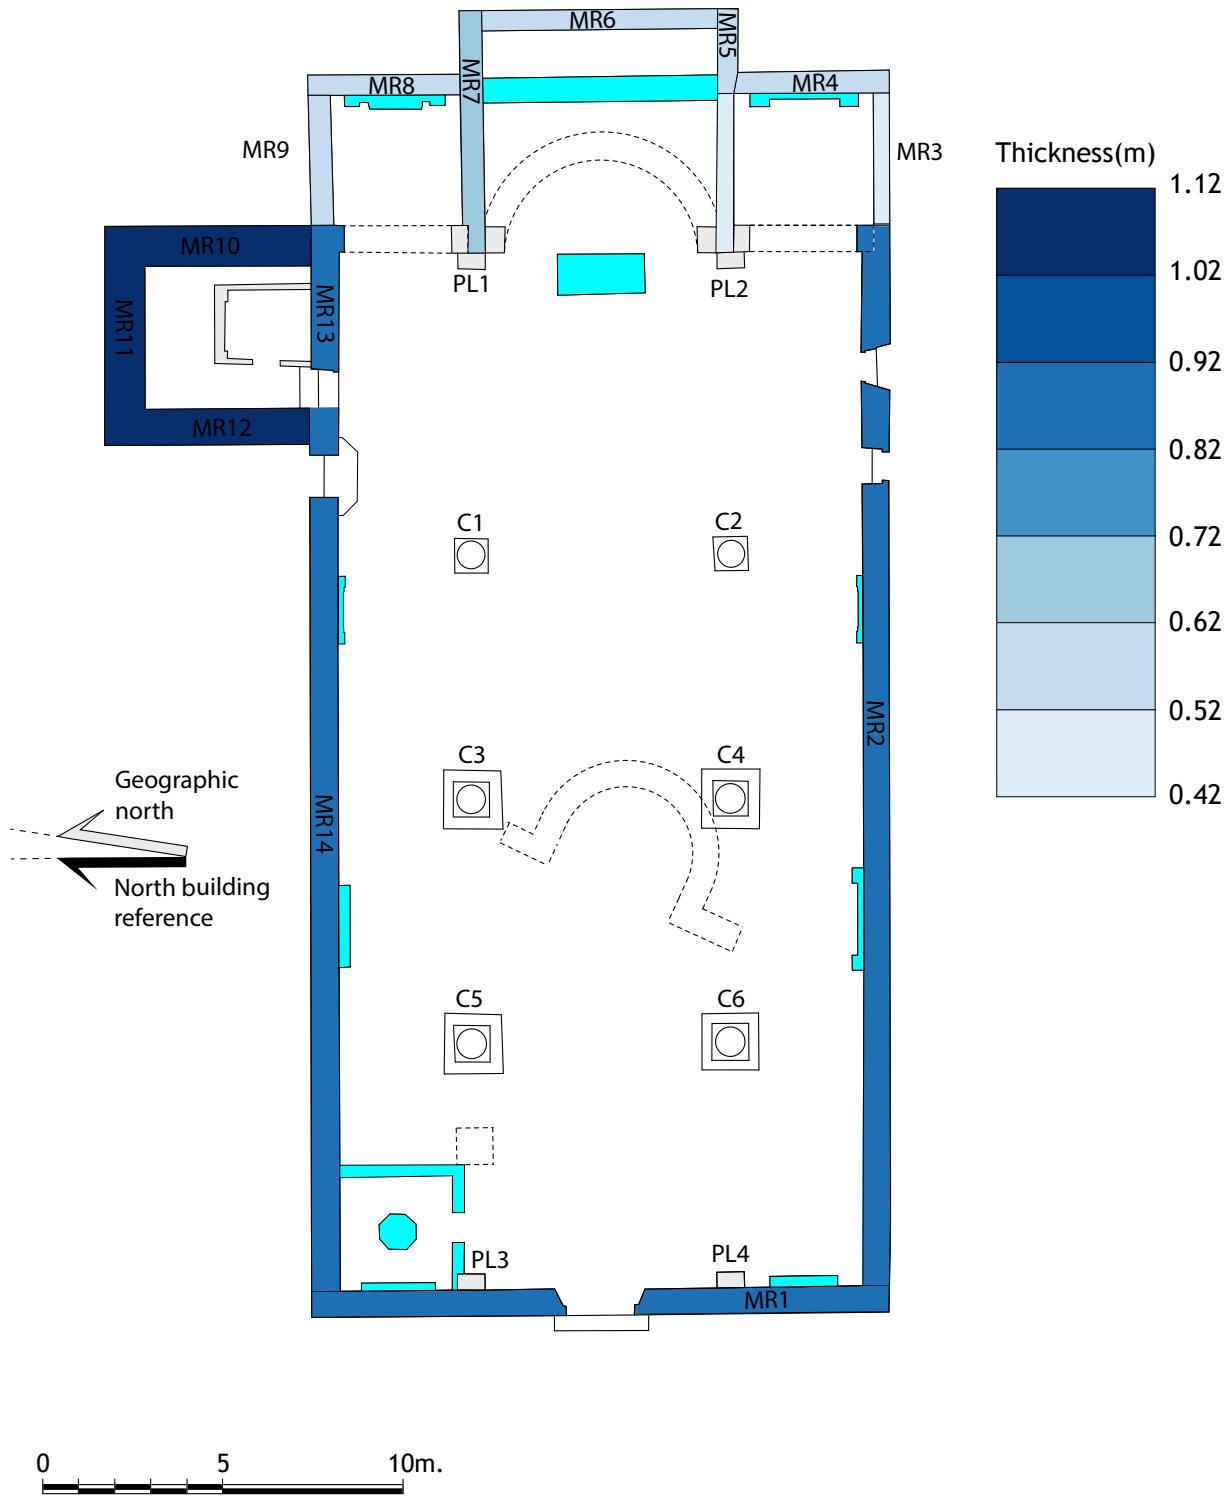


Figure 16: Thickness of the church walls going from 0.42 m to 1.12 m. Such a difference characterizes the building evolution of the church over time.

## 5.4 Phase 4

Phase 4 corresponds to the original construction of the bell tower using technique TCM13 (presented in Figure 7). The bell tower was built against the wall of the nave (MR14) as well as the wall of the northern lateral chapel (MR9, Figure 8). Although there are no historical writings describing the construction of the bell tower, there are three arguments to date its delayed construction. Firstly, the technique which is used in MR10, MR11 and MR12 (technique TCM13 as shown in Figure 8) is fully different from the technique used in wall MR14 (TCM2) and from the technique used in the first stage of the northern lateral chapel (TCM16 used in the original phase of MR8 and MR9) (Figure 17). This first observation indicates that the bell tower and the north lateral chapel, each resulting from a separate construction site, were not built at the same time. Second, the spatial relationships between walls MR10 – MR9, MR10-MR13, MR12-MR13 and MR12-MR14 show the posteriority of the bell tower. Both MR 10 and MR 12 clearly lean against MR9; MR13 and MR 14 are not linked.

Finally, the walls of the bell tower are clearly wider than the ones of the nave as well as those of the lateral chapels as shown in Figure 16.



Figure 17: The north lateral chapel. The first phase of the building is colored in red. The green part corresponds to a repair of the first phase.

## 5.5 Phase 5 and 6

R. Ajazzi (Ajazzi [1887], p. 15) mentioned two minor renovations of the church. The opening of a door in the east-facing wall of the bell tower in 1497 is retrieved by stratigraphic analysis (Figure 14). The repair of the three windows of the southern wall is also identified (in yellow in Figure 12). R. Ajazzi Ajazzi [1887] mentions the repair of the rose window of the church in 1528 (Ajazzi [1887]). The traces of the old rose window is still visible on both sides of the west wall (MR1) confirming its existence since at least 1542 (Figure 8 and Figure 9). It is nowadays infilled with technique TCM3 (Figure 4).

## 5.6 Phase 7 : repairs link to the 1542 seismic event

One of the largest earthquake in the Mugello basin occurred in June 6, 1542 (Guidoboni et al. [2018], Guidoboni et al. [2019]) with an estimated epicentral macroseismic intensity of 9 and an estimated magnitude of 6,02. The seismic event is reported at least in 81 historical records, among which 27 are from direct sources (Guidoboni et al. [2018], Guidoboni et al. [2019]). The epicenter is estimated very close to Scarperia (Figure 2). In the particular case of Sant’Agata del Mugello, damage are reported in four main historical writings. Descriptions are different from one historical source to another. The first document is a letter dated from June 23, 1542 and kept in the Biblioteca Nazionale Marciana di Venezia (\*[d], primary source). It reported damage related to the earthquake such as collapsed buildings, injuries and fires in the whole basin. The village of Sant’Agata composed of around 100 houses is described as being entirely collapsed with 11 fatalities. The church seems to be entirely destroyed except a part of the bell-tower described with a bell still attached at the top of the tower.

”Santa Agata quale era honorevel vila de più di cento fuochi e li erano molte bellissime case sta peggio del altre, tutta si trova rovinata e così un bel tempio che li era e il campanile tutto sfasciato, sopra del quale li è rimasto la campana quale sta in bilico ne si vede come né chi la sustenti talché pare cosa stupenda e meravigliosa e li sono morti XI.”

A second document originates from the *archivio di stato di Firenze* (\* [a], primary source) provided detailed information about the effect of the earthquake in the Mugello basin (1742 collapsed buildings and 113 dead people). The particular case of Sant’Agata is described as a collapsed church with 6 injuries:

”S[an]ta Agata Villa rovinata la chiesa, e mortovi 6 persone.”

A third document from the *archivio di stato di Pistoia* (\* [b], primary source) gives some quantitative information about the effect of the earthquake (more than 1500 collapsed building). The description of the building damage in Sant’Agata is particularly focused on the church described as entirely destroyed.

”Sancta Agata tutta la chiesa e la casa rovinata; morti 6.”

Finally a document from the *Archivio Parrocchiale dei Santi Jacopo e Antonio di Fivizzano* (\* [c], primary source). described the church as being destroyed with 6 dead people.

”Castelgrosso e Santagheta ruvinata la chiesa e morto persone 6.”

The archives clearly demonstrate the occurrence of a seismic event as an hypothesis to explain the observed repairs described below. Throughout the rest of this section, repairs related to the 1542 seismic event are described considering each macroelement of the church (the front wall, the bell tower, and the lateral chapels). As introduced in section 3.1.1, Nozzolini’s log book provides some information about the effect of the 1542 earthquake on the church. Even if T. Nozzolini did not witness the 1542 seismic event, he collected first hand information. He described the bending of the front wall as a result of the 1542 seismic event. The stratigraphic analysis reveals that wall corners of the front wall have been restored (represented in green in Figure 8 as blocks which did not staggered). In the case of the bell tower, Nozzolini learned from senior people who witnessed the 1542 seismic event that the bell tower was higher before the 1542 earthquake (Figure 18, [Brunori Cianti, 2011]). They decided after the earthquake to rebuild only the south wall of the bell tower where they opened two windows. The rest of the bell tower was then covered with a roof. Nozzolini found the bell tower in this state when he represented it in his log book (Figure 18). The stratigraphic analysis confirms the construction of the top of the south facing wall of the bell tower as shown in green in Figure 8, 12 and 14. The original shape of the south facing wall of the bell tower as it was rebuilt after the 1542 earthquake is visible in Figure 12. The infilling of the cracks is still visible on the west facing wall of the bell tower (MR12 in Figure 8).



Figure 18: Excerpt of Nozzolini’s archives describing the bell tower in 1608 .

In the case of the two lateral chapels, there is no documentation regarding the 1542 seismic event. A discordance is yet observed between technique TCM10 and technique TCM16 (Figure 10 and 14). In Figure 17, TCM10 is clearly used after TCM16. Such a discordance is interpreted as a repair of the technique TCM16 using technique TCM10. The stratigraphic analysis clearly show that damage description from historical sources should be carefully taken into account. The full collapse of the church described in the texts is not compatible since we still observe the aforementioned phases (phase 1 to phase 6) identified in the nave (Figures 8-13), the lower part of the bell tower (Figure 8) as well as the apse (Figure 14). From historical texts, we only validate the partial destruction of the bell tower (since the lower part which is older is still visible).

## 5.7 phase 8 : first phase of repairs carried out by T. Nozzolini

Phase 9 is related to the Nozzolini's repairs from 1608. The priest funded and lead unfinished restoration work on the church after the 1542 earthquake. He described the front wall as tilted. He first put the porch into its original position since the beams and the roof of the porch went outside of 30 cm (Brunori Cianti [2011], p. 82).

”Adi 12 di Agosto per haver rimesso al suo luogo il tetto del portico dinanzi alla chiesa che l'anno 1542 era uscito per il terremoto e calato le travi dal luogo suo in fuori un mezzo braccio [...]”

He used a tie rod to fix one of the beam of the porch to the front wall of the church. Two smaller tie rods are also fixed at the same place. Such reinforcement are no more visible.

”Per una catena di ferro di libbre 9 che lega una delle travi di detto tetto con la facciata della chiesa per un paletto di ferro di libbre 7 che tiene detta catena di dentro nella chiesa 1. due tutto Per due altre catenuzze minori poste al medesimo etto di libbre 5.”

Nozzolini describes the restoration of the roof of the church, as well as the porch of the bell tower. Even if the stratigraphic analysis detects the evidence of a previous porch along the north wall of the church (in blue in Figure 10) and the west wall of the bell tower (in blue in Figure 8), it does not correspond to the porch described by Nozzolini. We believe the so called porch was located against the east wall of the bell tower since a door existed at that time The priest also did some repairs in the dovecote (under the roof of the bell tower) (p. 87, Brunori Cianti [2011]) and he leveled also the ground of the church as it is nowadays observed (Brunori Cianti [2011], p 82) :

”Per dua migliaia di mezzane per mattonare la chiesa dal mezzo in sula quale feci abbassare è ridurre tutta a un piano scudi dieci e lire quattro per farle arrotare prima che si cocessero”

”A abbassare il pavimento e fare il fondamento.”

Nozzolini indeed describes the presence of several items that are no more in the church. In particular the existence of a stair going from the church to the dovecote (located in the bell tower at that time). He filled the door in the bell tower which is still visible (in blue in Figure 11).

”In questo medesimo Campanile l'anno 1607 feci la scala murata che è in sacrestia, che prima si montava di chiesa con una scala grande di legno, che arrivava a quell'uscio che hora apparisce murato nella prima colombaia.”

## 5.8 Phase 9 : the seismic event of 1611

A new seismic event occurred in September 8, 1611 with an estimated epicentral intensity of 7. The epicenter is located very close to Scarperia (Figure 2). This event is poorly described in the historical sources. Nozzolini described the event as a terrible disaster ([Brunori Cianti, 2011], p 88):

”[...] a di 8 di settembre detto anno a hore quattro e mezzo di notte venne un terremoto terribilissimo che rovino infite muraglie par il mugello ...”.

In the church, three chimneys collapsed, the cracks caused by the 1542 seismic event reopened and new cracks are detected. Such damage are visible in Figure 8. Because the belltower is particularly damaged, Nozzolini proposed a deep restoration of the building as described in its notebook (Brunori Cianti [2011], p 89).

”[...] io Tolomeo Nozzolini l’anno 1612 da dì 9 di luglio fino a tutto agosto mi misi a rassettarlo, la facciata delle Campane, non la toccai di niente se non quanto che essendo aguzza, l’alzai dalle bande e un braccio più, e la ridussi a facciata piana, dell’altre tre facciate ne disfecì otto braccia che erano intenebrate e conquassate e le alzai al pari di quell’altra e feci il campanile quadro con quelli altri tre finestroni e lo ridussi a padiglione nel modo che horasi trova, la spesa che vi è adata è quella che qui di sotto segue.”

The three walls of the bell tower (north wall, west wall and east wall) are leveled off about 4.7 m and then rebuilt at the same height as it is visible today (in blue in Figures 8, 10 and 14). The raising of the roof of the south facing wall of the bell tower (going from a triangular facade to a rectangular one) is visible in green in Figure 12.

### 5.9 Phase 10, phase 11 and phase 12

According to R. Ajazzi [1887] the east door of the bell tower is embedded in 1659. This repair is still visible in Figure 14 (in purple) and corresponds to phase 10.

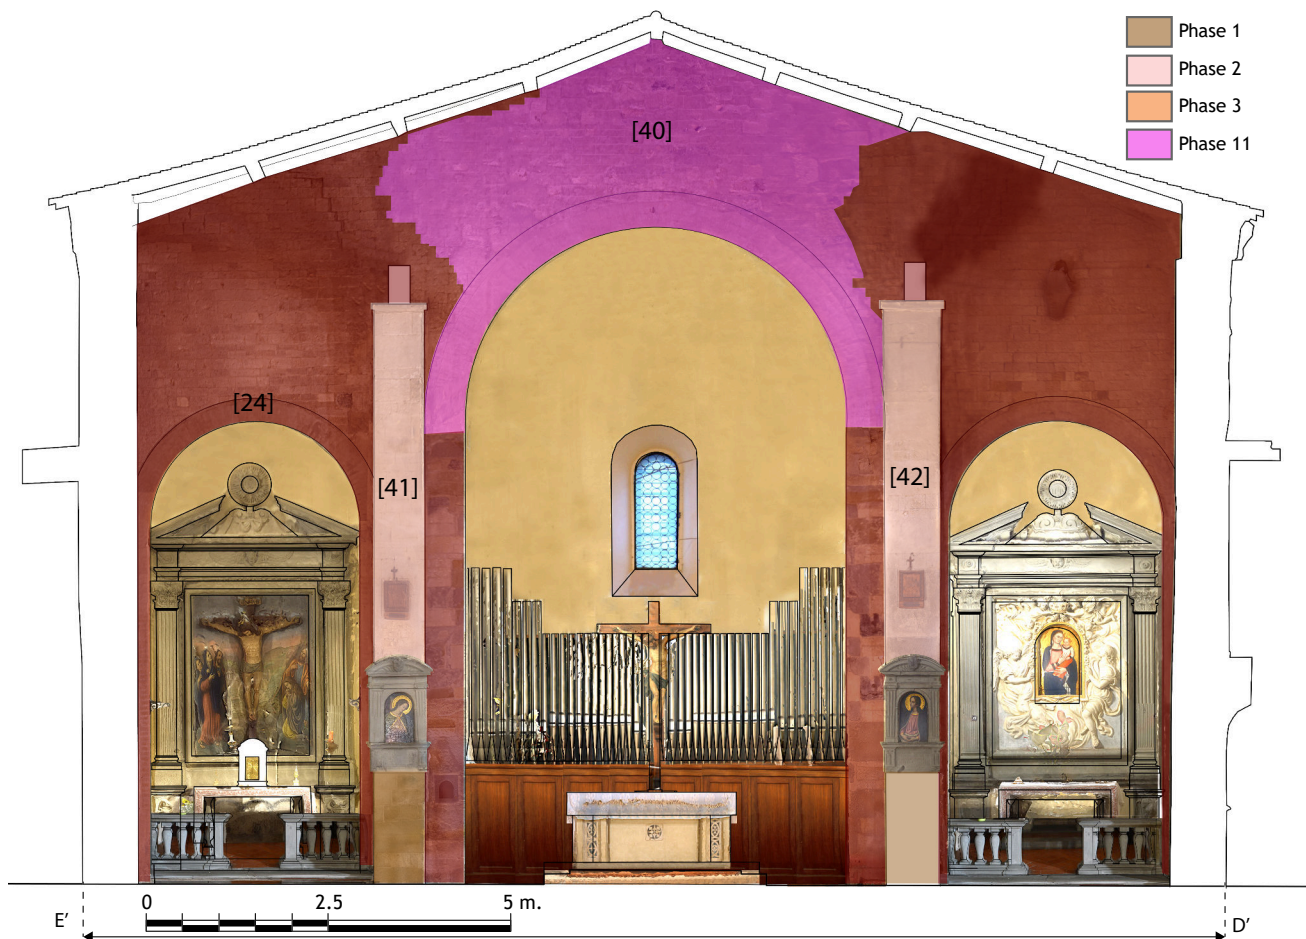



Figure 19: Stratigraphy of the inner east-facing of the church (MR4, MR6, MR8) showing phase 1, phase 2, phase 3 and phase 11. Phase 1 corresponds to the original construction of the Romanesque church. Phase 2 is identified as a repair of phase 1.



In 1819, some restoration works are done in the church choir corresponding to phase 11. The arc of the central apse (ARC2) is raised about 1.20 m (Brunori Cianti [2011]). This operation induced a partial destruction of the upper part of the choir. This restoration work is visible in pink in Figure 19. The two lateral apses are lengthened about 1.8 m (Brunori Cianti [2011]) but this work is no more visible because of the plaster on the walls.

”allungare le due ali del Mur delle Cappelle laterali per la lunghezza di braccia tre ciascuna , come pure il Muro che recinge il detto Coro per la lunghezza di Braccia 11<sup>1/4</sup>.”

Phase 12 is related to some reconfiguration work like the filling of the rose window and the repair of the front wall corners.

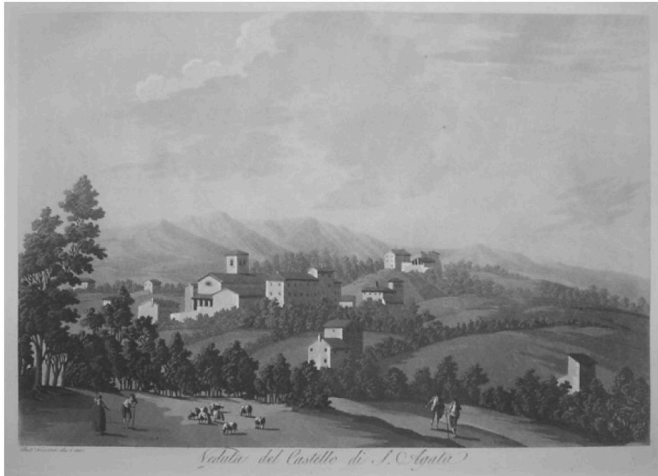

(a) View of the church of Sant'Agata in 1802.



(b) Photo of the church in 1905.

Figure 20: a) View of the church of Sant'Agata in 1802 (Fontani [1802]). b) Photograph of the church in 1905 (personal communication).

The rose window of the church is no more present as shown in Figure 20b contrary to the view shown in Figure 20a. Finally, we note the disappearance of the porch between the picture and the photo.

## 5.10 The 1919 seismic event

A new seismic event occurred in June 29, 1919 with an estimated epicentral macroseismic intensity of 7 in Sant'Agata and an estimated macroseismic magnitude of 6,38. The epicenter is located in the south-eastern part of the Mugello basin, 30 km away from Sant'Agata (Figure 2). Four primary sources describe the church in Sant'Agata (Guidoboni et al. [2019], Guidoboni et al. [2018]). Some minor damage are reported in the church like small cracks as well as the movement of some decorative structures inside the church. The stratigraphic analysis does not reveal any repairs associated with this historical earthquake.

## 5.11 The phase 13

This final phase is related to all the restoration events during the 19<sup>th</sup> century. All the phases are summarized in Figure 23.

## 5.12 Building techniques for repairs

Figure 21 shows the distribution of both the building techniques used in the repair units (Figure 21), and the building techniques which are repaired themselves (Figure 21b). The most commonly used techniques in repairs are TCM2 (41 %) and TCM8 (15.4 %). The most repaired techniques is also TCM2 (50.7 %). It is interesting to note that the building technique TCM2 is mostly repaired by TCM2 itself at different

period of time (mainly for the openings infilling). It shows that ancient builders had the will to make discreet repairs avoiding, for example, to repair blocks of limestone (TCM2) with bricks (TCM8) .

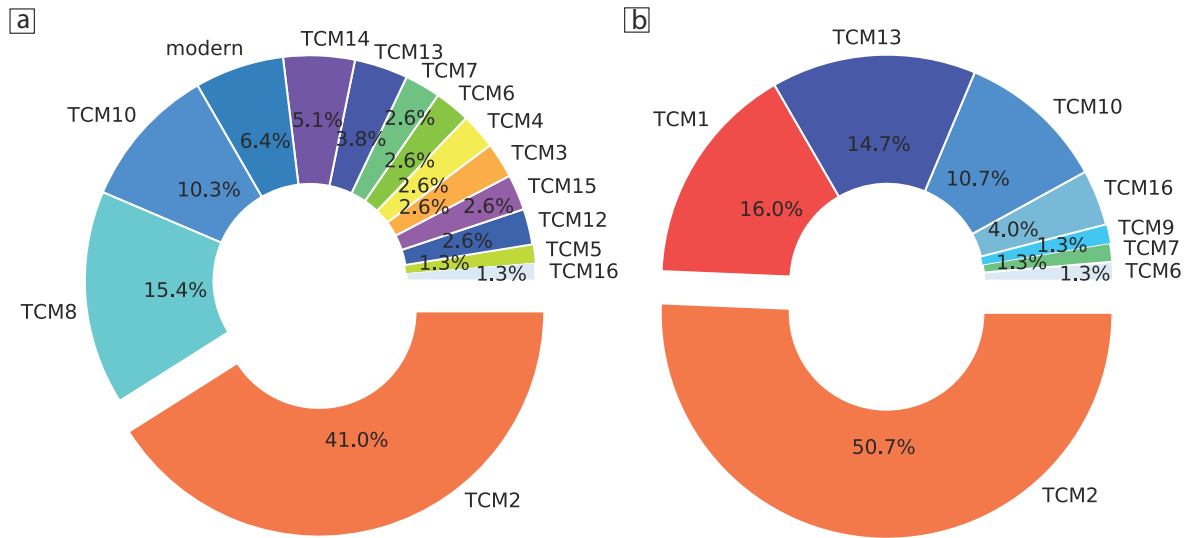


Figure 21: a) Distribution of the building techniques used in the repairs. b) Distribution of building techniques which are repaired.

## 6 Geometry and material evolution of the church

We summarize our findings by building a time line of the phases chronology in the light of historical records and stratigraphic analysis (Figure 22 and 23), proposing sketches for the 13 building phases identified (Figure 24) as well as for the earthquake damage mechanisms identified (Figure 25). The time line (Figure 22) clearly outlines the complementarity contribution of historical records and stratigraphic analysis in the different construction phases identified.

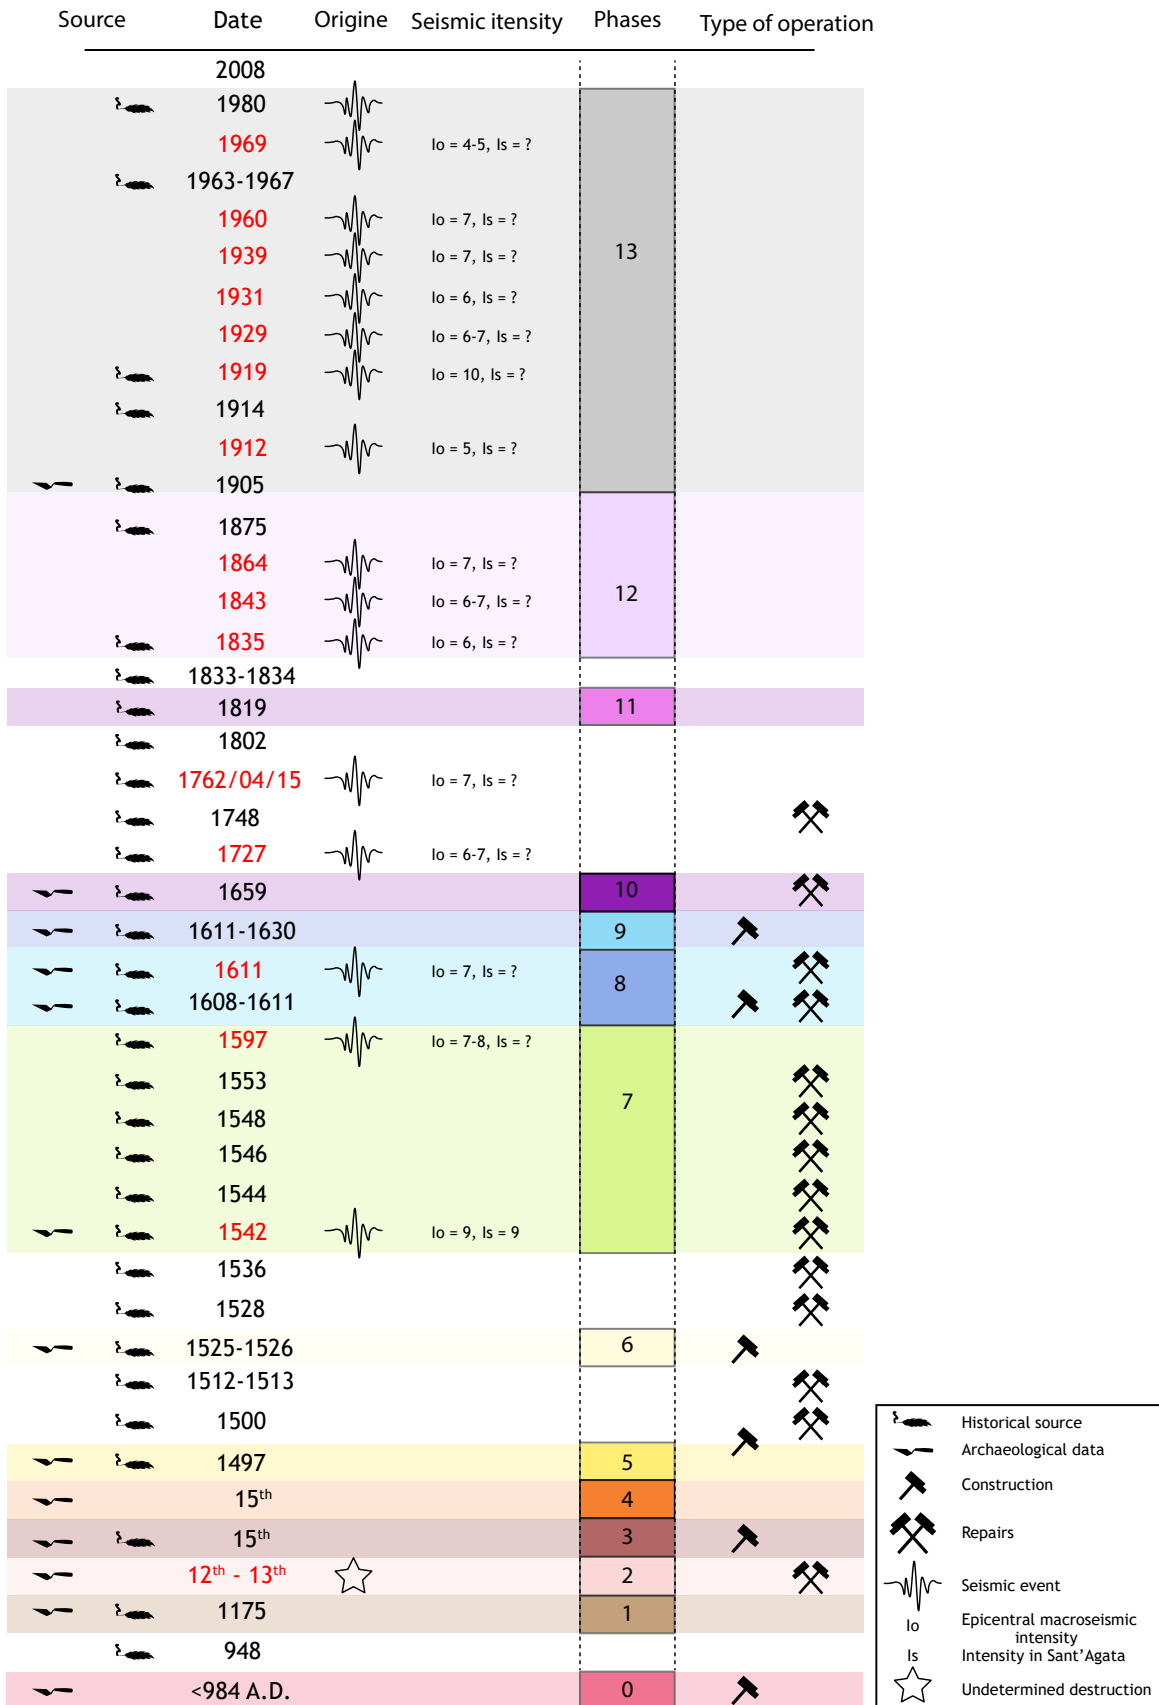


Figure 22: Relative chronology of the construction of the Sant'Agata church crosschecking historical sources and stratigraphic analysis. The figure shows on the left the origin of the data used to identify the construction phases (historical records or stratigraphic analysis).

The assembly of the different aforementioned phases is summarized in Figure 23.

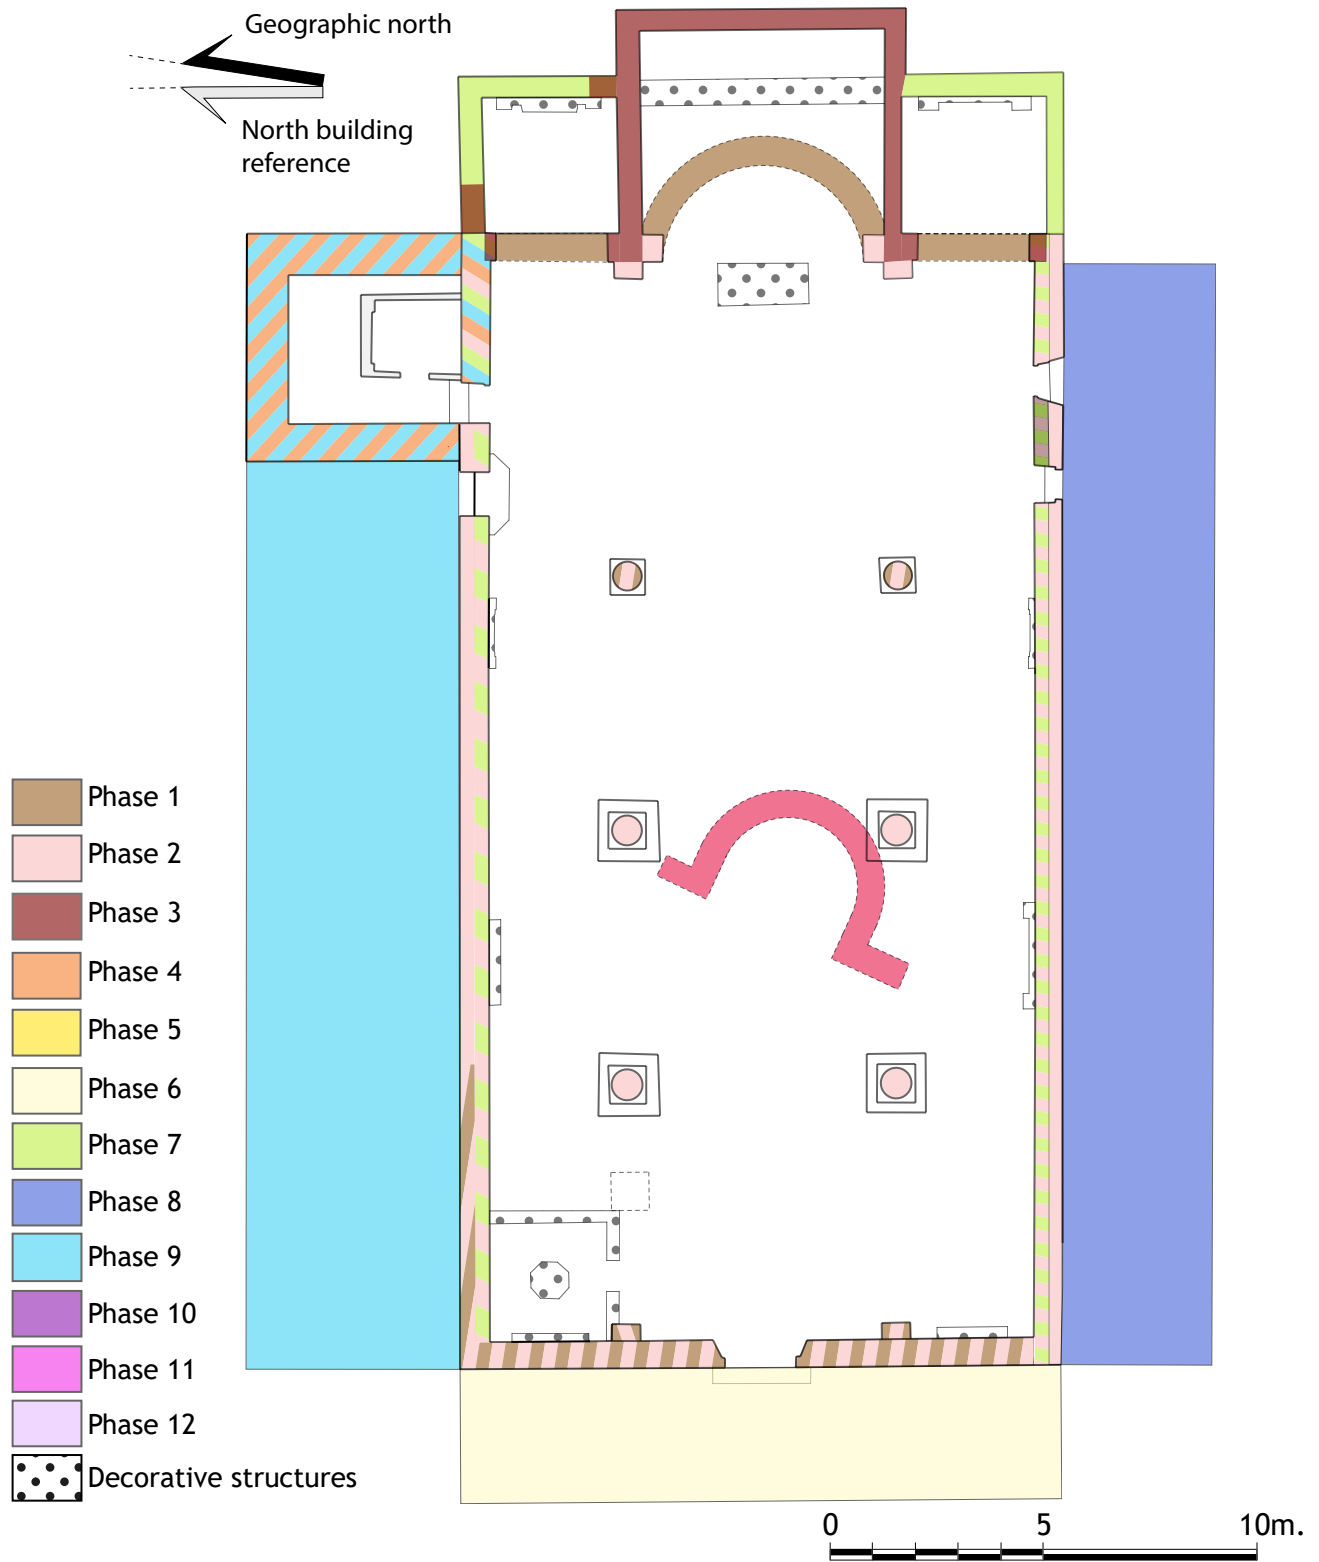


Figure 23: Architectural evolution of the church over time summarizing the assembly of the different aforementioned phases.

Based on this time line and on the architectural evolution of the church (Figure 23), an interpretation of the evolution of the church's architecture highlighting both the geometry and the material evolution over time is proposed (Figure 24).

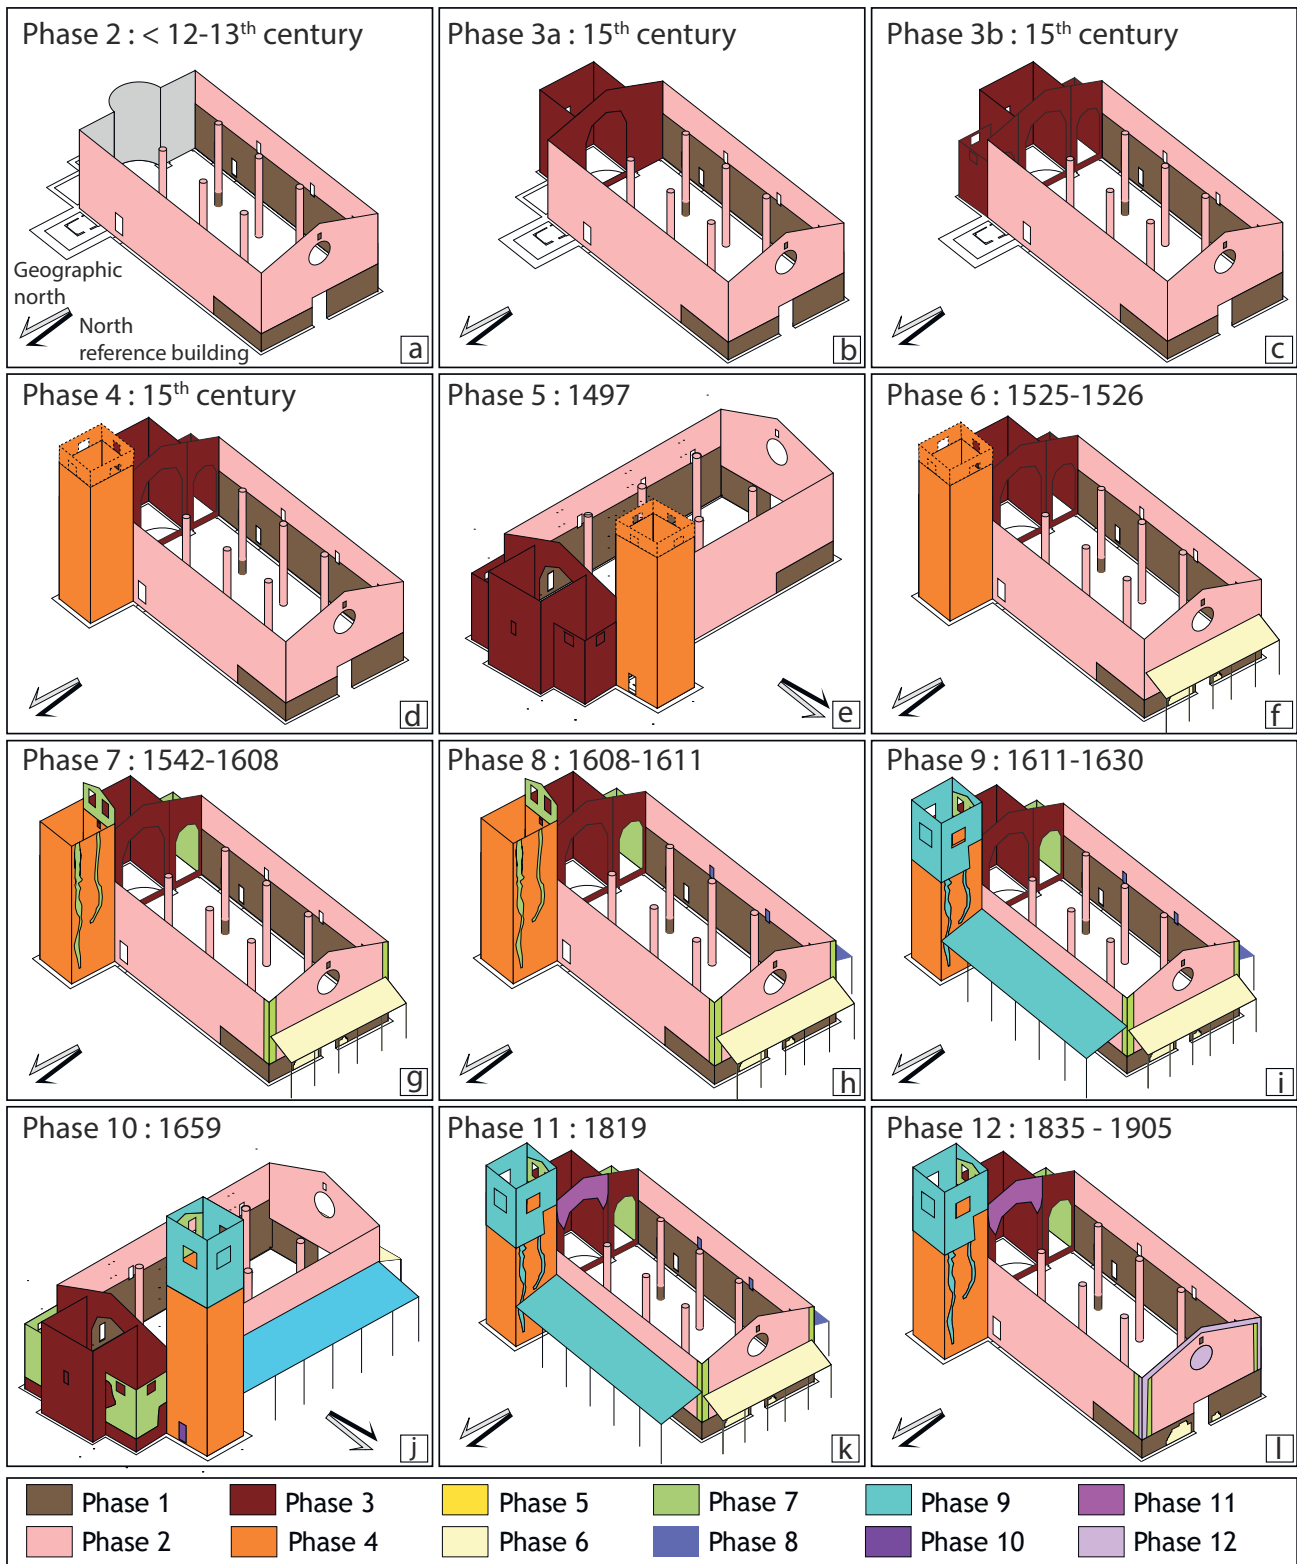


Figure 24: Sketches of the 12 building phases of the church over time.

During phase 0, the current church did not exist. The trace has been drawn on the floor of the current church using color stones (Figure 23). Phase 1 is related to the construction of the first phase of the current church (Figure 24a). This phase is still visible at the bottom of the church (Figure 23). Building technique TCM1 is used. The shape of the nave of phase 1 is not precisely known. However another trace of a monocircular nave is still visible in the central apse of the current church (Figure 23). Figure 24a provides an interpretation of the church as it could have been. The hypothesis of a semi-circular apse is also mentioned by Lia Brunori Cianti (Brunori Cianti [2011]). Phase 3 is characterized by the construction

of a rectangular central apse as well as the two lateral chapels. However, it is difficult to know if their construction was carried out at the same time. On the basis of three arguments, it was decided to split phase 3 in two subphases : phase 3a corresponding to the construction of the central apse (Figure 24b) and phase 3b related to the addition of the side chapels (Figure 24c). First, the thickness of the walls of the central apse and the lateral chapel is different (Figure 16). Second, an angular deviation of 1.8 degree has been detected between MR9 and MR13 (Figure 15). Initially, the central apse had to be built and connected to the wall of the older nave (Figure 24b). In a second step, the side chapels were added. The angular deviation of the north chapel is then interpreted as a design error. The rectangular central apse is built during phase 3a while the two lateral chapels are added during phase 3b. According to a stratigraphic argument : MR8 is built after MR7 (Figures 10, 14 and 17). The third historic argument comes from the analysis of Lia Brunori Cianti (Brunori Cianti [2011], secondary source) describing the addition of the two lateral chapels over the 15<sup>th</sup> century. Phase 4 corresponds to the construction of the bell tower against the north wall of the church (Figure 24d). The original height of the bell tower is discussed below. During phase 5, both the stratigraphic analysis and historical records confirms the opening of a door in the east wall of the bell tower (Figure 24e). Phase 6 corresponds to the construction of a penthouse along the front wall (Fig. 24f). This structure element is commonly cited in the historical records over time.

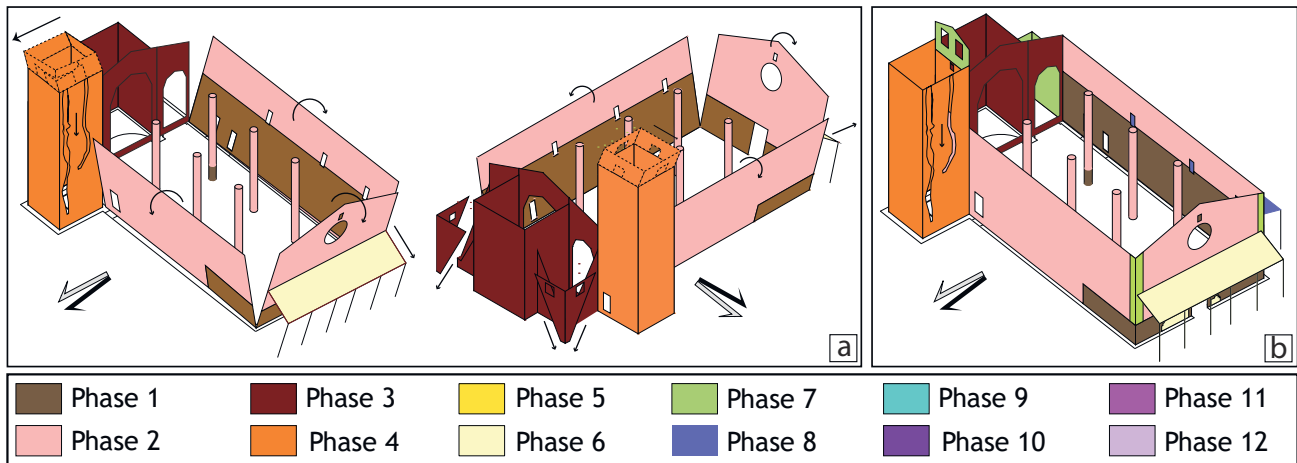


Figure 25: Sketches of the damage mechanisms identified for both, the 1542 (a) and 1611 (b) seismic event.

Phase 7 is related to the repairs after the 1542 seismic event (Figure 24g). The impact of the historical earthquake is described at the scale of the entire basin but not at the building scale. The church is thus described as entirely destroyed in the records. However stratigraphic analysis, providing an accurate location of building damage and repairs, proves that the nave and the bell tower were still standing. Such a result suggests how emphatic historical sources could be, in the description of the effects of an earthquake. This tendency is all the more common in written testimonies which record a reconstruction work, enhancing the role of an individual or institutional initiative ([Thomas and Witschel, 1992], and thus should not be taken literally (Guidoboni et al. [2009]).

Archives as well as stratigraphic data show that the top of the bell tower probably collapsed. The north, east and west facing wall of the bell tower were directly covered with a roof (15,5 m high deduced by the bottom limit of OPUR 44, 45 and 46 which also preserved such a limit from other construction phases) while the south wall is raised up above the roof (19,7 m high deduced from opur 44, 45 and 46). The dimensions of the church after such repairs are deduced from Nozzolini's description since he leveled it off 4,7 m. The nave currently has titling walls. Even if the induced damage of the front wall were repaired again when Nozzolini arrived 66 years after the 1542 earthquake, the repairs of the corner quoins are still visible (in green in Figure 24). It induced a bending of the three walls of the nave (Figure 25a). Such a bending is still visible since the corner walls are vertical while the middle part of the nave is bending. An important repair of the two lateral chapel is detected only by stratigraphic analysis. The failure mechanism deduced from such repair is a collapse of both chapels (Figure 25a on the right). It is important to note

that the absence of historical documents would have made it impossible to identify such damage without a stratigraphic analysis. Phase 8 corresponds to the first repair work led by T. Nozzolini between 1608 and 1611 (Figure 24h) and is precisely described in his exceptional log book. The north penthouse is rebuilt and a new one is built along the south wall of the nave. Phase 9 is related with the repairs made by T. Nozzolini after the 1611 seismic event (Figure 24i). His log book as well as the stratigraphic analysis of the bell tower show a reconfiguration of the top of the building. The damaged walls were first reduced then raised up until the current configuration. The identified repairs as well as the historical description suggests a deep cracking of the bell tower (as shown in Figure 25b). The eastern door of the belltower is embedded during phase 10 (Figure 24j) as described by historical writings and corroborated by the stratigraphic analysis. In 1819, the central apse is raised up related to phase 11 (Figure 24k). Phase 12 corresponds to the infilling of the rose window and the repair of the front wall corner (Figure 24l). Modern restoration over the 20<sup>th</sup> century are done during phase 13. The dimensions of most structural elements over time are fairly well known (nave, side chapels, central apse). In the case of the height of the original bell tower (built during phase 4) we have no direct information since it was destroyed and rebuilt many times. However Figure 26 described how we constrained the original height (h4) from the identified successive repair units and the historical sources. Figure 26 focused on the west wall of the bell tower. The oldest limit is h2 (estimated at 15.35 m from orthophoto in Figure 8) corresponding to the height of the damaged bell tower just after the 1542 earthquake and on which people decided to rebuild the south wall of the bell tower. After the first repair of the bell tower (phase 7, OPUR 46) the maximal height (h5) of the south wall of bell tower is of 18.58m (deduced from stratigraphic analysis in Figure 8). Since only the south wall of the church has been rebuilt, we can give a first evaluation of the height of the belltower between h2 and h5 (i.e. between 15.35m and 18.58 m). Furthermore, this evaluation can be improved using additional information from Nozzolini’s notebook. Indeed the only Nozzolini’s work in the bell tower is the destruction of 4,7 m of the three walls until the still visible h1 limits. h3 is then deduced from h1 at 17,38 m which is inevitably lower than the original heighth h4. It is important to note that h2 and h3 are not necessary equal since a slight levelling probably had to be done in order to be able to build the south wall contrary to the three other walls of the bell tower. The original height h4 can thus be constrained between h3 and h5 (i.e. 17.38 m and 18.58 m).

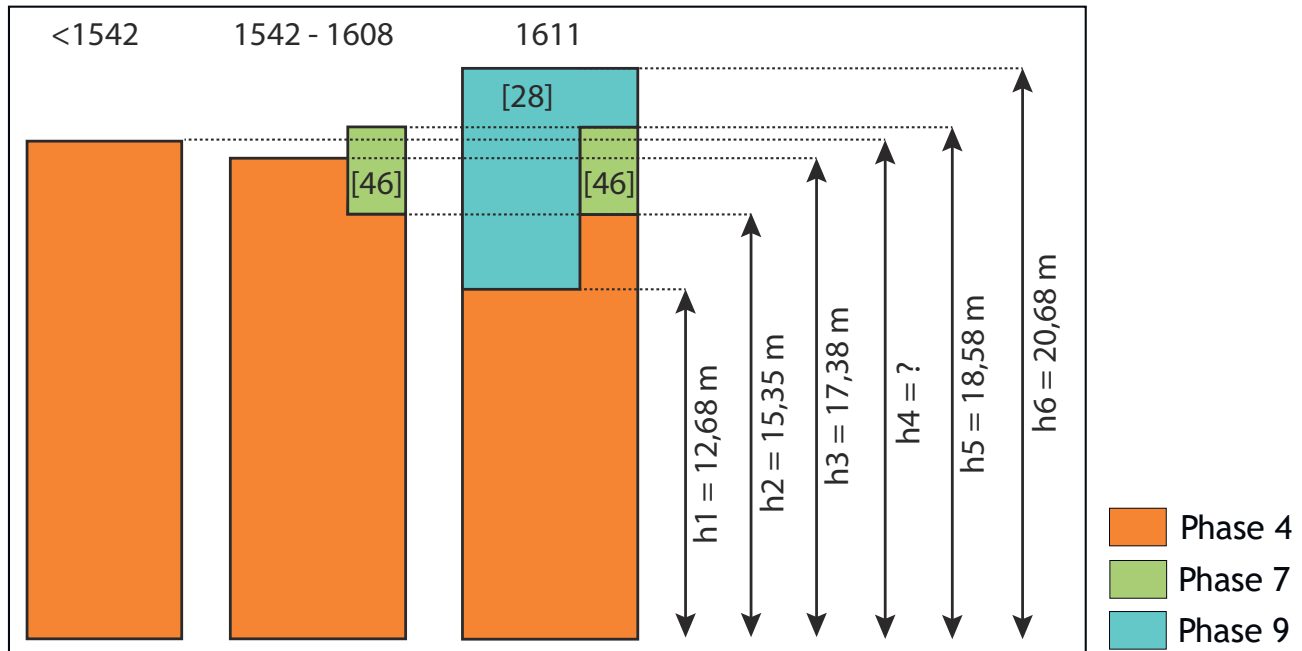


Figure 26: Scheme of the west wall of the bell tower to discuss the evolution of its height over time. OPUR ID are specified in square brackets.

## 7 Conclusion

Combining the analysis of historical records with the analysis of building stratigraphy following the RECAP method, we propose here a new approach to trace the architectural evolution of the Sant'Agata del Mugello church and identify damage mechanisms. 80 repair units are inventoried in the OPUR database. The identified repairs are then compared with written records which constitute an exceptional evidence. Such a methodology allows to identify 13 building phases. The two methods provide complementary information. Sometimes, information is not detected from one of the two methods. As an example, the collapse of both lateral chapels of the church during the 1542 earthquake was detected only from stratigraphic analysis since the seismic event is very little described in historical sources. Archives made it possible to distinguish between postseismic repairs and common reconstruction of the building. Both methods allow to identify and quantify damage mechanisms. Phase 7 and phase 9 are related with earthquake damage. As expected, the 1542 seismic event was the most damaging earthquake. Cracks damaged the bell tower inducing the fall of the top of the bell tower. The three walls of the nave are damaged following a bending damage mechanism. A complex overturning characterized the collapse of the two lateral chapels. T. Nozzoloni delivered an exceptional log book describing the multiple renovation works as well as repair works. The document contains first hand information about damage related to the 1542 seismic event. No damage are related to the 1597 earthquake. Before the 1611 seismic event, the front wall of the church was replaced in its original position. A penthouse was built alongside the southern facing wall of the nave. The 1611 seismic event damaged only the bell tower inducing deep cracks through the walls. The tower was first lowered then raised up to its current height. The study shows a drastic change in the building techniques used in the church over time. The earliest building techniques used large blocks of limestone for the building of the church : the nave, the central apse, the early stage of lateral chapels and the one of the bell tower. Techniques using large blocks of limestone are also used in the repair units. As an example, TCM2 is used to repair the nave. Nevertheless, damage induced by the 1542 seismic event are so important that building techniques drastically evolved. Masonry techniques with rounded shaped blocks or pebbles are used. Mortar is dominant (TCM9 and TCM10). TCM9 and TCM10 have a high vulnerability since material can be caught by hand. Techniques using stones and bricks are also used. The decreasing quality of the building techniques could be related to a quick reconstruction of the damaged church with limited fundings. The Nozzolini period (phase 8 and 9 from 1608 to 1630) is characterised by an improvement in the building techniques used to rebuild both the 1542 and 1611 seismic damage. Nozzolini's renovation used very small rectangular blocks of limestone with bricks using a more resistant mortar (TCM14). No more repairs are related with earthquakes after phase 9. Rectangular blocks of limestone are used to infill the rose window in the front wall and decimetric block of limestone are used in the wall corners with concrete. If the archives corroborates the stratigraphic analysis, the latter allows to improve the text interpretation. As an example, the analysis clearly shows that the church did not entirely collapsed after the 1542 earthquake as it was written. This comparison is essential even in the case of detailed historical sources like the Nozzolini's notebook. Accounts of post-seismic reconstructions are indeed often the elaboration of an individual memory through the glorification of renovation works (Bérenger-Badel [2005], Thomas and Witschel [1992]). Such a precision is particularly important to enhance the definition of epicentral macroseismic intensities.

The church of Sant'Agata is an exceptional working laboratory since the repair operations are still visible and the existence of exceptional historical documents like Nozzolini's log book allows to corroborate the information obtained from stratigraphic analysis. Such an extraordinary richness of information is mainly due to the Sant'Agata population who is strongly engaged into the preservation of its heritage. Indeed, the town hall of Scarperia e San Piero sponsored an outreach event, held in October 2019 in the church of Sant'Agata, to present the project to the local population and to share with them the main results of this study.

To conclude, this cross-disciplinary protocol, developed in the framework of a case study, has the potential to be applied to other buildings of different typologies, periods or locations and to contribute more broadly to the knowledge of the local historical seismicity.



## Acknowledgment

The authors thank the two anonymous reviewers and the editor Chris O Hunt for their enthusiastic reception of the paper and their helpful comments which improved the initial manuscript. The work greatly benefited from various supports: Cecilia Ciuccarelli who helped in finding the historical sources; Emma Cantisani and Fabio Fratini who shared results on their ongoing research on mortar analysis; Giovanni Minutoli, Tommaso Francucci, Marco Repole and Pierpaolo Lagani for sharing the cloud points from 3D laser scanner acquisition; the students of the restoration course (2018–2019) from Università degli Studi di Firenze participated in the photogrammetry acquisition and in the field data acquisitions; Raffaella Leporini provided fruitful comments on archaeological analysis; the students of the Archaeology of Buildings course of the University of Siena (2018–19), coordinated by Andrea Arrighetti and Giovanna Bianchi, provided support in archaeological analysis. We also thank Agnès Tricoche (LabEx TransferS) for her collaboration on the OPUR database. The authors warmly thank the community of Sant’Agata del Mugello for their moral and logistic support, in particular, the major Federico Ignesti, Don Gianluca Mozzi, Marco Casati, Filippo Bellandi, Paolo Gucci and Anna Bambi. This work was funded by IRSN and program TelluS-ALEAS of INSU-CNRS.

## References

- \*. \*, archivio di stato di firenze, carte strozziane, serie i, 353, cc.104-105, nota d'un tremoto venuto nel mugello sotto di 12 di giugno lo anno 1542, e le rovine da quello fatte. xvi sec. a.
- \*. Archivio di stato di pistoia, corporazioni religiose (patrimonio ecclesiastico), vol.270 f, cc.98-99, resoconto del padre s.vongeschi di cutigliano sul terremoto del mugello del 13 giugno 1542, giugno 1542. 1542. June b.
- \*. Archivio di stato di pistoia, corporazioni religiose (patrimonio ecclesiastico), vol.270 f, cc.98-99, resoconto del padre s.vongeschi di cutigliano sul terremoto del mugello del 13 giugno 1542, giugno 1542. 1542. c.
- \*. Una lettera de la discriptione del terremotto che è stato in toscana, la qual narra particolarmente tutte le terre che son ruinate e le persone morte, e li fuochi apparsi in aere, e la terra ap[er]ta, e de un lago fatto di acqua spuzolente di solfere, la quantità, e il numero delle case ruinate le qualcose furno a di iiii luio mdxxxxii. venezia 1542. June d.
- R. Ajazzi. *Addizioni di ricordi storici di Sant'Agata di Mugello*. Firenze, 1887.
- P. Albin, A. Rovida, O. Scotti, and H. Lyon-Caen. Large eighteenth–nineteenth century earthquakes in western gulf of corinth with reappraised size and location. *Bulletin of the Seismological Society of America*, July 2017. doi: 10.1785/0120160181. URL <https://doi.org/10.1785/0120160181>.
- Alessio Marchetti, Fabio Redi, Francesca Savini, and Ilaria Trizio. The Archaeoseismology of Historical Buildings: A Model Study from the L'Aquila Area in Italy. *Journal of Civil Engineering and Architecture*, 11(10), Oct. 2017. ISSN 19347359, 19347367. doi: 10.17265/1934-7359/2017.10.008. URL <http://www.davidpublisher.org/index.php/Home/Article/index?id=34569.html>.
- A. Amato, A. Antonioli, L. Chiaraluce, P. D. Gori, R. D. Stefano, F. Doumaz, L. Faenza, V. Lauciani, A. Marchetti, F. Mele, A. Michelini, M. Pirro, L. Scognamiglio, G. Selvaggi, L. Valoroso, S. Vinci, M. Anselmi, V. D. Rubeis, D. Piccinini, P. Sbarra, E. Tinti, P. Tosi, and A. Fiaschi. Rapporto tecnico-scientifico sulla sequenza sismica del mugello del 1 marzo 2008. *Istituto Nazionale di Geofisica e Vulcanologia*, page 30 pp, 2008.
- N. N. Ambraseys. Value of historical records of earthquakes. *Nature*, 232(5310):375, 1971. URL <https://doi.org/10.1038/232375a0>.
- A. Arrighetti. Constructive and seismic history of the sant'agata del mugello parish church. In P. I. LM, editor, *reuso 2015. III congreso internacional sobre documentacion, conservacion y reutilizacion del patrimonio arquitectonico y paisajistico*, pages 64–70, Valencia - ESP, 2015 2015. Editorial Universitat Politècnica de València. ISBN 9788490483862. Contributo in Atti di convegno.
- A. Arrighetti. Materiali e tecniche costruttive del Mugello tra basso Medioevo e prima Età Moderna. *Arqueología de la Arquitectura*, (13):037, Jan. 2017. ISSN 1989-5313, 1695-2731. doi: 10.3989/arq.arqt.2016.001. URL <http://arqarqt.revistas.csic.es/index.php/arqarqt/article/view/192>.
- A. Arrighetti. Registering and documenting the stratification of disruptions and restorations in historical edifices. the contribution of archaeoseismology in architecture. *Journal of Archaeological Science: Reports*, 23:243–251, Feb. 2019. doi: 10.1016/j.jasrep.2018.10.028. URL <https://doi.org/10.1016/j.jasrep.2018.10.028>.
- G. Bankoff. Design by disasters: Seismic architecture and cultural adaptation to earthquakes. In *Cultures and Disasters*, pages 69–87. Routledge, 2015.
- M. Benvenuti. Facies analysis and tectonic significance of lacustrine fan-deltaic successions in the pliocene–pleistocene mugello basin, central italy. *Sedimentary Geology*, 157(3-4):197–234, Apr. 2003. doi: 10.1016/s0037-0738(02)00234-8. URL [https://doi.org/10.1016/s0037-0738\(02\)00234-8](https://doi.org/10.1016/s0037-0738(02)00234-8).

- A. Bérenger-Badel. Les séismes dans la documentation épigraphique et numismatique sous le haut-empire: entre élaboration de la mémoire et reconstruction de l'événement. *Récits et représentations des catastrophes depuis l'Antiquité*, pages 161–173, 2005.
- L. Binda, G. Cardani, A. Saisi, and M. Valluzzi. Vulnerability analysis of the historical buildings in seismic area by a multilevel approach. 2006.
- P. Boncio, F. Brozzetti, and G. Lavecchia. Architecture and seismotectonics of a regional low-angle normal fault zone in central italy. *Tectonics*, 19(6):1038–1055, Dec. 2000. doi: 10.1029/2000tc900023. URL <https://doi.org/10.1029/2000tc900023>.
- M. Bonini, G. Corti, D. D. Donne, F. Sani, L. Piccardi, G. Vannucci, R. Genco, L. Martelli, and M. Ripepe. Seismic sources and stress transfer interaction among axial normal faults and external thrust fronts in the northern apennines (italy): A working hypothesis based on the 1916–1920 time–space cluster of earthquakes. *Tectonophysics*, 680:67–89, June 2016. doi: 10.1016/j.tecto.2016.04.045. URL <https://doi.org/10.1016/j.tecto.2016.04.045>.
- M. Bradtmöller, S. Grimm, and J. Riel-Salvatore. Resilience theory in archaeological practice—an annotated review. *Quaternary international*, 446:3–16, 2017. URL <https://doi.org/10.1016/j.quaint.2016.10.002>.
- G. P. Brogiolo. L'archeologia dell'architettura in italia nell'ultimo quinquennio (1997-2001). *Arqueología de la Arquitectura*, (1):19–26, 2002.
- L. Brunori Cianti. Sant'agata: una santa, una pieve, una comunità del mugello. 2011.
- A. Cagnana and T. Mannoni. *Archeologia dei Materiali dacostruzione*. Mantova: SAP Editrice, 2000.
- H. Dessales. The villa of diomedes. the making of a roman villa in pompeii. *Paris 2020*, 2020.
- H. Dessales and A. Tricoche. Un database per studiare le riparazioni post-sismiche. *Archeologia dell'Architettura*, XXIII, 2018–*Archeologia dell'architettura e terremoti*, 23:19–24, 2018. URL <https://hal.archives-ouvertes.fr/hal-02291284>.
- DISS Working Group. Database of individual seismogenic sources (diss), version 3.2.1: A compilation of potential sources for earthquakes larger than m 5.5 in italy and surrounding areas, 2018. URL <http://diss.rm.ingv.it/diss/index.php/DISS321>.
- D. Donne. Tettonica attiva dell'appennino settentrionale nel settore compreso tra l'appennino pistoiese e l'alta val tiberina. università degli studi di fi-renze (unpublished phd thesis, 144 pp). 2005. URL <https://doi.org/10.1785/0120160181>.
- F. Fontani. *Viaggio pittorico della Toscana dell'Abate Francesco Fontani*, volume 2. Firenze, 1802.
- P. Forlin and C. M. Gerrard. The archaeology of earthquakes: the application of adaptive cycles to seismically-affected communities in late medieval europe. *Quaternary international*., 446:95–108, 2017. URL <https://doi.org/10.1016/j.quaint.2017.06.030>.
- E. Guidoboni, J. E. Ebel, et al. Earthquakes and tsunamis in the past. a guide to techniques in historical seismology. 2009.
- E. Guidoboni, G. Ferrari, D. Mariotti, A. Comastri, G. Tarabusi, G. Sgattoni, and G. Valensise. Cfti5med, catalogo dei forti terremoti in italia (461 a.c.-1997) e nell'area mediterranea (760 a.c.-1500), 2018. URL <http://storing.ingv.it/cfti/cfti5/>.
- E. Guidoboni, G. Ferrari, G. Tarabusi, G. Sgattoni, A. Comastri, D. Mariotti, C. Ciuccarelli, M. G. Bianchi, and G. Valensise. CFTI5med, the new release of the catalogue of strong earthquakes in italy and in the mediterranean area. *Scientific Data*, 6(1), June 2019. doi: 10.1038/s41597-019-0091-9. URL <https://doi.org/10.1038/s41597-019-0091-9>.

- K.-G. Hinzen and A. Montabert. Rectangular Blocks vs Polygonal Walls in Archaeoseismology. *Annals of Geophysics*, 60(4), July 2017. ISSN 2037416X, 15935213. doi: 10.4401/ag-7127. URL <http://www.annalsofgeophysics.eu/index.php/annals/article/view/7127>.
- S. Lagomarsino and A. Boato. Stratigrafia e statica. *Archeologia dell'Architettura XV*, pages 47–53, 2010. URL <http://digital.casalini.it/10.1400/182800>.
- T. Mannoni. Metodi di datazione dell'edilizia storica. *Archeologia medievale*, 11:396, 1984. URL <https://search.proquest.com/docview/1298015597/citation/2C06ABA4C25D4EDBPQ/1?accountid=15867>.
- T. Mannoni. Archeologia della produzione architettonica. le tecniche costruttive. *Arqueología de la Arquitectura*, (4):11–19, 2005. URL <https://doi.org/10.3989/arq.arqt.2005.73>.
- I. Martini and M. Sagri. Tectono-sedimentary characteristics of late miocene-quaternary extensional basins of the northern apennines, italy. *Earth-Science Reviews*, 34(3):197–233, June 1993. doi: 10.1016/0012-8252(93)90034-5. URL [https://doi.org/10.1016/0012-8252\(93\)90034-5](https://doi.org/10.1016/0012-8252(93)90034-5).
- L. Nigro. The archaeology of collapse and resilience: Tell es-sultan/ancient jericho as a case study. *Overcoming Catastrophes. Essays on disastrous agents characterization and resilience strategies in pre-classical Southern Levant, Rome "La Sapienza" Studies on the Archaeology of Palestine and Transjordan*, 11:55–85, 2014.
- J. Ortega, G. Vasconcelos, H. Rodrigues, M. Correia, and P. B. Lourenço. Traditional earthquake resistant techniques for vernacular architecture and local seismic cultures: A literature review. *Journal of Cultural Heritage*, 27:181–196, 2017. URL <https://doi.org/10.1016/j.culher.2017.02.015>.
- S. Papa, G. Di Pasquale, S. Podestà, and A. Brignola. Manuale per la compilazione della scheda per il rilievo del danno ai beni culturali. *Chiese, Modello A-DC*, 2011.
- R. Parenti. Dalla stratigrafia all'archeologia dell'architettura. alcune recenti esperienze del laboratorio senese. *Arqueología de la Arquitectura*, (1):73–82, 2002. URL <https://doi.org/10.3989/arq.arqt.2002.7>.
- personal communication. Archivio fotografico personale di aldo giovannini.
- M. Ripepe, E. Marchetti, D. D. Donne, M. Coli, R. Genco, G. Olivieri, L. Colò, and G. Lacanna. Dipartimento di scienze della terra di firenze, centro di competenza del dipartimento della protezione civile della presidenza del consiglio dei ministri. page 48 pp, 2008.
- A. Rovida, M. Locati, R. D. Camassi, B. Lolli, and P. Gasperini. Catalogo parametrico dei terremoti italiani (cpti15), 2016. URL <https://emidius.mi.ingv.it/CPTI15-DBMI15/>.
- A. Samson, C. Crawford, M. Hoogland, and C. L. Hofman. Resilience in pre-columbian caribbean house-building: Dialogue between archaeology and humanitarian shelter. *Human Ecology*, 43(2):323–337, 2015. URL <https://doi.org/10.1007/s10745-015-9741-5>.
- F. Sani, M. Bonini, L. Piccardi, G. Vannucci, D. D. Donne, M. Benvenuti, G. Moratti, G. Corti, D. Montanari, L. Sedda, and C. Tanini. Late pliocene–quaternary evolution of outermost hinterland basins of the northern apennines (italy), and their relevance to active tectonics. *Il Quaternario*, 10:105–120, 1997.
- F. Sani, M. Bonini, L. Piccardi, G. Vannucci, D. D. Donne, M. Benvenuti, G. Moratti, G. Corti, D. Montanari, L. Sedda, and C. Tanini. Late pliocene–quaternary evolution of outermost hinterland basins of the northern apennines (italy), and their relevance to active tectonics. *Tectonophysics*, 476(1-2):336–356, Oct. 2009. doi: 10.1016/j.tecto.2008.12.012. URL <https://doi.org/10.1016/j.tecto.2008.12.012>.

- M. Sintubin and I. Stewart. A logical methodology for archaeoseismology: A proof of concept at the archaeological site of sagalassos, southwest turkey. *Bulletin of the Seismological Society of America*, 98 (5):2209–2230, Oct. 2008. doi: 10.1785/0120070178. URL <https://doi.org/10.1785/0120070178>.
- Soprintendenza. Soprintendenza archeologia, belle arti e paesaggio per la città metropolitana di firenze e le province di pistoia e prato. Photographic and Historical Archives of the Italian Ministry of Cultural Heritage, 1980.
- S. C. Stiros. Archaeological evidence of antiseismic constructions in antiquity. *Annals of Geophysics*, 38 (5-6), 1995. URL <https://doi.org/10.4401/ag-4056>.
- E. Thomas and C. Witschel. Constructing reconstruction: claim and reality of roman rebuilding inscriptions from the latin west. *Papers of the British School at Rome*, 60:135–177, 1992. URL <https://doi.org/10.1017/S0068246200010357>.
- R. Torrence and J. Grattan. The archaeology of disasters: past and future trends. In *Natural disasters and cultural change*, pages 17–34. Routledge, 2003.
- P. Volant, A. Levret, D. Carbon, O. Scotti, D. Combescure, T. Verdel, A. Piant, and P. Laurent. An archaeo-seismological study of the nimes roman aqueduct, france: indirect evidence for an m over 6 seismic event? *Natural Hazards*, 49(1):53–77, 2009. URL <https://doi.org/10.1007/s11069-008-9276-9>.

# OPUR catalogue

**Id. OPUR** 1

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Upper part, Middle part

**Hazard** **Supposed collapse** (Rocking. Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 1500 (preserved), Width 1510, Height 1191  
Masonry : Stone, Mortar [Lime and sand]



**Relations** Equal to TCM2 - Before TCM3, TCM4, TCM6 - After TCM1  
Contemporary to OPUR 35, 36, 37, 5, 77 - Before OPUR 2, 34, 4, 63, 64, 67, 68, 69, 7, 70, 72, 9 - After OPUR

**Other precisions** Front wall of the church (MR1) : between the middle and top of the wall. The upper part of the wall is built above a first constructive phase. A major change of work which. This could reflect a collapse of the structure.

the technique that is being repaired(TCM1) :  
Use of decimetric and quadrangular blocks of limestone (Pietra Albarese). Maximum length of the block : 25.5cm, Minimum length of the block : 12.3cm. Max width : 72cm, minimum width : 10.5 cm. Blocks edges are roughly cut. Course of serpentinite are used with an ornamental purpose. Dimension of joints : max : 1.2cm,

**Author & date** AM. 07/12/2018.

## Images

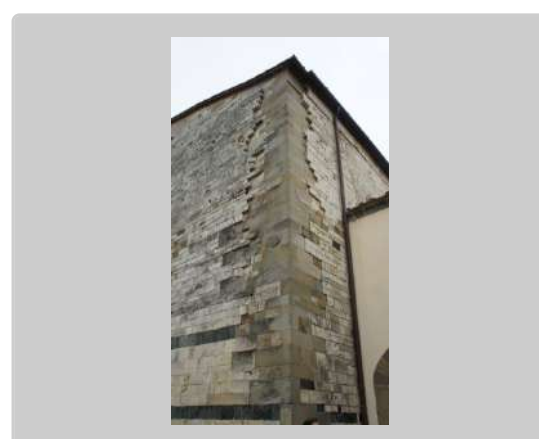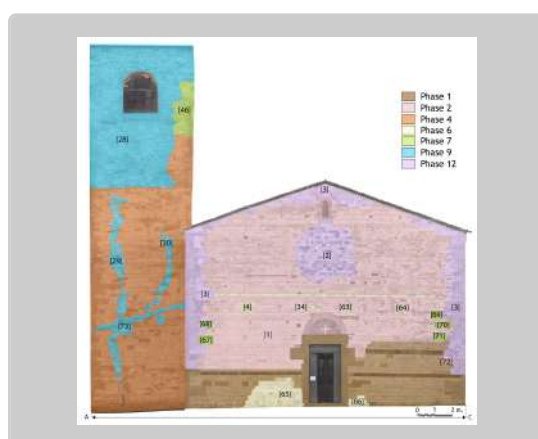

**Id. OPUR** 2

**Localisation** Sant'Agata, , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM3  
Repaired part(s) : North, South ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Length scanner, Width 339, Height 390  
Masonry, Filling-in : Stone, Mortar [Lime and sand] [dimension of elements : about 10°-20 cm]

**Relations** Equal to TCM3 - After TCM2  
Before OPUR 75 - After OPUR 1

**Other precisions** External facing of the front wall of the church (MR1) : Infilling of the rose window.  
Use of limestone (Pietra Alberese) and Serpentine course. Decimetric blocks.  
Undetermined origin. Such an infilling of the previous rose window might be considered as a common reconfiguration work even if it is sometimes made as a postseismic repair.

**Author & date** AM. 07/12/2018.

**Images**

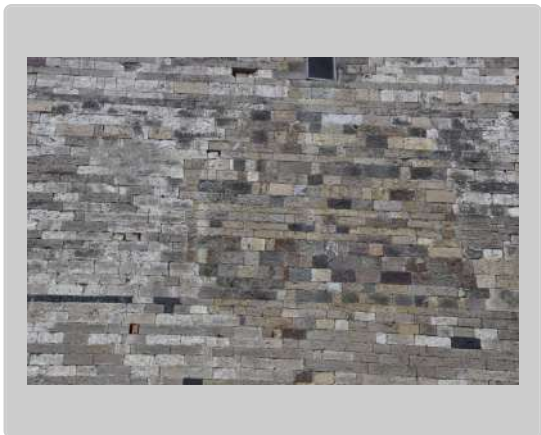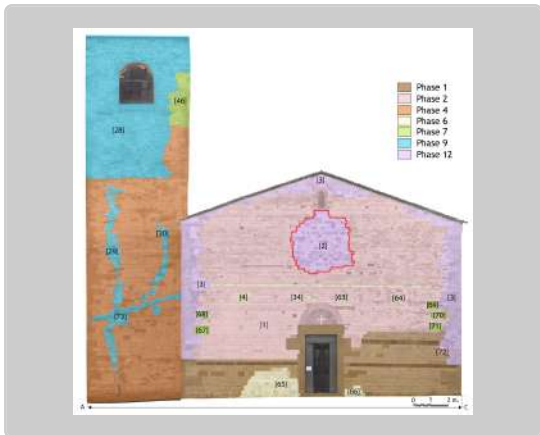

**Id. OPUR** 3

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM6  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Deformation** (Corner overturning)  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Not indicated**  
Dimensions (cm) : Width 123, Height 787  
Masonry, Block : Stone, Mortar [Lime and sand] [dimension of elements : between 20 and 50 cm]

**Relations** Equal to TCM6 - After TCM1, TCM2  
Contemporary to OPUR 79 - Before OPUR 4, 5 - After OPUR 67, 68, 69, 70, 71, 72, 75



**Other precisions** Repair of the two corner quoins of the front wall (MR1) as well as the upper part of the wall. The repair is particularly visible because of a centimetric shift between opur 6 and opur 1.

Use of decimetric blocks of limestone (until 50 centimeter length).

We associated this repair with a seismic event. First it is a typical repair due to a global overturning of the front wall. Such a damage is secondly described in historical source (Tolomeo Nozzolini's log book).

**Author & date** AM. 07/12/2018.

### Images

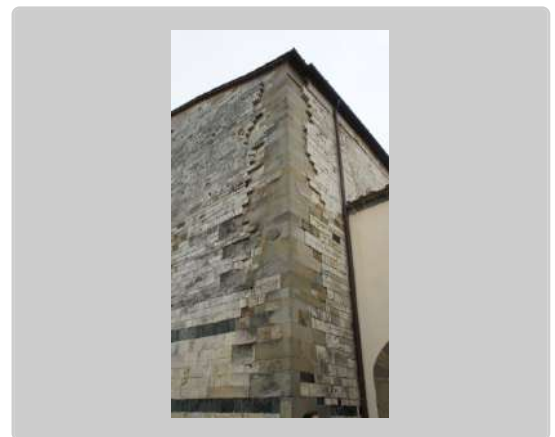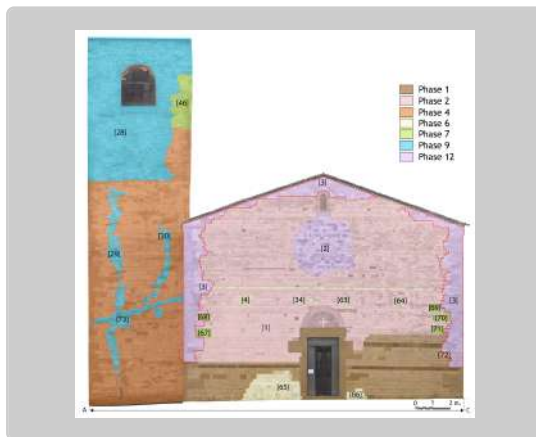



**Id. OPUR** 4

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 63, 78 - Before OPUR - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes which contained the beam of the penthouse.

**Author & date** AM. 07/12/2018.

**Images**

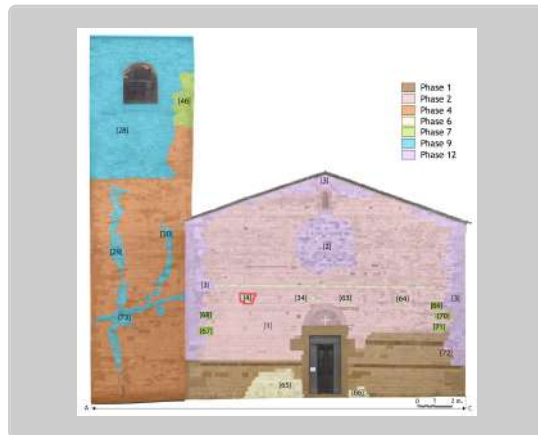

**Id. OPUR** 5

**Localisation** SantAgata, , , : Interior wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Supposed collapse** (Global overturning of the façade)  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 1500, Height ~7.50, Thickness ?  
Masonry, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM1  
Contemporary to OPUR 1, 6, 7 - Before OPUR 10, 74, 79, 8

**Other precisions** Front wall of the church (MR1) : internal part of the church.  
This is the same description than opur 1 but applied to the inner facing wall of the church.  
It is the same repair operation. Type of the masonry : SACO

**Author & date** AM. 07/12/2018.

### Images



**Id. OPUR** 6

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Width 19, Height 231  
Masonry : Stone, Mortar [Lime and sand] [dimension of elements : 10 cm]


**Relations** Equal to TCM2 - After TCM1  
Contemporary to OPUR 5, 7 - Before OPUR 8 - After OPUR 5

**Other precisions** Repair of the south pilaster (PL4) of the inner part of the front wall (MR1). Use of technique TCM2 to repair TCM1. The repair unit is linked to the repair unit of the front wall as described in opur 4. There is only a small part of the repair which is still visible today because this repair is itself repaired by another repair unit.

We note the same repair than the north pilaster (PL3).

**Author & date** AM. 08/12/2018.

### Images

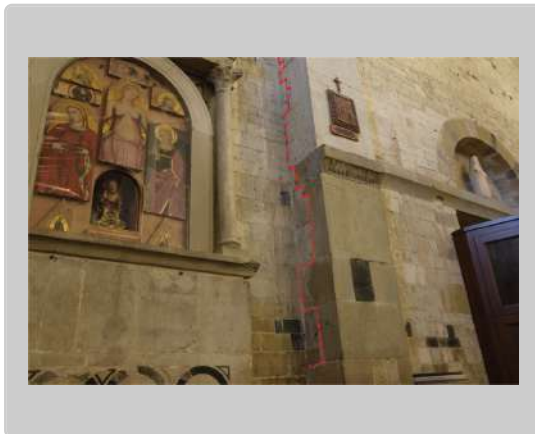

**Id. OPUR** 7

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Supposed collapse**  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Dimensions (cm) : Width 10, Height 76  
Masonry : Stone, Mortar [Lime and sand] [dimension of elements : 10 cm]

**Relations** Equal to TCM2 - After TCM1  
Contemporary to OPUR 5, 6 - Before OPUR 10

**Other precisions** Repair of the north pilaster (PL3) of the inner part of the front wall (MR1). Use of technique TCM2 to repair TCM1. The repair unit is linked to the repair unit of the front wall as described in opur 4. There is only a small part of the repair which is still visible today because this repair is itself repaired by another repair unit.  
Same repair work than the south pilaster (PL4).

**Author & date** AM. 08/12/2018.

**Images**

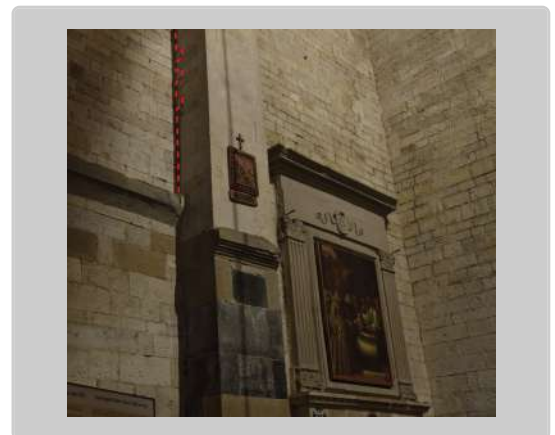

**Id. OPUR** 8

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Supposed collapse - Crack**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**  
Dimensions (cm) : Width 58, Height 483  
Masonry, Block : Stone, Mortar [Lime and sand]


**Relations** Equal to TCM2 - After TCM2  
After OPUR 5, 6

**Other precisions** Reconstruction or damage of the south pilaster (PL4). A crack is visible between the part of the pilaster built against the front wall and the second part that could interpreted as a repair or the consequence of the small overturning of the front wall after the 1542 earthquake. The same technique is used for both part of the pilaster.

Repair or damage?

**Author & date** AM. 08/12/2018.

**Images**

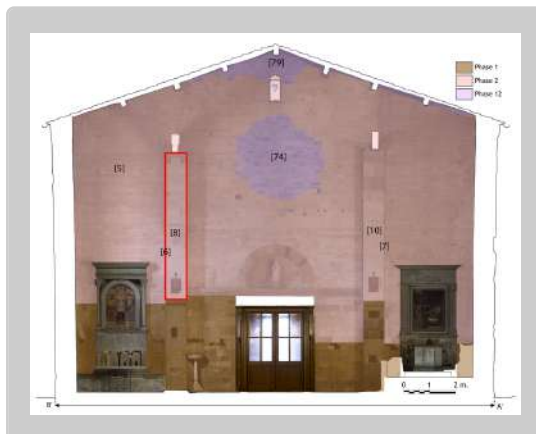

**Id. OPUR** 9

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Upper part, Middle part

**Hazard** **Deformation - Supposed collapse - Crack** (Global complex overturning of the façade)  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 2842, Height 338  
Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Before OPUR 13, 51 - After OPUR 1

**Other precisions** Internal facing wall of MR14 (north wall of the nave).  
Reconstruction of the wall from the middle until the top of the wall. Use of TCM2 with blocks of limestone having very fine joints. The repair is visible because the wall is straight ahead contrary to the wall below which undulates slightly.

It is important to not a bending of the wall below towards the interior of the church. It confirms the typology of the wall built using SACO technique.

**Author & date** AM. 08/12/2018.

**Images**



**Id. OPUR** 10

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : North, South ; Upper part, Middle part

**Hazard** **Supposed collapse - Crack**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Not indicated**  
Dimensions (cm) : Width 52, Height 490

**Relations** Equal to TCM2 - After TCM2  
After OPUR 5, 7

**Other precisions** Reconstruction or damage of the north pilaster (PL3). A crack is still visible between the part of the pilaster built against the front wall and the second part that could interpreted as a repair or the consequence of the small overturning of the front wall after the 1542 earthquake. The same technique is used for both part of the pilaster.

**Author & date** AM. 08/12/2018.

**Images**

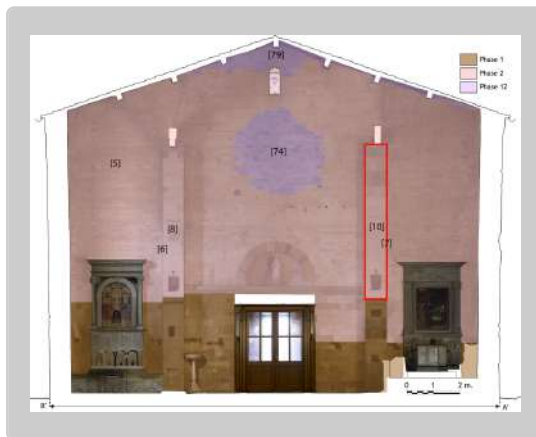

**Id. OPUR** 11

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part, Upper part

**Hazard** **Settling**  
Ancient origin : undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 720, Height 273  
Filling-in, Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 12 - After OPUR 1, 76

**Other precisions** Internal facing wall of MR2 (south wall of the nave). East part of the wall. Infilling of a previous opening above the door going to the canonica. Use of technique TCM2.  
I do not define a new building technique for this infilling. It is very close to the TCM2 technique used for the front wall. The only difference is the irregular face of the block. The repair operation seems to have been very fast. It is important to note that the three identified infilling in the church have been done using this degraded technique.

**Author & date** AM. 08/12/2018.

### Images

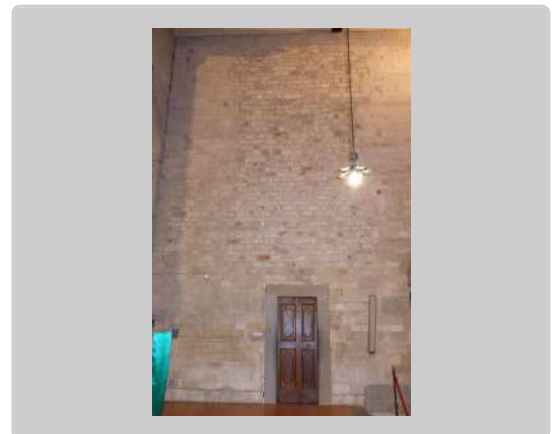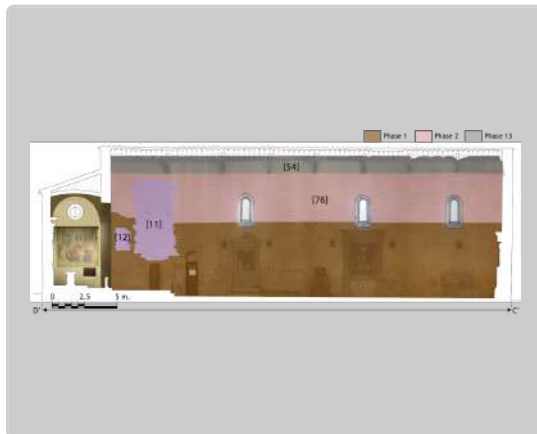



**Id. OPUR** 12

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : East, West ; Middle part, Upper part

**Hazard** **Settling**  
Ancient origin : undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 106, Height 170


**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 11 - After OPUR 1, 76

**Other precisions** Internal facing wall of MR2 (south wall of the nave). East part of the wall. Infilling of a previous opening very close to the previous infilling described in opur 11.

I do not define a new building technique for this infilling. It is very close to the TCM2 technique used for the front wall. The only difference is the irregular face of the block. The repair operation seems to have been very fast. It is important to note that the three identified infilling in the church have been done using this degraded technique.

**Author & date** AM. 08/12/2018.

### Images

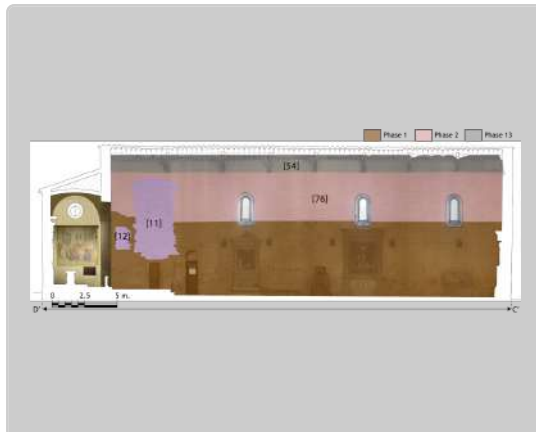

**Id. OPUR** 13

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part, Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 178, Height 341  
Filling-in, Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
After OPUR 9

**Other precisions** Internal facing wall of MR13 (north wall of the nave). East part of the wall. Infilling of a previous opening.  
I do not define a new building technique for this infilling. It is very close to the TCM2 technique used for the front wall. The only difference is the irregular face of the block. The repair operation seems to have been very fast. It is important to note that the three identified infilling in the church have been done using this degraded technique.

**Author & date** AM. 08/12/2018.

### Images

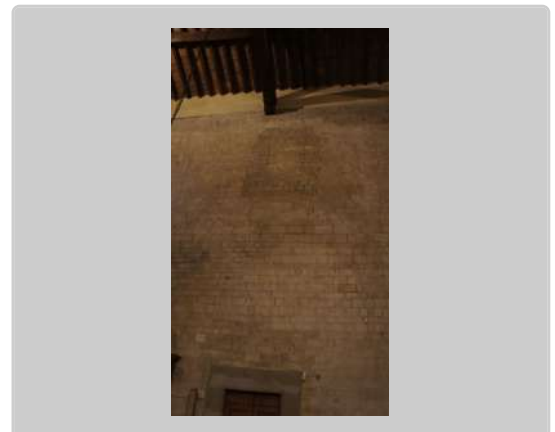

**Id. OPUR** 14

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention full** - ACoR : TCM10

**Hazard** **Supposed collapse - Fracture - Settling - Crack** (Corner overturning. Partial complex overturning)  
Ancient origin : earthquake - Probability of the event very strong



**Repair** **Not indicated**  
Dimensions (cm) : Width 419, Height 626

**Relations** Equal to TCM10 - Before TCM13, TCM8 - After TCM16  
Contemporary to OPUR 18 - Before OPUR 15, 16, 17

**Other precisions** North side chapel (MR8).  
A portion of a MR8 wall built against MR7 using the same building technique (TCM16) which translated the construction of the lateral chapel after the central apse. Yet the repair unit that we consider here is built against this previous portion of the wall MR8 with the use of technique TCM10. TCM10 is a mix of mainly irregular (sometimes regular) blocs of limestone with pebbles. It is important to note the high presence of mortar. This type of repair translates a partial collapse of the lateral chapel.  
The so called V profil chapel linked to the central apse. The V profil can be seen

**Author & date** AM. 08/12/2018.

**Images**

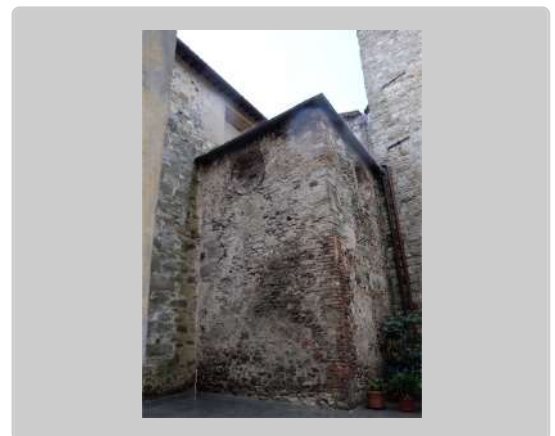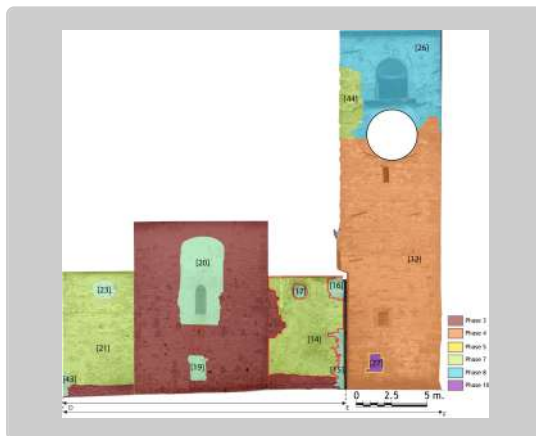

**Id. OPUR** 15

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : North, South, East, West ; Lower part

**Hazard** **Supposed collapse** (Corner overturning)  
Ancient origin : earthquake - Probability of the event low

**Repair** **Corner**  
Dimensions (cm) : **North-South wall** : Width 65, Height 154  
**East-West wall** : Width 65, Height 134  
Masonry : Terra cotta [Brick], Mortar [Lime and broken terra cotta]


**Relations** Equal to TCM8 - After TCM10, TCM9  
Contemporary to OPUR 16 - After OPUR 14, 18

**Other precisions** Corner of the north side chapel. Repair of the lowest part of the corner using bricks (TCM8)

We note the same repair in the highest part of the corner.  
Repair of the previous opur 14.

**Author & date** AM. 08/12/2018.

**Images**

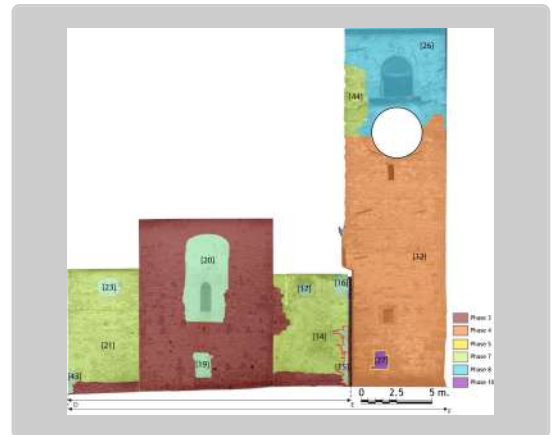

**Id. OPUR** 16

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : North, South, East, West ; Upper part

**Hazard** **Supposed collapse** (Corner overturning)  
Ancient origin : earthquake - Probability of the event low

**Repair** **Corner**  
Dimensions (cm) : **North-South wall** : Width 68, Height 296  
**East-West wall** : Width 66, Height 312  
Masonry : Terra cotta [Brick], Mortar [Lime and broken terra cotta]


**Relations** Equal to TCM8 - After TCM10  
Contemporary to OPUR 15 - After OPUR 14, 18

**Other precisions** Corner of the north side chapel. Repair of the highest part of the corner using bricks (TCM8)

We note the same repair in the lowest part of the corner.  
Repair of the previous opur 14.

**Author & date** AM. 08/12/2018.

### Images

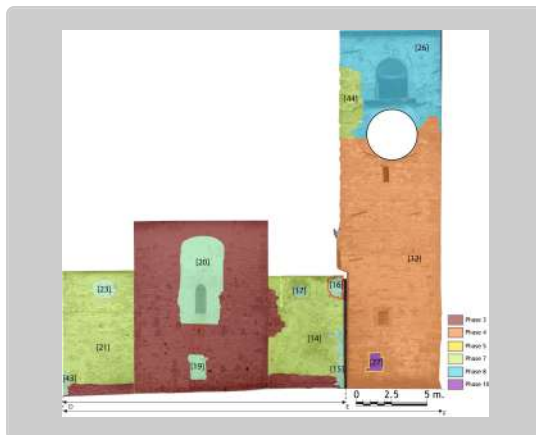

**Id. OPUR** 17

**Localisation** SantAgata, , , : Window

**Identity** **Intervention full** - ACoR : TCM10

**Hazard** **Settling**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**

Dimensions (cm) : Width 80, Height 83


Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM10 - After TCM10  
After OPUR 14

**Other precisions** North side chapel (MR8). Infilling of a old window using the same building technique (TCM10) used in the opur 14.

**Author & date** AM. 08/12/2018.

**Images**

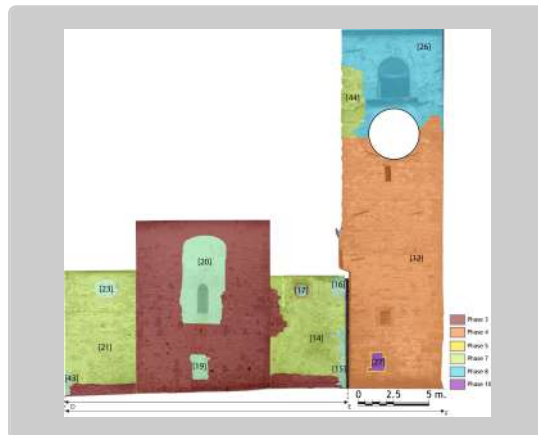

**Id. OPUR** 18

**Localisation** SantAgata, , , : Façade wall, non load-bearing

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : East, West ; Lower part

**Hazard** **Supposed collapse** (Corner overturning. Partial complex overturning)  
Ancient origin : earthquake - Probability of the event very strong



**Repair** **Corner, Reconstruction**  
Dimensions (cm) : **North-South wall** : Lenght 421, Height 608  
Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM10 - Before TCM13, TCM8  
Contemporary to OPUR 14 - Before OPUR 15, 16

**Other precisions** North side chapel (MR9).  
Same repair than opur 14 but applied to wall MR9.  
Use of a "assise de réglage" in the middle of the wall.

**Author & date** AM. 08/12/2018.

### Images

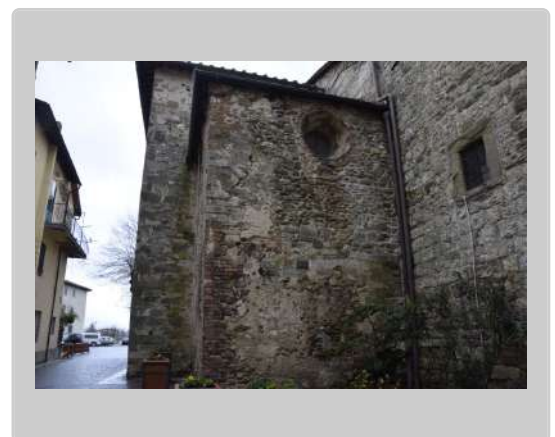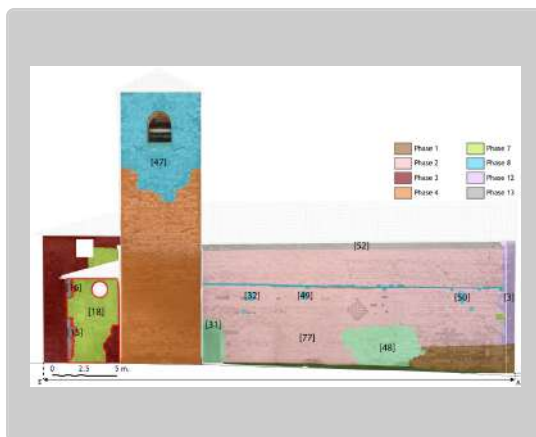

**Id. OPUR** 19

**Localisation** SantAgata, , , : Doorway

**Identity** **Intervention full** - ACoR : TCM16

**Hazard** **Settling**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**

Dimensions (cm) : Width 120, Height 198


Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM16 - After TCM16

**Other precisions** Central apse (MR6). External part of the apse. Infilling of a door. Use of the same building technique than for the wall (TCM16).

**Author & date** AM. 08/12/2018.

**Images**

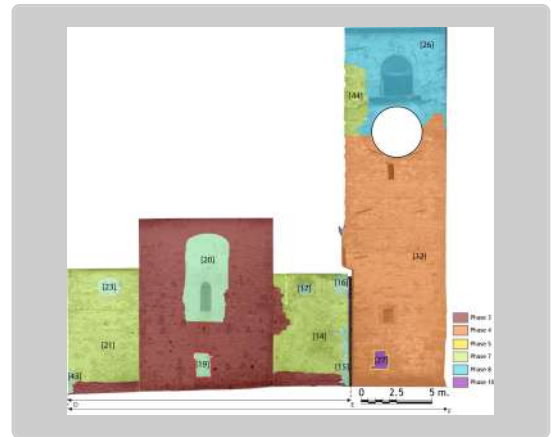



**Id. OPUR** 20

**Localisation** SantAgata, , , : Window

**Identity** **Intervention full** - ACoR : TCM8

**Hazard** **Settling**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**

Dimensions (cm) : Width 259, Height 458



Filling-in : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM16

**Other precisions** Central apse (MR6). External part of the apse. Infilling of a previous window. Use of bricks (TCM8).

**Author & date** AM. 08/12/2018.

**Images**

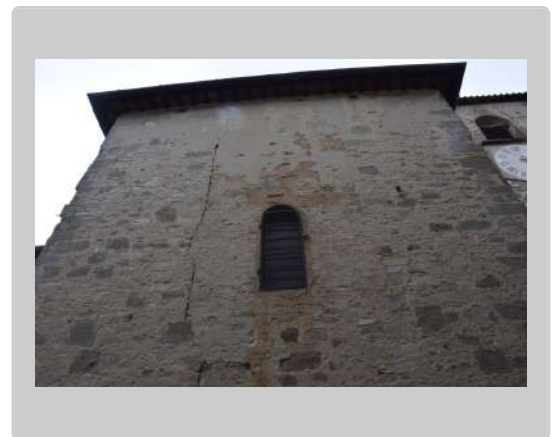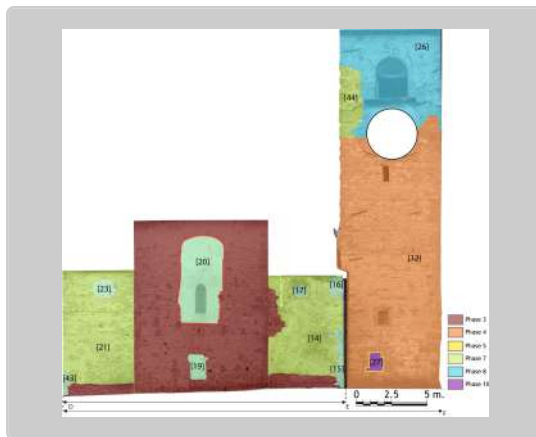

**Id. OPUR** 21

**Localisation** SantAgata, , , : Façade wall, non load-bearing

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : North, South, East, West ; Upper part, Middle part

**Hazard** -


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 379, Height 694  
Masonry, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM10 - Before TCM8  
Before OPUR 22, 23, 43

**Other precisions** South side chapel (MR4 east wall of the south chapel).  
Same repair than opur 14 but applied to wall MR4.  
Use of a "assise de réglage" in the middle of the wall.  
The repair work is very similar to the one used for the north chapel.

**Author & date** AM. 08/12/2018.

**Images**

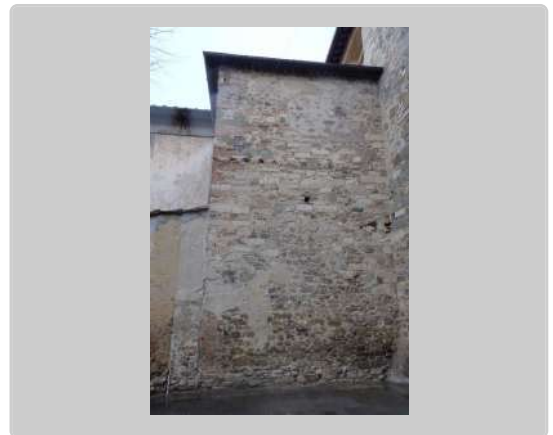

**Id. OPUR** 22

**Localisation** SantAgata, , , : Façade wall, non load-bearing

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : North, South ; Lower part

**Hazard** **Supposed collapse** (Corner overturning)  
Ancient origin : undetermined

**Repair** **Not indicated**  
Dimensions (cm) : Width 47, Height 177  
Masonry, Block : Stone, terra cotta, Mortar [Lime and sand]


**Relations** Equal to TCM10 - Before TCM8  
After OPUR 21

**Other precisions** South side chapel (MR3 south wall of the south chapel).  
Same repair than opur 14 but applied to wall MR3.  
Use of a "assise de réglage" in the middle of the wall.  
The repair work is very similar to the one used for the north chapel.  
A younger building is built against to this repair wall (the cloister).

We note the very high vulnerability of this technique.

**Author & date** AM. 08/12/2018.

### Images

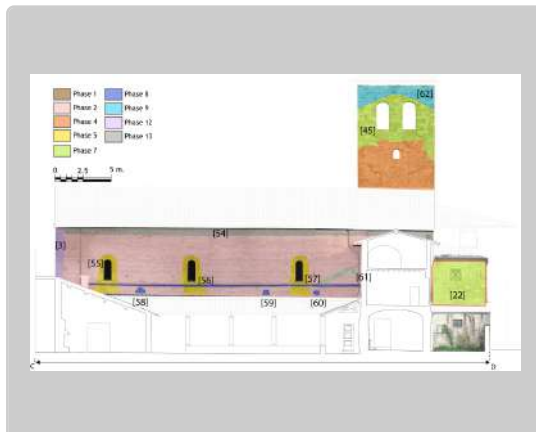

**Id. OPUR** 23

**Localisation** SantAgata, , , : Window

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : North, South ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined


**Repair** **Not indicated**  
Dimensions (cm) : Width 120, Height 119  
Filling-in, Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM10 - After TCM10  
After OPUR 21

**Other precisions** South side chapel (MR4 east wall of the south chapel). Infilling of the window using technique TCM10.

**Author & date** AM. 08/12/2018.

**Images**

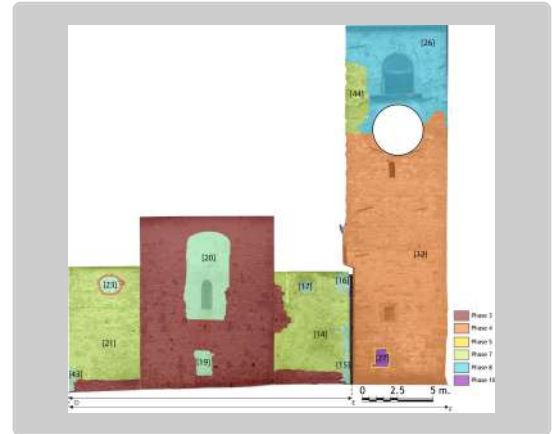

**Id. OPUR** 24

**Localisation** SantAgata, , , : Arch

**Identity** **Intervention full** - ACoR : TCM8

**Hazard** **Settling**

Ancient origin : earthquake - Probability of the event strong

**Repair** **Not indicated**

Masonry : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2


Before OPUR 40, 41, 42 - After OPUR

**Other precisions** Interior arches of the two lateral chapel. Techniques using bricks. This technique is different of the one used in the arch of the central apse (use of decimetric blocks of limestone and sandstone).

After understanding the building evolution of the church. This unit is no more considered as a repair unit. The two lateral arches have been probably built during the building of the two initial lateral chapels. Bricks are visible under the plaster.

**Author & date** AM. 08/12/2018.

**Images**

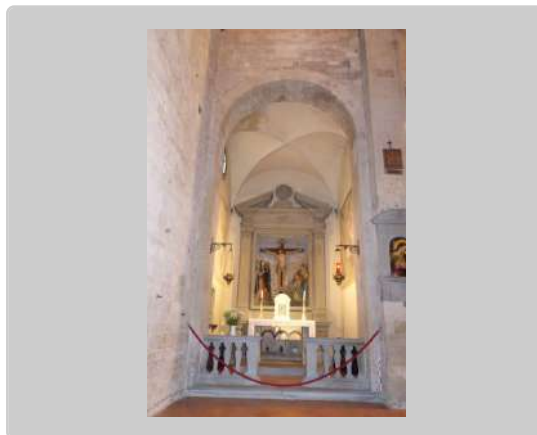

**Id. OPUR** 25

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial**  
Repaired part(s) : North, South, East, West

**Hazard** **Fracture** (Vertical crack)  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Cracks filling**  
Dimensions (cm) : Width 50, Height 170

**Relations** Not indicated

**Other precisions** External east facing wall of the bell tower. 12 iron chains in the wall. A small crack is visible.

**Author & date** AM. 08/12/2018.

**Images**



**Id. OPUR** 26

**Localisation** Sant'Agata, , , : Façade wall, non load-bearing

**Identity** **Intervention partial** - ACoR : TCM14  
Repaired part(s) : East, West ; Upper part

**Hazard**  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Not indicated**  
Dimensions (cm) : Width TOUTE LA LARGEUR CAMPANILE, Height 482

**Relations** Equal to TCM14 - After TCM10, TCM13  
Contemporary to OPUR 47 - After OPUR 44

**Other precisions** External east facing wall of the bell tower. Reconstruction of the upper part of the building using technique TCM14.  
This part of the bell tower has been rebuilt by Nozzolini. The symbol of Nozzolini's family is still visible embedded in the wall.

**Author & date** AM. 08/12/2018.

### Images

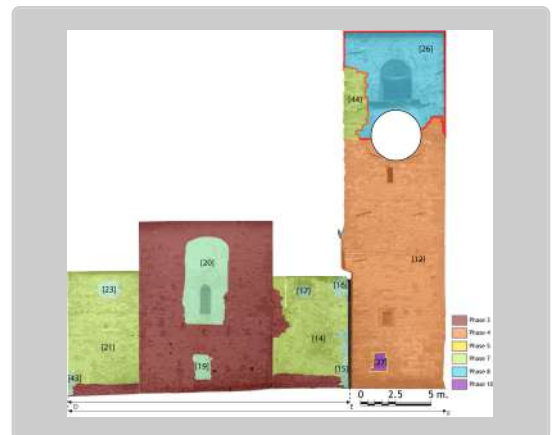

**Id. OPUR** 27

**Localisation** SantAgata, , , : Doorway

**Identity** **Intervention full** - ACoR : TCM13

**Hazard**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**


Dimensions (cm) : Width 104, Height 205

**Relations** Equal to TCM13 - After TCM13

**Other precisions** External east facing wall of the bell tower. Infilling of a door using the same technique than the wall.  
Information in the historical sources about the opening and the infilling of the door.

**Author & date** AM. 08/12/2018.

**Images**

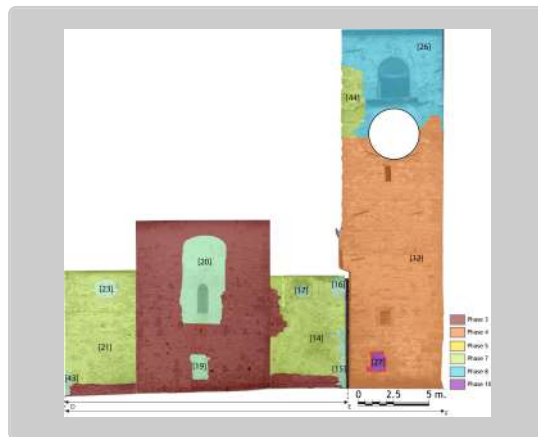



**Id. OPUR** 28

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM14  
Repaired part(s) : North, South ; Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Dimensions (cm) : Width 563, Height 502  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM14 - After TCM10, TCM13  
Contemporary to OPUR 29, 30, 47 - After OPUR 46

**Other precisions** External west facing wall of the bell tower. Reconstruction of the upper part of the building using technique TCM14.  
This part of the bell tower has been rebuilt by Nozzolini. The symbol of Nozzolini's family is still visible embedded in the wall.

**Author & date** AM. 08/12/2018.

### Images

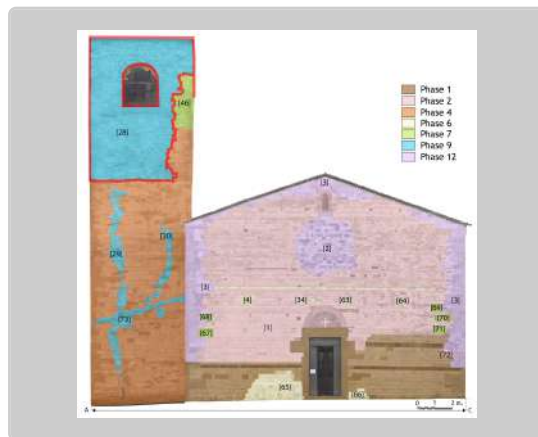

**Id. OPUR** 29

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM13  
Repaired part(s) : North, South ; Upper part, Middle part, Lower part

**Hazard** **Fracture** (Vertical crack)  
Ancient origin : earthquake - Probability of the event very strong

**Repair** **Cracks filling**  
Dimensions (cm) : Width 20, Height 1070  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]


**Relations** Equal to TCM13 - After TCM13  
Contemporary to OPUR 28 - Before OPUR 73

**Other precisions** External west facing wall of the bell tower. Infilling of the north crack reinforced using iron chain. TCM13 is used for the repair.

Mur W externe du campanile. Rebouchage de la fissure N en plus des tirants métalliques. Remplissage de la fissure de manière identique que la technique de construction (T-08)  
Stratigraphical analysis in good agreement with the Nozzolini's description.

**Author & date** AM. 08/12/2018.

**Images**

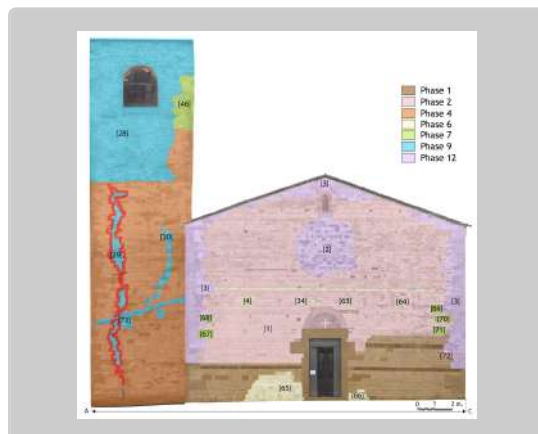

**Id. OPUR** 30

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR : TCM13**  
Repaired part(s) : North, South ; Upper part, Middle part, Lower part

**Hazard** **Fracture** (Vertical crack)  
Ancient origin : earthquake - Probability of the event very strong

**Repair** **Cracks filling**  
Dimensions (cm) : Width 20, Height 1075  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]


**Relations** Equal to TCM13  
Contemporary to OPUR 28 - Before OPUR 73

**Other precisions** External west facing wall of the bell tower. Infilling of the south crack using technique TCM13. Presence of iron chain.

In correct agreement with Nozzolini's description.

**Author & date** AM. 08/12/2018.

### Images

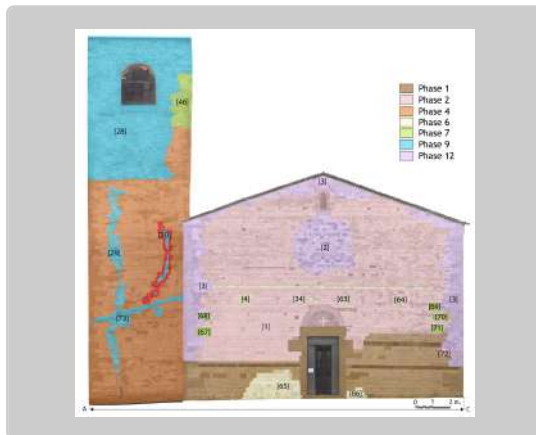

**Id. OPUR** 31

**Localisation** SantAgata, , , : Doorway

**Identity** **Intervention full** - ACoR : TCM8

**Hazard** **Settling**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**

Dimensions (cm) : Width 187, Height 342

Masonry : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8

After OPUR 77

**Other precisions** North wall of the nave (MR14). External part of the wall. Infilling of the top of the door using bicks.

**Author & date** AM. 08/12/2018.

**Images**



**Id. OPUR** 32

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Length 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM2  
Contemporary to OPUR 33, 49, 50 - After OPUR 77

**Other precisions** North wall of the nave (MR14). External part of the wall. Infilling of the hole (the one in the east part, close to the bell tower) probably used for the beam of a previous penthouse along the north wall of the nave.

**Author & date** AM. 08/12/2018.

### Images

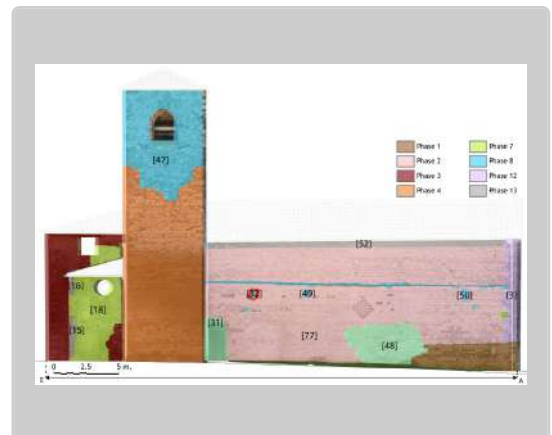

**Id. OPUR** 33

**Localisation** SantAgata, , , : Doorway

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined

**Repair** **Lintel**  
Dimensions (cm) : Lenght 210  
Filling-in, Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 32

**Other precisions** North wall of the nave (MR14). Inner part of the wall (inside the church). Infilling of the top of the door using TCM2.

**Author & date** AM. 09/12/2018.

**Images**



**Id. OPUR** 34

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Not indicated**  
Dimensions (cm) : Lenght 512, Height 281  
Masonry : Stone, Mortar [Not visible]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 78 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes which contained the beam of the penthouse.

**Author & date** AM. 09/12/2018.

**Images**

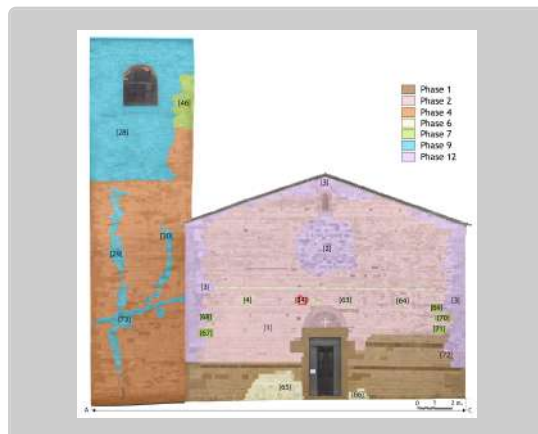

**Id. OPUR** 35

**Localisation** SantAgata, , , : Column

**Identity** **Intervention partial** - ACoR : TCM7  
Repaired part(s) : Upper part, Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Height 505  
Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM7 - After TCM1  
Contemporary to OPUR 1, 36, 37 - Before OPUR

**Other precisions** South east Column in the nave (CL2). Reconstruction using TCM7. Alternance of the blocks size between 17.5 cm and 9.8 cm.

**Author & date** AM. 09/12/2018.

**Images**

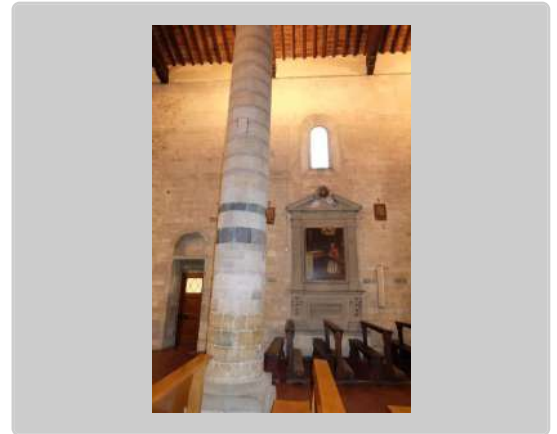



**Id. OPUR** 36

**Localisation** SantAgata, , , : Column

**Identity** **Intervention partial - ACoR** : TCM7  
Repaired part(s) : Upper part, Middle part

**Hazard** **Supposed collapse - Settling**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Height 402  
Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM7 - After TCM1  
Contemporary to OPUR 1, 35, 37

**Other precisions** North east Column in the nave (CL1). Reconstruction using TCM7. Alternance of the blocks size between 17.5 cm and 9.8 cm.

**Author & date** AM. 09/12/2018.

**Images**



**Id. OPUR** 37

**Localisation** SantAgata, , , : Column

**Identity** **Intervention partial** - ACoR : modern  
Repaired part(s) : Upper part, Middle part

**Hazard** **Supposed collapse - Settling**  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Reconstruction**  
Dimensions (cm) : Height 402  
Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to modern - After TCM7  
Contemporary to OPUR 1, 35, 36

**Other precisions** Column C4. Some blocks from the TCM3 building techniques are replaced with high blocks of sandstone. We did not define a building technique since it is related to modern restorations.

**Author & date** AM. 09/12/2018.

---

<b>Id. OPUR</b>	38
<b>Localisation</b>	SantAgata, , , : Interior wall, load-bearing
<b>Identity</b>	<b>Intervention partial</b> - ACoR : TCM15 Repaired part(s) : East, West ; Middle part
<b>Hazard</b>	-
<b>Repair</b>	<b>Cracks filling</b> Dimensions (cm) : Lenght 227, Height 136 Filling-in, Masonry : Stone, terra cotta, Mortar [Lime and sand]
<b>Relations</b>	Equal to TCM15 - After TCM13
<b>Other precisions</b>	Infilling of a fracture at the second floor of the bell tower (inner south wall of the belltower : MR13) using technique TCM15.
<b>Author &amp; date</b>	AM. 09/12/2018.

---

<b>Id. OPUR</b>	39
<b>Localisation</b>	SantAgata, , , : Interior wall, load-bearing
<b>Identity</b>	<b>Intervention partial</b> - ACoR : TCM15 Repaired part(s) : East, West ; Middle part
<b>Hazard</b>	-
<b>Repair</b>	<b>Cracks filling</b> Dimensions (cm) : Lenght w76 - e129, Height 243 Filling-in, Masonry : Stone, terra cotta, Mortar [Lime and sand]
<b>Relations</b>	Equal to TCM15 - After TCM13
<b>Other precisions</b>	Bell tower. Second floor. Infilling of a fracture located in the NW corner using technique TCM15.
<b>Author &amp; date</b>	AM. 09/12/2018.

---

**Id. OPUR** 40

**Localisation** SantAgata, , , : Window

**Identity** **Intervention full** - ACoR : TCM2

**Hazard** **Settling**

Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Not indicated**

Filling-in : mortar

**Relations** Equal to TCM2

After OPUR 24

**Other precisions** Inner part of the central apse above the main arch. The top of the arch has been rebuilt using technique TCM2. The wall above the wall is slightly tilted. A decay is still visible between the central part and the lateral ones.  
Probably linked to a reconstruction after the 18th century.

**Author & date** AM. 10/12/2018.

**Images**



**Id. OPUR** 41

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial** - ACoR : TCM12  
Repaired part(s) : North, South, East, West ; Upper part, Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40 (maximal), Width 20 (maximal), Height 20 (maximal)

**Relations** Equal to TCM12  
After OPUR 24

**Other precisions** PL1. North east pilaster. TCM12 repaired the the previous pilaster built with TCM1.  
TCM12 is characterized by large blocks of sandstone and limestones (40 cmx20 cm).

**Author & date** AM. 10/12/2019.

**Images**



**Id. OPUR** 42

**Localisation** SantAgata, , , : Pillar

**Identity** **Intervention partial** - ACoR : TCM12  
Repaired part(s) : North, South, East, West ; Upper part, Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40 (maximal), Width 20 (maximal), Height 20 (maximal)

**Relations** After TCM1  
After OPUR 24

**Other precisions** PL2. South east pilaster. TCM12 repaired the the previous pilaster built with TCM1. TCM12 is characterized by large blocks of sandstone and limestones (40 cmx20 cm).

**Author & date** AM. 10/12/2019.

**Images**



**Id. OPUR** 43

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : North, South, East, West ; Lower part

**Hazard** **Supposed collapse** (Corner overturning)  
Ancient origin : earthquake - Probability of the event low

**Repair** **Corner**  
Dimensions (cm) : **North-South wall** : Width 65, Height 154  
**East-West wall** : Width 65, Height 134  
Masonry : Terra cotta [Brick], Mortar [Lime and broken terra cotta]


**Relations** Equal to TCM8 - After TCM10  
After OPUR 21

**Other precisions** Corner of the south side chapel. Repair of the lowest part of the corner using bricks (TCM8)

We note the same repair in the corner of the north lateral chapel.  
Repair of the previous opur 21.

**Author & date** AM. 10/12/2019.

### Images

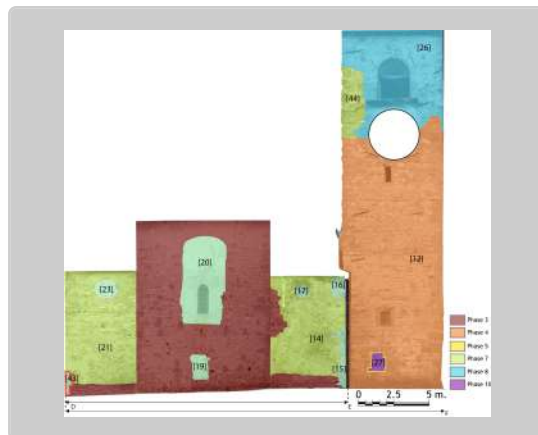



**Id. OPUR** 44

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM10 - Before TCM14 - After TCM13  
Before OPUR 26

**Other precisions** East wall of the bell tower. External part. Reconstruction of the south part of this wall using technique TCM10.  
Corresponds to the repair after the 1542 seismic event. It was done by the population of Sant'Agata before the arrival of Nozzolini in 1608. Only the south part of the wall was rebuilt.

**Author & date** AM. 10/12/2019.

### Images

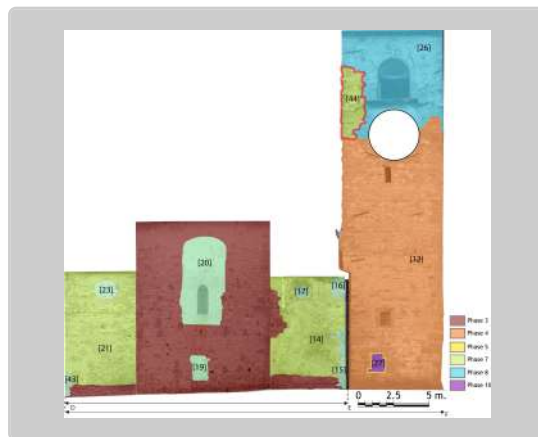

**Id. OPUR** 45

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM8  
Repaired part(s) : Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - Before TCM14 - After TCM13  
Before OPUR 62

**Other precisions** South wall of the bell tower. External part. Reconstruction using technique TCM10. Corresponds to the repair after the 1542 seismic event. It was done by the population of Sant'Agata before the arrival of Nozzolini in 1608. Only the south part of the wall was rebuilt.

**Author & date** AM. 10/12/2019.

### Images

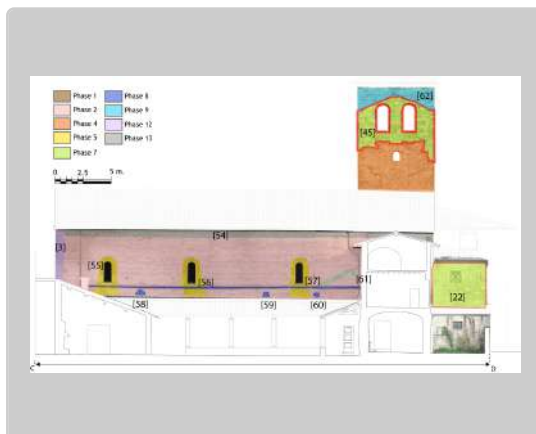

**Id. OPUR** 46

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM10  
Repaired part(s) : Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM10 - Before TCM14 - After TCM13  
Before OPUR 28

**Other precisions** West wall of the bell tower. External part. Reconstruction of the south corner using technique TCM10.  
Corresponds to the repair after the 1542 seismic event. It was done by the population of Sant'Agata before the arrival of Nozzolini in 1608. Only the south part of the wall was rebuilt.

**Author & date** AM. 10/12/2019.

### Images

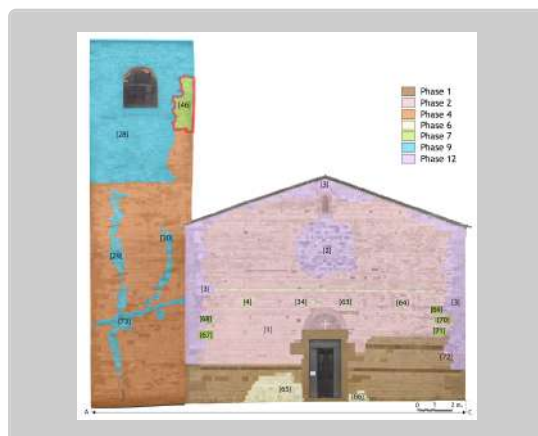

**Id. OPUR** 47

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM14  
Repaired part(s) : North, South ; Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Dimensions (cm) : Width 563, Height 502  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** After TCM13  
Contemporary to OPUR 26, 28, 62

**Other precisions** External north facing wall of the bell tower. Reconstruction of the upper part of the building using technique TCM14.  
This part of the bell tower has been rebuilt by Nozzolini. The symbol of Nozzolini's family is still visible embedded in the wall.

**Author & date** AM. 10/12/2019.

### Images

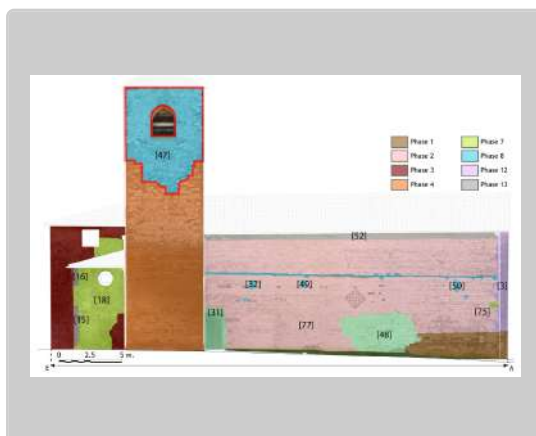

**Id. OPUR** 48

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM5  
Repaired part(s) : East, West ; Lower part

**Hazard** **Supposed collapse** (Disgregation of masonry)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Filling-in, Masonry : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM5 - After TCM1, TCM2  
After OPUR 77

**Other precisions** North wall of the nave. External part of the wall.  
Repair of the lower part of the wall which probably collapse. This repair is typical of a disgregation of the masonry.  
The so-called *cucci scucci* (PhD thesis by Andrea Arrighetti)

**Author & date** AM. 10/12/2019.

### Images

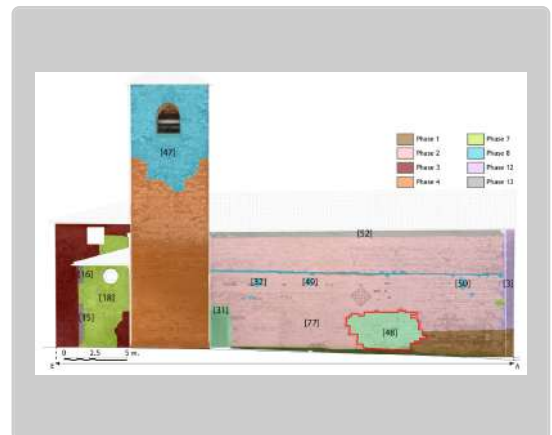

**Id. OPUR** 49

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 32, 50 - After OPUR 77

**Other precisions** North wall of the nave (MR14). External part of the wall. Infilling of the hole (the one in the middle of the church) probably used for the beam of a previous penthouse along the north wall of the nave.

**Author & date** AM. 10/12/2019.

### Images

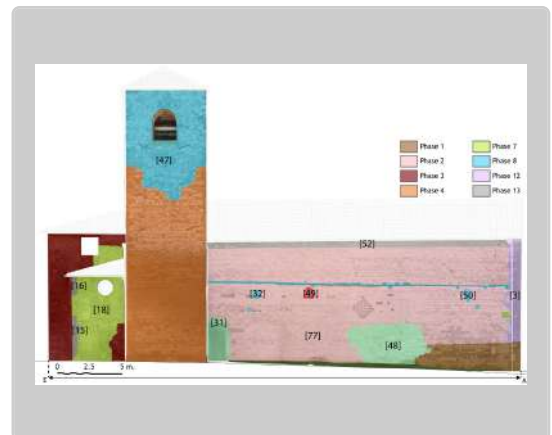

**Id. OPUR** 50

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM2  
Contemporary to OPUR 32, 49

**Other precisions** North wall of the nave (MR14). External part of the wall. Infilling of the hole (the one close to the front wall of the church) probably used for the beam of a previous penthouse along the north wall of the nave.

**Author & date** AM. 10/12/2019.

### Images

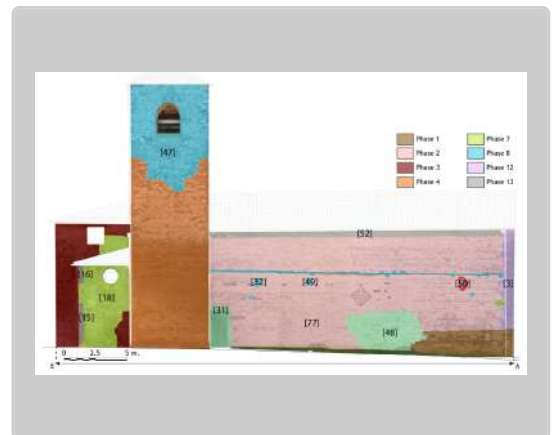

**Id. OPUR** 51

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : modern  
Repaired part(s) : West, East ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**

**Relations** Equal to modern - After TCM2  
After OPUR 9

**Other precisions** Modern restoration of the top of the church (MR14). Internal part. Concrete is used as plaster against the wall.

**Author & date** AM. 10/12/2019.

### Images

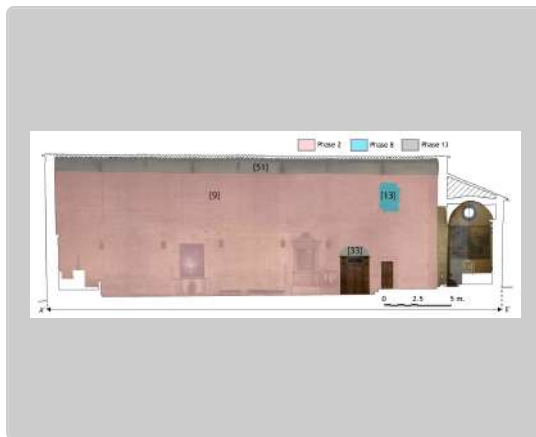



**Id. OPUR** 52

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : modern  
Repaired part(s) : West, East ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**

**Relations** Equal to modern - After TCM2  
After OPUR 77

**Other precisions** Modern restoration of the top of the church (MR14). External part. Concrete is used as plaster against the wall

**Author & date** AM. 10/12/2019.

### Images

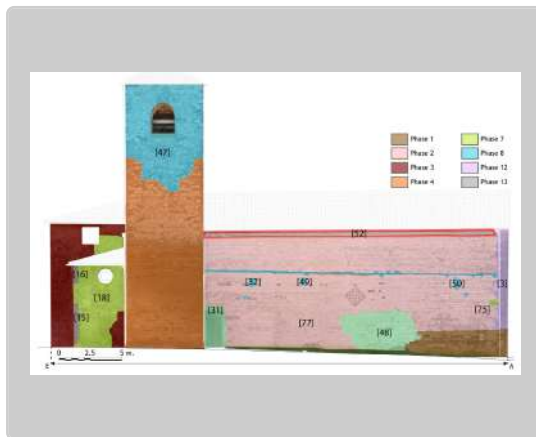

**Id. OPUR** 53

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : modern  
Repaired part(s) : West, East ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**

**Relations** After TCM2, TCM6  
After OPUR 3

**Other precisions** Modern restoration of the top of the church (MR2). External part. South wall of the nave. Concrete is used as plaster against the wall

**Author & date** AM. 10/12/2019.

### Images

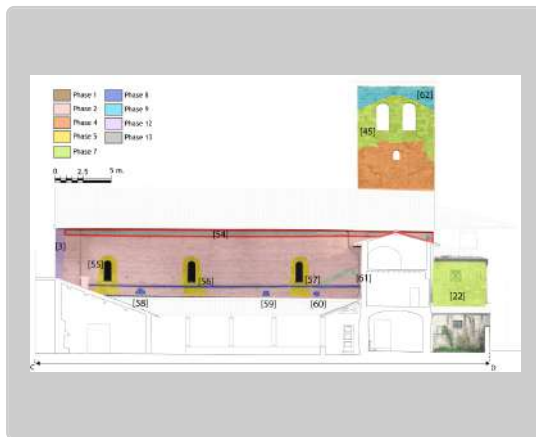

**Id. OPUR** 54

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : modern  
Repaired part(s) : West, East ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**

**Relations** Equal to modern - After TCM2  
After OPUR 76

**Other precisions** Modern restoration of the top of the church (MR2). Internal part. South wall of the nave. Concrete is used as plaster against the wall

**Author & date** AM. 10/12/2019.

**Images**

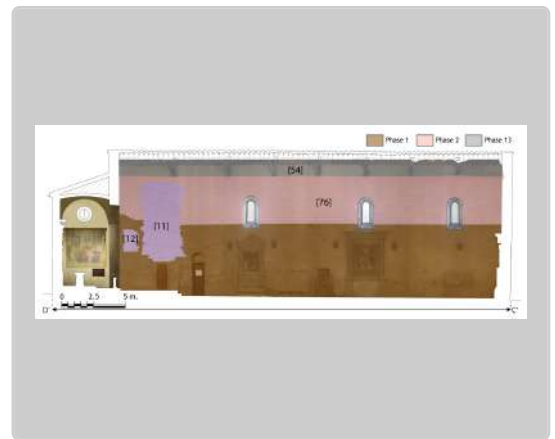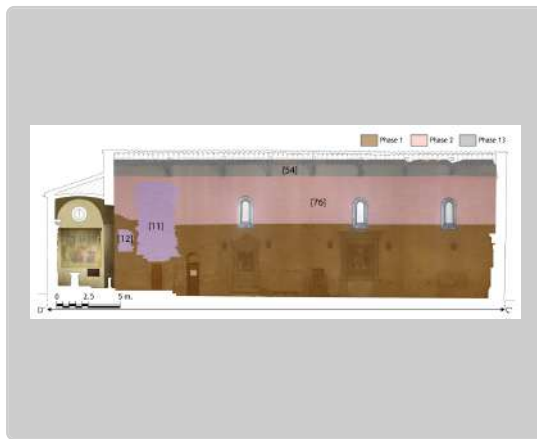

**Id. OPUR** 55

**Localisation** SantAgata, , , : Window

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : East, West ; Middle part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Not indicated**  
Filling-in, Masonry : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM2  
Contemporary to OPUR 56 - Before OPUR 58

**Other precisions** South wall of the church. External part of the church. Opening of a window (west) in the wall using technique TCM8 (bricks).

**Author & date** AM. 10/12/2019.

**Images**

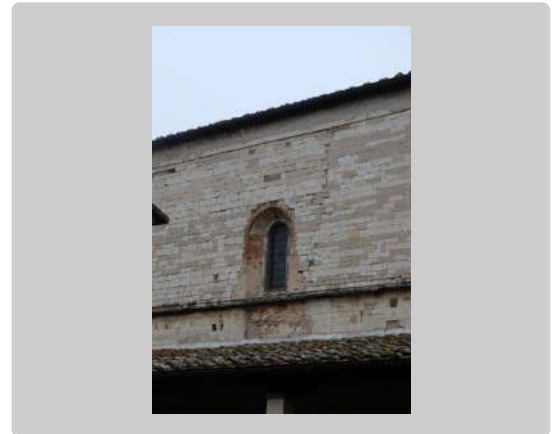

**Id. OPUR** 56

**Localisation** SantAgata, , , : Window

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : East, West ; Middle part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Not indicated**  
Filling-in, Masonry : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM2  
Contemporary to OPUR 55, 57 - Before OPUR 58

**Other precisions** South wall of the church. External part of the church. Opening of a window (middle) in the wall using technique TCM8 (bricks).

**Author & date** AM. 10/12/2019.

**Images**

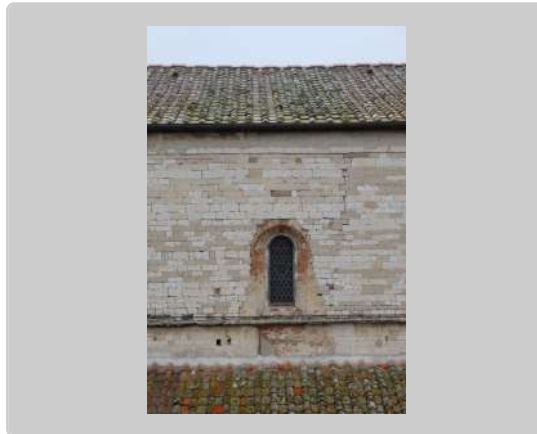

**Id. OPUR** 57

**Localisation** SantAgata, , , : Window

**Identity** **Intervention partial** - ACoR : TCM8  
Repaired part(s) : East, West ; Middle part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Not indicated**  
Filling-in, Masonry : Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM8 - After TCM2  
Contemporary to OPUR 56 - Before OPUR 58

**Other precisions** South wall of the church. External part of the church. Opening of a window (east) in the wall using technique TCM8 (bricks).

**Author & date** AM. 10/12/2019.

**Images**

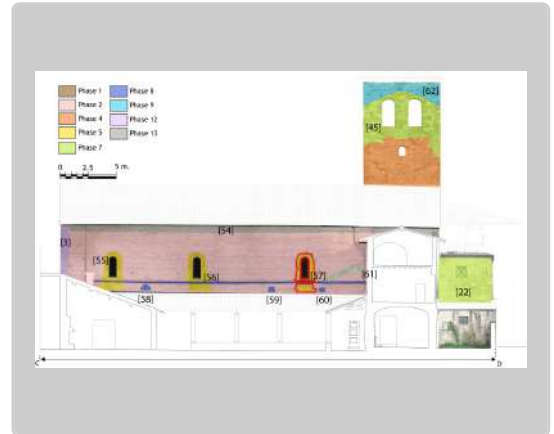

**Id. OPUR** 58

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 59, 60 - After OPUR 55, 56, 57

**Other precisions** South wall of the nave (MR2). External part of the wall. Infilling of the hole (the one close to the front wall of the church) probably used for the beam of a previous penthouse along the south wall of the nave. Probably built for the cloister.

**Author & date** AM. 10/12/2019.

### Images

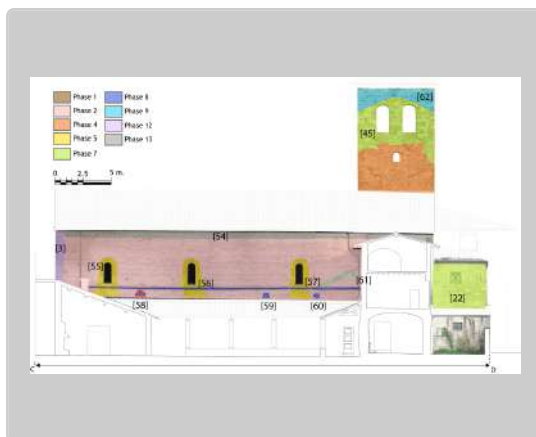

**Id. OPUR** 59

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 58, 60

**Other precisions** South wall of the nave (MR2). External part of the wall. Infilling of the hole (the one in the middle of the wall) probably used for the beam of a previous penthouse along the south wall of the nave. Probably built for the cloister.

**Author & date** AM. 10/12/2019.

### Images

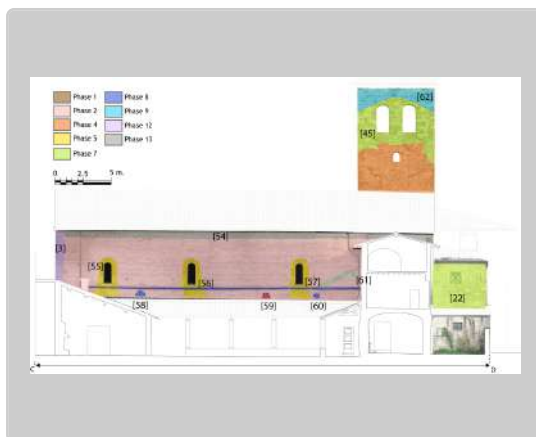



**Id. OPUR** 60

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 58, 59 - Before OPUR 61

**Other precisions** South wall of the nave (MR2). External part of the wall. Infilling of the hole (east) probably used for the beam of a previous penthouse along the south wall of the nave. Probably built for the cloister.

**Author & date** AM. 10/12/2019.

### Images

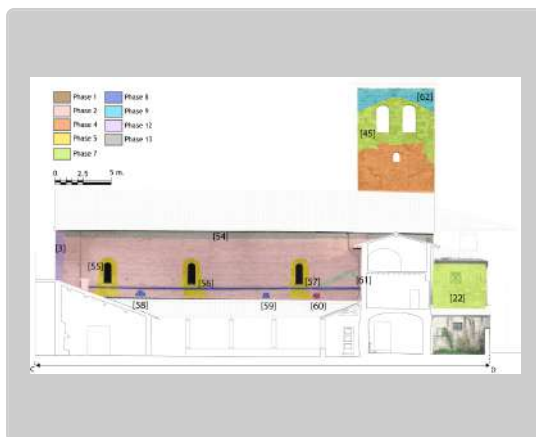

**Id. OPUR** 61

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
After OPUR 60

**Other precisions** South wall of the nave (MR2). External part of the wall. Infilling of the hole (east) probably used for the beam of a previous penthouse along the south wall of the cloister.

**Author & date** AM. 10/12/2019.

### Images

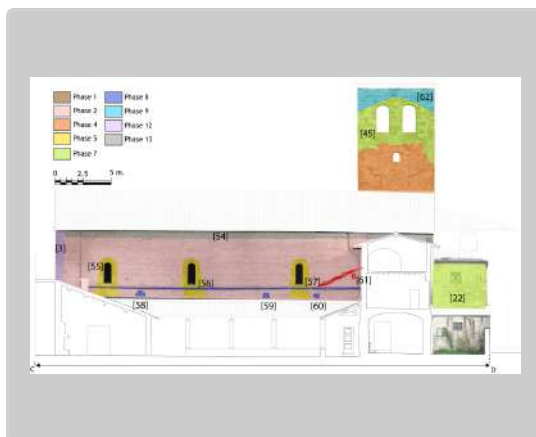

**Id. OPUR** 62

**Localisation** Sant'Agata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM14  
Repaired part(s) : North, South ; Upper part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : earthquake - Probability of the event strong


**Repair** **Reconstruction**  
Dimensions (cm) : Width 563, Height 502  
Masonry : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM14 - After TCM10  
Contemporary to OPUR 47 - After OPUR 45

**Other precisions** External south facing wall of the bell tower. Reconstruction of the upper part of the building using technique TCM14.  
This part of the bell tower has been rebuilt by Nozzolini. The symbol of Nozzolini's family is still visible embedded in the wall.

**Author & date** AM. 10/12/2019.

### Images

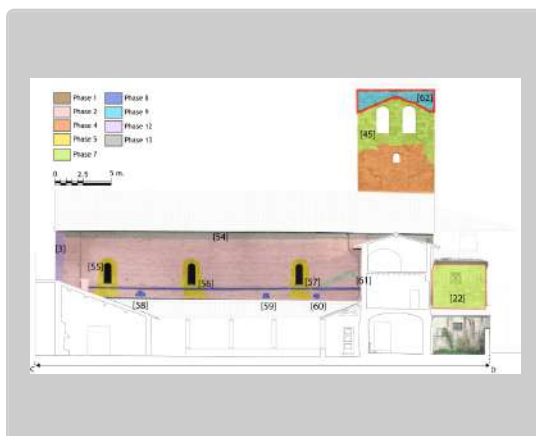

**Id. OPUR** 63

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 4, 64, 78 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes which contained the beam of the penthouse.

**Author & date** AM. 10/12/2019.

**Images**

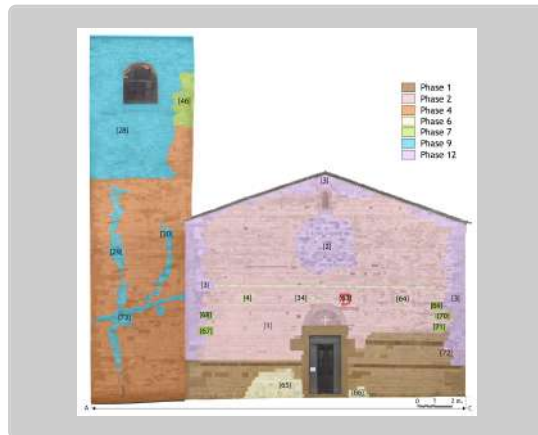

**Id. OPUR** 64

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 63, 78 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes which contained the beam of the penthouse.

**Author & date** AM. 10/12/2019.

**Images**

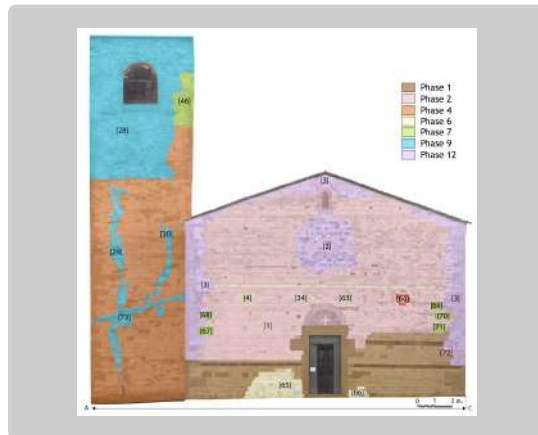

**Id. OPUR** 65

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM4  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM4 - After TCM1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes at the bottom of the front wall using technique TCM4.  
This hole is described in the historical records as the opening of a tomb.

**Author & date** AM. 10/12/2019.

**Images**



**Id. OPUR** 66

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM4  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM4 - After TCM1

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes at the bottom of the front wall using technique TCM4.  
This hole is described in the historical records as the opening of a tomb.

**Author & date** AM. 10/12/2019.

**Images**

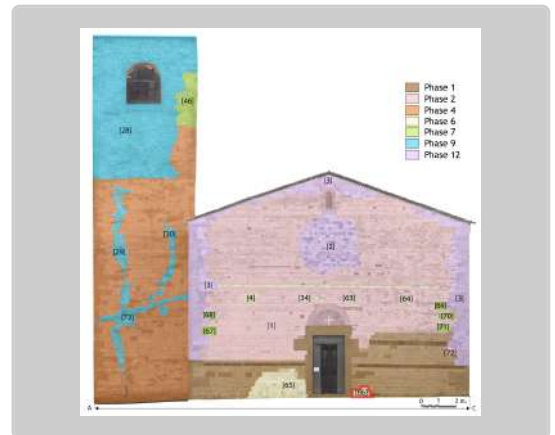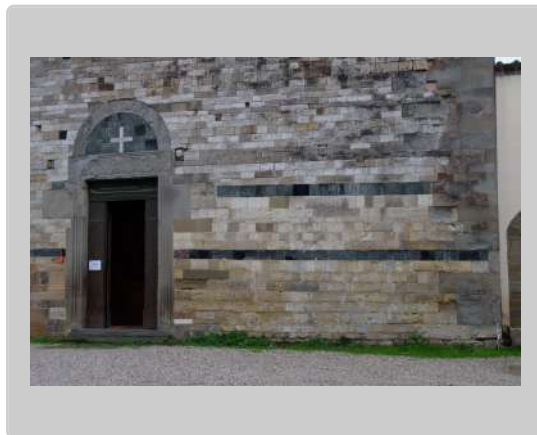

**Id. OPUR** 67

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 70, 71 - Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the 1542 seismic event by the people of the village to repair the bending of the front wall. Indeed, the block is not decayed like the middle part of the wall.

**Author & date** AM. 10/12/2019.

**Images**

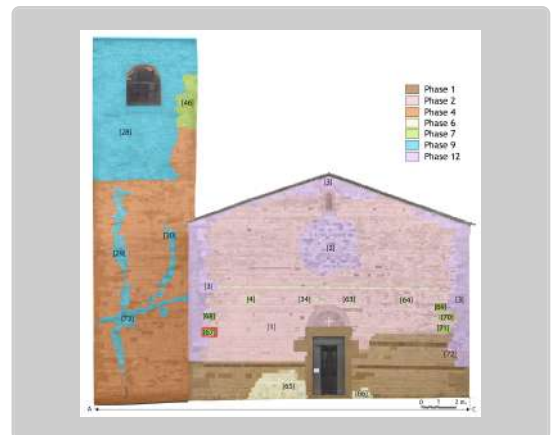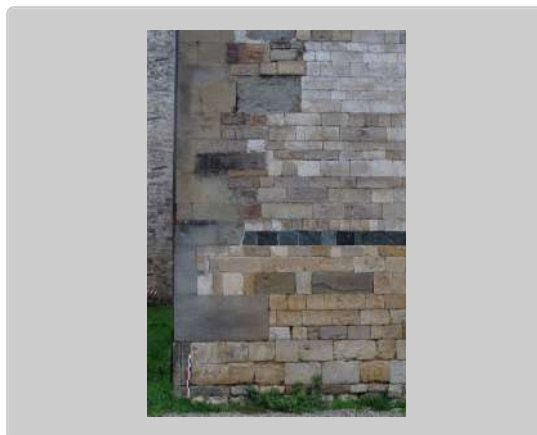



**Id. OPUR** 68

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 70, 71 - Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the 1542 seismic event by the people of the village to repair the bending of the front wall. Indeed, the block is not decayed like the middle part of the wall.

**Author & date** AM. 10/12/2019.

**Images**

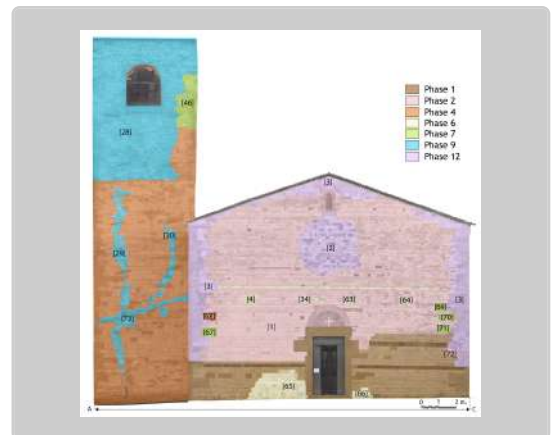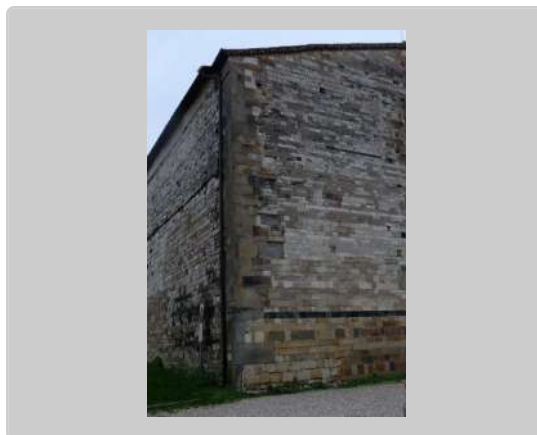

**Id. OPUR** 69

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the 1542 seismic event by the people of the village to repair the bending of the front wall. Indeed, the block is not decayed like the middle part of the wall.

**Author & date** AM. 10/12/2019.

**Images**

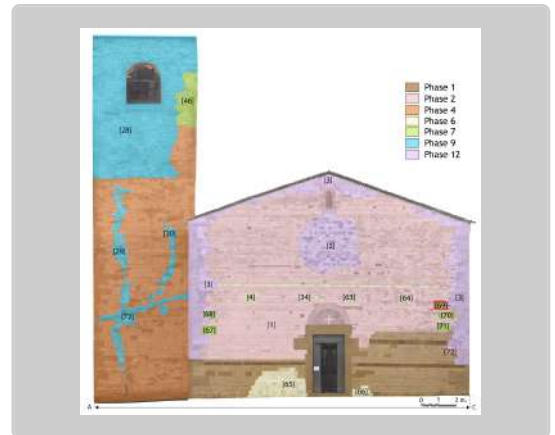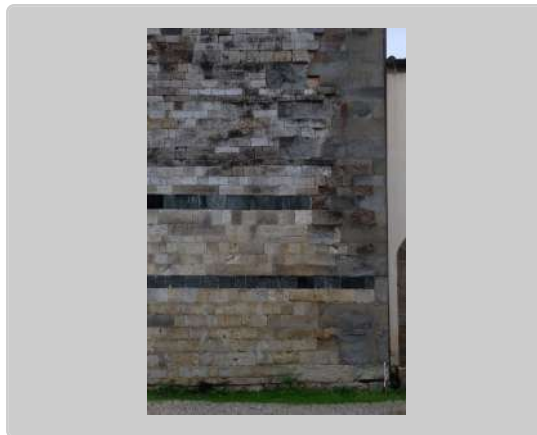

**Id. OPUR** 70

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** After TCM2  
Contemporary to OPUR 67, 68, 71 - Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the 1542 seismic event by the people of the village to repair the bending of the front wall. Indeed, the block is not decayed like the middle part of the wall.

**Author & date** AM. 10/12/2019.

**Images**

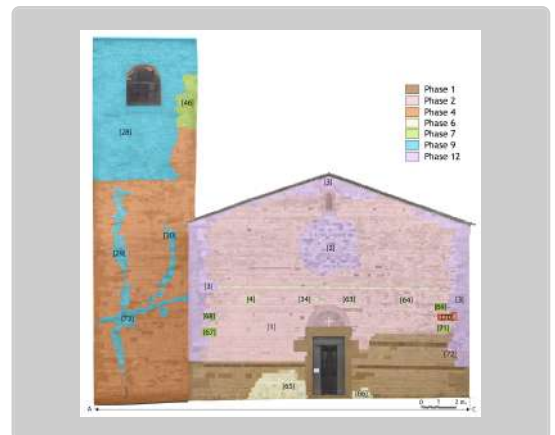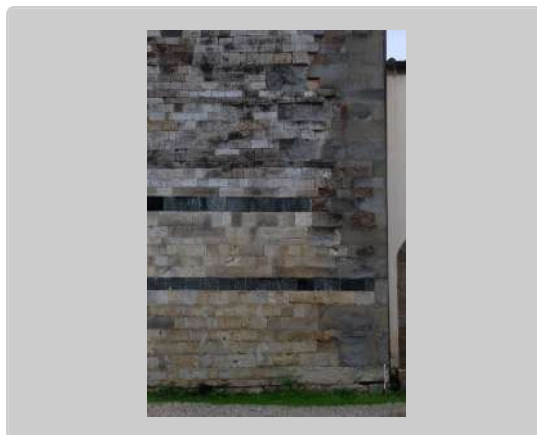

**Id. OPUR** 71

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 67, 68, 70 - Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the 1542 seismic event by the people of the village to repair the bending of the front wall. Indeed, the block is not decayed like the middle part of the wall.

**Author & date** AM. 10/12/2019.

**Images**

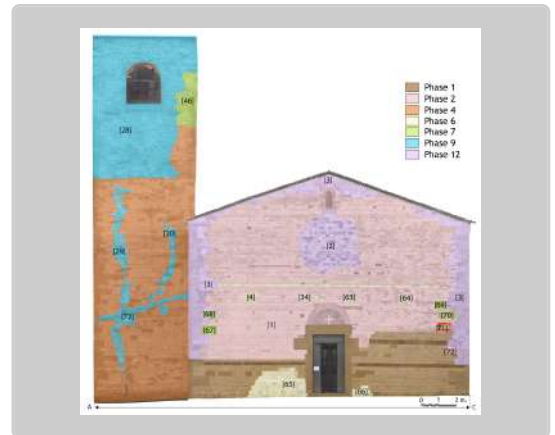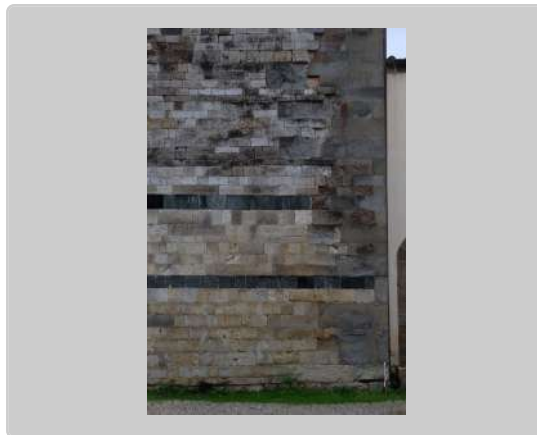

**Id. OPUR** 72

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Before TCM6 - After TCM1  
Before OPUR 3 - After OPUR 1

**Other precisions** Front wall of the church (MR1). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the undetermined event which induced the reconstruction of the front wall using technique TCM2. Indeed, the block is not decayed like the middle part of the wall. (related to opur 1)

**Author & date** AM. 10/12/2019.

**Images**

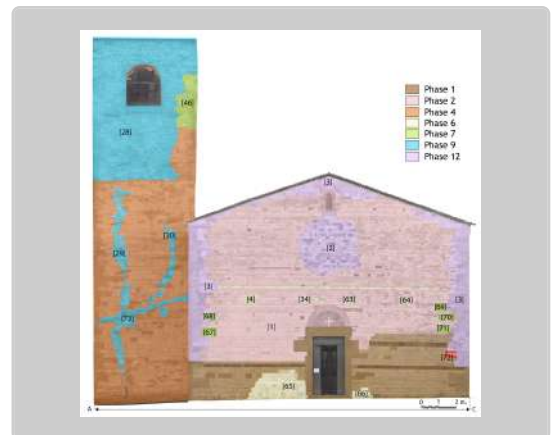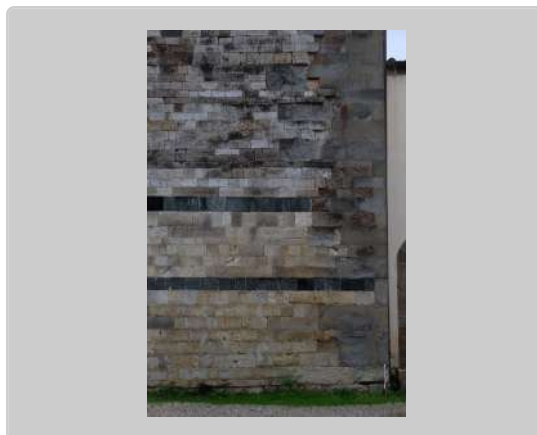

**Id. OPUR** 73

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : East, West ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 582, Height 273  
Filling-in : Stone, Terra cotta [Brick], Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM13  
After OPUR 29, 30

**Other precisions** West wall of the bell tower (MR14). External part of the wall. Infilling of two holes probably used for the beam of a previous penthouse along the north wall of the nave and the west wall of the bell tower.

**Author & date** AM. 10/12/2019.

### Images

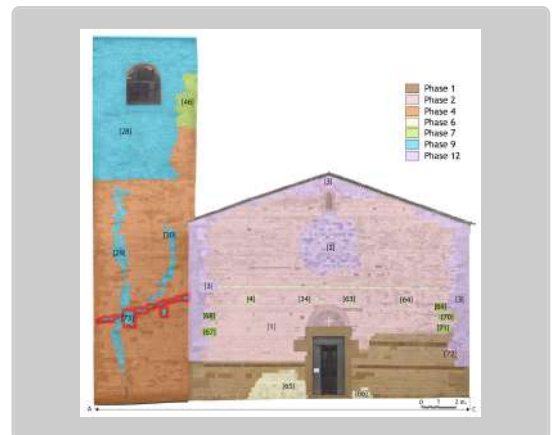

**Id. OPUR** 74

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM3  
Repaired part(s) : North, South ; Upper part

**Hazard** **Settling**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght scanner, Width 339, Height 390  
Masonry, Filling-in : Stone, Mortar [Lime and sand] [dimension of elements : about 10°-20 cm]

**Relations** Equal to TCM3 - After TCM2  
After OPUR 5

**Other precisions** Internal facing of the front wall of the church (MR1) : Infilling of the rose window. Use of limestone (Pietra Alberese) and Serpentine course. Decimetric blocks. Undetermined origin. Such an infilling of the previous rose window might be considered as a common reconfiguration work even if it is sometimes made as a postseismic repair.

**Author & date** AM. 10/12/2019.

### Images

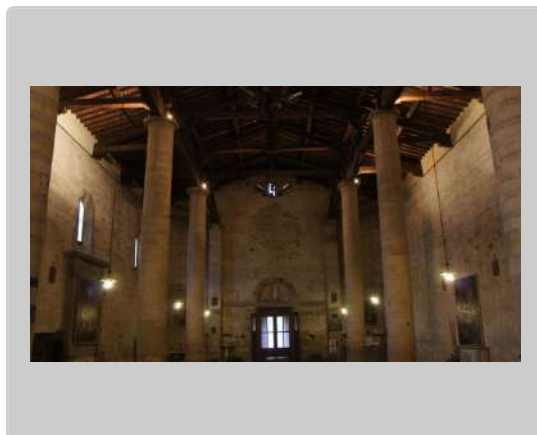

**Id. OPUR** 75

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse** (Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined



**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 40, Width 20, Height 20, Thickness 0  
Filling-in, Block : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2  
Before OPUR 3 - After OPUR 2

**Other precisions** North wall of the church (MR14). External facing of the church. Use of large block of limestone very different to the TCM2 technique used in this part of the wall.  
Probably linked to a repair of the corner quoins after the undetermined event which induced the reconstruction of the front wall using technique TCM2. Indeed, the block is not decayed like the middle part of the wall. (related to opur 1)

**Author & date** AM. 10/12/2019.

### Images

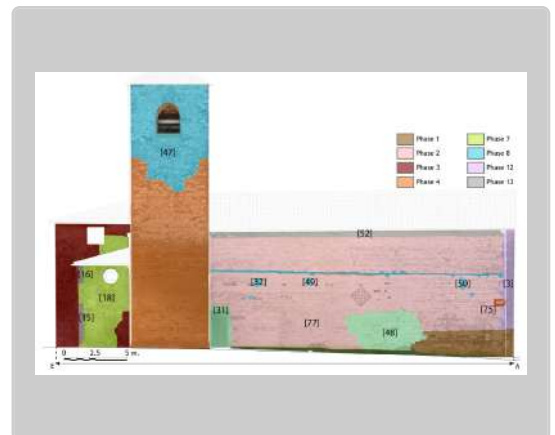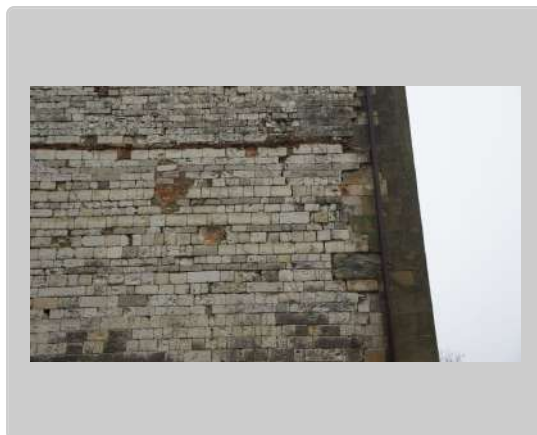



**Id. OPUR** 76

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial - ACoR** : TCM2  
Repaired part(s) : East, West ; Upper part, Middle part

**Hazard** **Deformation - Supposed collapse - Crack** (Global complex overturning of the façade)  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 2842, Height 338  
Masonry : Stone, Mortar [Lime and sand]


**Relations** Equal to TCM2 - After TCM2  
Before OPUR 11, 12, 54

**Other precisions** Internal facing wall of MR2 (south wall of the nave).  
Reconstruction of the wall from the middle (limit with the three windows) until the top of the wall. Use of TCM2 with blocks of limestone having very fine joints. The repair is visible because the wall is straight ahead contrary to the wall below which undulates slightly.

It is important to not a bending of the wall below towards the interior of the church. It confirms the typology of the wall built using SACO technique.

**Author & date** AM. 10/12/2019.

### Images

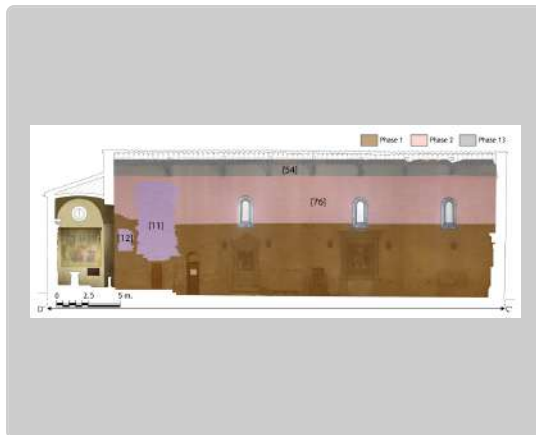

**Id. OPUR** 77

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Upper part, Middle part

**Hazard** **Supposed collapse** (Rocking. Partial overturning of the wall with rotations axis at the floor level)  
Ancient origin : undetermined - Probability of the event undetermined

**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 1500 (preserved), Width 1510, Height 1191  
Masonry : Stone, Mortar [Lime and sand]


**Relations** Equal to TCM2 - Before  
Contemporary to OPUR 1 - Before OPUR 31, 32, 48, 49, 52

**Other precisions** North wall of the church (MR1) : between the middle and top of the wall. The upper part of the wall is built above a first constructive phase. A major change of work which. This could reflect a collapse of the structure.

the technique that is being repaired(TCM1) :  
Use of decimetric and quadrangular blocks of limestone (Pietra Albarese). Maximum length of the block : 25.5cm, Minimum length of the block : 12.3cm. Max width : 72cm, minimum width : 10.5 cm. Blocks edges are roughly cut. Course of serpentinite are used with an ornamental purpose. Dimension of joints : max : 1.2cm,

**Author & date** AM. 10/12/2019.

### Images

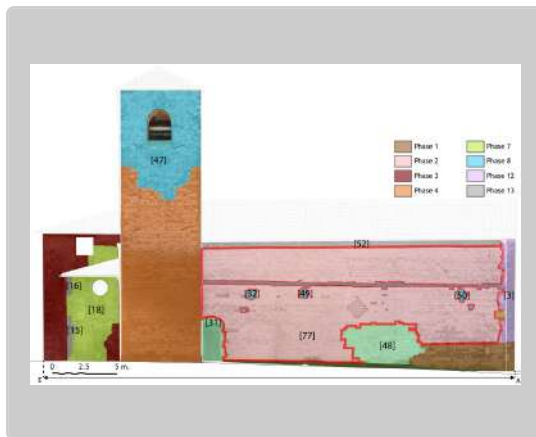

**Id. OPUR** 78

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM2  
Repaired part(s) : North, South ; Middle part

**Hazard** **Supposed collapse**  
Ancient origin : undetermined - Probability of the event undetermined


**Repair** **Reconstruction**  
Dimensions (cm) : Lenght 50, Height 50, Thickness 75  
Masonry, Filling-in : Stone, Mortar [Lime and sand]

**Relations** Equal to TCM2 - After TCM2  
Contemporary to OPUR 34, 4, 63, 64

**Other precisions** Front wall of the church (MR1). External facing of the church. Infilling of holes which contained the beam of the penthouse.

**Author & date** AM. 11/12/2019.

**Images**

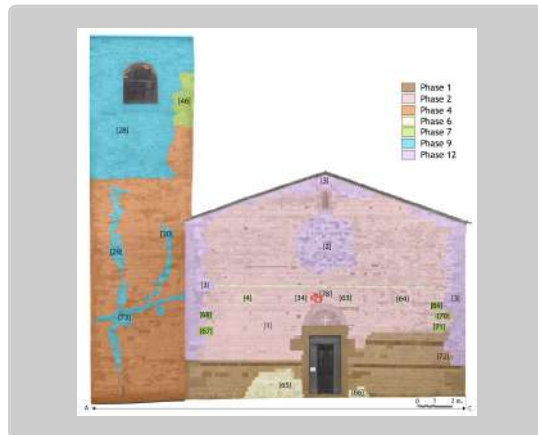

**Id. OPUR** 79

**Localisation** SantAgata, , , : Façade wall, load-bearing

**Identity** **Intervention partial** - ACoR : TCM6  
Repaired part(s) : North, South ; Middle part, Upper part

**Hazard** **Deformation** (Corner overturning)  
Ancient origin : earthquake - Probability of the event strong

**Repair** **Not indicated**  
Dimensions (cm) : Width 123, Height 787  
Masonry, Block : Stone, Mortar [Lime and sand] [dimension of elements : between 20 and 50 cm]

**Relations** After TCM2  
Contemporary to OPUR 3 - After OPUR 5

**Other precisions** Repair of the upper part of the wall of the front wall (MR1) for the internal part.

We associated this repair with a seismic event. First it is a typical repair due to a global overturning of the front wall. Such a damage is secondly described in historical source (Tolomeo Nozzolini's log book).

**Author & date** AM. 11/12/2019.

### Images



**Id. OPUR** 80

**Localisation** SantAgata, , , : Interior wall, load-bearing

**Identity** **Intervention partial**

**Hazard**

Ancient origin : earthquake - Probability of the event strong

**Repair** **Not indicated**

Metallic tie [Iron]

**Relations** Not indicated

**Other precisions** Use of an iron chain in the south wall of the church (MR2).

**Author & date** AM. 11/12/2019.

**Images**

