

Introducing a Verified Authenticated Key Exchange Protocol over Voice Channels for Secure Voice Communications

Piotr Krasnowski, J. Lebrun, B. Martin

▶ To cite this version:

Piotr Krasnowski, J. Lebrun, B. Martin. Introducing a Verified Authenticated Key Exchange Protocol over Voice Channels for Secure Voice Communications. 6th International Conference on Information Systems Security and Privacy, Feb 2020, Valetta, Malta. hal-03059639v1

HAL Id: hal-03059639 https://hal.science/hal-03059639v1

Submitted on 12 Dec 2020 (v1), last revised 7 Jan 2021 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Introducing a Verified Authenticated Key Exchange Protocol over Voice Channels for Secure Voice Communications

P. Krasnowski, J. Lebrun, B. Martin

*krasnowski@i3s.unice.fr*Université Côte d'Azur • I3S-CNRS • BlackBoxSecu










The Crypto Box



Figure: The Crypto Box visualization

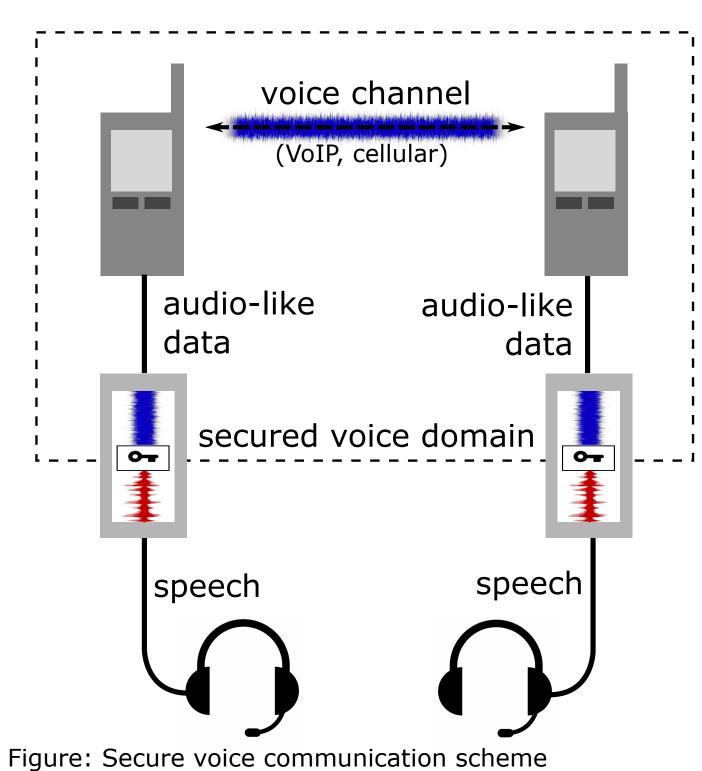

The Crypto Box provides real-time secure voice communications over 2G-4G networks and VoIP (Skype, WhatsApp, Signal...).


Recorded speech is encrypted into audio signal, adapted to transmission over voice channels in a presence of Voice Activity Detection.

Received signal can be decoded and decrypted only by a paired Crypto Box sharing the cryptographic key.

The Session Key is freshly generated for each secure call, requiring a dedicated authenticated KE protocol.

Sending data over voice channel

Voice compression, filtering and quantization introduced by digital voice channels significantly distort the signal. Data over Voice (DoV) technique encodes binary data into a waveform with voice-like properties. The DoV signal is robust against blockage by voice detection algorithms and withstands voice compression by popular voice coders like AMR or Silk.

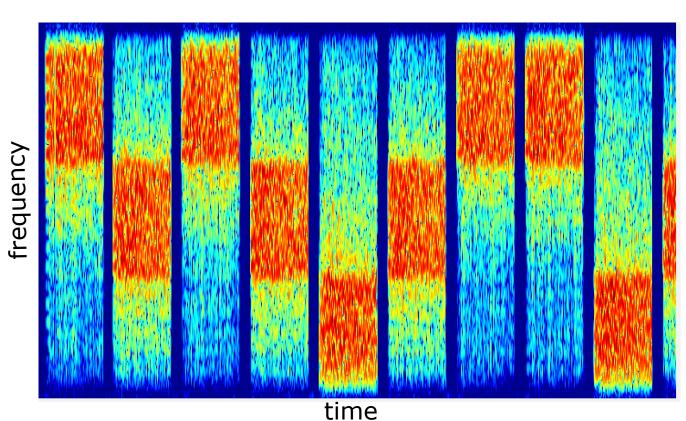

time

Figures: Spectrum of two different DoV techniques.

Protocol design challenges

- low bandwidth (~ 2kbps)
- long round-trip time (~ 2s)
- signal distortion (~ 5-10% BER)
- no Public Key Infrastructure
- flexible authentication (no shared secret by default)

Short Authentication String (SAS)

Short string of digits or words displayed on two Crypto Boxes after each key exchange. SAS is cooperatively compared vocally by speakers in order to verify the equality of strings.

- Speaker's voice recognition
- Session Key validation
- detecting a MITM adversary



Figure: The Crypto Box in *encryption mode*.

ECDHE Authenticated Key Exchange

Alice	vocal agreement on protocol initialization Setup	$ ightarrow$ \mathbf{Bob}
$1:N_A\leftarrow_{{}^{\scriptscriptstyle \$}}\mathbb{Z}_{32}^*$	A/B role negotiation	$\rightarrow N_B \leftarrow_{\mathfrak{s}} \mathbb{Z}_{32}^*$
$2:d_A \leftarrow_{\mathfrak{s}} \mathbb{Z}^*_{256}$		$d_B \leftarrow_{\text{\tiny{\$}}} \mathbb{Z}^*_{256}$
$3: Q_A = d_A G$		$Q_B = d_B G$
$4: \mathbf{R}_{A} \leftarrow_{*} \mathbb{Z}_{128}^{*}$		$R_B \leftarrow_{\mathfrak{s}} \mathbb{Z}_{32}^*$
K	Key exchange and authenticat	ion
5:	$\frac{ID_{A},\ N_{A},\ Q_{A}}{h_{128}(ID_{A}\ N_{A}\ Q_{A}\ R_{A})}$	
6:	$ \underbrace{ID_B, \ N_B, \ Q_B, \ R_B}_{Sign_{S_B}(\mathrm{'B'} \parallel ID_A \parallel N_A \parallel Q_A \parallel ID_B \parallel N_B \parallel Q_A \parallel Q$	$\overline{Q_B)}$
$7: Z = d_A Q_B$	$R_A = \frac{R_A}{Sign_{S_A}(\mathrm{'A'}\ ID_B\ N_B\ Q_B\ ID_A\ N_A\ Q_B)}$	$Z = d_B Q_A$
$8: K_S = h_{256}(Z $		$K_S = h_{256}(Z)$

9:	ACK					
SAS comparison over Encrypted Channel						
$10 \cdot SAS = h_{22}$	(

Acknowledgment

 $10: SAS = n_{32}(\triangledown) \longleftrightarrow comparison$ comparison

 $\bullet \equiv ID_A ||N_A||ID_B||N_B$ $\bullet \equiv R_A ||R_B||ID_B||Q_B||N_B$

Formal Verification with Tamarin Prover

Authentication scenario:	mutual signature	unilateral signature	vocal verification	nothing
Session Key secrecy	✓	✓	√	X
forward secrecy	✓	✓	✓	X
injective agreement	✓	✓	✓	X
reflection attack	✓	✓	X	X
key compromise				
impersonation	•	•	_	_

Conclusions

The proposed ECDHE key exchange protocol is highly adapted to the constraints of real-world voice-channels and is based on well-established and easily implementable primitives.

The security of the protocol relies on a scrupulous and cooperative authentication of speakers. Careless signature distribution or vocal verification are the biggest security threats.

New advances in artificial speech synthesis pose risk to security of vocal verification. Level of authentication can be improved by introducing contextual questions.

Acknowledgement:

This work is supported by grant DGA Cifre-Defense program No 01D17022178 DGA/DS/MRIS.