



HAL
open science

Simulating Realistic Pedestrian Behaviors in the Context of Autonomous Vehicles in Shared Spaces

Manon Prédhumeau

► **To cite this version:**

Manon Prédhumeau. Simulating Realistic Pedestrian Behaviors in the Context of Autonomous Vehicles in Shared Spaces. 20th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2021), International Foundation for Autonomous Agents and Multiagent Systems (IFAAMAS), May 2021, Online, France. hal-03135956

HAL Id: hal-03135956

<https://hal.science/hal-03135956>

Submitted on 9 Feb 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Simulating Realistic Pedestrian Behaviors in the Context of Autonomous Vehicles in Shared Spaces

Doctoral Consortium

Manon Prédhumeau
Grenoble Alps University, LIG
38000 Grenoble, France
manon.predhumeau@univ-grenoble-alpes.fr

ABSTRACT

In this PhD thesis, we investigate how pedestrians will behave in a shared space with an autonomous vehicle, by modeling and simulating realistic pedestrians' behavior. Our approach integrates agent-based social simulation with standard robotic tools. We proposed an agent-based model through extensions of the Social Force Model. We implemented this model as an open source tool to simulate the interactions between pedestrians and an autonomous vehicle in shared spaces. Simulation results, when compared with available data, show that combining an agent-based model and robotics is promising for handling real-world scenarios. The proposed model and simulator are used: 1) to simulate various shared space scenarios with heterogeneous and realistic pedestrians' behaviors; 2) to provide a simulated environment to test autonomous vehicle navigation strategies; 3) to reproduce real-world scenes and predict pedestrians trajectories around the autonomous car in real time.

KEYWORDS

Agent-based modeling and simulation; Crowd simulation; Social force model

ACM Reference Format:

Manon Prédhumeau. 2021. Simulating Realistic Pedestrian Behaviors in the Context of Autonomous Vehicles in Shared Spaces: Doctoral Consortium. In *Proc. of the 20th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2021)*, Online, May 3–7, 2021, IFAAMAS, 3 pages.

1 INTRODUCTION

In the near future, autonomous vehicles (AVs) will navigate in complex, human-populated urban environments, i.e. shared spaces. A shared space is a place where segregation between pedestrians and vehicles is minimized, by removing road markings, traffic lights, traffic signs and curbs [12]. This quite new urban design approach can be applied to a pedestrian zone, a parking area or a public square in a city center. In shared spaces, pedestrians and vehicles have to negotiate their trajectories without explicit traffic rules [12]. In order to provide AVs with a safe and socially-compliant navigation in shared spaces, we need to anticipate pedestrians' behavior.

In this thesis, we address the following question: how will pedestrians behave in a shared space with an AV? Our work contributes to give the AV knowledge of its current and future social environment by modeling and simulating pedestrians' behaviors. The

proposed model and simulations must meet three objectives: 1) to reproduce human navigation to better understand how pedestrians move in crowds, and what social norms they follow; 2) to provide a simulated environment to test AV navigation algorithms in near-real life conditions; and 3) to help predict pedestrians trajectories so that the AV can anticipate and adapt its navigation.

Microscopic approaches like Social Force Models (SFM) [7, 13, 14], models based on Reciprocal Velocity Obstacles (RVO) [9, 26], and data-driven models [2, 10] have been widely used to model pedestrian movements. Pedestrians adapt their behavior to the context and these models have been recently adapted to simulate pedestrians in shared spaces with vehicles [1, 3, 4, 11, 22, 27].

In order to meet our objectives, the model needs to reproduce accurate trajectories, with diverse and realistic pedestrians' behaviors, and simulations must be executed faster than real time. However, the existing models have limitations; they are difficult to generalize to various situations, they lack diversity in pedestrians' behavior and sometimes consider that pedestrians have a perfect behavior, they do not consider the social aspect of crowd navigation, or they need a lot of data to learn a model. Moreover, there is no model of shared space that integrates both advanced pedestrians' behavior and robotic functionalities for the AV's behavior.

2 CONTRIBUTIONS

2.1 Methodology

We proposed an agent-based model (ABM), where each pedestrian is represented by an agent with individual behaviors. A crowd of pedestrians is a set of heterogeneous agents, which move in their environment, perceive other agents and collaborate to avoid collisions. The ABM approach has the ability to reproduce specific individual behaviors, and to allow the model to be refined iteratively.

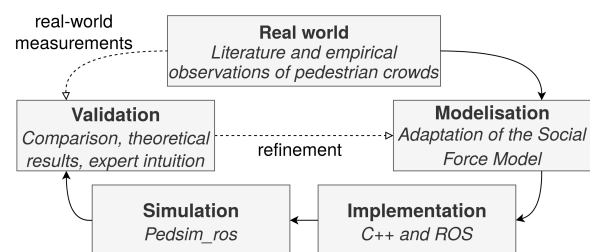


Figure 1: Proposed approach

Figure 1 presents the followed methodology. In the absence of a lot of empirical data, our model is based on video observations, and

results from literature and social sciences. We proposed extensions to one of the most famous crowd simulation models: the SFM [7]. The SFM uses physical forces to represent the internal motivations of pedestrians to move and avoid collisions. This model does not require large amounts of data and is computationally fast. After implementation, complex scenarios were simulated. The model and the simulations were validated by comparison with real-world measurements and theoretical results.

2.2 Model

In an open environment like a shared space, pedestrian’s behavior is governed by social norms, e.g. keep a minimum distance, and pedestrians adapt their behavior according to the crowd density [6]. We proposed an adaptation of the SFM to simulate sparse crowds in shared spaces [17]. The proposed model considers the visual perception and attention of pedestrians, and the adaptations of their personal space depending on the crowd density around them. The SFM of Moussaïd [13] and the refined model were compared through simulations of several crowd scenarios. The results show that the proposed model produces less dense crowds of more dynamic pedestrians with less collisions, which better fits the empirical observations for a sparse crowd. Moreover, the proposed model runs faster and provides a simple way to vary individual characteristics among agents.

Social groups, such as friends, couples, coworkers and families, represent a significant part of most urban crowds [14]. In order to simulate crowds in several contexts of shared space, e.g. a campus, a shopping street or a business area, we need to represent groups with various relationships. We proposed an extension of the SFM of [14], based on empirical observations from literature [18]. Four types of groups are modeled according to social relations: couples, friends, families and coworkers, and forces are customized according to the type of group. We also implemented and compared two approaches from the literature to simulate group avoidance behavior [18]. Intra-group distances and angles, as well as collision avoidance maneuvers in the simulation are compared with the SFM of [14] and with ground truth. The results show that the SFM is very sensitive to intra-group distances, which is of major importance in avoidance behavior of groups. Putting simulated groups members at realistic distances can reproduce realistic group avoidance behaviors. By simply adjusting the distribution of each social relationship in the crowd, the model can simulate many scenarios.

In order to be able to model pedestrians’ reactions to an AV, we extended our model with an AV agent, which integrates the AV’s characteristics, and kinematic and dynamic constraints in the SFM and generates realistic movements. Pedestrians act with AVs as they do with conventional vehicles [5, 16, 24], and models of pedestrian interactions with conventional vehicles already exist [1, 4, 8, 11, 23, 25, 27]. However, they fail to accurately predict the individual trajectories in real time, and they do not deal with the diversity of pedestrian-AV interactions in a shared space. We proposed a hybrid model of pedestrians’ reactions that integrates the different observed pedestrians’ behaviors when they encounter a car in shared spaces, i.e. running to cross, stopping to let the car pass, turning, stepping back, as well as groups’ behaviors [19]. The proposed model combines the SFM, and a new decision model for

conflicting interactions. The model was validated through qualitative and quantitative comparisons with ground truth trajectories, and the predictive capabilities of the model were compared to the SFM. The results show that the model can reproduce the various pedestrian behaviors that occur in shared spaces, and outperforms the SFM at predicting pedestrians trajectories on the used dataset.

2.3 Simulation

The proposed model was implemented in C++ with Pedsim_ros, and is open source and available [20]. Pedsim_ros [15] is an open source crowd simulator that integrates ROS [21], a set of software libraries and tools to develop robot applications. Pedsim_ros can be coupled very easily with robotic tools and developments by robotics specialists. In particular, the AV movements in the simulation can be controlled with ROS commands from an external algorithm, and simulated pedestrians dynamically react to the AV.



Figure 2: Snapshot of a shared space simulation

We designed and implemented scenarios for 3 shared spaces environments and 8 crowd configurations, which gradually go from a simple interaction to very complex interactions with a big crowd, as illustrated by Figure 2. Simulations of other shared space scenarios can be easily designed and executed, by tuning the characteristics of the environment, of the crowd, of the pedestrians, and of the AV.

3 CONCLUSIONS AND FUTURE WORK

This PhD thesis investigates how pedestrians will behave in a shared space with an AV. We model and simulate pedestrians’ behaviors, by adapting an ABM to the context of shared spaces with an AV. The proposed model does not require large data sets and was validated by comparison with real-world measurements. Using the proposed model, we provided an agent-based simulator to help the robotics community to develop AV’s navigation among humans. The model and simulator can be used to simulate shared space scenarios with heterogeneous pedestrians’ behaviors. The simulator offers an environment to test AV navigation algorithms in near-real life conditions and in complete safety. The model can reproduce real-world scenes and can run faster than real time to predict pedestrian trajectories. The simulation can thus be used by a real AV to predict pedestrians’ trajectories around it and to adapt its navigation dynamically. The current work is being pursued by testing navigation algorithms on simulated shared space scenarios, and by identifying situations where interactions may be problematic.

ACKNOWLEDGMENTS

This work is part of the HIANIC project (Human Inspired Autonomous Navigation In Crowds), funded by the French Ministry of Education and Research and the French National Research Agency.

REFERENCES

- [1] Bani Anvari, Michael G.H. Bell, Aruna Sivakumar, and Washington Y. Ochieng. 2015. Modelling shared space users via rule-based social force model. *Transportation Research Part C: Emerging Technologies* 51 (Feb. 2015), 83–103.
- [2] Aniket Bera, Sujeong Kim, and Dinesh Manocha. 2015. Efficient Trajectory Extraction and Parameter Learning for Data-Driven Crowd Simulation. *Graphics Interface 2015* (2015).
- [3] Qianwen Chao, Xiaogang Jin, Hen-Wei Huang, Shaohui Foong, Lap-Fai Yu, and Sai-Kit Yeung. 2019. Force-based Heterogeneous Traffic Simulation for Autonomous Vehicle Testing. In *Proc. IEEE International Conference on Robotics and Automation (ICRA)*. Montreal, QC, Canada, 8298–8304.
- [4] John Charlton, Luis Rene Montana Gonzalez, Steve Maddock, and Paul Richmond. 2020. Simulating Crowds and Autonomous Vehicles. *Transactions on Computational Science XXXVII* 12230 (July 2020).
- [5] Michael P. Clamann, Aubert, Miles, and Cummings, Mary. 2017. Evaluation of Vehicle-to-Pedestrian Communication Displays for Autonomous Vehicles. *Transportation Research Board 96th Annual Meeting (No. 17-02119)* (2017).
- [6] Anna Frohnwieser, Richard Hopf, and Elisabeth Oberzaucher. 2013. Human Walking Behavior - The Effect of Pedestrian Flow and Personal Space Invasions on Walking Speed and Direction. *Human Ethology Bulletin* (2013), 20–28.
- [7] Dirk Helbing and Péter Molnár. 1995. Social force model for pedestrian dynamics. *Physical review. E, Statistical physics, plasmas, fluids, and related interdisciplinary topics* 51, 5 (1995), 4282–4286.
- [8] Fatema T. Johora and Jorg P. Muller. 2018. Modeling Interactions of Multimodal Road Users in Shared Spaces. In *Proceedings of the 21st International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, Maui, HI, 3568–3574.
- [9] Sujeong Kim, Stephen J. Guy, Wenxi Liu, David Wilkie, Rynson W.H. Lau, Ming C. Lin, and Dinesh Manocha. 2015. BRVO: Predicting pedestrian trajectories using velocity-space reasoning. *The International Journal of Robotics Research* 34, 2 (Feb. 2015), 201–217.
- [10] Alon Lerner, Yiorgos Chrysanthou, and Dani Lischinski. 2007. Crowds by Example. *EUROGRAPHICS Computer Graphics Forum* 26, 3 (Sept. 2007), 655–664.
- [11] Yuexin Ma, Dinesh Manocha, and Wenping Wang. 2018. AutoRVO: Local Navigation with Dynamic Constraints in Dense Heterogeneous Traffic. In *ACM Computer Science in Cars Symposium (CSCS)*. Munich, Germany.
- [12] Hans Monderman, Emma Clarke, and Ben Hamilton Baillie. 2006. Shared Space: The alternative approach to calming traffic. *Traffic engineering and Control* 47, 8 (2006), 290–292.
- [13] Mehdi Moussaïd, Dirk Helbing, Simon Garnier, Anders Johansson, Maud Combe, and Guy Theraulaz. 2009. Experimental study of the behavioural mechanisms underlying self-organization in human crowds. *Proceedings of the Royal Society B: Biological Sciences* 276, 1668 (2009), 2755–2762.
- [14] Mehdi Moussaïd, Niriasca Perozo, Simon Garnier, Dirk Helbing, and Guy Theraulaz. 2010. The Walking Behaviour of Pedestrian Social Groups and Its Impact on Crowd Dynamics. *PLoS ONE* 5, 4 (2010), e10047.
- [15] Billy Okal, Timm Linder, Omar Islas, Dizan Vasquez, Sven Wehner, and Luigi Palmieri. 2014. Pedsim_ros gitHub repository. https://github.com/srl-freiburg/pedsim_ros. Accessed Dec. 31, 2020.
- [16] Ana Rodríguez Palmeiro, Sander van der Kint, Luuk Vissers, Haneen Farah, Joost C.F. de Winter, and Marjan Hagenzieker. 2018. Interaction between pedestrians and automated vehicles: A Wizard of Oz experiment. *Transportation Research Part F: Traffic Psychology and Behaviour* 58 (Oct. 2018), 1005–1020.
- [17] Manon Prédhumeau, Julie Dugdale, and Anne Spalanzani. 2019. Adapting the Social Force Model for Low Density Crowds in Open Environments. In *Proceedings of the Social Simulation Conference (SSC19)*. Springer Nature Switzerland AG, Mainz, Germany.
- [18] Manon Prédhumeau, Julie Dugdale, and Anne Spalanzani. 2020. Modeling and simulating pedestrian social group behavior with heterogeneous social relationships. In *Proceeding of the Spring Simulation Conference (SpringSim'20)*. Society for Computer Simulation International, Online, Article 39, 12 pages.
- [19] Manon Prédhumeau, Lyuba Mancheva, Julie Dugdale, and Anne Spalanzani. 2021. An Agent-Based Model to Predict Pedestrians Trajectories with an Autonomous Vehicle in Shared Spaces. In *Accepted at the 20th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2021)*. IFAAMAS, Online.
- [20] Manon Prédhumeau, Lyuba Mancheva, Julie Dugdale, and Anne Spalanzani. 2020. Proposed simulator gitHub repository. https://github.com/maprdhm/pedsim_ros_AV
- [21] Morgan Quigley, Ken Conley, Brian Gerkey, Josh Faust, Tully Foote, Jeremy Leibs, Eric Berger, Rob Wheeler, and Andrew Ng. 2009. ROS: an open-source Robot Operating System. In *ICRA Workshop on Open Source Software*, Vol. 3. Issue 3.2.
- [22] Jiaping Ren, Yangxi Xiao, Dinesh Manocha, Wei Xiang, Ruigang Yang, and Xiaogang Jin. 2019. Heter-Sim: Heterogeneous multi-agent systems simulation by interactive data-driven optimization. *IEEE Transactions on Visualization and Computer Graphics* (Oct. 2019), 11.
- [23] Nils Rinke, Chris Schiermeyer, Federico Pascucci, Volker Berkhahn, and Bernhard Friedrich. 2017. A multi-layer social force approach to model interactions in shared spaces using collision prediction. *Transportation Research Procedia* 25 (2017), 1249–1267.
- [24] Dirk Rothenbuecher, Jamy Li, David Sirkin, Brian Mok, and Wendy Ju. 2016. Ghost driver: A field study investigating the interaction between pedestrians and driverless vehicles. In *2016 25th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*. IEEE, New York, NY, USA, 795–802.
- [25] Robert Schönauer. 2017. *A Microscopic Traffic Flow Model for Shared Space*. Ph.D. Dissertation. Graz University of Technology.
- [26] Jur van den Berg, Ming Lin, and Dinesh Manocha. 2008. Reciprocal Velocity Obstacles for real-time multi-agent navigation. In *2008 IEEE International Conference on Robotics and Automation*. IEEE, Pasadena, CA, USA, 1928–1935.
- [27] Dongfang Yang, Ümit Özgüner, and Keith Redmill. 2020. A Social Force Based Pedestrian Motion Model Considering Multi-Pedestrian Interaction with a Vehicle. *ACM Transactions on Spatial Algorithms and Systems* 6, 2 (2020), 1–27.