



**HAL**  
open science

# Towards emotion based music generation: A tonal tension model based on the spiral array

Dorien Herremans, Elaine Chew

► **To cite this version:**

Dorien Herremans, Elaine Chew. Towards emotion based music generation: A tonal tension model based on the spiral array. The Annual Meeting of the Cognitive Science Society, Jul 2019, Montreal, Canada. hal-03277753

**HAL Id: hal-03277753**

**<https://hal.science/hal-03277753>**

Submitted on 5 Jul 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Towards emotion based music generation: A tonal tension model based on the spiral array

**Dorien Herremans (dorien.herremans@sutd.edu.sg)**

Information Systems, Technology and Design  
Singapore University of Technology and Design  
8 Somapah Road, 487273 Singapore

**Elaine Chew (elaine.chew@qmul.ac.uk)**

School of Electronic Engineering and Computer Science  
Queen Mary University of London  
Mile End Road, E1 4NS London, UK

**Keywords:** Tension; Tonal tension, Music, Computational modelling; Music and emotion; Music structure

## Introduction

Tension is an integral part of the music listening experience, closely connected to the sensing of emotions. We have explored how a particular aspect of tension, tonal tension, can be modelled and used to guide for automatic music generation.

A model was developed for extracting three aspects of tonal tension (Herremans & Chew, 2016b) from a musical score. The model is based on the spiral array, a three-dimensional model for tonality developed by Chew (2014). This was then integrated in an online interactive system, for easy visualisation, in sync with audio and score. Finally, the tension model was included in a state-of-the-art music generation system called MorpheuS, whereby we use tension to guide the underlying tension fabric of the generated music.

## Spiral Array Model

In order to model tonal tension, we first need to be able to model pitches in a meaningful way. This was achieved through the three-dimensional model of tonality called the spiral array (Chew, 2014). The spiral array consists of three sets of helices: one that represents pitch classes, a pair for major and minor triads, and a pair for major and minor keys. The pitch spiral is the one we use for modelling tension. The triads are generated as convex combinations of their member pitches, and keys are represented as convex combinations of their defining chords.

### Three new indicators of tension

Tension is a composite characteristic. There are many factors that contribute to the listener's feeling of tension, including loudness, timbre, dissonance, and harmonies. We chose to focus on tonal tension, and propose three characteristics, that are calculated for each time window, or cloud, of notes:

**Cloud diameter** Calculated as the largest distance between different notes in a cloud, thus capturing the dissonance of a note cluster.

**Cloud momentum** Calculated as the position change or movement between two adjacent clouds of notes, capturing the amount of harmonic change from one time slice to the next.

**Tensile strain** Computed as the distance between the centroid of the current slice and that of all pitches, representing the global key.

Figure 1 shows an example of the Tristan chord in the spiral array, a famous tense chord from Wagner's opera Tristan and Isolde. One can immediately see that it spans a large region in the pitch helix, which results in a high cloud diameter.

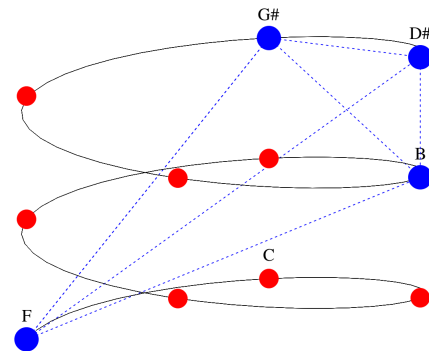


Figure 1: The Tristan chord in the Spiral Array pitch helix.

For a more complete overview of the proposed novel tonal tension model, the reader is referred to (Herremans & Chew, 2016b).

The model can be used for musicological or cognitive science purposes, as we have created an interactive online platform that visualises both tension (Herremans & Chuan, 2017) and arousal valence data (Herremans, Yang, et al., 2017) in sync with musical scores and audio.

### Scaffolding music generation

In recent years, automatic music generation systems have become ever more popular due to advances in deep learning. There is a wide range of music generation systems available, e.g. for generating music that matches computer games, harmonizing a melody, etc. For a complete overview, the reader

Figure 2: Excerpt (bars 1-8) of MorpheuS' piece based on the first of Stravinsky's *Three Pieces for String Quartet*

is referred to the survey paper by Herremans, Chuan, & Chew (2017). In this paper, the current challenges for music generation are identified as generating music with long term structure, and music that communicates certain emotions.

We developed a music generation system, called MorpheuS, which uses combinatorial optimization techniques to generate music with specific tension values over time (i.e., a given tension profile) and recurring pattern structure (Herremans & Chew, 2016a, 2017). MorpheuS takes as input an existing musical score in MusicXML format. From this piece, the tension is calculated using the model described above. Secondly, recurring note patterns are extracted using the SIA algorithm by Meredith et al. (2002). The user can then use this original tension profile and the detected recurrent pattern structure, or create a new version of these, to scaffold the music generation process.

In the first step of the music generation process, all pitches of the original template piece are erased, but the rhythm is kept intact. A variable neighborhood search algorithm then populates the rhythm template with random pitches, while preserving the repeated pattern structure. The pitches are then optimized to maximize the fit between the current tension profile and the desired tension. For a more in depth explanation, the user is referred to Herremans & Chew (2017).

Figure 2 shows an example of one of the generated pieces by MorpheuS, based on Stravinsky's *Three Pieces for String Quartet*, composed for performance by members of the Singapore Symphony Orchestra on Channel News Asia.

## Conclusions

The MorpheuS music generation system tackles one of the biggest remaining challenges in automatic music generation: generating music with structure and with the goal of communicating particular emotions over time. MorpheuS pieces have been performed internationally; recordings of selected pieces can be found online<sup>1</sup>.

<sup>1</sup>dorienherremans.com/morpheus

## Acknowledgments

This research started as part of a Marie Skłodowska-Curie Action Fellowship (EU MSCA grant No 658914), and has been supported by MOE2018-T2-2-161 and SMART-MIT Grant ING1611118-ICT.

## References

- Chew, E. (2014). *Mathematical and computational modeling of tonality: Theory and applications*. New York: Springer.
- Herremans, D., & Chew, E. (2016a). MorpheuS: Automatic music generation with recurrent pattern constraints and tension profiles. In *IEEE tencon*. Singapore: IEEE.
- Herremans, D., & Chew, E. (2016b). Tension ribbons: Quantifying and visualising tonal tension. In *Second international conference on technologies for music notation and representation (tenor)* (Vol. 2, p. 8-18). Cambridge, UK.
- Herremans, D., & Chew, E. (2017). MorpheuS: generating structured music with constrained patterns and tension. *IEEE Transactions on Affective Computing*, PP. doi: 10.1109/TAFFC.2017.2737984
- Herremans, D., & Chuan, C.-H. (2017). A multi-modal platform for semantic music analysis: visualizing audio- and score-based tension. In *11th international conference on semantic computing IEEE ICSC 2017*. San Diego.
- Herremans, D., Chuan, C.-H., & Chew, E. (2017). A functional taxonomy of music generation systems. *ACM Computing Surveys (CSUR)*, 50(5), 69.
- Herremans, D., Yang, S., Chuan, C.-H., Barthet, M., & Chew, E. (2017). Imma-emo: A multimodal interface for visualising score-and audio-synchronised emotion annotations. In *Proc. of the 12th int. audio mostly conf. on augmented and participatory sound and music experiences*.
- Meredith, D., Lemström, K., & Wiggins, G. A. (2002). Algorithms for discovering repeated patterns in multidimensional representations of polyphonic music. *Journal of New Music Research*, 31(4), 321-345.