

How serious is data leakage in deep learning studies on Alzheimer's disease classification?

Junhao Wen, Elina Thibeau-Sutre, Jorge Samper-Gonzalez, Alexandre M Routier, Simona Bottani, Didier Dormont, Stanley Durrleman, Olivier Colliot, Ninon Burgos

▶ To cite this version:

Junhao Wen, Elina Thibeau-Sutre, Jorge Samper-Gonzalez, Alexandre M Routier, Simona Bottani, et al.. How serious is data leakage in deep learning studies on Alzheimer's disease classification?. Organization for Human Brain Mapping (OHBM), Jun 2019, Roma, Italy. hal-03365742

HAL Id: hal-03365742 https://hal.science/hal-03365742v1

Submitted on 5 Oct 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

How serious is data leakage in deep learning studies on Alzheimer's disease classification?



<u>Junhao Wen^{*,1}</u>, <u>Elina Thibeau--Sutre^{*,1}</u>, Jorge Samper-González¹, Alexandre Routier¹, Simona Bottani¹, Didier Dormont^{1,2}, Stanley Durrleman¹, Olivier Colliot^{1,2,3}, Ninon Burgos¹

*The authors contributed equally to this study

¹ARAMIS Lab, ICM, Inserm U1127, CNRS UMR 7225, Sorbonne University, Inria, Paris, France

²AP-HP, Department of Neuroradiology, Pitié-Salpêtrière Hospital, Paris, France

³AP-HP, Department of Neurology, Pitié-Salpêtrière Hospital, Paris, France

junhao.wen89@gmail.com

elina.thibeausutre@icm-institute.org

@AramisLabParis

In recent years, there has been a strong interest in the use of deep learning (DL) for assisting diagnosis of brain diseases from neuroimaging data. evaluation of their performances is critical to assess their potential clinical value.

A major source of bias is data leakage, that can be difficult to detect for nonspecialists.

In this study, focusing on the case of Alzheimer's disease (AD) diagnosis from T1 MRI using convolutional neural networks

(CNN), we performed a rigorous literature search, assessed the prevalence of data leakage analysed its and Additionally, demonstrated We phenomenon of data leakage controlled setting by focusing on the impact of the data split strategy.

Methods

Literature Search

Search engines: Pub Med & Scopus

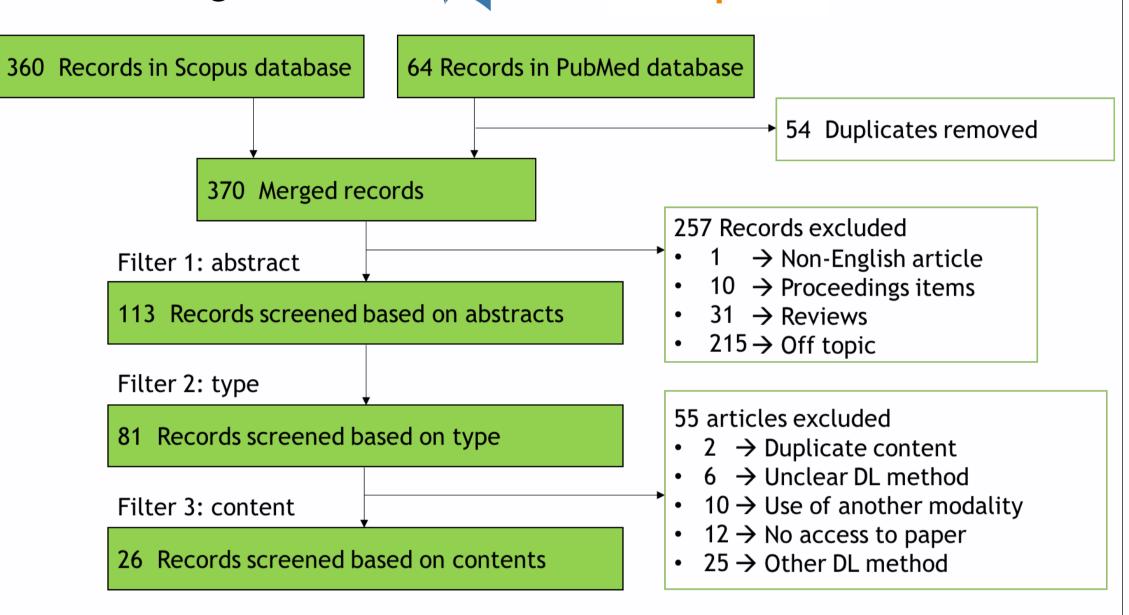


Diagram summarizing the bibliographic methodology.

Data Leakage

3 categories identified:

1. Biased split

Data extracted from the same individual is distributed in both the train and the test sets.

2. Late split

Test / train split is performed after another procedure (feature selection, pretraining...).

3. No independent test set

The performance is evaluated on the train and / or validation sets.


3 possible labels

- *lear* when data leakage is explicitly witnessed
 - Unclear when no sufficient explanation is offered
- None detected otherwise


Application

Evaluation of the impact of biased split: Two experiments were conducted with different data partitioning strategies for the AD vs CN classification on ADNI dataset.

A. Slice-level partitioning

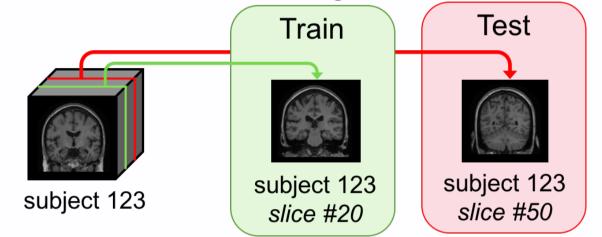

B. Subject-level partitioning

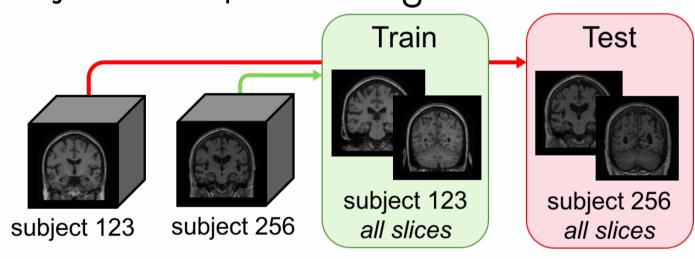


Results

Summary of the studies performing classification of AD using CNNs on anatomical MRI

A. Studies without data leakage

Data leakage Accuracy AD vs CN 83,70% None detected Aderghal et al, 2017 10.1007/978-3-319-51811-4_56 90% None detected Aderghal et al, 2018 10.1109/CBMS.2018.00067 Backstrom et al, 2018 * 10.1109/ISBI.2018.8363543 Cheng et al, 2017 10.1117/12.2281808 85,47% None detected Taqi et al, 2018 Cheng and Liu, 2017 BMEI.2017.8302281 (CN/mild/moderate None detected Islam and Zhang, 2018 ** 10.1186/s40708-018-0080-3 80,00% None detected Korolev et al, 2017 10.1109/ISBI.2017.7950647 88,31% None detected Li et al, 2018 10.1109/IST.2017.8261566 10.1016/j.compmedimag.2018 89,50% None detected Li et al, 2018 84,97% None detected 10.1007/s12021-018-9370-4 Liu et al, 2018 91,09% None detected Liu. et al, 2018 10.1016/j.media.2017.10.005 90,56% None detected Liu. et al, 2018 10.1109/JBHI.2018.2791863 10.1109/ISBI.2018.8363832 Senanayake et al, 2018 76% None detected Shmulev et al, 2018 10.1007/978-3-030-00689-1_9 (sMCI/pMCI: 62%) None detected Valliani and Soni, 2017 10.1145/3107411.3108224 81,30% None detected

B. Studies with potential data leakage

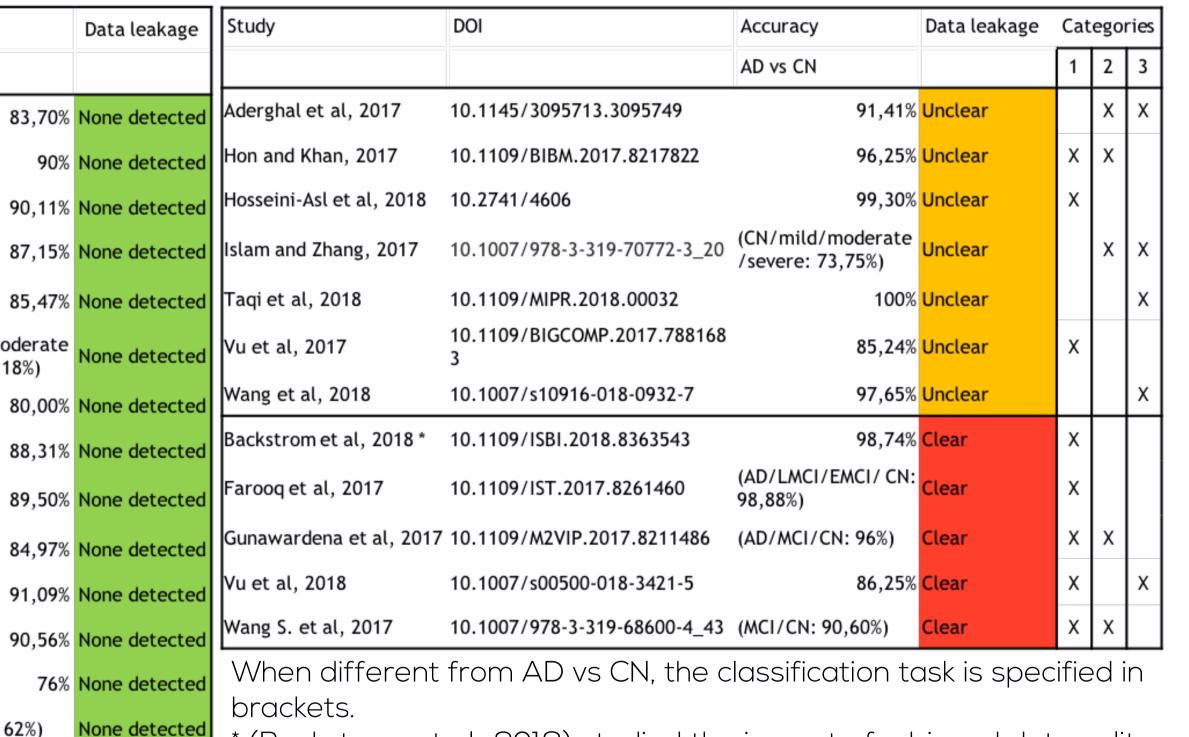


* (Backstrom et al., 2018) studied the impact of a biased data split

** Use of imbalanced accuracy on an imbalanced dataset


Data leakage categories:

- 1. Biased split
- 2. Late split
- No independent test set

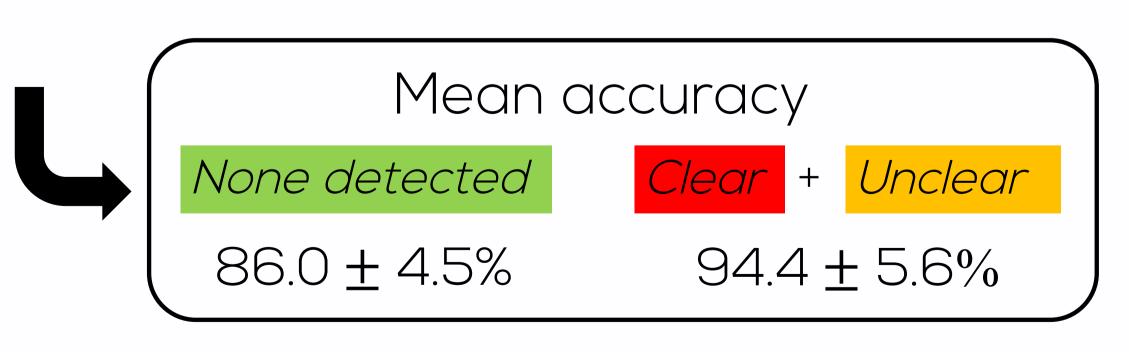


Observation of performance bias


A. Slice-level partitioning

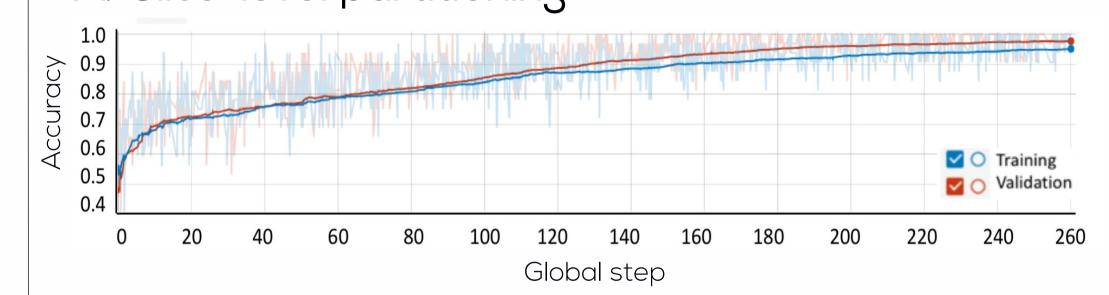

B. Subject-level partitioning

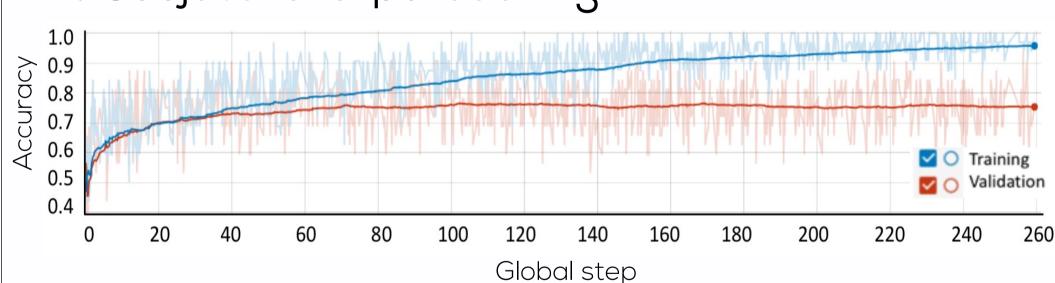

The training and validation accuracies (smoothed by a threshold of 0.99) are obtained during 150 epochs for both data split strategies over the same architecture.

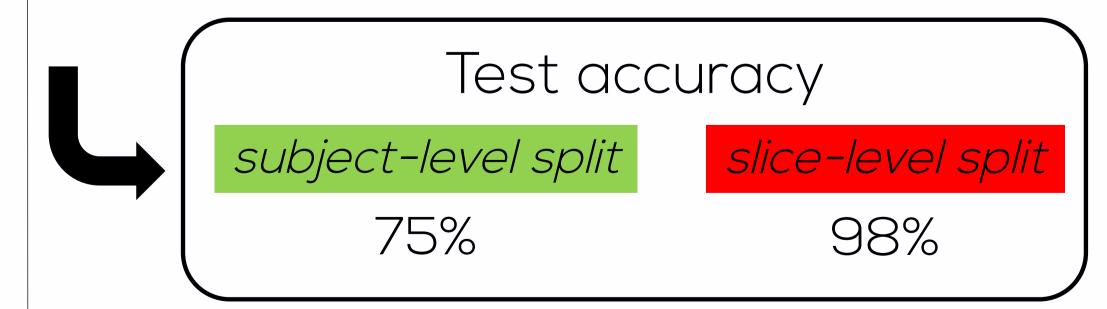

Conclusion

Data leakage is a common problem in the literature (42% of surveyed papers). Moreover, it has a serious impact on performance evaluation, as demonstrated by the strong differences in accuracies in both the literature and our experiments. Thus the current literature of the domain may overestimate the performance of deep learning systems for automatic diagnosis of Alzheimer's disease.

Downloads



All the papers that were analyzed in the literature search may be found at www.zotero.org/groups/2337160/ad-dl









