



HAL
open science

Nudging the N170 forward with prior stimulation – Bridging the gap between N170 and recognition potential

Canhuang Luo, Wei Chen, Rufin Vanrullen, Ye Zhang, Carl Michael Gaspar

► **To cite this version:**

Canhuang Luo, Wei Chen, Rufin Vanrullen, Ye Zhang, Carl Michael Gaspar. Nudging the N170 forward with prior stimulation – Bridging the gap between N170 and recognition potential. *Human Brain Mapping*, 2022, 43 (4), pp.1214-1230. 10.1002/hbm.25716 . hal-03452791

HAL Id: hal-03452791

<https://hal.science/hal-03452791>

Submitted on 27 Nov 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

Nudging the N170 forward with prior stimulation – Bridging the gap between N170 and recognition potential

Canhuang Luo^{1,3,4}, Wei Chen², Rufin VanRullen^{3,4}, Carl Michael Gaspar^{1,5*}, and Ye Zhang^{1*}

¹ Institutes of Psychological Sciences, Hangzhou Normal University, Hangzhou, China; Center for Cognition and Brain Disorders, The Affiliated Hospital of Hangzhou Normal University, Hangzhou, China; Zhejiang Key Laboratory for Research in Assessment of Cognitive Impairments, Hangzhou, China

² Khalifa University of Science and Technology, P.O. Box 127788, Abu Dhabi, United Arab Emirates

³ Université de Toulouse, UPS, Centre de Recherche Cerveau et Cognition, 31052 Toulouse, France

⁴ CerCo, CNRS UMR 5549, 31052 Toulouse, France

⁵ Zayed University, P.O. Box 144534, Abu Dhabi, United Arab Emirates

*** Correspondence should be addressed to authors below:**

Carl Michael Gaspar
Department of Psychology
College of Natural and Health Sciences
Zayed University
P.O. Box 144534
Abu Dhabi, United Arab Emirates
Email: carl.gaspar@zu.ac.ae

Ye Zhang
Institutes of Psychological Science
Hangzhou Normal University
311121 Hangzhou
Zhejiang, P.R. China
Email: zhangye.lucia@gmail.com

1 Abstract

2 Some neural responses are classified by the stimulus conditions leading up to that
3 response while other neural responses are also classified by the morphology of the responses
4 themselves. However, morphology-based classification may not be appropriate if one can
5 nudge a neural response into looking like another neural response. Morphology-based
6 classification occurs with the N170 and RP (Recognition Potential), ERP components that are
7 studied in separate literatures and yet share much in common in terms of functionality. In this
8 study, we demonstrate a gradual transformation in the morphology of the N170 to the RP using
9 a simple parametric manipulation of forward masks that is unlikely to cause a change in the
10 underlying processing. Both the N170 and RP are N1 components, meaning that they are the
11 first negative deflection of the evoked response. However, the RP is often measured with a
12 forward mask that ends at stimulus onset whereas the N170 is often measured with no masking
13 at all. This study investigates how ISI may delay and distort the N170 into an RP by
14 manipulating the temporal gap (ISI) between forward mask and target. The results revealed
15 reverse relationships between the ISI on the one hand, and the N170 latency, single-trial N1
16 jitter (an approximation of N1 width) and reaction time on the other hand. Importantly, we find
17 that scalp topographies have a unique signature at the N1 peak across all conditions, from the
18 longest gap (N170) to the shortest (RP). These findings prove that the mask-delayed N1 is still
19 the same N170, even under conditions that are normally associated with a different component
20 like the RP. In general, our results suggest that greater caution should be taken to interpret the
21 time course of a measured effect when forward masks are employed.

22

23 **Keywords:** object recognition; visual masking; Chinese characters; ERP; N170; recognition
24 potential

25

26 1 Introduction

27

28 Event related potential (ERP) components are important for inferring the time course of
29 perceptual and cognitive processing (Carreiras, Armstrong, Perea, & Frost, 2014; Dien, 2009;
30 Grainger & Holcomb, 2009). The most typical type of component, the kind studied in this paper,
31 is a peak in the evoked response, which can be either a positive or negative deflection. Inference

1 about processing can be relatively straightforward when components are classified almost
2 exclusively by the stimulus conditions leading up to that component. In this case, delays and
3 distortions in the component are interpreted as delays and distortions in processing. This is
4 certainly the case with components like the readiness potential (Libet, Libet, Gleason, Wright,
5 & Pearl, 1993) and the mismatch negativity (MMN) (Näätänen, Gaillard, & Mäntysalo, 1978).
6 The mismatch negativity (MMN) is a response evoked by an unexpected stimulus in a sequence
7 of regularly occurring stimuli. Importantly, an early MMN evoked by auditory stimuli is just
8 as much an MMN as a late MMN evoked by visual stimuli (Winkler, Czigler, Sussman, Horváth,
9 & Balázs, 2005)

10 However, confusion can arise when components are also classified by their morphology
11 – their latency and shape. The importance of latency in defining some components is often
12 reflected in component nomenclature like N170 (Shlomo Bentin, Allison, Puce, Perez, &
13 McCarthy, 1996), which refers to a negative deflection occurring around 170 ms after an object
14 from a familiar category appears. In some cases, peaks that are offset in time (i.e. with longer
15 latencies in most cases) and slightly different in shape are thought to reflect different processes.
16 While that interpretation is consistent with a cascade across processing levels, an equally valid
17 interpretation of peak offset is a delay in processing. How can we decide between these two
18 interpretations? This paper reports unique support for the delay interpretation in a comparison
19 between 2 nominally different ERP components: the N170 and the recognition potential, or RP
20 (Rudell, 1991; Martín-Loeches et al., 2001). The approach we take arises from the possibility
21 that the presence of forward-masking during typical recordings of RP can lead to processing
22 delay relative to the N170, which rarely involves forward masks. Masks are typically random
23 patterns and so their mere presence is unlikely to involve a dramatic switch in processing. In
24 order to test our delay-hypothesis we simply nudge the N170 into an evoked response that is
25 morphologically equivalent to an RP, by using forward masks with progressively smaller ISI.
26 Importantly, the experimental conditions at the extreme ends of our parametric manipulation
27 match the conventional experimental designs of N170 and RP studies. The remainder of the
28 Introduction describes N170 and RP in greater detail and motivates their comparison despite
29 being studied in different literatures with very little cross talk. Experimental design is
30 elaborated upon and more precise predictions are made in the context of the delay hypothesis.


31 The N170 is the first negative deflection in response to visually observed objects from a
32 familiar category, like faces. It is described as being a critical temporal marker for the extraction
33 of information from visually observed familiar objects (Martín-Loeches, 2007; Maurer, Zevin,

1 & McCandliss, 2008; Tanaka & Curran, 2001). However, the latency of N170 can be
2 influenced by various factors. For example, up-side down faces evoke an N170 that is delayed
3 by about 10 ms, compared to that evoked by upright faces (Rossion et al., 1999). Another
4 possible factor, which to our best knowledge has not been directly investigated, is inter-stimulus
5 intervals (ISI). In a survey we made (Figure 1), one can see a monotonic relationship between
6 N170 latency and ISI (Cao, Jiang, Li, & He, 2014; Dimigen, Kliegl, & Sommer, 2012; Fu, Feng,
7 Guo, Luo, & Parasuraman, 2012; Harris & Nakayama, 2007; Kuehl, Brandt, Hahn, Dettling, &
8 Neuhaus, 2013; Lin et al., 2011; Martens, Schweinberger, Kiefer, & Burton, 2006; Shen et al.,
9 2017; Su, Mak, Cheung, & Law, 2012). In fact, a very short ISI can delay the N170 up to ~80
10 ms later than the typical latency, which is an enormous effect compared to the face inversion
11 effect. Moreover, if a study uses very short ISI between forward masks and targets (for example,
12 Su et al., 2012; studies marked with orange color in Figure 1), we can see that not only is the
13 latency delayed, but also the waveform is wider and deformed enough to make peak isolation
14 challenging. Taken together, the results drawn from these separate studies suggest that the N170
15 can be nudged forward and widened by the recency of prior stimulation. The most extreme
16 delay should occur with zero ISI (e.g., Su et al., 2012), at which point the N170's morphology
17 might be indistinguishable with another ERP component: the recognition potential (RP).

18 RP is usually studied in a totally separate body of literature focusing on the time course
19 of word recognition (Dien, 2009; Martín-Loeches, 2007). Unlike the N170, the RP is usually
20 measured with a paradigm called rapid stream stimulation (RSS) which presents multiple masks
21 before a target in succession and multiple masks after. However, RP is similar to N170 in many
22 other aspects. Primarily, both the RP and N170 are responses to the visual presentation of
23 familiar objects. And there are also a number of morphological similarities between these two
24 ERPs. Both of them are almost always N1 components (for a non-N1 RP, see Rudell, 1991;
25 2010). Both ERPs are observed at similar channels and have similar topographies (S. Bentin,
26 Mouchetant-Rostaing, Giard, Echallier, & Pernier, 1999; Hinojosa, Martín-Loeches, Gómez-
27 Jarabo, & Rubia, 2000; Martín-Loeches, Hinojosa, Fernández-Frías, & Rubia, 2001; Martín-
28 Loeches, Hinojosa, Gomez-Jarabo, & Rubia, 2001; Maurer, 2008; Maurer, Brandeis, &
29 McCandliss, 2005; Maurer et al., 2008). The one major morphological difference between
30 N170 and RP is delay: the RP typically occurs around 250 ms post-stimulus, which is longer
31 than the typical latency of N170. And because of the delay, RP is often linked to higher level
32 processing stages than the processing stage revealed by N170 (Dien, 2009). However, this
33 widely-accepted interpretation of RP does not consider the presence of forward-masking during

1 typical recordings of RP. If the forward mask merely delays the brain signal in response to the
2 target, could the RP just be a delayed brain response such that its mask-free latency would
3 actually be ~170 ms? To put it simply, is RP actually an N170 delayed by forward masks?

4 Taken together, our study aims to answer two questions: 1) Is the N1 systematically
5 delayed and warped by ISI? 2) Is RP a delayed version of N170? Answers to these questions
6 can only be obtained by establishing the relationship between ISI and N170. In this study, we
7 measure electrophysiological responses evoked by rapidly displayed Chinese characters, and
8 we focus mostly on characteristics of the N1 and vertex positive potential (VPP). VPP is
9 measured at a vertex channel such as Cz and is considered to reflect the same process the N170
10 does (Joyce & Rossion, 2005). Our subjects also performed a 1-back task on Chinese characters,
11 and we measured their reaction times. In these respects, our study is like many others in both
12 the N170 and RP literatures. However, our study is unique in three ways: First, across 14
13 conditions, we parametrically manipulate the temporal proximity between the target and a
14 forward-mask image, from 0-gap (quasi-RP condition; gap denotes ISI) to infinity-gap (or no-
15 mask, the typical N170 condition). Second, we focus on the specification of waveform-
16 morphology in order to determine whether the N1 component obtained in N170 and gap
17 conditions is the same. Finally, we obtain lots of data for each subject (150 trials for each of the
18 14 conditions). Altogether, we are able to obtain unique “gap-metric” functions, the ERP-
19 component equivalent of a psychometric function for 3 major aspects of N1 morphology: N1
20 latency, N1 single-trial jitter, and topographical similarity to the N170. In addition, reaction
21 times measured across gap conditions also allows us to assess the functional consequences of
22 gap-related waveform changes. Our experimental design allows us to isolate the effect of a
23 single masking stimulus on variability in N1 morphology. All these allow us to answer the first
24 question and part of the second question. Considering that applying only one forward mask per
25 trial is not typical in the majority of RP studies (but see: Dien, Brian, Molfese & Gold, 2013),
26 to completely answer the second question, typical RP was also measured with the RSS
27 paradigm as a control condition and compared with all the other 14 conditions.

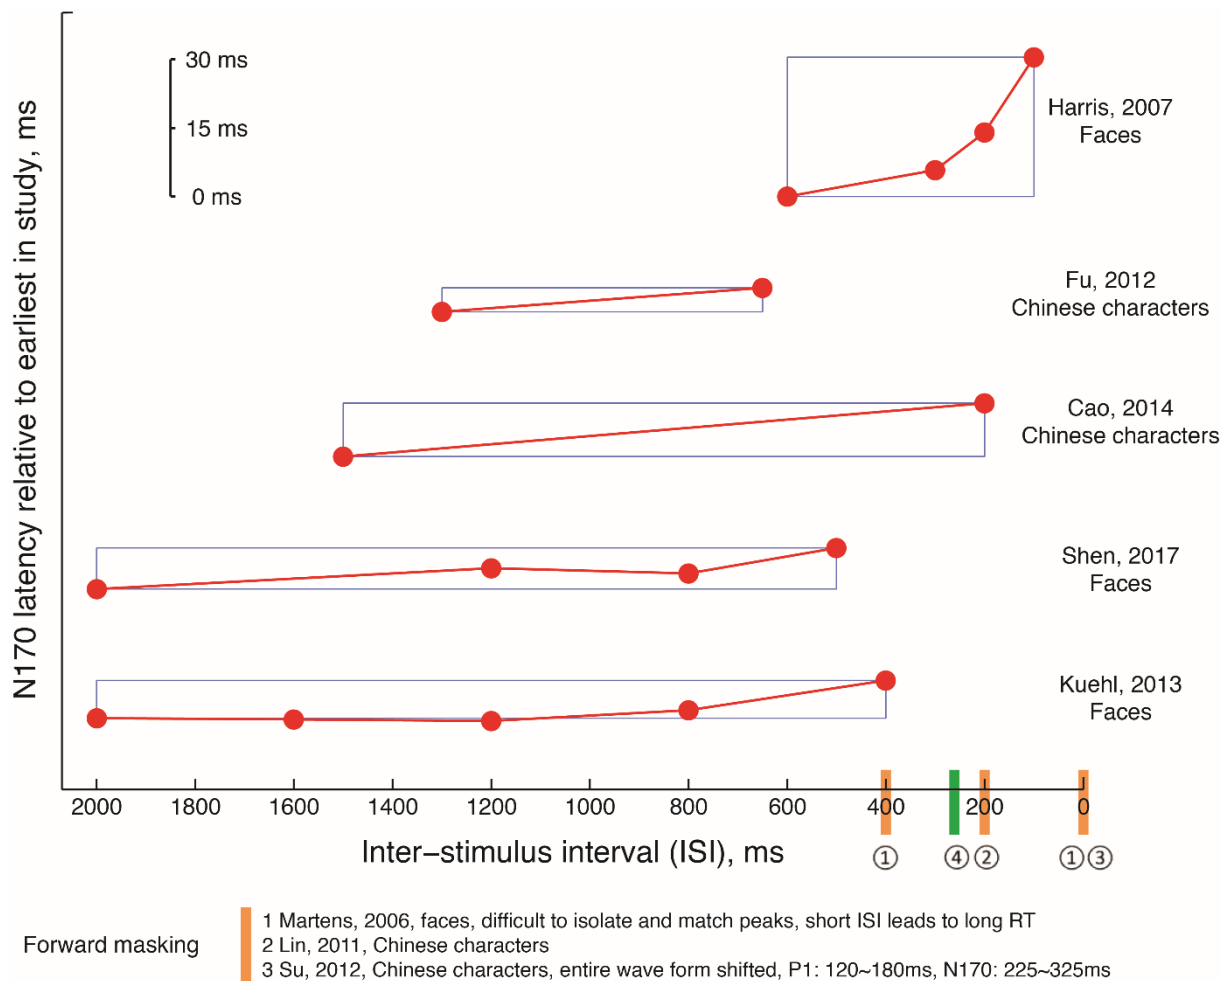

1 Eye-tracking & EEG 4 Dimigen, 2012, words, average interval between fixations = 233ms.

2

3 Figure 1, Summary of studies that used short ISI. The studies marked in yellow are forward-masking studies.

4 These studies provide more limited results than the adaptation studies shown above the x axis, because: they
 5 either have only a single ISI, they do not report N170 latencies, or those latencies are difficult to estimate from
 6 the figures because the grand-average waveforms are complex. The study marked in green is an eye-tracking &
 7 EEG study, the average interval between reading fixations during a combined EEG and eye-tracking study on
 8 reading can be consider like an “ISI”.

9 2 Materials and methods

10 2.1 Participants

11 Nine healthy adult participants (all right-handed, age ranging from 24 to 27, 4 males) with
 12 normal or corrected-to-normal vision took part in the study and were paid for their participation.
 13 Data from two participants were rejected due to too many artifact-contaminated trials (e.g., eye
 14 blinks, head movements and α wave). Valid data from seven participants were reported here.

1 All participants were native Chinese who had more than 10 years of education in speaking and
2 reading Chinese characters. Written informed consent was obtained from each participant prior
3 to the experiment.

4 **2.2 Stimuli**

5 Stimuli were gray scale images of 150 Chinese noun characters and 150 masks. Chinese
6 characters were chosen from the Modern Chinese Corpus of Center for Chinese Linguistics
7 (Peking University, 2015) (see http://ccl.pku.edu.cn:8080/ccl_corpus/index.jsp?dir=xiandai).
8 The frequency of each character was higher than 105 occurrences per million in this corpus,
9 mean frequency of all characters is 250.95 occurrence per million. The number of strokes in
10 Characters ranges from 7 to 12 (mean 9.18). The masks were made up of the 150 Chinese
11 characters by cutting these characters into '16' portions vertically and randomly permuting their
12 horizontal position. These masks and Chinese characters were matched in visual attributes. The
13 size of the basic set of characters and masks were around $4.4^{\circ} \times 4.4^{\circ}$ of visual angle.


14 **2.3 Procedure**

15 After electrode-cap placement, participants were seated in a dim light and sound-
16 attenuated shielded room, at a viewing distance of 60 cm from the computer monitor. Stimuli
17 were presented with MATLAB (MathWorks, Natick, Mass) using the Psychophysics Toolbox
18 (Version 3.0.12; <http://psychtoolbox.org>) (Brainard, 1997; Kleiner et al., 2007) on a light gray
19 background.

20 The sequence of events for each trial, summarised in Figure 2, is as follows: In each trial,
21 a "+" fixation was presented at first in the center of the screen for 500 ms, which was followed
22 by a blank for 800 ms. Then, a forward mask, a character, and a backward mask were presented
23 orderly, each for 250 ms. Each trial was ended by a blank of 800 ms. The masks in each trial
24 were randomly chosen from all the masks. Participants were instructed to make a response by
25 pressing the 'm' key as quickly and accurately as possible when a repeated character was
26 detected in successive trials. The ISI (i.e., temporal gap) between the preceding mask and the
27 character varied from 0 to 600 ms with a step of 50 ms. So totally, there were 13 gap conditions.
28 Additionally, there were two more conditions, one was without the preceding mask in order to
29 elicit the classic N170 (no-mask condition), in which the blank interval between the fixation
30 and the character was 1050 ms ; for the other one the RSS paradigm was used, in which 3~5
31 masks were presented prior to the targets and 4~6 masks were presented after to elicit typical
32 RP (RSS condition), which served as a control condition. The stimulus presentations for

1 different conditions are described in Figure 2. All 15 conditions were separated by blocks; each
 2 block had only one condition. There were 58 trials in each block where 8 characters were
 3 randomly chosen to be repeated ‘targets’ (same character as shown on previous trial). Each
 4 condition was tested with three blocks, totally 174 trials for one condition. The experiment
 5 started with a practice block of 58 trials (these stimuli were not used in the main test). The order
 6 of blocks and trials in each block were randomised, and the RSS condition (control) was
 7 conducted after the subjects completed all the other conditions.

8

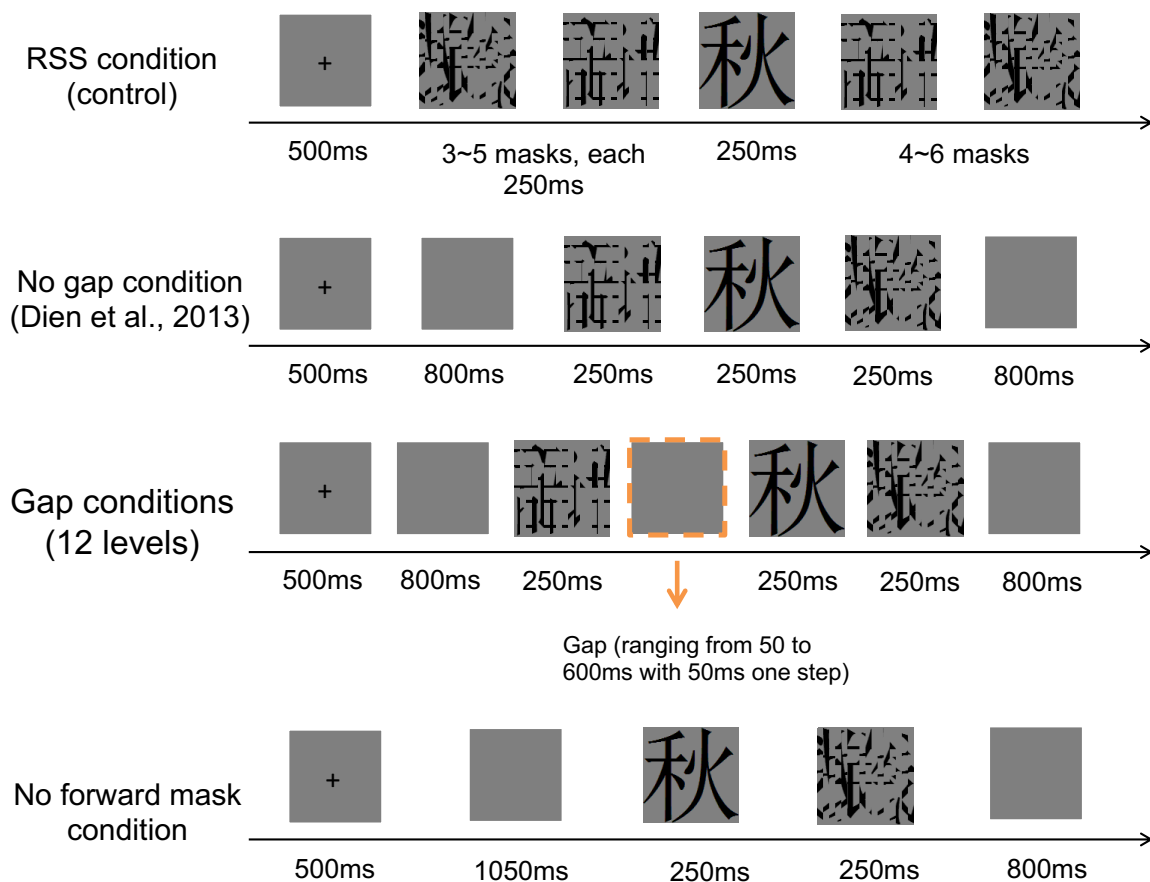

9

10 Figure 2. Trial sequence for each condition. The sequence shown at the top is for the RSS (typical RP) condition,
 11 the second sequence is for the 0-gap (quasi-RP) condition. The sequence shown at the bottom is for the no-mask
 12 (N170) condition. And the sequence in the middle shows how intermediate gap conditions are generated by
 13 varying the duration of the central event (a blank screen, outlined with a dashed line in this figure). Note how the
 14 overall timing is equated between the 0-gap and no-mask conditions.

15 2.4 EEG recording and preprocessing

16 Brain electrical activity was recorded from 32 scalp sites using tin electrodes mounted in

1 an elastic cap (BrainAmp, Brain Product). Vertical and horizontal eye movements were
 2 monitored using two electrodes placed on the outer canthus of right eye and in the inferior areas
 3 of the left orbit. The ground electrode was placed along the midline, ahead of Fz, and
 4 impedances were systematically kept below 7 k Ω . Signals were digitised at a sampling rate of
 5 500 Hz and band-pass filtered at 0.016~70 Hz. Potentials were referenced on-line to the FCz
 6 electrode and averaged-referenced off-line. Participants were asked to minimise eye
 7 movements, head movement, and swallowing during the recording.

8 EEG data was low-pass filtered at 30 Hz and high-pass filtered at 0.1 Hz. Data was
 9 epoched from 1000 ms before the onset of stimulus to 1000 ms after the onset of stimulus. Only
 10 non-repeated trials were extracted. Artefact rejections were applied over the epoched data.
 11 Trials with α wave and abnormal trend and blink during the presentation of stimuli were rejected
 12 by visual inspection. After trial rejection, the remaining numbers of trials did not vary much
 13 across conditions (see Table 1).

	RSS	0	50	100	150	200	250	300	350	400	450	500	550	600	N170
Q1	126	125	124	128	128	125	133	121	119	122	118	107	124	126	114
Q2	138	136	136	136	134	136	138	134	138	139	134	142	140	140	133
Q3	141	139	142	145	138	142	145	143	143	144	137	144	145	143	143

14 Table 1. Number of trials per condition, summarised by quartiles across subjects. Q1 to Q3
 15 refer to the first to third quartiles; i.e., Q2 is the median.

17 2.5 Analysis

18 2.5.1 N1 latencies (mean ERP)

19 The peak latencies and amplitudes of N1 were automatically extracted at the maximum
 20 (negative) amplitude value between 130 and 330 ms at P7 electrode (left occipio-temporal area),
 21 and the peak latencies and amplitudes of VPP were automatically extracted at the maximum
 22 (positive) amplitude at Fz electrode (fronto-central area) within the same time window.
 23 Automatic extraction was performed using ERPLAB (Lopez-Calderon & Luck, 2014) and
 24 EEGLAB functions (Delorme & Makeig, 2004).

25 2.5.2 N1 widths (single-trial jitter)

1 N1 component width, measured directly on the mean ERP waveform, is difficult to define.
2 Some subjects lack distinctive peaks around the N1 (P1 and P2) to serve as delimiters. Also,
3 subjects vary in the shape of their N1 component; some having more kurtosis than others, and
4 others being more asymmetrical. Therefore, we measure single-trial N1 components and take
5 the standard deviation of their latencies across trials - their temporal jitter - to be a proxy
6 measure of component width. Several studies have used this method to establish reliable
7 differences in N1 latency variability across experimental conditions (e.g., Navajas, Ahmadi, &
8 Quian Quiroga, 2013; Zhang, Luo, & Luo, 2013, and across subject populations (Milne, 2011).
9 Single-trial N1 peaks were estimated from 150 ms windows centred on the latency of the N1 in
10 the mean ERP of the appropriate gap condition and subject. Within each window of each trial,
11 we used custom Matlab scripts and publicly available Matlab code to estimate the latency of
12 the most negative local peak (findpeaks.m, authored by Professor Tom O’Haver at University
13 of Maryland, Version 6.0, Last revised March, 2016;
14 <http://terpconnect.umd.edu/~toh/spectrum/findpeaks.m>).

15 **2.5.3 Decay function relating N1 latency and jitter, to gap**

16 We used the following exponential function to relate both N1 latency, and N1 jitter, to
17 gap, separately for each subject:

$$18 \quad y = m * e^{\frac{-g}{k}}$$

19 , where y can be either N1 latency (ms), or N1 jitter (standard deviation, ms), g is gap (ms), m
20 specifies the starting point (y at gap 0), and k is the inverse of the decay rate (small k means
21 fast decay). Best fitting parameters were obtained by minimising the sum-of-squares error using
22 Matlab’s fminsearch.m (Matlab R2014a).

23 **2.5.4 Statistical analyses of correlations**

24 For statistical analyses of correlations between N1 latency and RT, and between N1
25 latency and VPP latency, we used the lmer program of the lme4 package (Bates, Mächler,
26 Bolker, & Walker, 2014) for estimating fixed and random coefficients (subjects). Our focus is
27 on the coefficient between N1 latency and RT, or between N1 and VPP latencies, modelled as
28 fixed effects in separate models. Variation in intercept across subjects is modelled as a random
29 effect; hence the use of a linear mixed model. Our main results concern the coefficient
30 associated with our fixed effects, which is evaluated in two ways. First, we examine an anova-
31 based model comparison between a subjects-only model and the subjects-plus-coefficient


1 model (the full model). Second, and more importantly, we use a parametric bootstrap of the full
2 model to generate a confidence interval for the coefficient. This package is supplied in the R
3 system for statistical computing (The R Development Core Team, 2011). For a comparison
4 with more traditional methods, we also include the results for repeated-measures multiple
5 regression analysis (rmMRA). Performing an rmMRA is simple: Multiple linear regressions
6 are performed separately for each subject, then a t-test can be performed to determine if the
7 mean of a coefficient value across subjects, is significantly different from zero.

8

9 **3 Results**


10 **3.1 Gap-metric functions**

11 Our main data are mean ERP for each condition and each subject. A nice visual summary
12 for each subject can be constructed by what we call a ‘stack plot’: ERP stacked vertically across
13 conditions (in order of gap), and colour-coded for amplitude. The stack plot for subjects 1 is
14 shown in Figure 3 (code for producing this stack plot is available on Github:
15 <https://github.com/SourCherries/firecracker>. Stack plots for the remainder of subjects can be found
16 in supplementary Figure 1). A large time-course, from -800 to 600 ms is shown, so that one can
17 see responses to both masking and target stimuli. The main observation is a systematic change
18 in shape and overall timing from the N170 condition to the widest gap, and then to smaller and
19 smaller gaps: as a mask is introduced and its temporal proximity to the target increases, the
20 neural response to the target appears to delay and widen proportionally. We can quantify these
21 relations more precisely by examining the relation between gap (ms) and N1 peak latency (ms),
22 N1 single-trial jitter (SD ms), and reaction time (ms).

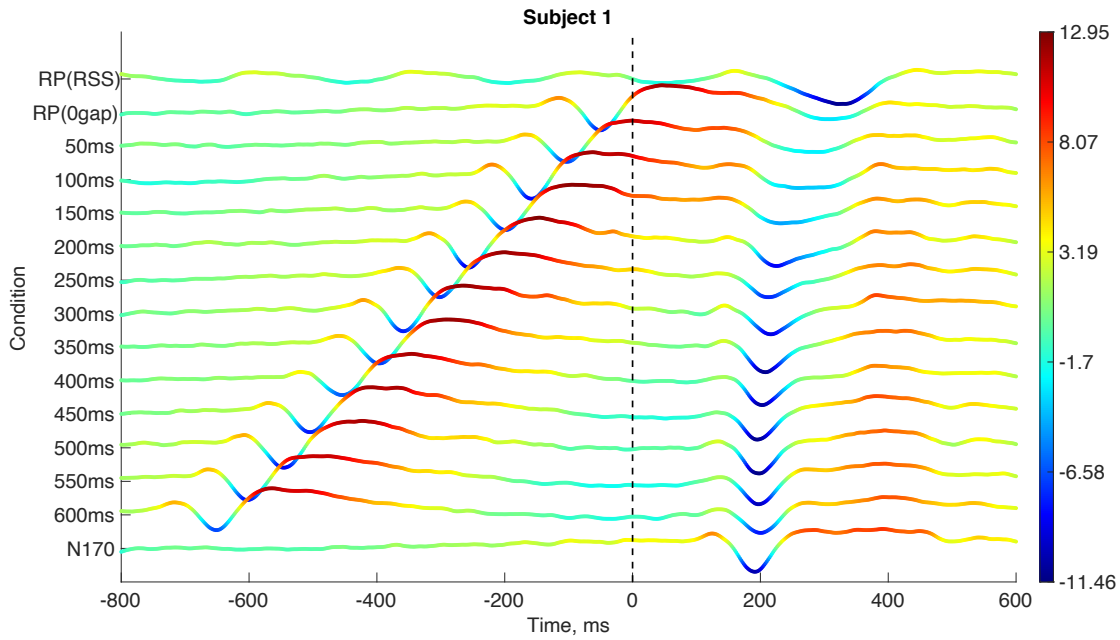


1
 2 Figure 3. ERP stack plot for subject 1 (top). Mean ERPs are stacked vertically across conditions and voltage is
 3 colour-coded, with a corresponding colour-bar to the right.

4 Each gap function (N1 latency, jitter and RT), measured separately for each subject, is
 5 normalized by its respective value for the N170 condition. We do this because the N170 does
 6 not have a 'gap', since there is no mask in that condition (arguably, 'gap' is effectively infinity).
 7 Normalization is also a way to easily check if values are different from their natural baseline
 8 (N170): latencies should be mostly above 0, as with jitter values and RT. For N1 latency and
 9 RT, N170 latencies are subtracted. And for jitter, which are in units of standard deviation (ms),
 10 we take the log of jitter divided by N170-jitter.

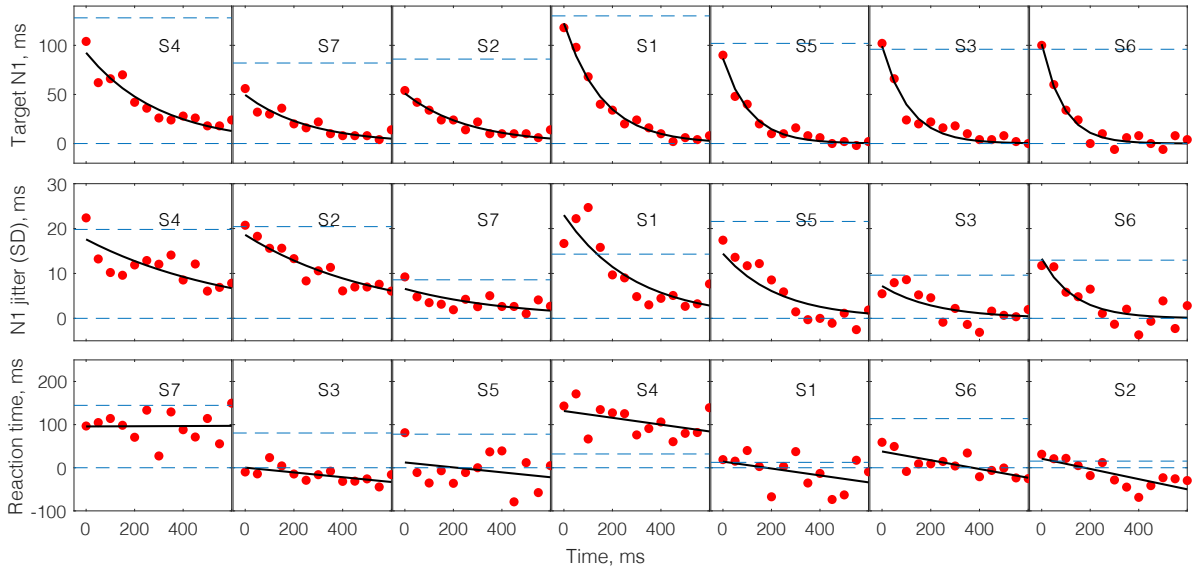

1
2
3
4

Figure 4. Gap functions for N1 latency, N1 jitter and reaction time, from top to bottom. The upper dash lines represent RP (RSS condition), and the bottom dash lines represent N170 (no forward mask condition).

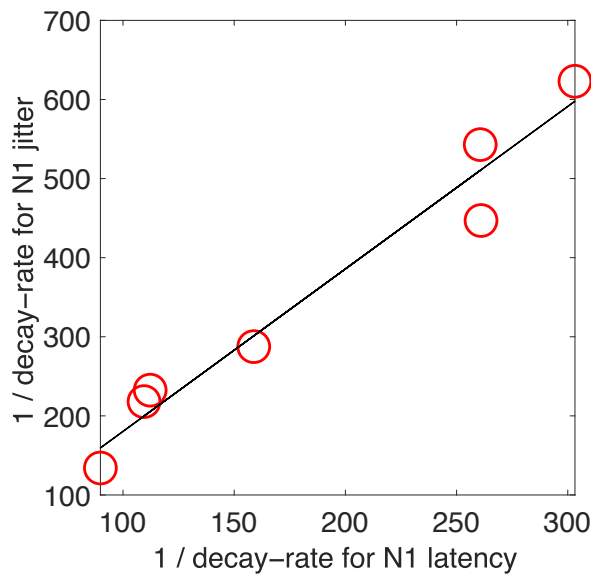

5
6
7
8

Figure 5. Decay rates of N1 latency and jitter are related by a power function. The fitted line is $k_{n1_jitter} = m * k_{n1_latency}^{\gamma}$, where best fit parameters are $m=0.0884$ and $k = 1.6315$.

9 Gap-metric functions for N1 latency, jitter, and reaction time, are shown in Figure 4. For
10 each subject, N1 latencies and jitters are a clear exponential function of gap. There are also
11 clear individual differences in decay rate, so we order gap functions for latency and jitter from
12 subjects with the smallest to the highest decay rates (from high k to small k), which are related


1 by a power function almost perfectly between latency and jitter (Figure 5). Therefore, N1 jitter
2 and latency decay ‘together’.

3 Figure 4 also shows a clear trend for an inverse relation between RT and gap (lines are fit
4 here instead of exponential functions, and subjects are ordered by intercept). RT is more closely
5 examined in the next section.

6 To further confirm that the jitters are the main factor that widen the target N1s, we
7 removed the variance of the single trial latencies by aligning the single-trial peaks then averaged
8 the trials that belong to each condition. All the average N1s appeared to have similar width after
9 removing the single trial jitters (Supplement Figure 2).

10 In agreement with the studies in our survey (Figure 1), our results (Figure 3 and 4)
11 show that the forward-mask changes the timing of the N1 waveform, depending on how close
12 it is to the target image: the smaller the gap, the greater the change in N1 (both delay and
13 widening). If that is true, then one would also expect that the speed of a subject’s own neural
14 response to the mask - as an intermediate event between mask and target - would have a
15 similar effect: if their mask-N1 is very slow (long latency) then their ‘effective gap’ is much
16 smaller than the ‘nominal gap’ value; but if their mask-N1 is very rapid (short latency) then
17 their ‘effective gap’ is closer to the ‘nominal gap’ between mask- and target-image onsets.
18 Therefore, individual differences in mask-N1 latency should accurately predict individual
19 differences in target-N1 decay rates. As expected, individual differences in decay rate, for
20 both N1 latency and jitter, are excellently predicted by the latency of a subject’s N1 response
21 to the masking stimuli (Correlation between Mask N1 latency and parameter k of target N1
22 latency: $r = -0.8583$, $p = 0.0134$; Correlation between Mask N1 latency and parameter k
23 of target N1 jitter: $r = -0.9118$, $p = 0.0042$) (Figure 6).

24

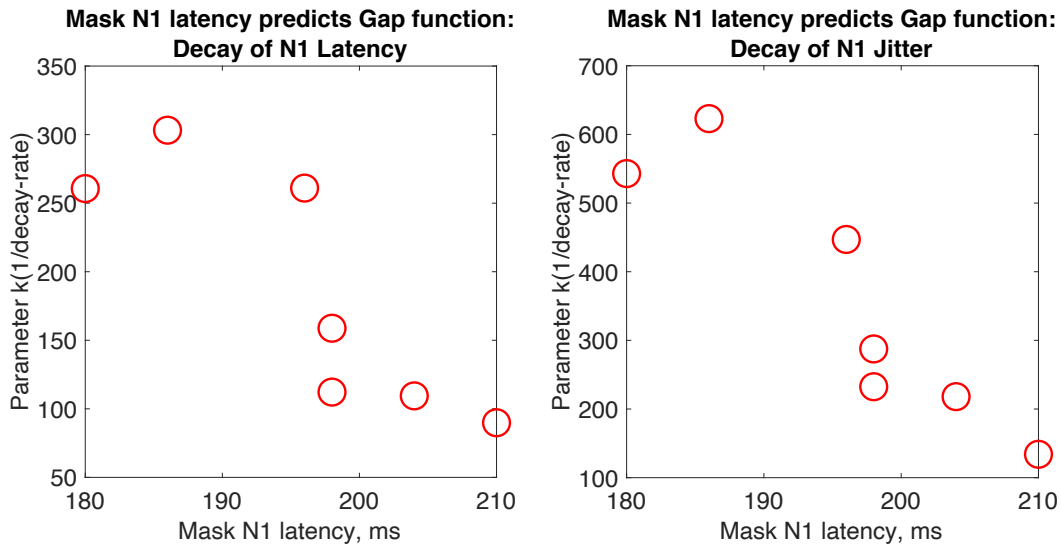

1
2 Figure 6. Latency of N1 response to masking stimulus predicts k-parameter (1/decay-rate) of target-N1, for both
3 N1 latency and N1 jitter.
4

5 3.2 N1 latency and RT

6 We employ both a linear mixed model (LMM) and repeated-measures multiple-
7 regression analysis (rmMRA). For LMM, we perform 2 model comparisons. First, we compare
8 subject-intercept only, versus subject-intercept plus N1-latency, with reaction time (RT) as the
9 dependent variable. These models are not nested; they have different fixed-effect structures.
10 Therefore, we estimate these models using maximum likelihood estimation rather than
11 restricted maximum likelihood (Knoblauch & Maloney, 2012). A LMM without N1-latency
12 fits significantly worse than the complete model, with a delta-Chi-square (1 d.f.) = 20.55, $p =$
13 $5.798e-06$, for the decrease in log likelihood. Similarly, rmMRA results (summarised in Table
14 2, along with result for the full LMM model), demonstrate a significant N1-latency and RT
15 correlation. An additional nested, model comparison, that examined the effect of including
16 random slopes was insignificant, with a delta-Chi-square (1 d.f.) = 0.96, $p = 0.33$. Evaluation
17 of the N1-latency and RT correlation can be made on the significance of the LMM model
18 comparison, and the rmMRA. However, p-values obtained from model comparisons of LMM
19 (Knoblauch and Maloney, 2012), and from rmMRA (Baayen, Davidson, & Bates, 2008), tend
20 to be liberal, so we focus mainly on the confidence intervals of effects, which are based on a
21 parametric bootstrap of 1000 samples from our model based on N1-latency and random subject
22 intercepts (using restricted maximum likelihood). The 95-percent confidence interval for the
23 coefficient for N1-latency is [0.344, 0.845]. The point estimate (shown in Table 2) is 0.59, so

1 for every 10 ms delay in N1, we expect a delay in reaction time of about 6 ms.

2

	LMM			rmMRA		
	Coefficient	SE	t	Coefficient	SE	t
Mean RT, ms	524.84	35.32	14.86	503.06	23.65	21.27
N1 latency, ms	0.59	0.12	4.81	0.71	0.14	4.95

Table 2. Summary of fixed effects for both LMM (using restricted maximum likelihood) and rmMRA models of RT, predicted by N1-latency. Additionally, for the LMM, we have a random effect (not shown in this table): the standard deviation associated with subject (intercept) is 61.44, which ends up being approximately the same as the SD of intercepts measured with rmMRA. $t > 2.4$ is significant at 5% level (two-tailed).

3

4 **3.3 N1 and VPP latencies**

5 In the N170 literature, the VPP component is sometimes measured alongside the N170
6 component. Joyce and Rossion (2005) find that the amplitudes of the N170 and VPP
7 components vary in a precisely inverse manner and the peaks of the N170 and VPP are
8 temporally coincident. If the N170 latencies were delayed by the forward mask, VPP latencies
9 should also be delayed along with the N170 latencies; as with the timing of every pair of N1
10 and VPP in each gap condition. In other words, the N170 latencies should correlate with the
11 VPP latencies, as shown by the LMM below.

12 For LMM, first we compare subject-intercept only, versus subject-intercept plus VPP-
13 latency. We estimate these models using maximum likelihood estimation. A LMM without
14 VPP-latency fits significantly worse than the complete model, with a delta-Chi-square (1 d.f.)
15 = 173.7, $p = 2.2e-16$, for the decrease in log likelihood. Similarly, rmMRA results (summarised
16 in Table 3, along with result for the full LMM model), demonstrate a significant VPP-latency
17 and N1-latency correlation. An additional nested, model comparison, that examined the effect
18 of including random slopes was insignificant, with a delta-Chi-square (1 d.f.) = 2.06, $p = 0.15$.
19 Evaluation of the VPP- and N1-latency correlation can be made on the significance of the LMM

1 model comparison, and the rmMRA. Focussing on our LMM of N1-latency, based on VPP
 2 latency and random subject intercepts, we perform a parametric bootstrap of 1000 samples
 3 (using restricted maximum likelihood). The 95-percent confidence interval for N1-latency is
 4 [0.79, 0.94].

	LMM			rmMRA		
	Coefficient	SE	t	Coefficient	SE	t
Mean N1 latency, ms	31.521	8.944	3.524	34.78	17.081	2.04
VPP latency, ms	0.862	0.038	22.458	0.84	0.082	10.32

5
 6 Table 3. Summary of fixed effects for both LMM (using restricted maximum likelihood) and
 7 rmMRA models of N1-latency, predicted by VPP-latency. Additionally for the LMM, we
 8 have a random effect (not shown in this table): the standard deviation associated with subject
 9 (intercept) is 9.2, which ends up being slightly higher than the SD of intercepts measured with
 10 rmMRA (8.8). $t > 2.4$ is significant at 5% level (two-tailed).


11
 12 **3.4 Topographies**

13 Analysis described here measures matches in topographical distributions between time
 14 frames, and between conditions. Inner-products were used instead of (normalised) correlations
 15 because measuring correlation would require centring and normalising each topography on a
 16 frame-by-frame basis. However, such normalisation, we argue, would throw away information
 17 about changes in polarity across time, as well as overall voltage energy.

18 Assuming the N1 topography from the N170 condition is a unique marker associated with
 19 processing at N1 (Maurer et al., 2005), the strength of its inner-product with topographies from
 20 other gap conditions should roughly predict the timing of the N1 in those conditions. How well
 21 are N1 latencies in each gap condition predicted by their topographical match with the N170
 22 condition at N1?

23 In each gap condition, we measured the time course of inner-products between the N1

1 topography from the N170 condition to all other topographies in that condition. If the N1 peak
 2 is similar across gap conditions, in the sense that it reflects the same process that underlies the
 3 N1 in the N170 condition, then latency of the maximum inner-product along the time-course
 4 for a given gap condition should roughly match the timing of the N1 in that condition. In
 5 addition, this logic also applies to the RSS condition. To be clear about this analysis, we include
 6 markers in Figure 7 that depict both the timing of N1 latency (black triangles), and the timing
 7 of the max inner-product with N170 topography (red, upside down triangles). One can clearly
 8 see that maximum latencies follow N1 latencies across gap condition. To precisely quantify
 9 this correlation for every subject, we include a scatter plot between maximum-inner-product
 10 and N1 latencies in Figure 8, using different coloured markers for each of the 7 subjects. This
 11 plot is convincing : across gap and subject, topographical distributions across time are most
 12 similar to the N170 topography at the latency of the N1 ($r = 0.9424$, $p = 8.7283e-51$).

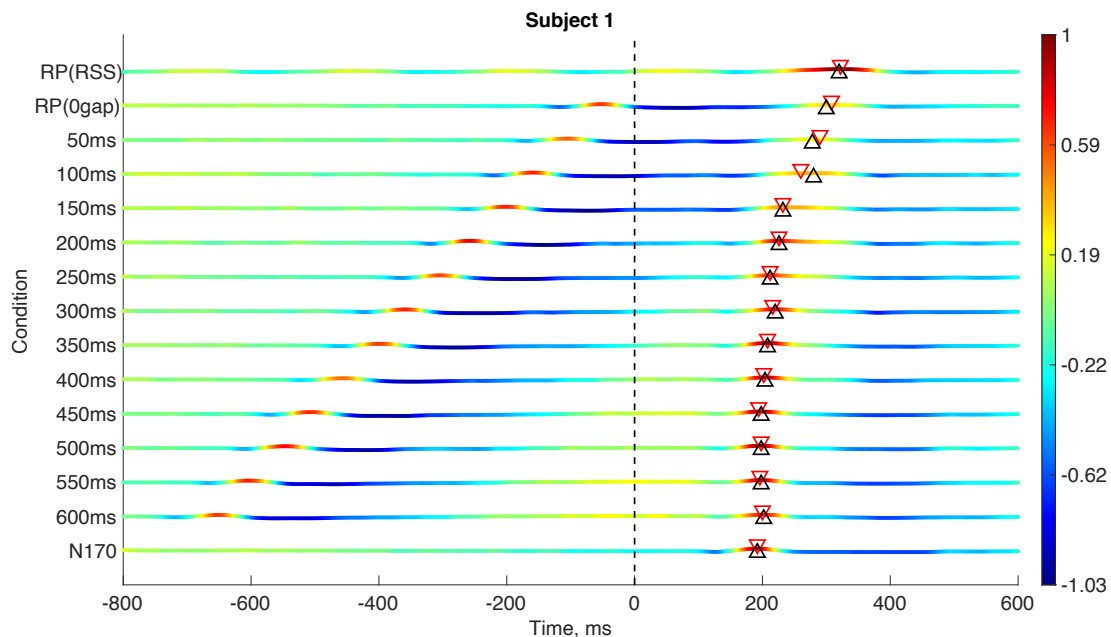


13
 14 Figure 7. Time-course of inner product between N170 topographical distribution (at N1 latency), and
 15 topographies at every other time-frame, and condition. To improve visualisation, each inner-product time-course
 16 is normalised by its maximum inner-product. In each condition, a black triangle (pointing up) shows the latency
 17 of the N1 for the mean ERP in that condition; and a red triangle (pointing down) shows the latency of the
 18 topography in that condition which has the highest inner-product with the N170 topography (at N1), within 0 to
 19 400 ms. According to our hypothesis, black and red triangles should roughly match up.

20
 21 A same analysis was done to match the RP (RSS condition) topography at RP latency
 22 with every frame of every condition. The question is similar: are topographies in each gap

1 condition most similar to the RP topography at their respective N1 latencies? The answer to the
2 question is yes. The results using RP topography are basically identical with the results using
3 N170 topography; the RP version of figure 7 and 8 can be found in the supplementary material
4 (Supplementary Figure 4 and 5)

5

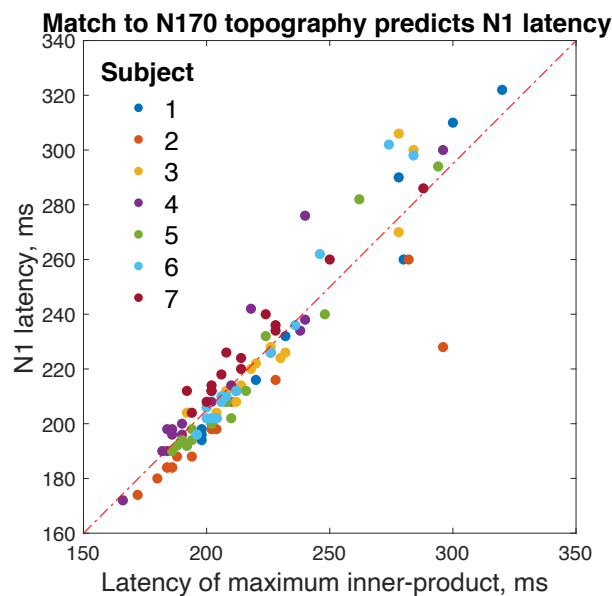

6

7 Figure 8. The latency of maximum inner-product with N170 topography (at N1) for each gap condition, predicts
8 the N1 latency for that condition, for each subject. For clarity, note that, the x-axis here corresponds to the black
9 triangles depicted in Figure 7 (for subjects S1); while the y-axis corresponds to the red triangles in that Figure.

10

11 4 Discussion

12 The current study tested the hypothesis that the N170 can be nudged forward by forward-
13 masking into a component that is morphologically equivalent to an RP. All aspects of waveform
14 morphology revealed a full picture of how ISIs and forward masks influence the target N1 and
15 therefore provided compelling evidence that: (1) The delayed N1 can be recognized as N170;
16 and (2) RP is a delayed version of N170. For each subject, N1 latency fell from its highest level
17 in the 0-gap (quasi-RP) condition, toward the asymptotic level given by the latency in the no-
18 mask (N170) condition. Individual differences in the decay parameter were well predicted by
19 how quickly their mask-evoked N1 occurred: Faster N1 responses to the mask resulted in
20 slower decay rates. Single-trial N1 jitter, our approximation of N1 width, behaved in the same
21 manner as N1 latency: for each subject, an exponential decay with gap increase; and decay

1 parameters well predicted by latency of mask-evoked N1. Target N1 of all the conditions had
2 similar width after removing single-trial N1 jitter. Importantly, reaction times were also delayed
3 by gap reductions, and were significantly correlated with N1 latency, consistent with the idea
4 that a delayed N1 signals a delay in information processing. Finally, we demonstrate that the
5 specific topographical distribution of voltage at N1, measured in the N170 condition, is both
6 unique to the N1 time-point in that condition, and best matched to a small temporal window
7 around the N1 time-point, for every gap condition and RSS condition (typical RP): 1)
8 topographical similarity to the N170 (at N1) follows the delay in N1 latency as the gap between
9 mask and target narrows. 2) topographical similarity to the N170 in the RSS condition appears
10 at same time as the latency of the typical RP.

11 **The delayed N170 should be categorized as N170**

12 The finely-spaced gap conditions spanning 0~600 ms allowed us to uncover a continuum
13 of changes in N1 latency and peak width. In agreement with the results of the studies using the
14 short ISIs summarised in our introduction, our results showed that target N1 was delayed when a
15 short ISI was used. Moreover, the width of target N1 became wider and noisier when the gap
16 is short, in line with Su et al. (2012). Both latency delay and the wider width can be explained
17 by short ISIs and forward masks using an exponential decay function, and the decay rate can
18 be predicted by the mask N1 latency. When we removed the jitter and aligned the single-trial
19 peak, the N1 widths of different conditions were actually similar (Supplementary Figure 2),
20 indicating that the single-trial jitter was the main cause of the widened width of N1.

21 In addition to the studies summarized in Figure 1, of which 4 studies utilized adaptation
22 (Cao et al., 2014; Fu et al., 2012; Kuehl et al., 2013; Shen et al., 2017), many other N170 studies
23 have adopted short ISI, such as studies using priming (Campanella et al., 2000; Jemel, Pisani,
24 Calabria, Crommelinck, & Bruyer, 2003) and rapid serial visual presentation (RSVP)(Gao et
25 al., 2011; W. Luo, Feng, He, Wang, & Luo, 2010; W. Luo et al., 2013; Robinson, Plaut, &
26 Behrmann, 2017). If the N1 latency was out of the typical N170 time window (as almost all
27 these RSVP studies have shown), these studies would have faced one problem, that is: when
28 did the measured effect actually happen? At ~170ms where the typical N170 occurs? Or at the
29 actual latency the effect was measured? This question is difficult to answer based only on the
30 results of these prior studies. Even if the topography of the N1 seemed similar with the
31 topography of a typical N170 (Gao et al., 2011; W. Luo et al., 2010, 2013), there was no
32 evidence supporting the idea that the N1 was merely pushed forward by the previous stimulus,
33 and that the topography was not by chance akin to N170. Now our current study has provided

1 this missing evidence.

2 Given that both the signal of the whole brain and the behavioral responses were delayed
3 by the forward masks, we can conclude that the whole information process was delayed. One
4 plausible explanation for the delay could be that it was the result of the refractory period of
5 the visual system (Berry & Meister, 1998; M. C. Teich, Matin, & Cantor, 1978; Malvin Carl
6 Teich & Diamant, 1980). Before processing the next stimulus, neurons require time to recover
7 from processing the previous, which is compatible with the inverse correlation between mask
8 N1 latency and the parameter k (1/decay rate) (Figure 6), suggesting that the slower the brain
9 responds to the forward mask, the more the target N1 latency is affected. This explanation based
10 on the refractory period could hold for not only the paradigms using forward masks, but also
11 the paradigms presenting any kinds of visual stimuli preceding the target with short or 0 ISI.
12 Another implication of a delay in the entire whole-brain signal could be that, not only N170,
13 but also other visual evoked potentials, such as P1, N2 and N400 etc., could also be delayed, as
14 long as there is a forward stimulus. Thus, greater caution should be taken when pinpointing a
15 cognitive process to a specific time window when short ISI is used, especially N400 studies
16 (e.g. Kutas & Hillyard, 1980), in which normally the stimuli of sentences are presented word-
17 by-word in succession with very short or zero ISI.

18 **RP is a delayed version of N170**

19 In order to determine if RP is a delayed version of the N170, we measured RP in both the
20 0-gap condition (with one forward mask, analogous to Dien et al., 2013) and the RSS condition.
21 The former allowed us to determine if RP was really a delayed response, for the 0-gap condition
22 was the end of the continuum of the gap conditions. The latter condition, employing RSS,
23 confirmed that the delayed N1 was same as the typical RP, as the topographical similarity result
24 showed (Figure 7, 8 and Supplementary Figure 3,4,5). Therefore, the results from both
25 conditions have provide the proper evidence for determining whether RP is a delayed version
26 of the N170.

27 There are a number of implications for an ambiguity between N170 and RP components.
28 Differently labelled components with different latencies are often assumed to reflect different
29 levels of processing. This can be seen in one review that has included RP and N170: Due to
30 latency differences, Dien et al. (2009) relate RP and N170 to different stages in word processing.
31 However, our results now provide us with greater reason to question interpretations like this:
32 Perhaps the same stage of processing was reflected by both components, only with a change in

1 latency. Another implication of RP-N170 ambiguity is that the semantic-processing often
2 associated with RP may prove to be more important to the N170 than is realised in that literature.
3 Most N170 studies focus on the unique visual attributes of a stimulus-category that are often
4 associated with experts. Nonetheless, name-object associations have been found to significantly
5 modulate N170 amplitudes (Heisz & Shedden, 2009); consistent with the idea that the boundary
6 between RP and N170 processing is quite vague. Nonetheless, none of this would be surprising
7 on a physiological level, since we already know that single-cell responses in human IT, believed
8 to underlie much of N170, are sensitive to both visual and semantic attributes (Quiroga, Reddy,
9 Kreiman, Koch, & Fried, 2005). Finally, RP is often described as being more selective for
10 differences in object category, especially familiarity (Martín-Loeches, 2007). While this was
11 mostly conjecture in the past, we have recently shown that, in some conditions, the use of a
12 forward mask can amplify N1-amplitude differences between stimulus categories (Luo et al.,
13 2019). If N170 and RP are not as different as previously thought, then the advantage of using
14 forward-masking as a tool to enhance differential responses should be explored in a wider range
15 studies, especially those in the area of expert object recognition.

16 This ERP/N170 paper is unusual in that, instead of focusing on stimulus selectivity, we
17 focus on waveform morphology: component latency, width, and topographical distribution. Our
18 parametric manipulation of mask-to-target SOA (gap) allowed us to precisely measure a
19 gradual, continuous change in these morphological features between the opposite ends of what
20 are considered to be ‘N170’ and ‘RP’ conditions. And while the systematic transition between
21 ‘N170’ and ‘RP’ is consistent with the idea that the RP is a delayed version of the N170, form
22 does not necessarily equal function. Nonetheless, we remain optimistic, based on two results.
23 First, our correlation between N1 latency and reaction time suggests that delays in N1 are delays
24 in information processing. Second, we show in another study that the RP and N170 share the
25 same stimulus selectivity in 3 different types of stimulus-category contrasts (Luo et al., 2019).
26 This is an important first step. Ideally, the time-course (and channel distribution) of information
27 processing should be inferred from the data rather than simply assumed to occur at the latencies
28 of pre-defined components (Rousselet et al., 2010; Rousselet & Pernet, 2011);. By taking such
29 an approach, one can determine if ERP sensitivity to stimulus information truly occurs where
30 we expect it to: near the N1 or RP component, depending on the presence of a forward mask
31 and its temporal proximity to the target stimulus. However, that would require a different, more
32 ambitious experimental design, requiring many more trials, and using meaningful stimulus
33 variations that we expect the visual brain to be sensitive to.

1 One can argue that neither the RSS paradigm nor forward-masking are essential for
2 obtaining RP, they are just tools to amplify RP more effectively (Martín-Loeches, 2007). Let's
3 take a closer look into the RP studies that didn't use forward masks. First, in the first RP study
4 by Rudell (1991), the RP with 250 ms latency was a difference wave derived from the
5 subtraction between the target condition presenting one target image on each trial and the
6 control condition displaying only a meaningless image on each trial. This genuine 250 ms RP
7 was, obviously, different from the RP delayed by the forward mask(s). Second, Mari-Beffa,
8 Valdés, Cullen, Catena, & Houghton (2005) didn't use forward masks and yet claimed they
9 were measuring RP. However, the latency of their RP, about 200 ms, was in the range of N170
10 latency. Last but not least, the RP observed by Proverbio & Riva (2009), who didn't use forward
11 masks as well, was in fact the second negative deflection, unlike the other RP that was the first.
12 In short, the RPs that were measured without forward masks were either indistinguishable from
13 N170 or distinguishable from the RP measured with forward masks. Since the RP reported by
14 Rudell (see Rudell, 1991 to 2010) was actually a positive wave instead of N1, was that RP also
15 a delayed brain signal? The answer is yes, as long as forward masks were used. Besides, the
16 reason why that RP was a positive wave might be due to the bipolar recording Rudell used.

17

18 **Conclusion**

19 In summary, systematic properties of our unique 'gap-metric' functions and our time-
20 courses of topographical similarity, all suggest that shorter ISI leads to longer N170 latency, in
21 other words, the delayed N1 should still be recognized as N170. The plausible interpretation of
22 the delay could be the refractory period of the visual system. The implication of the relationship
23 between ISI and the N170 latency also applies for other visual ERPs, that is if a short ISI is
24 used, the component delay should be taken into account when interpreting the time course of
25 the measured effect. Our study also suggests an effective tool to estimate the N170 latency
26 when the peak is hard to identify (i.e., the topographical similarity measurement with dot-
27 product)

28 Taken together with the results of the gap conditions, the RSS condition further confirmed
29 that the RP waveform is a delayed version of the N170. This implies potential benefits from
30 greater cross-talk between RP and N170 literatures, most especially in how these literatures
31 emphasise different types of information-processing, and in the potential use of forward masks
32 as a tool for enhancing stimulus selectivity of the N170 (Luo et al., 2019). In general, our

1 findings suggest that greater caution should be taken when classifying ERP components based
2 on morphology, and that the effect of specific experimental designs (e.g., ISI, forward masks)
3 on the morphology of these components should be considered when comparing components.
4 But given the flexible nature of component morphology we demonstrate in this study, perhaps
5 morphology-based classification should be replaced or at least validated by data-driven
6 approaches to ERP analysis (e.g., Rousselet et al., 2010; Rousselet & Pernet, 2011).

7

8 **Acknowledgments**

9 National Natural Science Foundation of China (NSFC) to Carl M. Gaspar (grant No.:
10 31371132). This study was funded by the National Natural Science Foundation of China
11 (NSFC) (grant No.: 31400974), Zhejiang Provincial Natural Science Foundation of China
12 (ZJNSF) (grant No.: LY18C090010), and Zhejiang Provincial Dominant and Characteristic
13 Disciplines Cultivation project of College of Education of Hangzhou Normal University
14 (grant No.:9JYXK023) to Ye Zhang.

15

16

17 **Reference**

- 18 Baayen, R. H., Davidson, D. J., & Bates, D. M. (2008). Mixed-effects modeling with crossed
19 random effects for subjects and items. *Journal of Memory and Language*, *59*(4), 390–
20 412. <https://doi.org/10.1016/j.jml.2007.12.005>
- 21 Bates, D., Mächler, M., Bolker, B., & Walker, S. (2014). *Fitting Linear Mixed-Effects Models*
22 *using lme4*. Retrieved from <http://arxiv.org/abs/1406.5823>
- 23 Bentin, S., Mouchetant-Rostaing, Y., Giard, M. H., Echallier, J. F., & Pernier, J. (1999). ERP
24 Manifestations of Processing Printed Words at Different Psycholinguistic Levels: Time
25 Course and Scalp Distribution. *Journal of Cognitive Neuroscience*, *11*(3), 235–260.
26 <https://doi.org/10.1162/089892999563373>
- 27 Bentin, Shlomo, Allison, T., Puce, A., Perez, E., & McCarthy, G. (1996).

- 1 Electrophysiological studies of face perception in humans. *Journal of Cognitive*
2 *Neuroscience*. <https://doi.org/10.1162/jocn.1996.8.6.551>
- 3 Berry, M. J., & Meister, M. (1998). Refractoriness and neural precision. *Advances in Neural*
4 *Information Processing Systems*, 110–116. [https://doi.org/10.1523/jneurosci.18-06-](https://doi.org/10.1523/jneurosci.18-06-02200.1998)
5 02200.1998
- 6 Brainard, D. H. (1997). The Psychophysics Toolbox. *Spatial Vision*, 10(4), 433–436.
7 <https://doi.org/10.1163/156856897X00357>
- 8 Campanella, S., Hanoteau, C., Depy, D., Rossion, B., Bruyer, R., Crommelinck, M., & Guerit,
9 J. M. (2000). Right N170 modulation in a face discrimination task: An account for
10 categorical perception of familiar faces. *Psychophysiology*, 37(6), 796–806.
11 <https://doi.org/10.1111/1469-8986.3760796>
- 12 Cao, X. H., Jiang, B., Li, C., & He, Z. Q. (2014). Rapid adaptation effect of N170 for printed
13 words. *Perceptual and Motor Skills*, 119(1), 191–202.
14 <https://doi.org/10.2466/24.22.PMS.119c15z6>
- 15 Carreiras, M., Armstrong, B. C., Perea, M., & Frost, R. (2014). The what, when, where, and
16 how of visual word recognition. *Trends in Cognitive Sciences*, 18(2), 90–98.
17 <https://doi.org/10.1016/j.tics.2013.11.005>
- 18 Delorme, A., & Makeig, S. (2004). EEGLAB: An open source toolbox for analysis of single-
19 trial EEG dynamics including independent component analysis. *Journal of Neuroscience*
20 *Methods*, 134(1), 9–21. <https://doi.org/10.1016/j.jneumeth.2003.10.009>
- 21 Dien, J. (2009). The neurocognitive basis of reading single words as seen through early
22 latency ERPs: A model of converging pathways. *Biological Psychology*, 80(1), 10–22.
23 <https://doi.org/10.1016/j.biopsycho.2008.04.013>
- 24 Dimigen, O., Kliegl, R., & Sommer, W. (2012). Trans-saccadic parafoveal preview benefits
25 in fluent reading: A study with fixation-related brain potentials. *NeuroImage*, 62(1),
26 381–393. <https://doi.org/10.1016/j.neuroimage.2012.04.006>
- 27 Fu, S., Feng, C., Guo, S., Luo, Y., & Parasuraman, R. (2012). Neural adaptation provides
28 evidence for categorical differences in processing of faces and Chinese characters: An
29 ERP study of the N170. *PLoS ONE*, 7(7). <https://doi.org/10.1371/journal.pone.0041103>
- 30 Gao, X., Deng, X., Chen, N., Luo, W., Hu, L., Jackson, T., & Chen, H. (2011). Attentional

- 1 biases among body-dissatisfied young women: An ERP study with rapid serial visual
2 presentation. *International Journal of Psychophysiology*, 82(2), 133–142.
3 <https://doi.org/10.1016/j.ijpsycho.2011.07.015>
- 4 Grainger, J., & Holcomb, P. J. (2009). Watching the Word Go by: On the Time-course of
5 Component Processes in Visual Word Recognition. *Language and Linguistics Compass*,
6 3(1), 128–156. <https://doi.org/10.1111/j.1749-818X.2008.00121.x>
- 7 Harris, A., & Nakayama, K. (2007). Rapid face-selective adaptation of an early extrastriate
8 component in MEG. *Cerebral Cortex*, 17(1), 63–70.
9 <https://doi.org/10.1093/cercor/bhj124>
- 10 Heisz, J. J., & Shedden, J. M. (2009). Semantic Learning Modifies Perceptual Face
11 Processing. *Journal of Cognitive Neuroscience*, 21(6), 1127–1134.
12 <https://doi.org/10.1162/jocn.2009.21104>
- 13 Hinojosa, J. A., Martín-Loeches, M., Gómez-Jarabo, G., & Rubia, F. J. (2000). Common
14 basal extrastriate areas for the semantic processing of words and pictures. *Clinical*
15 *Neurophysiology*, 111(3), 552–560. [https://doi.org/10.1016/S1388-2457\(99\)00275-8](https://doi.org/10.1016/S1388-2457(99)00275-8)
- 16 Jemel, B., Pisani, M., Calabria, M., Crommelinck, M., & Bruyer, R. (2003). Is the N170 for
17 faces cognitively penetrable? Evidence from repetition priming of Mooney faces of
18 familiar and unfamiliar persons. *Cognitive Brain Research*, 17(2), 431–446.
19 [https://doi.org/10.1016/S0926-6410\(03\)00145-9](https://doi.org/10.1016/S0926-6410(03)00145-9)
- 20 Joyce, C., & Rossion, B. (2005). The face-sensitive N170 and VPP components manifest the
21 same brain processes: The effect of reference electrode site. *Clinical Neurophysiology*,
22 116(11), 2613–2631. <https://doi.org/10.1016/j.clinph.2005.07.005>
- 23 Kleiner, M., Brainard, D., Pelli, D., Ingling, A., Murray, R., & Broussard, C. (2007). What's
24 new in psychtoolbox-3. *Perception*, 36(14), 1–16. <https://doi.org/10.1068/v070821>
- 25 Knoblauch, K., & Maloney, L. T. (2012). Modeling psychophysical data in R. In *Modeling*
26 *Psychophysical Data in R*. <https://doi.org/10.1007/978-1-4614-4475-6>
- 27 Kuehl, L. K., Brandt, E. S. L., Hahn, E., Dettling, M., & Neuhaus, A. H. (2013). Exploring
28 the time course of N170 repetition suppression: A preliminary study. *International*
29 *Journal of Psychophysiology*, 87(2), 183–188.
30 <https://doi.org/10.1016/j.ijpsycho.2012.12.007>

- 1 Kutas, M., & Hillyard, S. A. (1980). Reading senseless sentences: Brain potentials reflect
2 semantic incongruity. *Science*, *207*(4427), 203–205.
3 <https://doi.org/10.1126/science.7350657>
- 4 Libet, B., Libet, B., Gleason, C. A., Wright, E. W., & Pearl, D. K. (1993). Time of Conscious
5 Intention to Act in Relation to Onset of Cerebral Activity (Readiness-Potential). In
6 *Neurophysiology of Consciousness*. https://doi.org/10.1007/978-1-4612-0355-1_15
- 7 Lin, S. E., Chen, H. C., Zhao, J., Li, S., He, S., & Weng, X. C. (2011). Left-lateralized N170
8 response to unpronounceable pseudo but not false Chinese characters-the key role of
9 orthography. *Neuroscience*, *190*, 200–206.
10 <https://doi.org/10.1016/j.neuroscience.2011.05.071>
- 11 Lopez-Calderon, J., & Luck, S. J. (2014). ERPLAB: an open-source toolbox for the analysis
12 of event-related potentials. *Frontiers in Human Neuroscience*, *8*.
13 <https://doi.org/10.3389/fnhum.2014.00213>
- 14 Luo, C., Chen, W., Zhang, Y., & Gaspar, C. M. (2019). Rapid stream stimulation can enhance
15 the stimulus selectivity of early evoked responses to written characters but not faces.
16 *PLoS ONE*, *14*(3), e0213637. <https://doi.org/10.1371/journal.pone.0213637>
- 17 Luo, W., Feng, W., He, W., Wang, N. Y., & Luo, Y. J. (2010). Three stages of facial
18 expression processing: ERP study with rapid serial visual presentation. *NeuroImage*,
19 *49*(2), 1857–1867. <https://doi.org/10.1016/j.neuroimage.2009.09.018>
- 20 Luo, W., He, W., Yang, S., Feng, W., Chen, T., Wang, L., ... Luo, Y. J. (2013).
21 Electrophysiological evidence of facial inversion with rapid serial visual presentation.
22 *Biological Psychology*, *92*(2), 395–402. <https://doi.org/10.1016/j.biopsycho.2012.11.019>
- 23 Marí-Beffa, P., Valdés, B., Cullen, D. J. D., Catena, A., & Houghton, G. (2005). ERP
24 analyses of task effects on semantic processing from words. *Cognitive Brain Research*,
25 *23*(2–3), 293–305. <https://doi.org/10.1016/j.cogbrainres.2004.10.016>
- 26 Martens, U., Schweinberger, S. R., Kiefer, M., & Burton, A. M. (2006). Masked and
27 unmasked electrophysiological repetition effects of famous faces. *Brain Research*,
28 *1109*(1), 146–157. <https://doi.org/10.1016/j.brainres.2006.06.066>
- 29 Martín-Loeches, M. (2007). The gate for reading: Reflections on the recognition potential.
30 *Brain Research Reviews*, *53*(1), 89–97. <https://doi.org/10.1016/j.brainresrev.2006.07.001>

- 1 Martín-Loeches, M., Hinojosa, J. A., Fernández-Frías, C., & Rubia, F. J. (2001). Functional
2 differences in the semantic processing of concrete and abstract words.
3 *Neuropsychologia*, 39(10), 1086–1096. [https://doi.org/10.1016/S0028-3932\(01\)00033-1](https://doi.org/10.1016/S0028-3932(01)00033-1)
- 4 Martín-Loeches, M., Hinojosa, J. A., Gomez-Jarabo, G., & Rubia, F. J. (2001). An early
5 electrophysiological sign of semantic processing in basal extrastriate areas.
6 *Psychophysiology*, 38(1), 114–124. <https://doi.org/10.1111/1469-8986.3810114>
- 7 Maurer, U. (2008). Category specificity in early perception: face and word N170 responses
8 differ in both lateralization and habituation properties. *Frontiers in Human*
9 *Neuroscience*, 2. <https://doi.org/10.3389/neuro.09.018.2008>
- 10 Maurer, U., Brandeis, D., & McCandliss, B. D. (2005). Fast, visual specialization for reading
11 in English revealed by the topography of the N170 ERP response. *Behavioral and Brain*
12 *Functions*, 1. <https://doi.org/10.1186/1744-9081-1-13>
- 13 Maurer, U., Zevin, J. D., & McCandliss, B. D. (2008). Left-lateralized N170 Effects of Visual
14 Expertise in Reading: Evidence from Japanese Syllabic and Logographic Scripts.
15 *Journal of Cognitive Neuroscience*, 20(10), 1878–1891.
16 <https://doi.org/10.1162/jocn.2008.20125>
- 17 Milne, E. (2011). Increased Intra-Participant Variability in Children with Autistic Spectrum
18 Disorders: Evidence from Single-Trial Analysis of Evoked EEG. *Frontiers in*
19 *Psychology*, 2. <https://doi.org/10.3389/fpsyg.2011.00051>
- 20 Näätänen, R., Gaillard, A. W. K., & Mäntysalo, S. (1978). Early selective-attention effect on
21 evoked potential reinterpreted. *Acta Psychologica*. [https://doi.org/10.1016/0001-](https://doi.org/10.1016/0001-6918(78)90006-9)
22 [6918\(78\)90006-9](https://doi.org/10.1016/0001-6918(78)90006-9)
- 23 Navajas, J., Ahmadi, M., & Quian Quiroga, R. (2013). Uncovering the mechanisms of
24 conscious face perception: A single-trial study of the N170 responses. *Journal of*
25 *Neuroscience*, 33(4), 1337–1343. <https://doi.org/10.1523/JNEUROSCI.1226-12.2013>
- 26 Peter Rudell, A. (1992). Rapid stream stimulation and the recognition potential.
27 *Electroencephalography and Clinical Neurophysiology*, 83(1), 77–82.
28 [https://doi.org/10.1016/0013-4694\(92\)90135-5](https://doi.org/10.1016/0013-4694(92)90135-5)
- 29 Proverbio, A. M., & Riva, F. (2009). RP and N400 ERP components reflect semantic
30 violations in visual processing of human actions. *Neuroscience Letters*, 459(3), 142–146.

- 1 <https://doi.org/10.1016/j.neulet.2009.05.012>
- 2 Quiroga, R. Q., Reddy, L., Kreiman, G., Koch, C., & Fried, I. (2005). Invariant visual
3 representation by single neurons in the human brain. *Nature*, *435*(7045), 1102–1107.
4 <https://doi.org/10.1038/nature03687>
- 5 Robinson, A. K., Plaut, D. C., & Behrmann, M. (2017). Word and face processing engage
6 overlapping distributed networks: Evidence from RSVP and EEG investigations. *Journal*
7 *of Experimental Psychology: General*, *146*(7), 943–961.
8 <https://doi.org/10.1037/xge0000302>
- 9 Rossion, B., Gauthier, I., Tarr, M. J., Pierenne, D., Debatisse, D., & Despland, P. A. (1999).
10 The N170 occipito-temporal component is delayed to inverted faces but not to inverted
11 objects: Electrophysiological evidence of face-specific processes in the human brain.
12 *NeuroImage*, *9*(6 PART II). Retrieved from
13 <https://journals.lww.com/clinicalneuropharm/00001756-200001170-00014.fulltext>
- 14 Rousselet, G. A., Gaspar, C. M., Pernet, C. R., Husk, J. S., Bennett, P. J., & Sekuler, A. B.
15 (2010). Healthy aging delays scalp EEG sensitivity to noise in a face discrimination task.
16 *Frontiers in Psychology*, (JUL). <https://doi.org/10.3389/fpsyg.2010.00019>
- 17 Rousselet, G. A., & Pernet, C. R. (2011). Quantifying the Time Course of Visual Object
18 Processing Using ERPs: It's Time to Up the Game. *Frontiers in Psychology*, *2*.
19 <https://doi.org/10.3389/fpsyg.2011.00107>
- 20 Rudell, Alan P. (1999). The recognition potential and the word frequency effect at a high rate
21 of word presentation. *Cognitive Brain Research*, *8*(2), 173–175.
22 [https://doi.org/10.1016/S0926-6410\(99\)00018-X](https://doi.org/10.1016/S0926-6410(99)00018-X)
- 23 Rudell, Alan P., & Hu, B. (2010). Effects of long-time reading experience on reaction time
24 and the recognition potential. *International Journal of Psychophysiology*, *76*(3), 158–
25 168. <https://doi.org/10.1016/j.ijpsycho.2010.03.006>
- 26 Rudell, Alan P., & Hua, J. (1996). The recognition potential and conscious awareness.
27 *Electroencephalography and Clinical Neurophysiology*, *98*(4), 309–318.
28 [https://doi.org/10.1016/0013-4694\(95\)00265-0](https://doi.org/10.1016/0013-4694(95)00265-0)
- 29 Rudell, Alan Peter. (1991). The Recognition Potential Contrasted with the P300. *International*
30 *Journal of Neuroscience*, *60*(1), 85–111. <https://doi.org/10.3109/00207459109082040>

- 1 Shen, C., Stasch, J., Velenosi, L., Madipakkam, A. R., Edemann-Calleen, H., & Neuhaus, A.
2 H. (2017). Face identity is encoded in the duration of N170 adaptation. *Cortex*, *86*, 55–
3 63. <https://doi.org/10.1016/j.cortex.2016.10.010>
- 4 Su, I.-F., Mak, S.-C. C., Cheung, L.-Y. M., & Law, S.-P. (2012). Taking a Radical Position:
5 Evidence for Position-Specific Radical Representations in Chinese Character
6 Recognition Using Masked Priming ERP. *Frontiers in Psychology*, *3*.
7 <https://doi.org/10.3389/fpsyg.2012.00333>
- 8 Tanaka, J. W., & Curran, T. (2001). A Neural Basis for Expert Object Recognition.
9 *Psychological Science*, *12*(1), 43–47. <https://doi.org/10.1111/1467-9280.00308>
- 10 Teich, M. C., Matin, L., & Cantor, B. I. (1978). Refractoriness in the maintained discharge of
11 the cat's retinal ganglion cell. *Journal of the Optical Society of America*, *68*(3), 386–402.
12 <https://doi.org/10.1364/JOSA.68.000386>
- 13 Teich, Malvin Carl, & Diament, P. (1980). Relative refractoriness in visual information
14 processing. *Biological Cybernetics*, *38*(4), 187–191.
15 <https://doi.org/10.1007/BF00337011>
- 16 The R Development Core Team. (2011). R: A Language and Environment for Statistical
17 Computing Reference Index. In *R Foundation for Statistical Computing*. R Foundation
18 for Statistical Computing.
- 19 Winkler, I., Czigler, I., Sussman, E., Horváth, J., & Balázs, L. (2005). Preattentive binding of
20 auditory and visual stimulus features. *Journal of Cognitive Neuroscience*.
21 <https://doi.org/10.1162/0898929053124866>
- 22 Zhang, D., Luo, W., & Luo, Y. (2013). Single-trial ERP evidence for the three-stage scheme
23 of facial expression processing. *Science China Life Sciences*, *56*(9), 835–847.
24 <https://doi.org/10.1007/s11427-013-4527-8>
- 25