



HAL
open science

Going beyond the 'synthetic method': new paradigms cross-fertilizing robotics and cognitive neuroscience

Edoardo Datteri, Thierry Chaminade, Donato Romano

► To cite this version:

Edoardo Datteri, Thierry Chaminade, Donato Romano. Going beyond the 'synthetic method': new paradigms cross-fertilizing robotics and cognitive neuroscience. *Frontiers in Psychology*, In press, 10.3389/fpsyg.2022.819042 . hal-03599592v1

HAL Id: hal-03599592

<https://hal.science/hal-03599592v1>

Submitted on 7 Mar 2022 (v1), last revised 3 Jun 2022 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Going beyond the 'synthetic method': new paradigms cross-fertilizing robotics and cognitive neuroscience

Edoardo Datteri^{1*}, Thierry Chaminade², Donato Romano³

¹RoboticCSS Lab, Laboratory of Robotics for the Cognitive and Social Sciences, Department of Human Sciences for Education, University of Milano-Bicocca, Milan, Italy, Italy, ²Aix-Marseille Université, Institut de Neurosciences de la Timone, UMR 7289, CNRS, Marseille, France, France, ³The BioRobotics Institute, Sant'Anna School of Advanced Studies, Viale Rinaldo Piaggio 34, 56025 Pontedera, Pisa, Italy, Italy

Submitted to Journal:
Frontiers in Psychology

Specialty Section:
Cognition

Article type:
Review Article

Manuscript ID:
819042

Received on:
20 Nov 2021

Revised on:
11 Feb 2022

Journal website link:
www.frontiersin.org

In review

Conflict of interest statement

The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest

Author contribution statement

The authors equally contributed to the ideation and the design of the structure of the article. ED wrote sections 1 and 4. TC wrote section 2. DR wrote section 3.

Keywords

Robotics, Biomimetics, ethorobotics, Biorobotics, Philosophy of science

Abstract

Word count: 149

In so-called ethorobotics and robot-supported social cognitive neuroscience, robots are used as scientific tools for the study of animal behaviour and cognition. Building on previous epistemological analyses of biorobotics, in this article it is argued that these two research fields - ethorobotics and robot-supported social cognitive neuroscience -, widely differing from one another in the kinds of robots involved and in the research questions addressed, share a common methodology, which significantly differs from the "synthetic method" that dominated biorobotic approaches to the study of animal (including human) behaviour until recently. The methodological novelty of this strategy, the research opportunities that it opens, and the theoretical and technological challenges that it gives rise to, will be discussed with reference to the peculiarities of the two research fields. Some broad methodological issues concerning the generalization of results concerning robot-animal interaction to theoretical conclusions on animal-animal interaction will be identified and discussed.

Contribution to the field

The manuscript offers a methodological analysis of an emerging strand of biorobotics research, in which experiments involving animal-robot interaction provide empirical evidence to theorize on social behaviour in animals (humans included). It argues that this emerging strategy significantly differs from the 'synthetic method' characterizing classical biorobotics. Even though a few analyses of this strategy have been recently formulated, this paper broadens their scope by pointing out that two research fields as diverse as ethorobotics and social robotics offer examples of this method. The authors believe that this manuscript can contribute to scientific progress by 1) providing epistemologically-grounded arguments for believing that the strategy discussed here is novel and deserves attention by the (neuro)scientific community, 2) proposing some potentially interesting variants of it, 3) emphasizing the research opportunities and methodological challenges to be faced by ethorobotics and robot-supported social cognitive neuroscience.

Going beyond the ‘synthetic method’: new paradigms cross-fertilizing robotics and cognitive neuroscience

Edoardo Datteri^{1*}, Thierry Chaminade², Donato Romano^{3,4}

¹RobotiCSS Lab, Laboratory of Robotics for the Cognitive and Social Sciences, Department of Human Sciences for Education, University of Milano-Bicocca, Milan, Italy.

²Aix-Marseille Université, Institut de Neurosciences de la Timone, UMR 7289, CNRS, Marseille, France.

³The BioRobotics Institute, Sant’Anna School of Advanced Studies, Viale Rinaldo Piaggio 34, 56025 Pontedera, Pisa, Italy

⁴Department of Excellence in Robotics and AI, Sant’Anna School of Advanced Studies, 56127 Pisa, Italy

*** Correspondence:**

Corresponding Author
edoardo.datteri@unimib.it

Keywords: robotics, biomimetics, ethorobotics, biorobotics, philosophy of science

Abstract

In so-called ethorobotics and robot-supported social cognitive neurosciences, robots are used as scientific tools to study animal behaviour and cognition. Building on previous epistemological analyses of biorobotics, in this article it is argued that these two research fields, widely differing from one another in the kinds of robots involved and in the research questions addressed, share a common methodology, which significantly differs from the “synthetic method” that, until recently, dominated biorobotics. The methodological novelty of this strategy, the research opportunities that it opens, and the theoretical and technological challenges that it gives rise to, will be discussed with reference to the peculiarities of the two research fields. Some broad methodological issues related to the generalization of results concerning robot-animal interaction to theoretical conclusions on animal-animal interaction will be identified and discussed.

1. Introduction

1.1 Robots as inspirational and experimental tools

Running Title

Throughout history, machines endowed with sensing and actuating devices – now called robots – have been often involved in the development of philosophical and empirical theories on the form and mechanisms of animal behaviour and cognition (Tamborini, 2021, 2022). Their role has occasionally been *inspirational*. According to Riskin (2016), for example, Descartes’ mechanistic reconstruction of the animal body may have been inspired by his visits to the garden of Saint-Germain-en-Laye, populated by hydraulic, responsive automata representing mythological characters. In this and other cases, automata built for purposes other than scientific research (e.g., entertainment) have been interpreted as constructive proofs that certain aspects of animal behaviour can be reproduced mechanically, thus inspiring mechanistic conceptions of life and animal behaviour.

At least since the beginning of the 20th century (but see Mantovani, 2020, for a historical precedent), robots have occasionally played a different role in the study of behaviour and cognition. In cybernetics (Cordeschi, 2002) and, more recently, biorobotics (Gravish & Lauder, 2018; Webb & Consi, 2001; Webb, 2001), robots are deliberately built for *experimental* purposes: they are used as experimental tools for the discovery and testing of theories on animal behaviour and cognition. The term “biorobotics” will be used here in a very broad sense, as referring to the experimental use of robots to discover and test theories in the life and social sciences. From a methodological point of view, it can be argued that contemporary biorobotics can be ideally split into (at least) two broad branches. They differ from one another in at least three features, which can be introduced by the following questions:

- Is the robot a model of the system under investigation?
- Is the robot used for surrogate reasoning?
- Does the study conform to the ‘synthetic method’?

The content of these questions will be clarified in the ensuing sections. It will be argued here that the answer to these questions is affirmative for many contemporary biorobotic studies, which will be called *classical* here. Other biorobotic studies, which will be called here *interactive*, admit of a negative answer. As stressed later, clarifying the methodological distinction between these two branches of biorobotics is worth the effort for some reasons. First, a methodological analysis of biorobotics may reveal the methodological diversity of the field and differentiate distinct experimental strategies from one another. Second, it may help one identify the theoretical and epistemological assumptions on which its results rest, which may differ from one another depending on the strategy. Third, it can lead one to establish that different subfields of biorobotics display methodological commonalities, as it will be argued in the ensuing analysis of ethorobotics and social cognitive neuroscience.

1.2 Classical biorobotics

The methodological characteristics of classical biorobotics will be explored here starting from the three questions introduced above and using a study on bat echolocation (Bou Mansour et al., 2019) as an example of this branch of biorobotics.

Is the robot a model of the system under investigation? In classical biorobotics, the robot (R from now on, see Figure 1) is regarded as a model of the living system L under investigation. For example, in the study on bat echolocation mentioned above, the robot is regarded by the authors as a model of a bat. And, arguably, the same can be said of all the biorobotic studies reviewed in (Gravish & Lauder, 2018). The nature of the relationship holding between two concrete systems, when the first is

Running Title

regarded as a model of the second one, has been discussed in an extensive philosophical literature. What makes a concrete system, R in our case, a model of another concrete system L? Here it will be assumed, according to the so-called *inferential* account proposed by Suárez (2004), that a robot R is a model of living system L if (a) the experimenter stipulates that R represents L, and (b) R, by virtue of its characteristics, may in principle enable one to make inferences about L (e.g., about some aspects of L's behaviour or internal mechanism). Both conditions are satisfied in the bat study. The authors stipulate that the robotic bat represents a bat, and the robot, by virtue of its characteristics, may enable the authors to make inferences about the behaviour of bats - specifically, about the mechanisms of obstacle avoidance in real-life bats. It is claimed here that all classical biorobots can be regarded as models of the system under investigation in this sense (see Frigg & Nguyen, 2017 for other definitions of the concept of scientific model). Note that, as discussed later, robots are models of living organisms in interactive biorobotics too, with a crucial difference: whereas, in classical biorobotics, the robot is a model of the living system *under investigation*, in interactive biorobotics the robot is a model of a system *other than* the system under investigation.

Is the robot used for surrogative reasoning? In classical biorobotics, the robot R is used as an experimental surrogate of the system L under investigation (which is also the system of which R is a model). By performing experiments on the surrogate, one acquires knowledge about L. The knowledge obtained in classical biorobotics can be of two different kinds. In so-called model-oriented studies (Datteri, 2021a), experiments on the surrogate enable one to discover the mechanism governing some aspects of L's behaviour. In so-called prediction-oriented studies, experiments on the surrogate enable one to predict the behaviour that L would generate in some circumstances. The position of the lens in Figure 1 represents the fact that, in classical biorobotics, the experiments are performed on R, meaning that R's behaviour is the subject of analysis. The term "surrogative reasoning" was coined by Swoyer (1991) and is now widely used in the philosophical literature to refer to the primary role of scientific models: they enable surrogative reasoning, meaning that they enable one to reason about the modelled system using a surrogate of it. Surrogative reasoning characterizes classical biorobotics which is, in this respect, a typical form of model-based science (Magnani & Bertolotti, 2017). As discussed below, in interactive biorobotics the robot is used for purposes other than surrogative reasoning.

Does the study conform to the 'synthetic method'? Classical biorobotics, and more specifically model-oriented classical biorobotic studies, typically adopt the so-called "synthetic method" which has also been dubbed "understanding by building approach" (Pfeifer et al., 2008) and frequently adopted in cognitively-driven Artificial Intelligence (Newell & Simon, 1972) and neuroscience (Kawato, 2008). The synthetic method, as thoroughly discussed in (Cordeschi, 2002), is a particular form of surrogative reasoning (meaning that not all surrogative reasoning, in robotics and beyond, conforms to the synthetic method). The synthetic method is an experimental strategy, and a form of scientific reasoning, in which the robotic model R is used for a particular purpose, i.e., *to discover the mechanism governing the behaviour of the modelled system L* (whereas, as anticipated, other forms of biorobotics aim at predicting L's behaviour, which is clearly different from discovering the mechanism that governs it). It is a comparative approach. The robot (R) implements a mechanism (*Mech*) that is hypothesised to produce some aspects of the behaviour of L. For example, in the bat study, the robot implements a mechanism based on active acoustic gaze scanning and detection of interaural level difference which is hypothesised to produce good echolocation in bats (echolocation refers to bats' capacity to localise and avoid obstacles relying on the analysis of echos of ultrasound emitted by the animal). The behaviour of R and L is compared in particular experimental conditions. Behavioural matches or mismatches are taken as evidence to accept or refute the hypothesis that *Mech* governs the behaviour of L as well. For example, in the bat study, R did not reach good levels

of echolocation, and this led the authors to refute the hypothesis that bats implement *Mech* as it stands. What matters for the present study is that classical biorobotic studies typically involve experimental comparisons between the behaviour of the robot R and the behaviour of the modelled system L. A comparison which, as claimed below, is not made in interactive biorobotics.[1]

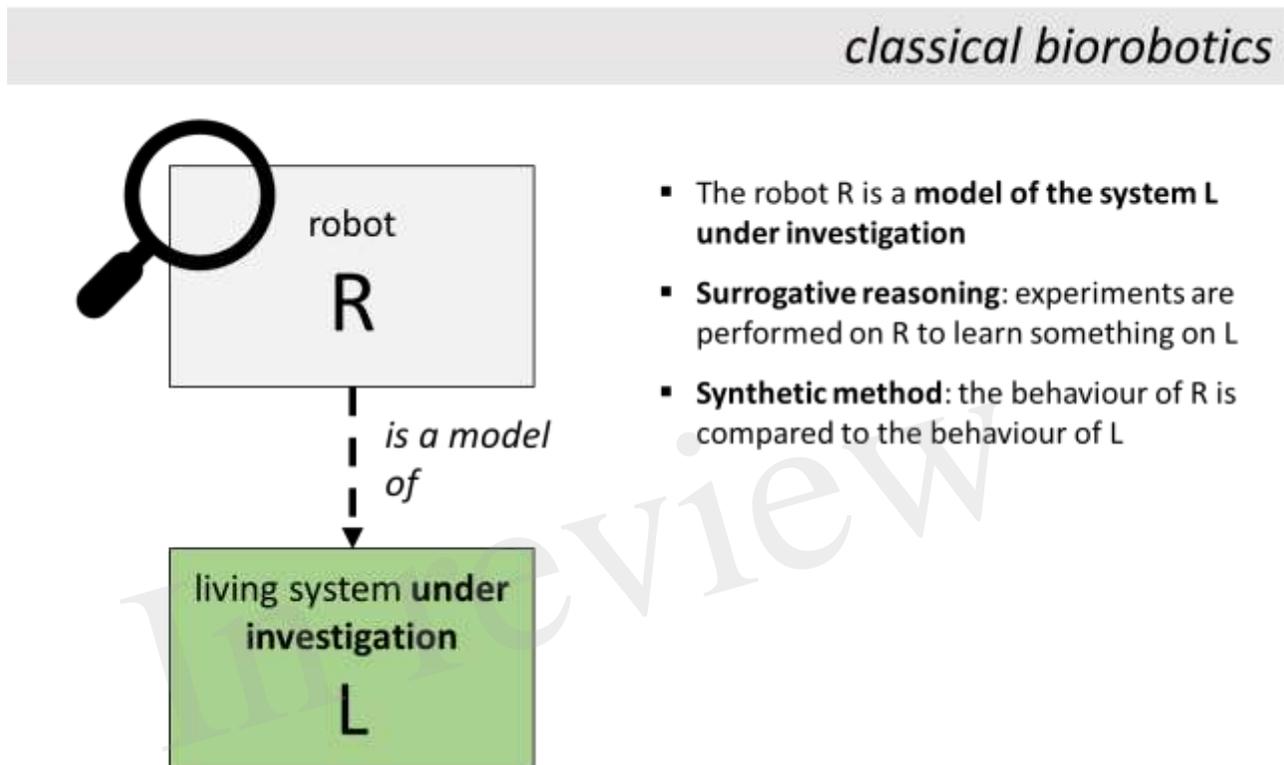


Figure 1. In classical biorobotics, the robot is a model of the living system under investigation and is used to perform surrogative reasoning on it. Experiments are performed on R (as represented by the position of the lens). The behaviour of the robot is compared to the behaviour of the system L under investigation.

1.3 Interactive biorobotics

Recent years have witnessed the emergence of methodologies for the use of robots to study animal cognition and behaviour which differ from classical biorobotics. Notwithstanding their diversity, they all involve forms of *interaction* between robotic devices and living systems. One such development is taking place in the field of social cognitive neuroscience. Social cognitive neuroscience (SCN from now on) is distinctively concerned with the study of the cognitive and neurophysiological mechanisms underlying social behaviour (Liebermann, 2010). Quite recently, in this field of research, humanoid robots interacting with humans have been used “as a new type of ‘stimuli’ in psychological experiments” (Wykowska, 2020; Chaminade & Cheng, 2009). They have been claimed to “provide insightful information regarding social cognitive mechanisms in the human brain” (Wykowska et al., 2016). The subfield of SCN using robots for this purpose (Chaminade and Kawato, 2011) will be referred to as rSCN from now on (the “r” standing for “robot-supported”). This use of robots characterises so-called ‘android science’ too (McDorman & Ishiguro, 2000), as discussed later. Another field in which such development is taking place is so-called ethorobotics (Romano et al., 2019). In ethorobotics, animal-like robots, interacting with real-life animals in more

Running Title

or less ecological contexts, have been claimed to “have the potential to revolutionise the study of social behaviour” (Krause et al., 2011) and to constitute “a novel method for studying collective animal behaviour” (Faria et al., 2010).

In these two research fields, robots are used to theorise on animal cognition and behaviour. To be sure, these fields significantly differ from one another in the target system (respectively, human beings and non-human animals), in the typical characteristics of the robots involved (respectively, humanoid and animaloid robots), and broadly speaking in the research questions addressed. However, at some level of analysis, it can be argued that these two research fields share the same methodological approach.

Indeed, in rSCN and ethorobotics, a robot R *interacts with* the living system L^* under investigation (see Figure 2). This is the first point of departure from classical biorobotics, where the robot *does not interact* with the system under investigation (there called L). Another striking difference is that the subject of experimental analysis is not the robot, as in classical biorobotics (where one is interested in the behaviour produced by the robot in controlled experimental settings, and in whether it can reproduce L 's behaviour), but the system under investigation: in the interactive approaches discussed here, one analyses the reactions of L^* to the stimulations delivered by the robot, as represented by the position of the lens in Figure 2. Other finer-grained differences emerge in connection with the three features of classical biorobotics identified before (see Table 1 for a summary).

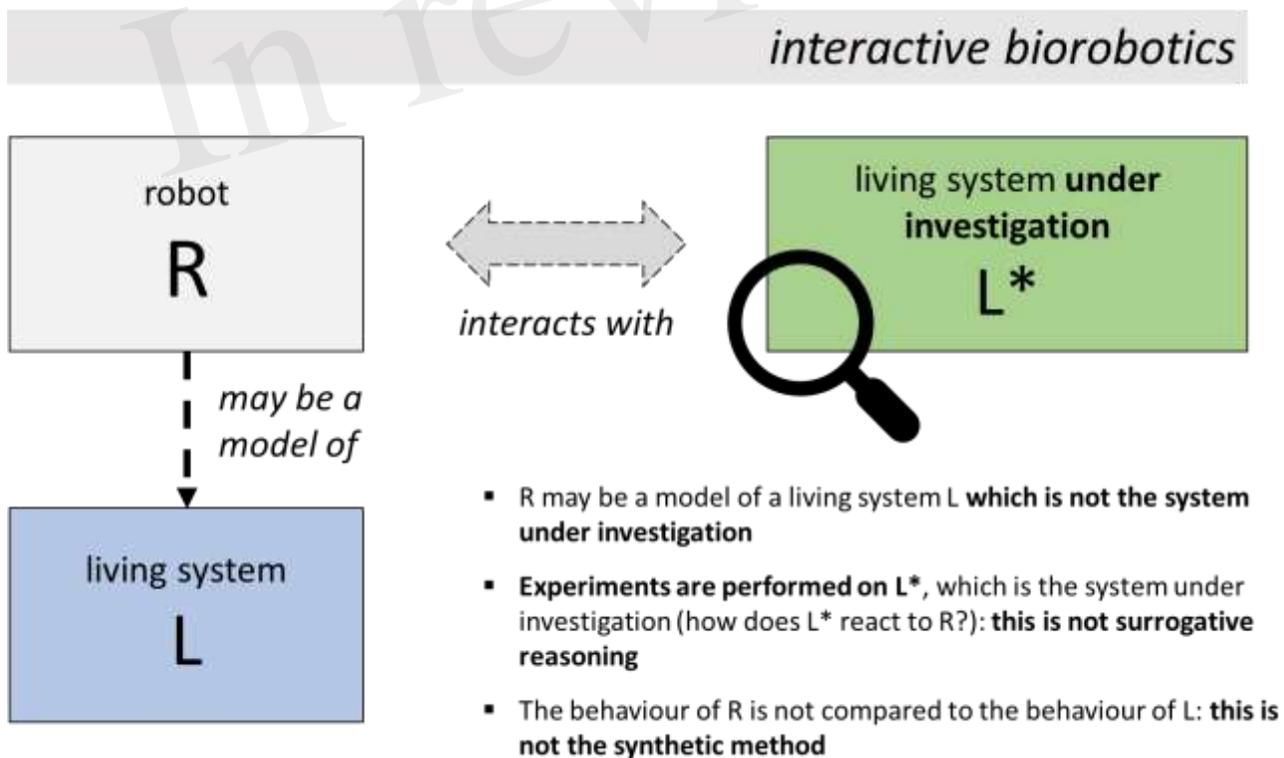


Figure 2. In interactive biorobotics, the robot R may be a model of a living system L . However, it is not used to perform surrogative reasoning on it. Rather, it is used to study the behaviour of another system, L^* , with which it interacts in suitable experimental conditions.

Is the robot a model of the system under investigation? In some cases, the robot R is a model of a biological system L . For example, in some rSCN and ethorobotic studies, the robot is a model of a

Running Title

human being or of a non-human animal. However, unlike biorobotics, this does not need to be the case. In rSCN and ethorobotics, one may decide to observe L^* 's reactions to stimuli coming from robots which do not model any living system (for an example, see Blanke et al., 2014). Moreover, while in classical biorobotics the robot R is a model of the system under investigation (e.g., of a bat in the aforementioned study), in rSCN and ethorobotics the robot is not a model of the system under investigation, which is L^* in Figure 2. This consideration has some implications on whether rSCN and ethorobotics can be said to involve forms of surrogative reasoning, as discussed below.

Is the robot used for surrogative reasoning? In rSCN and ethorobotics, R is not used to theorise on the system of which it is a model (i.e., on L in Figure 2). Rather, it is used to study the system L^* *with which it interacts*. Thus, even when R is a model of a living system L , L is not the system under investigation, or, equivalently, R is not used to perform surrogative reasoning on the modelled system. This is an important point of departure from classical biorobotics and, more generally, from model-based science as traditionally conceived (Magnani & Bertolotti, 2017), which is based on the use of surrogates to reason about the modelled system. In the interactive approaches discussed here, the system L which is modelled by the robot does not coincide with the system L^* which is the focus of investigation (Datteri, 2020, 2021a).

Does the study conform to the ‘synthetic method’? The claim that social robotics and ethorobotics do not adopt the “synthetic method” characterizing classical biorobotics and AI-based studies of cognition partially follows from the observations made above. The goal of these studies is not to discover the mechanism governing the system L modelled by the robot. Their goal is to study the behaviour of the system L^* interacting with the robot. Also note that, unlike the synthetic method, the approach described here does not involve any comparison between the behaviour of the robot R and the behaviour of the modelled system L . Neither they involve a comparison between the behaviour of R and the behaviour of the system L^* under investigation: the goal is not to find out whether R can reproduce L^* 's behaviour, but to study L^* 's reactions to the presence and characteristics of R . Table 1 summarizes the differences between classical and interactive biorobotics discussed here, and Table 2 provides definitions of some key terms used in this article.

Table 1. Methodological differences between classical and interactive biorobotics.

	<i>Is the robot a model of the system under investigation?</i>	<i>Is the robot used for surrogative reasoning?</i>	<i>Does the study conform to the ‘synthetic method’?</i>
Classical biorobotics	Yes	Yes	Yes
Interactive biorobotics	No	No	No

Table 2. Definitions of the key terms used in the text

Running Title

<i>Term</i>	<i>Definition</i>
Model	The term is used here to refer to a concrete system that stands for, or represents, another concrete system. See (Frigg & Nguyen, 2017) for an analysis of the conditions under which a system R can be regarded as a model of another system L. The so-called inferential conception of scientific modelling (Suárez, 2004) is presupposed here.
System under investigation	The system studied in a piece of research. In biorobotics, the system under investigation is a living system.
Modelled system	If R is a model of living system L, L is the modelled system. In classical biorobotics, L is the modelled system and the system under investigation. In interactive biorobotics, L is not the system under investigation.
Surrogate reasoning	The (possibly experimental) use of a model R to draw inferences about the modelled system (Swoyer, 1991).
Synthetic method	A comparative strategy that can be adopted to discover the mechanism governing the behaviour of a living system L. It involves building a robot R which implements the mechanism which is hypothesised to govern L's behaviour, and comparing the behaviours of R and L. It is widely adopted in classical biorobotics. See (Cordeschi, 2002) for an extensive discussion.
Biorobotics	The term refers to the experimental use of robots to discover and test theories in the life and social sciences.
Social cognitive neuroscience (SCN)	Is a research field concerned with the study of the cognitive and neurophysiological mechanisms underlying social behaviour (Liebermann, 2010).
Robot-supported social cognitive neuroscience (rSCN)	Is a subfield of SCN in which robots are used to study the cognitive and neural mechanisms underlying social behaviour .
Ethorobotics	Is a research field characterized by the use of robots to study and/or modulate animal behaviour (Krause et al., 2011; Romano & Stefanini 2021c).

1.4 Biorobotics and scientific method

As pointed out before, comparing classical with interactive biorobotics is worth the effort for a number of reasons. It may reveal the methodological diversity of biorobotics. Robots can be used to study cognition and behaviour in many ways, and this diversity can be appreciated by raising one's sight over the level of the individual studies and adopting a more general, methodological perspective. Reconstructing the methodologies adopted in the field may also end up uncovering potentially fruitful experimental strategies that have rarely or not been attempted so far (an example being the simulation-interactive methodology discussed in Datteri, 2021b). It may also reveal methodological issues that distinctively arise in one or the other branch of biorobotics. A few examples will be briefly discussed here.

Interactive biorobotic studies involve inferential steps that are not carried out in classical biorobotics (and vice versa). One of them has been discussed in (Datteri, 2020). In interactive studies, the behaviour of the living system under investigation (L^* in Figure 2) is analysed during interaction with robot R. As such, the experimental results *prima facie* concern L^* 's reactions to a *robot*. However, many interactive biorobotic studies aim at generalising this kind of results to obtain theoretical conclusions on the social dynamics occurring within groups of living systems. In these cases, experimental results concerning the relationship between L^* and R (e.g., between a human and a humanoid robot) are taken as a basis to draw theoretical conclusions about the relationship between L^* and other, possibly conspecific, living systems (e.g., between humans). This inferential step, when carried out, clearly needs justification: one cannot simply take for granted that L^* 's reactions to R will be the same as those that L^* would display, in similar circumstances, interacting with another living system. How this inference can be justified is a question that falls out of the scope of this article (for a discussion, see Datteri 2021a). What really matters here is to note that this inferential step, and the corresponding justification, are not required in classical biorobotics, which is based on a totally different experimental procedure. Classical biorobotics does not raise this methodological issue (but it raises other methodological issues, widely discussed in Datteri & Tamburrini, 2007; Tamburrini & Datteri, 2005).

Both branches of biorobotics evoke questions about biomimicry: how similar should the robot be to its living counterpart, from a morphological and behavioural point of view, for the study to genuinely contribute to the life and social sciences? This question has different facets in the two fields and is to be addressed through different routes. Classical biorobotics typically adopts the synthetic method¹. As discussed above, this method involves the building of a robot R which implements a mechanism *Mech* which, in turn, is hypothesised to govern the behaviour of the living system L under investigation. R can be sensibly used to test *Mech* only if the former correctly implements the latter. But one thing is to require that R correctly implement *Mech*, another thing is to require that R be similar to the target system. And the second assumption is *not* made in the synthetic method. Indeed, the synthetic method has often led the experimenters to reject the hypothesis that *Mech* governs the behaviour of the target system (an example being the study on bat echolocation discussed above). In those cases, R has genuinely contributed to scientific research – by providing empirical reasons to reject a hypothesis – even though it was not similar to L (because it implemented a biologically

¹ As pointed out in (Datteri, 2021a), prediction-oriented biorobotic studies do not conform to the synthetic method, while model-oriented studies do. However, the number of model-oriented studies published in the literature significantly surpasses the number of prediction-oriented studies. For this reason, even though in principle classical biorobotics needs not adopt the synthetic method, it is fair to say that it typically does.

Running Title

implausible mechanism). To sum up, what really matters in classical biorobotics is whether the robot correctly implements the hypothesised biological or cognitive mechanism, regardless of whether it is similar to the target system or not. The biomimicry question admits of a different answer in interactive biorobotics. There, it is legitimate to demand that the robot R be similar to the modelled system L, at least in the relevant morphological or behavioural respects. If such similarity obtains, L*'s reactions to R may be taken as an empirical basis to theorise on the reaction that L* would produce interacting with L, i.e., to justify the inferential step outlined in the paragraph above. This issue has been extensively discussed in (Datteri, 2021a).

To sum up. A methodological analysis of biorobotics may disclose the full range of uses of robots as experimental tools in the life and social sciences and pave the way for a discussion of the methodological issues distinctively arising in its branches. Distinguishing classical from interactive biorobotics may also enable one to acknowledge that such diverse research fields as rSCN and ethorobotics share common methodological features. The following sections will discuss how the interactive approach reconstructed here is adopted in rSCN (section 2) and ethorobotics (section 3).

2. Bridging Humanoid Robotics and Social Cognitive Neuroscience

2.1 Methodological novelty

In 1950, Alan Turing proposed a test of "artificial intelligence" based on the ability to mimic human conversation called the "imitation game" (Turing, 1950). In the original version, a conversational artificial agent passes the Turing Test if a person interacting with it, through exchanges of written text (amounting to what we would today call an online chat), fails to recognize, when being asked explicitly, its artificial nature. It therefore requires 1) a human judge to discuss in writing with an unknown agent, and then 2) to determine, in a forced choice, whether this agent was a human or an automatic text synthesizer. In other words, an "artificial intelligence" is a machine devoid of any intentionality, thoughts, history, i.e. the internal mental states supposedly required for human communication, capable of holding a realistic human-like conversation even when being probed by a real human.

If one takes a reverse perspective, from the human instead of the machine point of view, "Computing Machinery and Intelligence" is particularly clever in how it proposes an operationalized perspective on what human intelligence is². Yet such a definition is in conflict with current perspectives in social cognitive neurosciences, that emphasises hidden internal states, in contrast to observable behaviours, as defining features of human cognition. The original proposal also has a number of practical issues, most of them already considered by Alan Turing. First, such an interaction is relatively far from a natural social interaction given that the human conversant knows that the other agent is likely to be artificial and is asked to make a forced dichotomous choice. When the other agent is a human, both interlocutors know that they are "playing a game". Neither situation happens in real life. Also, this test does not determine whether the machine behaves "intelligently", a descriptor with too loose a meaning, torn between folk psychology, the meaning of IQ tests and the social ability under scrutiny, but whether it behaves as a human being would if it were asked the same questions in the same context of an "imitation game". Other important limitations are the

² Note, though, that some limitations should be taken into consideration, if only that all humans are far from being capable of using written language, and would thus lack "intelligence" if the definition was considered strictly.

Running Title

reliance on a simple linguistic vector, written text, and its corollary, the hidden position of the conversers: in humans, face-to-face - or at least voice-to-voice - interactions are the hallmark of social functioning. While these limitations are acceptable - given that, on the one hand, machines don't need embodiment to produce intelligible meaning, and, on the other hand, such impoverished exchanges indeed exist in humans, historically in the form of epistolary correspondence and more recently with emails or, even more relevant and more recent, online chats, the proposed approach remains reductive to investigate the scientific bases of human social interactions and their relevance to understand their human-machine counterparts.

Nevertheless, understanding, from a social cognitive neuroscience point of view, how artificial agents are perceived is an extremely timely question considering the contemporary incentive to introduce them in human everyday environments. Telephones' voicebots and online virtual assistants are already largely present, in-home voice assistants entered households more recently, and it is expected that embodied humanoid robots should be the next step in putting humans in contact with "artificial intelligences"³. Therefore, rather than their purported "intelligence", the key question to answer is how humans will consider and behave toward human-like artificial entities.

Is it possible to re-think the "Imitation game", so as not to evaluate the machine's "intelligence", but its acceptance as a social partner one wants to interact with, something that can be called its social competence? One possibility could be to have people face an embodied robot, interact with it and evaluate to which extent their behaviour mimics the behaviour they have when facing fellow humans. As in the movie 'Ex machina' (Garland, 2014), the robot's face being perfectly human in all regards while many other cues point to an artificial agent, the imitation would somehow be reversed from the original test: assessed here is whether we "imitate ourselves" when interacting with an agent clearly identified as artificial - in other words, do we produce the same behaviours when facing an artificial agent resembling a human being than if it were a real human being. Going one step further, one can ask whether we use the same cognitive mechanisms and respective physiological underpinnings when interacting with human and human-like artificial agents. Although such a test seems to come straight out of science fiction, social cognitive neuroscience, and in particular the second-person neuroscience framework (Schilbach et al., 2013), provide a perfect point of view to investigate the behavioural and physiological mechanisms involved in Human-Human versus Human-Robot interactions (Chaminade, 2017; Chaminade & Kawato, 2011; Rauchbauer Birgit et al., 2019). In addition this proposal isn't completely new, as Android Science, introduced in particular by Karl McDorman and Hiroshi Ishiguro in the mid 2000 (McDorman and Ishiguro, 2006), already considered using androids to study human cognition given their resemblance with humans (in shape and behaviour) coupled with full reproducibility. But the current proposal of going further than the synthetic method goes further, as well as it gets rid of certain limitations of android science. Not only android science considered robots only as exact imitations of humans, in shape and behaviours, while we consider in the current proposal that that the artificial nature of the robot is an asset instead of a hindrance, it neglected something that appears clearly now, more than 15 years later, namely that such devices weren't, and still aren't, available. Limitations such as the uncanny valley, that too human-like imperfect robotic devices are repulsive instead of attractive, still appear very relevant despite decades of research and developments in humanoid robotics.

³ Note that the meaning of "intelligence" in "artificial intelligence" can be very remote from the one defined by Alan Turing's "Imitation game"; while it is very interesting that the main acceptance of the former, that one could roughly understand as generalised machine learning, is likely to be involved in the later, understood as reproducing human-like, in particular social, behaviours, in order to interact naturally with humans, these two acceptations of the word intelligence do not overlap.

Running Title

In the next section we provide examples of investigations on how interacting with natural or artificial agents, not androids, elicits different effects, both at the behavioural and physiological levels, on cognitive mechanisms pertaining to social cognition. Insights from this line of studies are twofold. Firstly, it helps address the open question whether artificial anthropomorphic agents should elicit the same effects as humans to be socially competent. Secondly, it informs us about which mechanisms involved in social cognition are influenced by the nature versus the appearance and behaviour of an interacting agent, akin to top-down versus bottom-up processing. A simple example to illustrate this dichotomy is the case of artificial speech synthesiser of telephone robots: it is not because the source isn't a real human that we don't understand what it says. Actually, as for any heard speech, its understanding is irresistible. But on the other hand, philosopher Daniel Dennett argued that we don't adopt an intentional stance, we don't attribute mental states (Dennett, 1987), when interacting with a robot given it is devoid of intentions. This influence of the anthropomorphism of humanoid robots is challenging but goes beyond the current contribution; a recent discussion can be found in (Spatola & Chaminade, international journal of human – computer studies, bioXriv).

2.2 Research opportunities

Observing humanoid robots' actions. The Action Observation System (OAS) is a network of brain areas involved in perceiving and understanding human actions. Interestingly, two components of the OAS react differently when actions are depicted by a humanoid robot. Observing a robot executing human actions significantly increases the activity in occipital cortices, the component of the AOS associated with the processing of visual information, compared to the same actions executed by humans (Perani et al., 2001), independently of whether the action perceived needs to be understood or not (Chaminade et al., 2010). As a decrease of activity would be expected for unnatural stimuli if processing relied on a "matching to template" mechanism, the occipital action observation network rather appears to react as an error detector, with increased response to artificial agent's actions because they are very different - in both shape and dynamics - than real actions. Such an effect can be compared to the fact that responses in the face fusiform area increase with the distance of individual faces from an average, prototypical, face (Loffler et al., 2005). This is a general mechanism, as the same is observed in auditory areas responding to voices: the further the distance from an average, prototypical voice, the more active these areas are (Latinus et al., 2013). Altogether, these results indicate that cortical areas involved in recognizing visual or auditory objects on the basis of sensory information areas are involved in a purely perceptual, or bottom-up, processing.

Another component of the AOS comprises motor areas of the posterior frontal cortex (premotor cortex). The automatic response of brain motor control systems caused by the perception of another's actions is called "motor resonance". In the same way that we cannot refrain from accessing the meaning of speech when we perceive it, we cannot refrain from activating our motor control systems when observing actions. Motor resonance can be measured as the influence that observing someone else's actions has on the actions executed by the observer, an effect called motor interference. Indeed, motor interference is found, but reduced, when we observe the actions of a robot that has an overall human shape but clearly mechanical constituents (Oztop et al., 2005), while it does not if the robot is reduced to an industrial manipulator arm (Kilner et al., 2003; Oztop et al., 2005). At the neural level, response in the left inferior frontal gyrus, a premotor area involved in motor resonance, is reduced when the action is depicted by a robot instead of a human (Chaminade et al., 2010). Hence the mechanism involved in motor resonance is different from what we discussed in posterior sensory areas. Instead of indicating dissimilarity, increased activity indicates a matching to reality (see also (Perani et al., 2001). For this reason, it has been argued for some time that this would be an important metric of how we relate with artificial agents (Chaminade & Cheng, 2009). Furthermore, in contrast

Running Title

to posterior areas, its response is modulated by the task of the observer. If forced to consider the robot's movements as human actions (by asking them to rate "the emotions" versus "the motion" of the robot presented on the screen), area in premotor areas is significantly increased to reach the level of the activity in response to the human depicting the same emotions, while response to human emotions isn't affected by the instruction. Therefore, results suggest reduction of motor resonance when observing humanoid robots can be contracted by instructing participants to see its movement as actions. A very similar conclusion has been drawn using a different approach, where the instruction to see the robot movement as actions primed robot anthropomorphism (Spatola & Chaminade, international journal of human – computer studies, bioRxiv). Human-robot interaction of the OAS confirm that the occipitotemporal action observation network responds, in a hard way, to the distance between the sensory prototypes and incoming information, with increased response when observing robots (vs. humans) executing movements, while the motor resonance network acts as a mirror, with reduced activity when the agent is a robot compared to a human, but sensitive to instruction, and possibly related to anthropomorphism of the robot.

Interacting with a humanoid robot. More recent work focused on real interactions with, and not mere observation of, humanoid robots. An fMRI study used a fully controlled stone-paper-scissors game as support of the interaction (Chaminade et al., 2012). Three brain regions were found to be significantly less responsive when humans (believed they) interacted with a robot, compared with another human: the medial prefrontal cortex and right temporoparietal junction (TPJ), both involved in mentalizing, and the hypothalamus, involved in social reward through the release of oxytocin. The significantly reduced response of the medial prefrontal cortex and right TPJ was also found using the prisoner's dilemma as support of the interaction (Krach et al., 2008). In both cases, robots were used to manipulate the context of the social interaction, but the interaction itself remained fully controlled using well-established procedures from experimental social neuroscience. Therefore in these studies, it is the belief about the nature of the agent, rather than the agent itself, that explains differences in brain activity.

A major step forward was the design of a truly interactive scenario. Participants were scanned with fMRI while they were discussing naturally either with a confederate of the experimenter, or with a robotic conversational head. Unbeknownst to them, the robotic device was controlled by the confederate using a Wizard of Oz procedure: participants always interacted with the same individual, but believed they were interacting with an autonomous agent. Results showed that areas involved in mentalizing (TPJ), emotions (amygdala) and social motivation (hypothalamus) were significantly more activated in human-human than in human-robot interactions (Figure 3). These results confirmed that participants adopt a different stance, including a reduced social motivation, when interacting with the artificial compared to the natural agent. These findings support the proposal that the activity in key brain structures can be used to assess implicitly the social competence of robotic designs along various dimensions of social cognition.

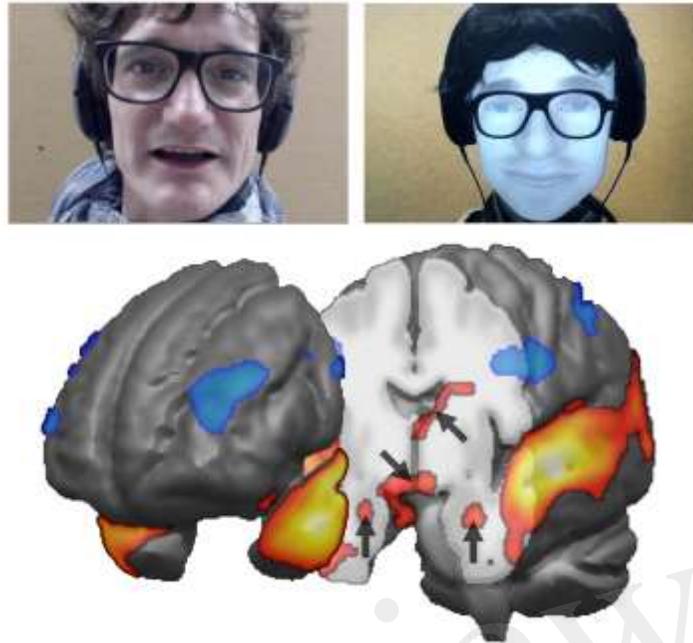


Fig. 3. Comparing conversation with human versus robot (top: extract from video) yields increased activity in subcortical structures, namely (arrows on the brain cut-off below, from top to bottom) the right caudate nucleus, the hypothalamus and the amygdala bilaterally.

Further analysis of this corpus reveals that three key regions for autonomic processing of human emotions react differently to the happiness expressed by the conversational partner. In the insula and hypothalamus in particular, the positive correlation between the BOLD signal and the level of happiness expressed by the conversational agent is significant for the human partner, but absent when the interlocutor is the robot. If confirmed with a more emotionally expressive robot, this finding suggests that core autonomic systems used for social bonding only respond to human agents. Research with other categories of agents, such as robots with different embodiments, but also animals, as well as people from very different cultural backgrounds, would help prolong the current investigation on the mechanisms involved in human social cognition.

2.3 Technological and theoretical challenges

As realistic android robots are emerging and the research in artificial intelligence promises to provide naturalistic conversational agents, some of the questions raised by the “Turing Test” are still contemporary: do we know whether an agent is natural or artificial? Can we, how can we, but also why should we want to know? And if we are to interact with such artificial beings, what features do we expect from them? In the previous section, it is proposed that local brain activity can provide information about cognitive mechanisms differing between human-human and human-robot interactions along pertinent dimensions of social interactions such as mentalizing and motivational processes. Using this information to describe human-human and human-robot interactions in a social cognitive neuroscience framework is fundamental to understanding what a likeable agent is, and how we consider artificial agents as interacting partners, and therefore holds the potential of complementing the Imitative Game in the social domain.

Running Title

Our next challenge is far more complex. We've seen in the previous section that the effects on some mechanisms involved in social interactions are not static, but malleable under the effect of the context. What is unclear is how time, or experience, will influence the results as robots become increasingly present in our surroundings. Though hazardous, a comparison can be made with the animalisation of native African at the time of slavery. The point here is not to draw a parallel with the nature of these individuals - clearly and undoubtedly humans, which is not the case for robots - but with the way they were perceived and conceived by the occidental, white population; a view that lasted for centuries and also took centuries to disappear (and still shows reminiscences today). If humans can dehumanise their fellows based on their perceived "otherness"⁴, can we imagine they can also humanise artefacts based on similarity with humans? While this can seem a philosophical, as well as politically incorrect, question, it raises doubts on whether current findings on the social competence of artificial agents are universal, or merely reflect a snapshot at a specific time in human cultural evolution, in which robots, given their recent history, remaining clumsiness and perception as mere mechanical artefacts, are far from having reached a stable societal representation (the one required in Android Science). Animal rights activism is a very contemporary example of what could happen in the future for robots, and the attribution of a citizenship to the gynoid robot Sophia in 2017, though highly anecdotal, was certainly thought as a precursor of things to come. As the "father" of Sophia puts it, "I think we should see the future with respect for all sentient beings and that will include machines⁵." Addressing this issue scientifically is far-fetched but not insurmountable, and can teach us a lot on the flexibility of our mental representations pertaining to social interactions. A flexibility that has to be considered through the lens of cultural evolution, certainly a hallmark of human history.

3. Ethorobotics and animal-robot interaction

3.1 Methodological novelty

Research on animal–robot interaction, promoted by the high impact on society that robotics has made in the last decades (Yang et al. 2018; Romano et al. 2019), is rapidly growing. Robots are serving as advanced allies in investigating phenomena of behavioural adaptation, due to their high degree of manipulability and the possibility of controlling their position in the environment. They also allow one to perform highly standardised and reproducible experiments for the study of cognitive processes, such as perception, learning, memory and decision making.

In animal-robot interaction contexts, biomimetic agents are perceived as natural heterospecifics or conspecifics by animals, creating biohybrid dynamic systems where robots detect, communicate and interact with the animals, triggering specific neuro-behavioural responses, and adapting their behaviour in function of the animal's behaviour (Cianca et al. 2013; Romano et al. 2017; Bierbach et al. 2018; Karakaya et al. 2020). This paradigm shift in the study of animal behaviour – called 'ethorobotics', see Table 2 – lies at the interface of ethology and robotics and has many potential applications in different areas including the control of animal populations in agriculture, the improvement of animal farming conditions, as well as in preserving wildlife.

The use of interactive artificial agents to study animal intelligence relies on multiple disciplines, such as biomimetics, robotics, machine learning, biosystems engineering, neuroethology and more.

⁴ Clearly "otherness" is a percept depending on the environment and past history in which it is made. Consider the thought experiment: if one lives his own life only surrounded by robots or non-human animals, wouldn't humans be the strange, unusual, and maybe repulsive, agents?

⁵ <https://www.cnn.com/2017/12/05/hanson-robotics-ceo-sophia-the-robot-an-advocate-for-womens-rights.html>

Running Title

Animals are elective model organisms for developing new methods in the aforementioned fields, thanks to their ability to learn and remember, their inter-individual differences, their adaptability to various experimental settings. These abilities can be exploited to face primary challenges in robotics, especially when artificial agents interact with abiotic and biotic factors, that also include interactions with humans, in the real world. It should also be noted that the field of ethorobotics has often informed study of human-robot interaction too, emphasizing that social robots should have functions, as well as behaviours, and cognitive abilities fitting their specific environment. So, a robot endowed with social competence can produce meaningful and efficient interaction with humans independently of its human-like appearance (Miklósi et al. 2017).

Ethorobotics has several important objectives, including the improvement of animal wellness and environmental sustainability through mitigation of human activities on ecosystems. From an engineering point of view, animal-robot interaction can allow the creation of distributed hybrid networks of agents composed of animals and robots, bringing new emerging cognitive and physical capabilities to current bio-inspired robotic systems. And, more crucially for the purposes of the present paper, ethorobotics can importantly contribute to the study of animal behaviour and cognition.

3.2 Research opportunities

Indeed, one of the most interesting goals of contemporary research on animal-robot interaction is the study of animals' neuroethological and cognitive mechanisms. This goal is pursued in ethorobotics by exploring methodologies allowing living organisms to interact with robots in a natural way. Ethology is a scientific discipline devoted to the study of animal and human behaviour in natural environments (Curtis & Houpt 1983; McFarland 1993; Lorenz 2013). Research on interactive robots involves the study of organism-organism and organism-robot interaction by ethologists, as well as their cooperation in the design and modelling of robots' morphology and behaviour, to obtain functional artificial agents performing and fitting in the complex animal environment. In addition, interactive robots can be used to validate *in silico* systems, establishing open/closed-loop interactions with animals, and to manipulate specific behavioural displays 'on demand' in animals.

Several stimuli have been traditionally used in ethology. Living subjects have been extensively used in many studies (Myrberg & Thresher 1974; Willmott & Foster 1995; Rowland 1999), as they reflect the natural behaviour of a species, generating realistic hypotheses that are typically tested by correlation analysis (Rowland 1999). Although the use of freely interacting subjects provides the most natural social cues, it is very difficult to manipulate specific behavioural displays that can affect the response of focal subjects. Invasive approaches (e.g. freezing, surgical manipulation, pharmacological agents, etc.), can modify certain features of the live stimuli, but they are not ethically acceptable and should be permanently avoided, in order to comply with recent guidelines on animal behaviour research (ASAB/ABS. 2020). Mirrors have long been used too in ethological studies to stimulate focal subjects (Leitão et al. 2019; Zablocki-Thomas et al. 2021) especially to visually duplicate conspecific features. However, the use of mirror has been often criticised due to the fact that it immediately reproduces feedback from the subject's response, resulting in response rhythms that significantly differ from natural interactions. The use of static dummies and decoys with morphological features imitating conspecifics or heterospecifics has a respected tradition. Dummies can range from simple 2D silhouettes to 3D casted objects precisely reproducing visual features of the model species (Rowland 1999; Tryjanowski et al. 2018). They are particularly powerful as far as

Running Title

static cues such as shape, size, posture and livery are concerned. However, the major limitation of dummies is their lower effectiveness in evoking response from focal subjects compared to living animals, also due to the difficulty in reproducing the movement of living systems. Playing back recorded sequences of behaviours is an additional method to provide stimuli during behavioural experiments (Rowland 1999; Chouinard-Thuly et al. 2017; Hirschy-Douglas & Read 2016). Video playbacks permit the control and modification of visual features to simulate dynamic processes. However, these videos use imaging systems based on human perception, and cannot be equally perceived by species with a different spectral sensitivity, and flicker fusion rate. Also, video playbacks, as for mirrors, cut out the 3D exploration, as well as the tactile perception of the stimulus provided.

Robotics applied to ethological studies, obviously, offers capabilities extending far beyond the previously mentioned methods, allowing one to create biomimetic artificial agents performing complex behaviours that require sophisticated locomotion patterns or coordinated moving (Butail et al. 2014; Phamduy et al. 2014; Abdai et al. 2018; Bierbach et al. 2020; Romano and Stefanini 2021a), and producing several kind of signals (Partan et al. 2009; Polverino et al. 2019; Romano and Stefanini 2021b). Biomimetic agents can be fully controlled, allowing one to test all subjects with an identical set of cues. So, different responses from individuals are related to the intrinsic differences of focal animals and not to mutual influences between focal and stimulus individuals (Bierbach et al. 2021). Also, animal-robot interaction offers benefits as far as the welfare of the tested animals is concerned. In particular, the use of robots in ethological studies promotes the 3Rs Principle (Russell and Burch 1959; Tannenbaum and Bennett 2015), currently representing the gold standard for animal protection in laboratory conditions. The 3Rs Principle is based on the reduction of the number of individuals used in the experiments, the refinement of methods decreasing stress for animals, and wherever possible, the replacement of animals in tests by using alternative methods. Robots are particularly suitable for fulfilling the 3Rs Principle when studying aggressive behaviour among conspecifics or predator-prey interaction between heterospecifics.

Furthermore, beside new knowledge, animal-robot interactive systems can produce a notable socio-economic impact on our daily lives, as well as on the influences of humans on the environment.

3.3 Technological and theoretical challenges

Even though animal-robot interactive systems and ethorobotics have a huge scientific and technological potential, still, few research pathways have been explored. There is a growing interest in the use of robots in ethology. However, further efforts are needed to face several issues. A major challenge is connected to developing biomimetic robots able to adapt and negotiate with unstructured environments, to be released in natural habitats for interaction with animals. Also, energy harvesting and autonomy are crucial aspects that should be considered for long-lasting interactions in the real world. In addition, the development of robots which are effectively accepted as conspecifics by animals still represents a challenge that needs to be further addressed to boost the biomimetic design of interactive artificial agents. Furthermore, these mechatronic systems are often expensive and require dedicated expertise for their operation. As a result, still few research groups, with a multidisciplinary team, can use this advanced technology. So, it is crucial to promote worldwide collaborations between scientists with different backgrounds, due to the potential future impact that this field will have on the study of cognition and behavioural ecology.

4. Taking stock: interactive robots for the study of animal behaviour and cognition

Running Title

Robot-inspired social cognitive neuroscience (rSCN, section 2) and ethorobotics (section 3) involve building and experimenting with very different kinds of robots (humanoid and animaloid, respectively). Both fields introduce methodological novelties and open distinctive research opportunities for the study of the behavior and cognition of human and non-human animals, and give rise to distinctive technological and theoretical challenges. Despite their *prima facie* differences, they both exemplify *epistemic* uses of interactive robots, which are used as scientific tools for understanding animal behaviour and cognition. Moreover, in this article it has been argued that rSCN and ethorobotics share a common methodological structure, which was illustrated in section 1. In both research fields, indeed, one builds a robot which may model a living system L, but is used to study the behaviour and cognition of another living system L*. This strikingly differs from the “synthetic method” which has dominated cybernetic and biorobotic approaches to the study of animal behaviour until recently.

The methodological structure outlined in section 1 and exemplified by reference to the research fields discussed here may admit variants, some of which may still have to be investigated and instantiated. For example, recall that the classical biorobotics approach is distinctively comparative: the behaviour of the robot is compared with the behaviour of the modelled system in appropriate experimental conditions. The interactive methodology is not comparative *in the same sense* in which classical biorobotics is. In the vast majority of the ethorobotic studies carried out so far, for example, one learns something about the behaviour and cognition of the system L* by analysing its reactions to the stimuli exerted by the robot, with no comparison whatsoever between the behaviour of L* and the behaviour of the robot. To be sure, these studies often involve control groups in which the system L* interacts with robots differing in some respects from one another. But this kind of comparison is different from the comparative step involved in classical biorobotics, where *the behaviour of the robot is compared with the behaviour of the living system modelled by the robot*. A type of comparison which is more akin to classical biorobotics would consist in comparing the reactions of the system L* to the robot R with the reactions of the same system L* to the living system L modelled by the robot, or, more shortly, in comparing the dynamics of robot-animal (R-L*) interaction with the dynamics of animal-animal (L-L*) interaction. This sort of comparison has been relatively unexplored in ethorobotics, while it is made in many social cognitive neuroscience studies as illustrated in section 2, where human reactions to robots are compared with human reactions to other human beings. Another comparative variant of the interactive strategy, envisaged in (Datteri, 2021b), would be to compare the dynamics of robot-animal (R-L*) interaction with the dynamics of interaction between the robot and *a robotic model of the focal system*. This variant might be of interest for studying the internal mechanisms guiding the behaviour of the focal systems.

The considerations made in this article are mainly methodological. Reconstructing, and illustrating with examples, the rational structure of emerging approaches to the study of living systems may provide a basis to identify and discuss their methodological and theoretical complexities, some of which were considered before. Monitoring, understanding, and finally overcoming these complexities is of the utmost importance for placing robot-supported interactive approaches to the study of social behaviour on firm methodological grounds. Collaboration between scientists, engineers, and philosophers of science - distinctively devoted to the study of the conceptual and rational foundations of scientific research - is essential to push classical and interactive forms of biorobotics to higher levels of methodological maturity.

References

Running Title

Abdai, J., Korcsok, B., Korondi, P., & Miklósi, A. (2018). Methodological challenges of the use of robots in ethological research. *Anim. Behav. Cogn*, 5, 326-340.

ASAB/ABS. (2020). Guidelines for the treatment of animals in behavioural research and teaching. *Animal Behaviour*.

Bierbach, D., Francisco, F., Lukas, J., Landgraf, T., Maxeiner, M., Romanczuk, P., ... & Krause, J. (2021, July). Biomimetic robots promote the 3Rs Principle in animal testing. In *ALIFE 2021: The 2021 Conference on Artificial Life*. MIT Press. https://doi.org/10.1162/isal_a_00375

Bierbach, D., Mönck, H. J., Lukas, J., Habedank, M., Romanczuk, P., Landgraf, T., & Krause, J. (2020). Guppies prefer to follow large (robot) leaders irrespective of own size. *Frontiers in Bioengineering and Biotechnology*, 8, 441.

Bierbach, D., Lukas, J., Bergmann, A., Elsner, K., Höhne, L., Weber, C., ... & Krause, J. (2018). Insights into the social behavior of surface and cave-dwelling fish (*Poecilia mexicana*) in light and darkness through the use of a biomimetic robot. *Frontiers in Robotics and AI*, 5, 3.

Blanke, O., Pozeg, P., Hara, M., Heydrich, L., Serino, A., Yamamoto, A., Higuchi, T., Salomon, R., Seeck, M., Landis, T., Arzy, S., Herbelin, B., Bleuler, H., & Rognini, G. (2014). Neurological and Robot-Controlled Induction of an Apparition. *Current Biology*, 24(22), 2681–2686. <https://doi.org/10.1016/j.cub.2014.09.049>

Bou Mansour, C., Koreman, E., Steckel, J., Peremans, H., & Vanderelst, D. (2019). Avoidance of non-localizable obstacles in echolocating bats: A robotic model. *PLOS Computational Biology*, 15(12), e1007550. <https://doi.org/10.1371/journal.pcbi.1007550>

Butail, S., Polverino, G., Phamduy, P., Del Sette, F., & Porfiri, M. (2014, March). Fish-robot interactions in a free-swimming environment: effects of speed and configuration of robots on live fish. In *Bioinspiration, Biomimetics, and Bioreplication 2014* (Vol. 9055, p. 90550I). International Society for Optics and Photonics.

Chaminade, T. (2017). An experimental approach to study the physiology of natural social interactions. *Interaction Studies*, 18(2), 254-275.

Chaminade, T., & Cheng, G. (2009). Social cognitive neuroscience and humanoid robotics. *Journal of Physiology-Paris*, 103(3-5), 286-295.

Chaminade, T., & Kawato, M. (2011). Mutual benefits of using humanoid robots in social neuroscience. In *The Oxford Handbook of Social Neuroscience*.

Chaminade, T., Rosset, D., Da Fonseca, D., Nazarian, B., Lutscher, E., Cheng, G., & Deruelle, C. (2012). How do we think machines think? An fMRI study of alleged competition with an artificial intelligence. *Frontiers in human neuroscience*, 6, 103.

Chaminade, T., Zecca, M., Blakemore, S.-J., Takanishi, A., Frith, C. D., Micera, S., Dario, P., Rizzolatti, G., Gallese, V., & Umiltà, M. A. (2010). Brain response to a humanoid robot in areas implicated in the perception of human emotional gestures. *PloS one*, 5(7).

Chouinard-Thuly, L., Gierszewski, S., Rosenthal, G. G., Reader, S. M., Rieucau, G., Woo, K. L., ...

Running Title

& Witte, K. (2017). Technical and conceptual considerations for using animated stimuli in studies of animal behavior. *Current Zoology*, 63(1), 5-19.

Cianca, V., Bartolini, T., Porfiri, M., & Macrì, S. (2013). A robotics-based behavioral paradigm to measure anxiety-related responses in zebrafish. *PloS one*, 8(7), e69661.

Cordeschi, R. (2002). *The Discovery of the Artificial. Behavior, Mind and Machines Before and Beyond Cybernetics*. Springer, Dordrecht.

Curtis, S. E., & Houpt, K. A. (1983). Animal ethology: its emergence in animal science. *Journal of Animal Science*, 57(suppl_2), 234-247.

Datteri, E. (2017a). Biorobotics. In Lorenzo Magnani & T. Bertolotti (Eds.), *Springer Handbook of Model-Based Science* (pp. 817–837). Springer International Publishing. https://doi.org/10.1007/978-3-319-30526-4_37

Datteri, E. (2017b). The Epistemic Value of Brain–Machine Systems for the Study of the Brain. *Minds and Machines*, 27(2), 287–313. <https://doi.org/10.1007/s11023-016-9406-1>

Datteri, E. (2020). The Logic of Interactive Biorobotics. *Frontiers in Bioengineering and Biotechnology*, 8(July). <https://doi.org/10.3389/fbioe.2020.00637>

Datteri, E. (2021a). Interactive biorobotics. *Synthese*, 198(8), 7577–7595. <https://doi.org/10.1007/s11229-020-02533-2>

Datteri, E. (2021b). The creation of phenomena in interactive biorobotics. *Biological Cybernetics*, 2014. <https://doi.org/10.1007/s00422-021-00900-x>

Datteri, E., & Tamburrini, G. (2007). Biorobotic Experiments for the Discovery of Biological Mechanisms. *Philosophy of Science*, 74(3), 409–430. <https://doi.org/10.1086/522095>

Dennett, D. C. (1987). *The intentional stance*. MIT Press.

Faria, J. J., Dyer, J. R. G., Clément, R. O., Couzin, I. D., Holt, N., Ward, A. J. W., Waters, D., & Krause, J. (2010). A novel method for investigating the collective behaviour of fish: Introducing “Robofish.” *Behavioral Ecology and Sociobiology*, 64(8), 1211–1218. <https://doi.org/10.1007/s00265-010-0988-y>

Frigg, R., & Nguyen, J. (2017). Models and Representation. In L. Magnani & T. Bertolotti (Eds.), *Springer Handbook of Model-Based Science* (pp. 49–102). Springer International Publishing. https://doi.org/10.1007/978-3-319-30526-4_3

Garland, A. (2014). *Ex machina*. Universal Studios.

Gravish, N., & Lauder, G. V. (2018). Robotics-inspired biology. *The Journal of Experimental Biology*, 221(7), jeb138438. <https://doi.org/10.1242/jeb.138438>

Hirskyj-Douglas, I., & Read, J. C. (2016). The ethics of how to work with dogs in animal computer interaction. In *Proceedings of the Animal Computer Interaction Symposium. Measuring Behaviour*.

Karakaya, M., Porfiri, M., & Polverino, G. (2020, April). Invasive alien species respond to

Running Title

biologically-inspired robotic predators. In *Bioinspiration, Biomimetics, and Bioreplication X* (Vol. 11374, p. 113740C). International Society for Optics and Photonics.

Kilner, J. M., Paulignan, Y., & Blakemore, S. J. (2003). An interference effect of observed biological movement on action. *Current Biology: CB*, 13(6), 522-525. [https://doi.org/10.1016/s0960-9822\(03\)00165-9](https://doi.org/10.1016/s0960-9822(03)00165-9)

Krach, S., Hegel, F., Wrede, B., Sagerer, G., Binkofski, F., & Kircher, T. (2008). Can Machines Think? Interaction and Perspective Taking with Robots Investigated via fMRI. *PLoS ONE*, 3(7), e2597.

Krause, J., Winfield, A. F. T., & Deneubourg, J. L. (2011). Interactive robots in experimental biology. *Trends in Ecology and Evolution*, 26(7), 369–375. <https://doi.org/10.1016/j.tree.2011.03.015>

Latinus, M., McAleer, P., Bestelmeyer, P. E. G., & Belin, P. (2013). Norm-based coding of voice identity in human auditory cortex. *Current Biology: CB*, 23(12), 1075-1080. <https://doi.org/10.1016/j.cub.2013.04.055>

Leitão, A. V., Hall, M. L., Delhey, K., & Mulder, R. A. (2019). Female and male plumage colour signals aggression in a dichromatic tropical songbird. *Animal Behaviour*, 150, 285-301.

Lieberman, M. D. (2010). Social Cognitive Neuroscience. In *Handbook of Social Psychology* (Issue 111, pp. 883–885). John Wiley & Sons, Inc. <https://doi.org/10.1002/9780470561119.socpsy001005>

Loffler, G., Yourganov, G., Wilkinson, F., & Wilson, H. R. (2005). FMRI evidence for the neural representation of faces. *Nature Neuroscience*, 8(10), 1386-1391. <https://doi.org/10.1038/nn1538>

Lorenz, K. (2013). *The foundations of ethology*. Springer Science & Business Media.

MacDorman, K. F., & Ishiguro, H. (2006). The uncanny advantage of using androids in cognitive and social science research. *Interaction Studies*, 7(3), 297-337.

Magnani, Lorenzo, & Bertolotti, T. (Eds.). (2017). *Springer Handbook of Model-based Science*. Springer. <https://doi.org/10.1080/02698595.2019.1615662>

Mantovani, M. (2020). Descartes' Man Under Construction: The Circulatory Statue of Salomon Reisel, 1680. *Early Science and Medicine*, 25(2), 101–134. <https://doi.org/10.1163/15733823-00252P01>

McFarland, D. (1993). *Animal behaviour: psychobiology, ethology, and evolution*. John Wiley & Sons.

Miklósi, Á., Korondi, P., Matellán, V., & Gácsi, M. (2017). Ethorobotics: A new approach to human-robot relationship. *Frontiers in psychology*, 958.

Myrberg Jr, A. A., & Thresher, R. E. (1974). Interspecific aggression and its relevance to the concept of territoriality in reef fishes. *American Zoologist*, 14(1), 81-96.

Newell, A., & Simon, H. A. (1972). *Human Problem Solving*. Prentice-Hall.

Oztop, E., Franklin, D. W., Chaminade, T., & Cheng, G. (2005). Human–humanoid interaction : Is a

Running Title

- humanoid robot perceived as a human? *International Journal of Humanoid Robotics*, 2(04), 537-559.
- Partan, S. R., Larco, C. P., & Owens, M. J. (2009). Wild tree squirrels respond with multisensory enhancement to conspecific robot alarm behaviour. *Animal Behaviour*, 77(5), 1127-1135.
- Perani, D., Fazio, F., Borghese, N. A., Tettamanti, M., Ferrari, S., Decety, J., & Gilardi, M. C. (2001). Different Brain Correlates for Watching Real and Virtual Hand Actions. *NeuroImage*, 14(3), 749-758. <https://doi.org/10.1006/nimg.2001.0872>
- Phamduy, P., Polverino, G., Fuller, R. C., & Porfiri, M. (2014). Fish and robot dancing together: bluefin killifish females respond differently to the courtship of a robot with varying color morphs. *Bioinspiration & biomimetics*, 9(3), 036021.
- Pfeifer, R., Lungarella, M., & Sporns, O. (2008). The Synthetic Approach to Embodied Cognition. In P. Calvo & A. Gomila (Eds.), *Handbook of Cognitive Science* (pp. 121–137). Elsevier. <https://doi.org/10.1016/B978-0-08-046616-3.00007-4>
- Polverino, G., Karakaya, M., Spinello, C., Soman, V. R., & Porfiri, M. (2019). Behavioural and life-history responses of mosquitofish to biologically inspired and interactive robotic predators. *Journal of the Royal Society Interface*, 16(158), 20190359.
- Rauchbauer Birgit, Nazarian Bruno, Bourhis Morgane, Ochs Magalie, Prévot Laurent, & Chaminade Thierry. (2019). Brain activity during reciprocal social interaction investigated using conversational robots as control condition. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 374(1771), 20180033. <https://doi.org/10.1098/rstb.2018.0033>
- Riskin, J. (2016). *The Restless Clock. A History of the Centuries-Long Argument over What Makes Living Things Tick*. University of Chicago Press.
- Romano, D., & Stefanini, C. (2021a). Individual neon tetras (*Paracheirodon innesi*, Myers) optimise their position in the group depending on external selective contexts: Lesson learned from a fish-robot hybrid school. *biosystems engineering*, 204, 170-180.
- Romano, D., & Stefanini, C. (2021b). Unveiling social distancing mechanisms via a fish-robot hybrid interaction. *Biological Cybernetics*, 1-9. <https://doi.org/10.1007/s00422-021-00867-9>
- Romano, D., & Stefanini, C. (2021c). Animal-robot interaction and biohybrid organisms. *Biological cybernetics*, 1-2. <https://doi.org/10.1007/s00422-021-00913-6>
- Romano, D., Donati, E., Benelli, G., & Stefanini, C. (2019). A review on animal–robot interaction: from bio-hybrid organisms to mixed societies. *Biological Cybernetics*, 113(3), 201-225.
- Romano, D., Benelli, G., & Stefanini, C. (2017). Escape and surveillance asymmetries in locusts exposed to a Guinea fowl-mimicking robot predator. *Scientific reports*, 7(1), 1-9.
- Rowland, W. J. (1999). Studying visual cues in fish behavior: a review of ethological techniques. *Environmental Biology of Fishes*, 56(3), 285-305.
- Russell, W. M. S., & Burch, R. L. (1959). *The principles of humane experimental technique*. Methuen.

Running Title

Schilbach, L., Timmermans, B., Reddy, V., Costall, A., Bente, G., Schlicht, T., & Voegeley, K. (2013). Toward a second-person neuroscience. *Behavioral and Brain Sciences*, 36(4), 393-414. <https://doi.org/10.1017/s0140525x12000660>

Suárez, M. (2004). An Inferential Conception of Scientific Representation. *Philosophy of Science*, 71(5), 767–779. <https://doi.org/10.1086/421415>

Swoyer, C. (1991). Structural representation and surrogate reasoning. *Synthese*, 87(3), 449–508. <https://doi.org/10.1007/BF00499820>

Tamborini, M. (2021). The Material Turn in the Study of Form: From Bio-Inspired Robots to Robotics-Inspired Morphology. *Perspectives on Science*, 643–665. https://doi.org/10.1162/posc_a_00388

Tamborini, M. (2022). *The Architecture of Evolution: The Science of Form in Twentieth-Century Evolutionary Biology*. University of Pittsburgh Press.

Tamburrini, G., & Datteri, E. (2005). Machine Experiments and Theoretical Modelling: from Cybernetic Methodology to Neuro-Robotics. *Minds and Machines*, 15(3–4), 335–358.

Tannenbaum, J., & Bennett, B. T. (2015). Response to Dr. Carbone's Letter to the Editor. *Journal of the American Association for Laboratory Animal Science: JAALAS*, 54(4), 351-352.

Tryjanowski, P., Morelli, F., Kwieciński, Z., Indykiewicz, P., & Møller, A. P. (2018). Birds respond similarly to taxidermic models and live cuckoos *Cuculus canorus*. *Journal of Ethology*, 36(3), 243-249.

Turing, A. M. (1950). Computing Machinery and Intelligence. *Mind*, LIX(236), 433-460. <https://doi.org/10.1093/mind/LIX.236.433>

Webb, B., & Consi, T. R. (Eds.). (2001). *Biorobotics: Methods and Applications*. The MIT Press.

Webb, B. (2001). Can robots make good models of biological behaviour? *Behavioral and Brain Sciences*, 24(6), 1033–1050. <https://doi.org/10.1017/S0140525X01000127>

Willmott, H. E., & Foster, S. A. (1995). The effects of rival male interaction on courtship and parental care in the fourspine stickleback, *Apeltes quadracus*. *Behaviour*, 132(13-14), 997-1010.

Wykowska, A. (2020). Social Robots to Test Flexibility of Human Social Cognition. *International Journal of Social Robotics*, 12(6), 1203–1211. <https://doi.org/10.1007/s12369-020-00674-5>

Wykowska, A., Chaminade, T., & Cheng, G. (2016). Embodied artificial agents for understanding human social cognition. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 371(1693), 20150375. <https://doi.org/10.1098/rstb.2015.0375>

Yang, G. Z., Bellingham, J., Dupont, P. E., Fischer, P., Floridi, L., Full, R., ... & Wood, R. (2018). The grand challenges of Science Robotics. *Science Robotics*, 3(14), eaar7650.

Zablocki-Thomas, P. B., Boulinguez-Ambroise, G., Pacou, C., Mézier, J., Herrel, A., Aujard, F., & Pouydebat, E. (2021). Exploring the behavioral reactions to a mirror in the nocturnal grey mouse lemur: sex differences in avoidance. *PeerJ*, 9, e11393.

1. Conflict of Interest

The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

2. Author Contributions


The authors equally contributed to the ideation and the design of the structure of the article. ED wrote sections 1 and 4. TC wrote section 2. DR wrote section 3.

Written informed consent was obtained from the individuals for the publication of any potentially identifiable images or data included in this article.

In review


Figure 1.JPEG

In review

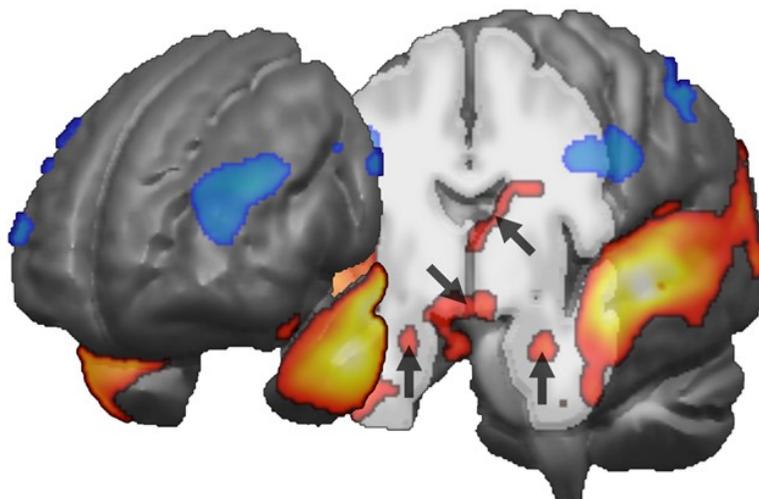

In review


classical biorobotics

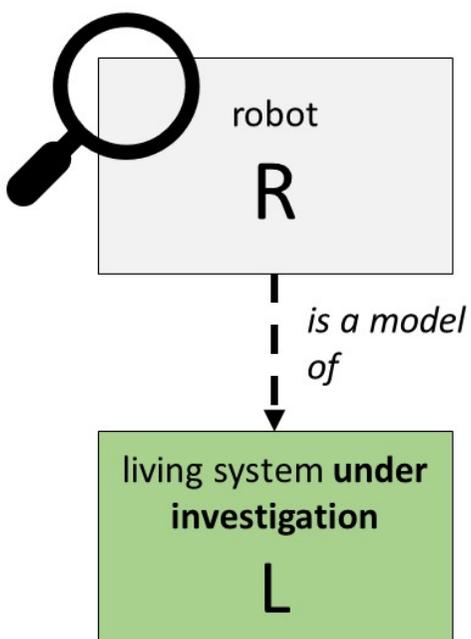

- The robot R is a **model of the system L under investigation**
- **Surrogate reasoning**: experiments are performed on R to learn something on L
- **Synthetic method**: the behaviour of R is compared to the behaviour of L

In review

interactive biorobotics

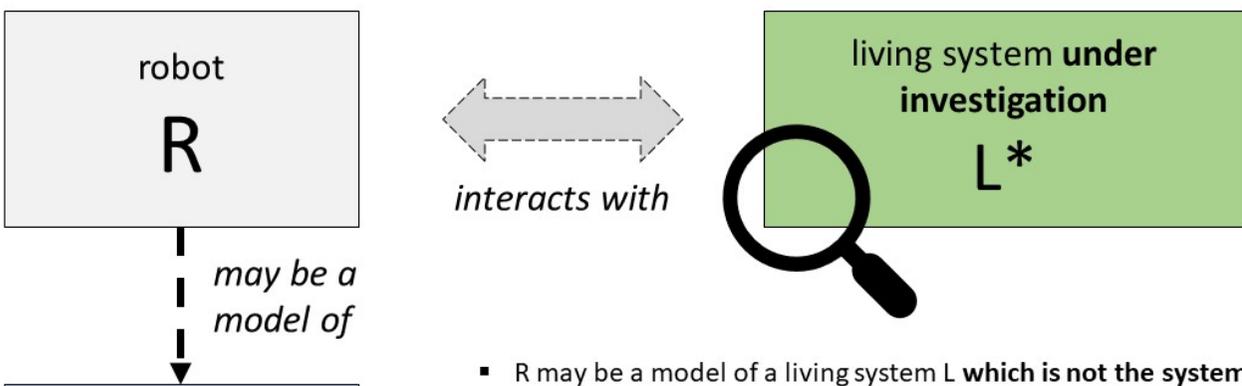

- R may be a model of a living system L **which is not the system under investigation**
- **Experiments are performed on L***, which is the system under investigation (how does L* react to R?): **this is not surrogative reasoning**
- The behaviour of R is not compared to the behaviour of L: **this is not the synthetic method**