



HAL
open science

What can be expected of a T90 extension piece to improve selectivity in bottom trawl multispecific fisheries in the Bay of Biscay?

Dorothee Kopp, Fabien Morandeau, M.A. Mouchet, Camille Vogel, Sonia Méhault

► To cite this version:

Dorothee Kopp, Fabien Morandeau, M.A. Mouchet, Camille Vogel, Sonia Méhault. What can be expected of a T90 extension piece to improve selectivity in bottom trawl multispecific fisheries in the Bay of Biscay?. *Fisheries Science*, 2018, 84 (4), pp.597-604. 10.1007/s12562-018-1203-8 . hal-03767818

HAL Id: hal-03767818

<https://hal.science/hal-03767818v1>

Submitted on 24 Jan 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

What can be expected of a T90 extension piece to improve selectivity in bottom trawl multispecific fisheries in the Bay of Biscay?

Kopp Dorothée ^{1,*}, Morandeau Fabien ¹, Mouchet Maud ², Vogel Camille ³, Méhault Sonia ¹

¹ Unité de Sciences et Technologies Halieutiques, Laboratoire de Technologie et Biologie Halieutique IFREMERLorient, France

² UMR 7204 MNHN-UPMC-CNRS Centre d'Ecologie et des Sciences de la Conservation, CP135 Paris, France

³ Fisheries Science for the English Channel and North Sea, Fisheries Resources Laboratory IFREMERPort-en-Bessin-Huppain, France

* Corresponding author : Dorothée Kopp, email address : dorothee.kopp@ifremer.fr

Abstract :

In the Bay of Biscay, the selective properties of otter trawls have mainly been studied with regard to single species. However, for bottom trawl multispecific fisheries targeting fish, it remains challenging to find a selective device capable of limiting catches of small individuals of several species without commercial losses. The present study focuses on an innovative technical solution to reduce catches of undersized individuals in a multispecies bottom trawl fishery in the Bay of Biscay. We tested a cylinder made of 100-mm diamond meshes turned at 90°, namely T90 inserted in the extension piece. We present the selectivity results obtained for six commercial species. This device allows the escape of small *Solea solea*, *Trachurus trachurus* and *Spondyllosoma cantharus* individuals. No commercial losses of *Sepia officinalis* were recorded. Patterns for *Dicentrarchus labrax* and *Mullus surmuletus* require further investigation due to limited fish size ranges in the dataset.

Keywords : Gear technology, Covered codend, Turned mesh, Escape, Discard ban

39 1. Introduction

40 In 2013, the European Union reformed its Common Fisheries Policy (CFP) and approved the landing
41 obligation, prohibiting the discard of any individual of the species under quota (Official Journal of the
42 European Union, 28 December 2013). *De minimis* exemptions to this landing obligation could be
43 granted on the condition that scientific evidence indicates that increases in selectivity are very
44 difficult to achieve (Council of the European Union, 2013). Thus the landing obligation serves as
45 motivation for fishermen to implement selectivity measures to reduce discards. Among these
46 measures, improving gear selectivity was identified as one way to reduce unwanted bycatch such as
47 commercial species under specific legislation or individuals below the Minimum Conservation
48 Reference Sizes (MCRS) (Graham 2006).

49 Gear selectivity can be improved by i) adding a selective device (e.g. Lomeli and Wakefield 2016), ii)
50 changing mesh size and shape (e.g. Sala et al. 2008; Aydın and Tosunoğlu 2010) or iii) by combining
51 both approaches (e.g. Lövgren et al. 2016; Vogel et al. 2017). Bycatch reduction devices, such as grids
52 (Fonseca et al. 2005), horizontal separator panels (Ferro et al. 2007) or topless trawls (Revill et al.
53 2006) have already proven to significantly reduce discards in fisheries. However, the diversity of
54 species caught in multispecies fisheries, their corresponding morphologies and behaviours, as well as
55 the variability in their MCRS may impede the overall efficiency of a given selective device (Bullough et
56 al. 2007; Ryer 2008; Krag et al. 2014; Santos et al. 2015). Improvements of fishing gear selectivity in
57 multispecies fisheries remain challenging and experimental testing of various selective techniques
58 continues in Europe (e.g. Ordines et al. 2006; Sala et al. 2008; Bayse et al. 2016; Lövgren et al. 2016;
59 Krag et al., 2016; Vogel et al. 2017).

60 The T90 mesh based techniques, i.e. a diamond mesh turned 90° and remaining wide open
61 throughout the fishing process, was first introduced in the early 1990s in the Baltic Sea (Moderhak
62 1997). It was later tested in the Bay of Biscay (Meillat and Morandeau 2001) and in other European
63 ecoregions (Madsen et al. 2012; Tokaç et al. 2014; Bayse et al. 2016). Conclusions on its selective
64 properties vary, depending on whether roundfish or flatfish species are considered (Madsen et al.

65 2012; Herrmann et al. 2013; Bayse et al. 2016). Compared to equivalent diamond mesh sizes,
66 enhanced selectivity in the codend is found for roundfish with T90 netting whereas T90 decreases
67 selectivity for flatfish like plaice. So far, T90 meshes were mainly tested in the codend (Madsen et al.
68 2012; Herrmann et al. 2013; Bayse et al. 2016) while other parts from the trawl might be relevant to
69 increase fishing gear selectivity. The present study focuses on an innovative technical solution to
70 reduce catches of undersized individuals in a multispecies fish-directed bottom trawl fishery in the
71 Bay of Biscay, France. No selective studies have been reported to date on this fishery and there is a
72 need to provide fishermen with selective devices adapted to multispecies catches, which can be
73 extended to other demersal fisheries or areas. The experimental selective device we present, a
74 cylinder composed of 100 mm T90 meshes mounted in the extension piece, is innovative since to our
75 knowledge, T90 netting has never been tested in the extension piece of the trawl.

76

77 2. Materials and methods

78 2.1. Selective device and collection of escaping fish

79 The experiment was conducted onboard the commercial fishing vessel *Déesses de l'Océan* (NO
80 930 461) using a single otter trawl with semi pelagic rig, with a 22 m ground rope and 18 m headline.
81 The codend was 25 meshes deep, 140 free meshes in circumference and made of double-twine PE
82 with a stretched-mesh size of 74.6 ± 3.1 mm (70 mm nominal). The selective device was mounted in
83 the extension piece, between 22 meshes in the anterior part and 10 meshes in the posterior part
84 (Fig. 1). Fish were prevented from escaping these two sections by: i) a flapper (70 mm mesh) in the
85 anterior part, ii) an overlapping net (100 mm mesh) used as connection with the inner bag in the
86 posterior part (Fig. 1). To avoid escape from the codend, a fine mesh inner bag of 37.2 ± 0.8 mm
87 mesh size (20 mm nominal) was inserted there. The selective device used was a cylinder composed
88 of 113.9 ± 1.8 mm (100 mm nominal) meshes mounted in the extension piece with a netting
89 orientation turned at 90° (T90 ; Fig. 2) with a 72 mesh circumference and 40 mesh length
90 polyethylene (PE). The selective performance of the T90 extension piece was estimated using the

91 covered codend method (MacLennan 1992), held open by kites as developed by Madsen et al.
92 (2001). The cover was made of polyamide netting with a 20 mm nominal mesh size, a circumference
93 of 1370 meshes and a length twice as long as the extension piece and codend combined. A
94 combination of kites, floats and chains was used to keep the cover away from the test extension
95 piece (Madsen et al. 2001) (Fig. 1). Prior the sea trials, the kite cover and the selective device were
96 tested and validated in the flume tank at IFREMER Lorient, using a half scale model. All mesh
97 measurements of gear parts were made on 30 meshes with the Omega mesh gauge.

98 2.2. Field data collection

99 The sea trials were conducted in the fishing grounds of the Bay of Bourgneuf (Bay of Biscay, off
100 France, 47°02N; 02°10W) in June 2016 (Fig. 3). Nine hauls were performed during daytime at a mean
101 (\pm SD) depth of 11 ± 4 m. Haul speed was 3.5 knots as under commercial conditions and tow duration
102 was set at one hour. After each haul, the total catches from the codend (i.e. the fine mesh-size inner
103 bag) and from the cover were sorted separately and by species. The weight of all individuals from a
104 given species was recorded and the total length of each individual was measured. When the total
105 catch was too large to allow measurement of every individual (e.g. for horse mackerel), sub-sampling
106 was performed by randomly dividing the species catch into two baskets, repeating this operation
107 until reaching a manageable and representative sample size. Resultant sampling ratios were used to
108 elevate numbers at length used in the subsequent modelling process. The species investigated in this
109 study were black seabream *Spondyliosoma cantharus*, cuttlefish *Sepia officinalis*, horse mackerel
110 *Trachurus trachurus*, red mullet *Mullus surmuletus*, European seabass *Dicentrarchus labrax* and
111 common sole *Solea solea*.

112 2.3. Data analysis

113 The size selectivity of our device was assessed by comparing the distribution of individual total length
114 between the codend and cover fractions. Length–frequency curves were plotted for the six species in
115 the codend and the cover. Proportions of fish retained per length class, $P(l)$, were calculated
116 according to:

$$P(l) = \frac{N_{l,t}}{N_{l,c} + N_{l,t}}$$

117 where $N_{l,t}$ is the sum of fish of length l in the codend and $N_{l,c}$ the sum of fish of length l in the cover,
 118 across all hauls.

119 For each one of the six species, the proportions $P(l)$ were analyzed using Generalized Linear
 120 Modelling (GLM), with the logit link function. The aim was to examine whether the retention and
 121 escape of the different species was length related. A logistic model, whose parameters a and b were
 122 estimated by maximum likelihood, was adjusted to the observed retention proportions $P(l)$ (Fryer
 123 1991; Millar and Fryer 1999).

124 In the case of the covered codend method, the logistic model is reduced to

$$\text{logit}(P(l)) = \ln\left(\frac{P(l)}{1 - P(l)}\right) = a + b \cdot l$$

125 where $P(l)$ is the probability that a fish of length l will be retained in the test codend given it enters
 126 the trawl. The goodness of fit of the model to data was evaluated by plotting the deviance residuals
 127 vs the fitted values. When a pattern was observed from GLM residuals, polynomial of second order
 128 GLM was tested.

129 Finally, the selectivity parameters L_{50} (50% retention length) and SR (selection range) were calculated
 130 from the 1st order polynomial model parameters (Wilemand et al. 1996):

$$131 \quad L_{50} = \frac{-a}{b} \quad \text{and} \quad SR = \frac{2\log(3)}{b}$$

132 All statistical analyses were performed in R (R Core Team, 2017).

133

134 3. Results

135 Catches per length classes displayed contrasting retention patterns for the different species (Fig. 4).
 136 Sole from 5 to 24 cm were able to escape the fishing gear, but this trend steadily decreased from
 137 length 25 cm and upwards. For black seabream, individuals between 15 and 23 cm escaped, while
 138 individuals below 15 cm and over 23 cm were mostly retained and those above 28 cm were always
 139 captured in the codend. On the whole range of length classes observed (most of the catch was made

140 up of individuals below 18 cm), cuttlefish was always more numerous in the codend than in the
141 cover. It is worth noting that, even though no size related differences in seabass retention rates could
142 be detected by the model, there was a slight increase in the catch proportion in the codend. Red
143 mullets escaped on the whole length range observed. For horse mackerel, more individuals of 10-15
144 cm long were recorded in the cover than in the codend.

145 GLM of first order polynomial was fitted to cuttlefish, horse mackerel, red mullet, seabass and sole
146 data and polynomial of second order GLM was fitted to black seabream data. For all species, graphics
147 of deviance residuals versus fitted values did not display any special pattern and less than 5% of the
148 values were found outside the 95%-confidence interval. GLMs identified significant size related
149 differences in retention rates for cuttlefish, sole, black seabream. L_{50} for sole is 26.1 cm with
150 associated SR of 55.7 cm. The L_{50} for cuttlefish is 0.7 cm, showing a poor selectivity of the device for
151 this species (Table 1). Associated prediction curves correctly pick up the retention profile of the T90
152 cylinder for cuttlefish and black seabream (Fig. 4), while it is less evident for sole. No size related
153 differences in retention rates could be shown for horse mackerel, red mullet and seabass based on
154 the GLM procedure, leading to the absence of L_{50} (Table 1).

155

156 4. Discussion

157 Our experiments demonstrate that, for coastal trawlers from the Bay of Biscay, a T90 cylinder
158 mounted in the extension piece let escape part of the unwanted catch such as horse mackerel
159 though selection of other commercial species are mixed and discussed hereafter.

160 Results for sole showed a L_{50} of 26 cm with most of the individuals from 5 to 24 cm escaping when
161 using the selective device. However, a wide SR of 55.7 cm is observed, which leads to both
162 escapement of commercial size individuals and retention of unwanted individuals. Bayse et al. (2016)
163 observed a smaller selection range of 3.5 cm when using a 80 mm T90 codend. Such difference
164 suggests that the position of the selective mesh in the trawl has an effect on fish contact probability,
165 which is supported by Graham et al. (2003) who found that a square mesh panel provides better

166 escapement rates when placed close to the codend than in the extension piece. Fish behaviour
167 combined to the contact probability of the device are known to have an effect on selectivity patterns
168 (Ryer 2008; Krag et al. 2014, 2016; Santos et al. 2016), which may explain wider *SR* from extension
169 than from codend selective device.

170 Sole falls under the new PCP legislation and the landing obligation. Given that its MCRS is set at 26
171 cm in the Bay of Biscay, the escape of individuals under MCRS is beneficial to both fishermen and the
172 stock, as escaping individuals would not account for TAC but would contribute to stock dynamics. The
173 implementation of the T90 cylinder would lead to less discards. Moreover, according to Suuronen
174 (2005) and references therein, mortality observed for escaped individuals may be relatively low for
175 flatfish; for example, a survival probability of nearly 100% was estimated for escaped white flounder
176 (DeAlteris and Reifsteck 1993).

177 The three-part pattern observed for black seabream could be explained by two independent
178 processes. While large individuals (> 23 cm) are mechanically retained, smaller individuals seem to be
179 under physiological constraints; thus individuals smaller than 15 cm are retained in the codend whilst
180 individuals 15-23 cm are able to escape. Based on Breen et al. (2004), we hypothesize that larger
181 individuals are able to swim for a longer time whereas smaller ones drop back rapidly into the
182 codend.

183 Our experiment revealed that nearly the whole fraction of horse mackerel under 15 cm total length
184 escaped from the T90 cylinder, which is the species MCRS. As this species constitutes the third most
185 discarded species (in tons) in the coastal bottom trawl fisheries of the Bay of Biscay (Cornou et al.
186 2016), this escape would allow fisherman to avoid lengthy sorting periods while later discarding the
187 fish. Moreover this species shows particularly low survival probability when exposed to air on deck
188 (Morfin et al. 2017); their direct escape at sea from the gear would be highly beneficial for the
189 species stock. Finally, because the catch is mostly composed of individuals below 15 cm, these
190 immature fish (Mahé al. 2007) may further contribute to the stock replenishment. Moreover,
191 schooling behaviour characterise horse mackerel aggregations (Masse et al. 1996) and may be

192 responsible for the high escapement rate observed during our experiment. Although the
193 phenomenon provides a particularly interesting demonstration of escapement from the T90 cylinder,
194 the dominance of the 10-15 cm size-class compared to the whole size range of the species impairs
195 the model ability to pick up an overall pattern and flattens the shape of the retention curve.

196 The T90 cylinder does not let cuttlefish escape from the trawl; almost the whole species catch is
197 found in the codend. Given that there is no MCRS for that species, status quo is preserved: no discard
198 reduction or commercial loss are observed. Further work would need to be carried out on the
199 financial implications for fishermen, as potential economic losses on other associated demersal
200 species may be compensated for by cuttlefish catches.

201 Concerning European seabass, it is worth noting that, while the model detects high escapement rate
202 and a weak size effect on retention, the length range observed in the experimental hauls does not
203 cover the whole size range of the species in the wild nor the MCRS set at 42 cm in the Bay of Biscay.
204 Therefore, no conclusion can be drawn on commercial size retention though, based on a small
205 number of individuals, our experiment suggests that retention is initiated from 32cm.

206 Finally, from the sea trials, it appears that the T90 let escape a majority of red mullet individuals
207 across the observed size range. However, the small number of individuals captured during the trial
208 limits our understanding of the effect of the T90 cylinder on this species. Even if the landing tonnage
209 of this species is rather small compared to the other commercial species caught, its high market
210 value (around 10€/kg in 2014) (Coupeau et al. 2016) and its low legal minimum landing weight (40g;
211 Council Regulation (EC) No 2406/96) renders the cylinder detrimental in terms of financial outcomes
212 for fishermen. Red mullets reach sexual maturity above 15 cm total length (Mahé et al. 2013) and
213 from a stock management point of view, the escape of immature individuals by the implementation
214 of the T90 cylinder would be beneficial for further fish reproduction and subsequent stock
215 recruitment.

216 To the best of our knowledge, this is the first time that the T90 mesh configuration has been tested
217 in a cylinder located in the extension part of the trawl, although the T90 codend has been frequently

218 tested (Moderhak 1997; Digre et al. 2010; Herrmann et al. 2013; Bayse et al. 2016). Also, it is
219 expected that the gear configuration we tested enhances escapees' survival potential by giving
220 unwanted fish the opportunity to escape before entering the codend and preventing them from
221 swimming related exhaustion in the trawl body. It may also help preserving the physical integrity of
222 escapees since they do not face compression in the codend nor are in contact with abrasive objects
223 within the catch bulk such as crustacean pincers or bivalve shells. The large size of the mesh (100
224 mm) as well as the mesh orientation (i.e., not classical diamond mesh but T90 open meshes) prevent
225 escaped fish from injuries due to skin and scale loss as already observed for round fish passing
226 through a T90 codend (Digre et al. 2010).

227 To conclude, based on the multispecies approach we present, the proposed 100 mm T90 cylinder
228 mounted in the extension part of a coastal otter trawl provides fishermen with a selective device
229 relevant to reduce discards. The device appears especially efficient when by-catch is made of high
230 proportion of pelagic species displaying schooling behaviour, as demonstrated for horse mackerel in
231 our experiment. Such a selective device may therefore be of interest for other multispecies demersal
232 fisheries facing by-catch of anchovy, sardine and sprat in the Bay of Biscay, and herring in the
233 Channel and North Sea areas.

234

235 Acknowledgements

236 This work was part of the FUSION project supported by *France Filière Pêche* and the *Direction des*
237 *Pêches Marines et de l'Aquaculture*. The authors thank the crew of the *Déeses de l'Océan* for their
238 help in conducting the experiments on board, and Niels Madsen for his fruitful comments on the
239 covered codend design. We also would like to express our gratitude to Marie Morfin whose expertise
240 in statistical analysis helped to improve the manuscript.

241

242 Reference list

243 Aydin C, Tosunoğlu Z (2010) Selectivity of diamond, square and hexagonal mesh codends for Atlantic
244 horse mackerel *Trachurus trachurus*, European hake *Merluccius merluccius*, and greater forkbeard
245 *Phycis blennoides* in the eastern Mediterranean. J Appl Ichthyol 26:71-77

246 Bayse SM, Herrmann B, Lenoir H, Depestele J, Polet H, Vanderperren E, Verschueren B (2016) Could a
247 T90 mesh codend improve selectivity in the Belgian beam trawl fishery? Fish Res 174:201-209

248 Breen M, Dyson J, O'Neill B, Jones EG, Haigh M (2004) Swimming endurance of haddock
249 (*Melanogrammus aeglefinus* L.) at prolonged and sustained swimming speeds, and its role in their
250 capture by towed fishing gears. ICES J Mar Sci 61:1071-1079

251 Bullough LW, Napier IR, Laurenson CH, Riley D, Fryer RJ, Ferro RST, Kynoch RJ (2007) A year-long trial
252 of a square mesh panel in a commercial demersal trawl. Fish Res 83:105-112

253 Cornou A-S, Dimeet J, Goascoz N, Scavinner M, Rochet MJ (2016) Catches and discards in French
254 fishing fleets. Results of observations onboard commercial vessels in 2015.
255 <http://archimer.ifremer.fr/doc/00353/46441/> (in French)

256 Coupeau Y, Leblond E, Berthou P, Demaneche S, 2016. Fishing vessels activity in 2014 – Noirmoutier
257 maritime district. [http://sih.ifremer.fr/Publications/Syntheses/Facade-Atlantique/Synthese-par-](http://sih.ifremer.fr/Publications/Syntheses/Facade-Atlantique/Synthese-par-quartier-region-et-facade2/2014/Pays-de-Loire)
258 [quartier-region-et-facade2/2014/Pays-de-Loire](http://sih.ifremer.fr/Publications/Syntheses/Facade-Atlantique/Synthese-par-quartier-region-et-facade2/2014/Pays-de-Loire) (in French)

259 Council of the European Union, 2013. Position of the Council at first reading with a view to the
260 adoption of a Regulation of the European Parliament and of the Council on the Common Fisheries
261 Policy, amending Council Regulations (EC) No 1954 / 2003 and (EC) No 1224 / 2009 and repealing
262 Council Regulations.

263 DeAlteris JT, Reifsteck DM (1993) Escapement and survival of fish from the codend of a demersal
264 trawl. ICES Mar Sci Symposia 196:128-131

265 Digre H, Hansen UJ, Erikson U (2010) Effect of trawling with traditional and 'T90' trawl codends on
266 fish size and on different quality parameters of cod *Gadus morhua* and haddock *Melanogrammus*
267 *aeglefinus*. Fish Sci 76:549-559

268 Ferro RST, Jones EG, Kynoch RJ, Fryer RJ, Buckett B-E (2007) Separating species using a horizontal
269 panel in the Scottish North Sea whitefish trawl fishery. ICES J Mar Sci 64:1543–1550

270 Fonseca P, Campos A, Mendes B, Larsen RB (2005) Potential use of a Nordmøre grid for by-catch
271 reduction in a Portuguese bottom-trawl multispecies fishery. Fish Res 73:49–66

272 Fryer RJ (1991) A model of between-haul variation in selectivity. ICES J Mar Sci 48: 281-290

273 Graham N (2006) Trawling: Historic Development, Current Status and Future Challenges. Mar
274 Technol Soc J 40:20–24

275 Graham N, Kynoch RJ, Fryer RJ (2003) Square mesh panels in demersal trawls: further data relating
276 haddock and whiting selectivity to panel position. Fish Res 62:361-375

277 Herrmann B, Wienbeck H, Moderhak W, Stepputtis D, Krag LA (2013) The influence of twine
278 thickness, twine number and netting orientation on codend selectivity. Fish Res 145:22–36

279 Krag LA, Herrmann B, Karlsen JD (2014) Inferring fish escape behaviour in trawls based on catch
280 comparison data: model development and evaluation based on data from Skagerrak, Denmark.
281 PLOS ONE 9:e88819

282 Krag LA, Herrmann B, Feekings J, Lund HS, Karlsen JD (2016) Improving escape panel selectivity in
283 *Nephrops*-directed fisheries by actively stimulating fish behavior. Can J Fish Aquat Sci 74:486-493

284 Lomeli MJM, Wakefield WW (2016) Evaluation of a sorting grid bycatch reduction device for the
285 selective flatfish bottom trawl in the U.S. West Coast fishery. Fish Res 183:294-303

286 Lövgren J, Herrmann B, Feekings J (2016) Bell-shaped size selection in a bottom trawl: A case study
287 for *Nephrops* directed fishery with reduced catches of cod. Fish Res 184: 26-35

288 MacLennan DN (1992) Fishing gear selectivity: an overview. Fish Res 13:201–204

289 Madsen N, Hansen KE, Moth-Poulsen T (2001) The kite cover: a new concept for covered codend
290 selectivity studies. Fish Res 49:219–226

291 Madsen N, Herrmann B, Frandsen RP, Krag LA (2012) Comparing selectivity of a standard and turned
292 mesh T90 codend during towing and haul-back. Aquat Living Resour 25:231–240

293 Mahé K, Delpech J-P, Carpentier A (2007) Literature review of main marine resources in the Eastern
294 Channel and the Bay of Biscay. <http://archimer.ifremer.fr/doc/00000/6643/> (in French)

295 Mahé K, Coppin F, Vaz S, Carpentier A (2013) Striped red mullet (*Mullus surmuletus*, Linnaeus, 1758)
296 in the eastern English Channel and southern North Sea: growth and reproductive biology. J Appl
297 Ichthyol 29:1067-1072

298 Masse J, Koutsikopoulos C, Patty W (1996) The structure and spatial distribution of pelagic fish
299 schools in multispecies clusters: An acoustic study. Ices J Mar Sci 53:155-160.

300 Meillat M, Morandeau F (2001) Hake selectivity - Summary of work aiming to improve the selectivity
301 of *Nephrops* / hake bottom trawls. IFREMER. <https://w3.ifremer.fr/archimer/doc/00347/45793/> (in
302 **French with English abstract**)

303 Millar RB, Fryer RJ (1999) Estimating the size-selection curves of towed gears, traps, nets and hooks.
304 Rev Fish Biol Fish 9:89-116

305 Moderhak W (1997) Determination of selectivity of cod codends made of netting turned through 90
306 degree. Bull Sea Fish Inst 140:1–14

307 Morfin M, Méhault S, Benoît HP, Kopp D (2017) Narrowing down the number of species requiring
308 detailed study as candidates for the EU Common Fisheries Policy discard ban. Mar Pol 77:23-29

309 Ordines F, Massutí E, Guijarro B, Mas R (2006) Diamond vs. square mesh codend in a multi-species
310 trawl fishery of the western Mediterranean: effects on catch composition, yield, size selectivity and
311 discards. Aquat Living Resourc 19:329-338

312 R Development Core Team (2017) R: a language and environment for statistical computing. R
313 Foundation for Statistical Computing, Vienna, Austria. <http://www.R-project.org/>

314 Revill A, Dunlin G, Holst R (2006) Selective properties of the cutaway trawl and several other
315 commercial trawls used in the Farne Deep North Sea *Nephrops* fishery. Fish Res 81:268–275

316 Ryer CH (2008) A review of flatfish behavior relative to trawl. Fish Res 90: 138-146

317 Sala A, Lucchetti A, Piccinetti C, Ferretti M (2008) Size selection by diamond- and square-mesh
318 codends in multi-species Mediterranean demersal trawl fisheries. Fish Res 93:8-21

319 Santos J, Herrmann B, Mieske B, Stepputtis D, Krumme U, Nilsson H (2015) Reducing flatfish bycatch
320 in roundfish fisheries. *Fish Res* 184:64–73

321 Suuronen P (2005) Mortality of fish escaping trawl gears. *FAO Technical paper* 478. Rome, FAO, 72p

322 Tokaç A, Herrmann B, Aydın C, Kaykaç H, Ünlüler A, Gökçe G (2014) Predictive models and
323 comparison of the selectivity of standard (T0) and turned mesh (T90) codends for three species in the
324 Eastern Mediterranean. *Fish Res* 150:76–88

325 Vogel C, Kopp D, Méhault S (2017) From discard ban to exemption: How can gear technology help
326 reduce catches of undersized *Nephrops* and hake in the Bay of Biscay trawling fleet? *J Environ Manag*
327 186:96–107

328 Wileman DA, Ferro RST, Fonteyne R, Millar RB (1996) Manual of methods of measuring the selectivity
329 of towed fishing gears. *ICES Coop Res Rep* 215, 126p

330

331 **Table 1** Results of the selectivity analysis. Numbers of fish escaped and caught, p -value corresponds
 332 to the significance of the length/length² parameters in the GLM, L_{50} and SR are presented only when
 333 the length parameter is significant in case of first order polynomial model

Species	Number escaped	Number caught	p -value	L_{50}	SR
Black seabream	31	86	0.012/0.006	-	-
Cuttlefish	50	472	0.000	0.7	8.1
Horse mackerel	5037	172	0.917	-	-
Red mullet	76	35	0.828	-	-
Seabass	109	31	0.384	-	-
Sole	88	66	0.034	26.1	55.7

334

335

336 Figure captions


337 **Fig. 1** Diagram of the selective device with location details within the trawl body (left side) and of the
338 covered codend (right side)

339 **Fig. 2** a- standard netting used onboard commercial vessel, b- the turned mesh T90 netting used in
340 this study in the extension piece

341 **Fig. 3** Map of the study area in the Bay of Biscay presenting the location of sampling sites (black dots)

342 **Fig. 4** Selectivity curves for fish including 95% confidence intervals (grey shaded areas). Black dots
343 represent experimental retention proportions. Solid black lines represent the catch size frequency
344 distribution in the cover and dotted black lines represent the catch size frequency distribution in the
345 codend

346

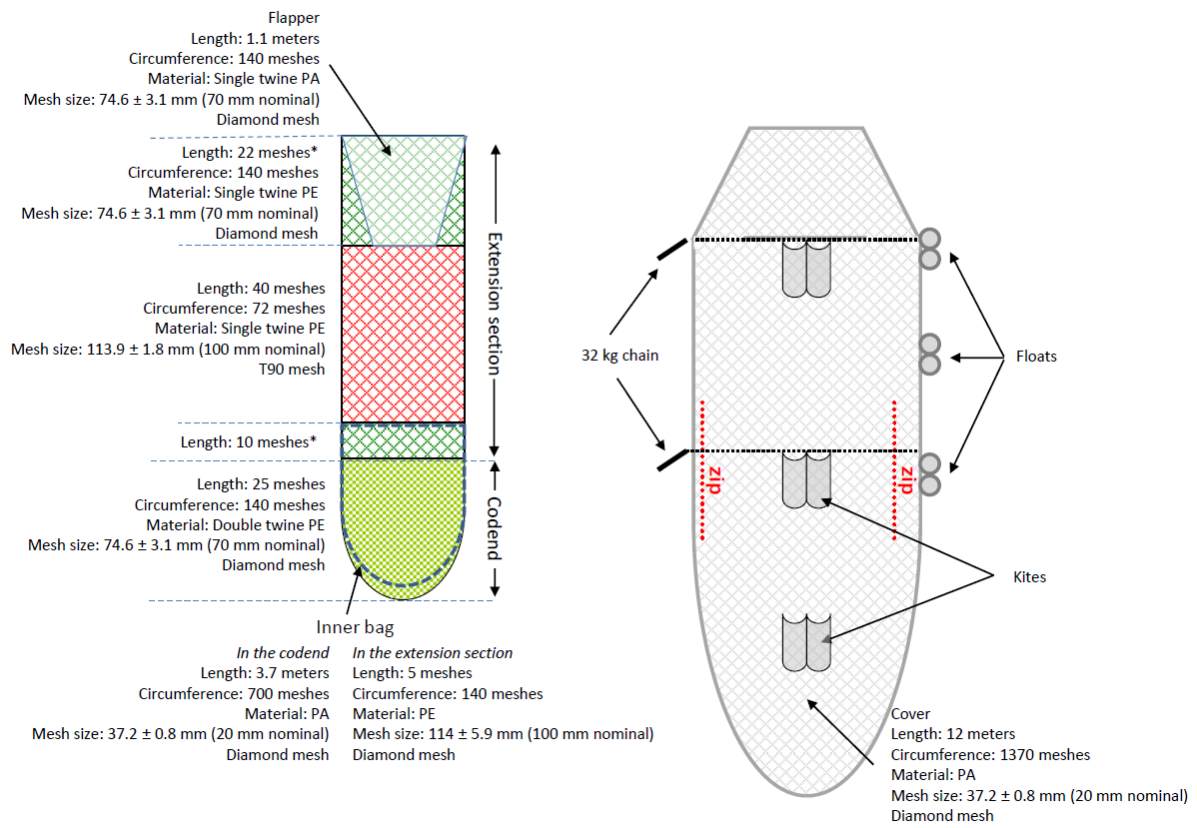

347

348


349 Figure 1

350



351
352 Figure 2


353

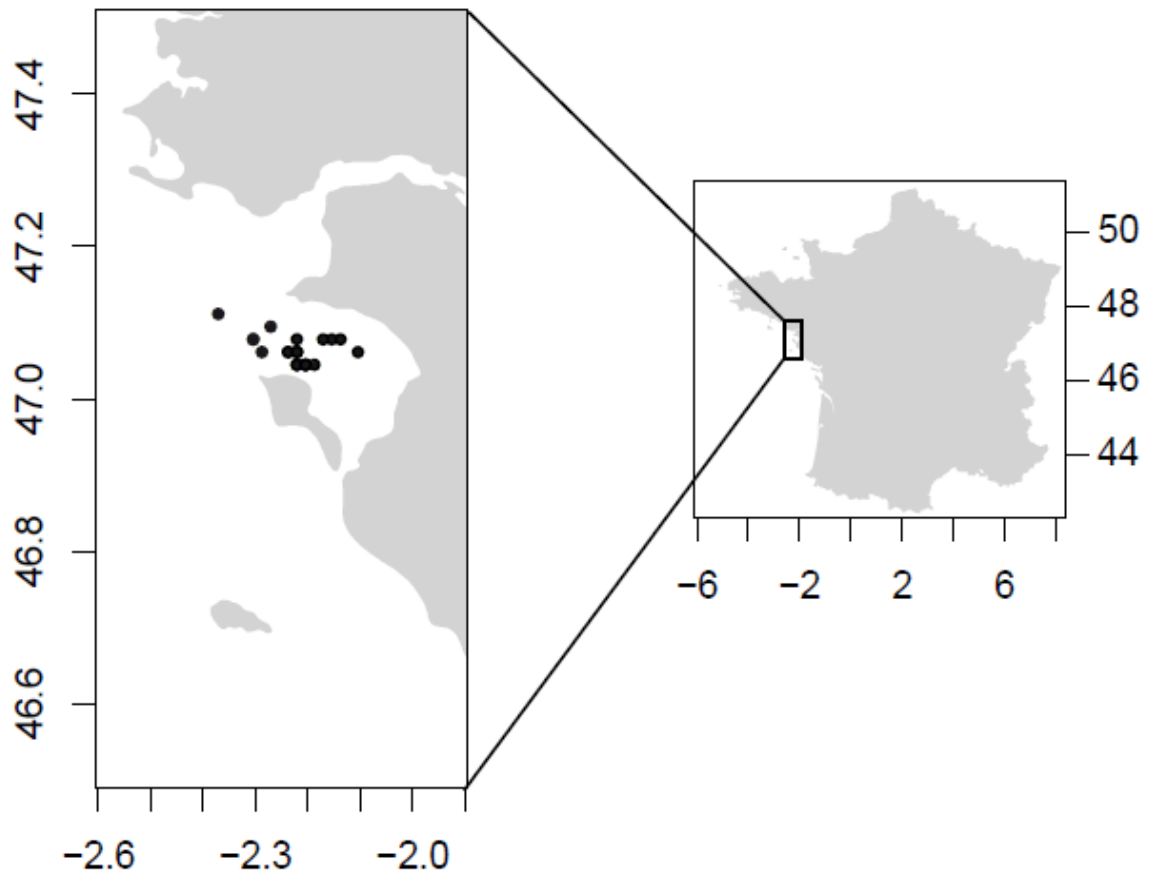

354

355 Figure 3

356

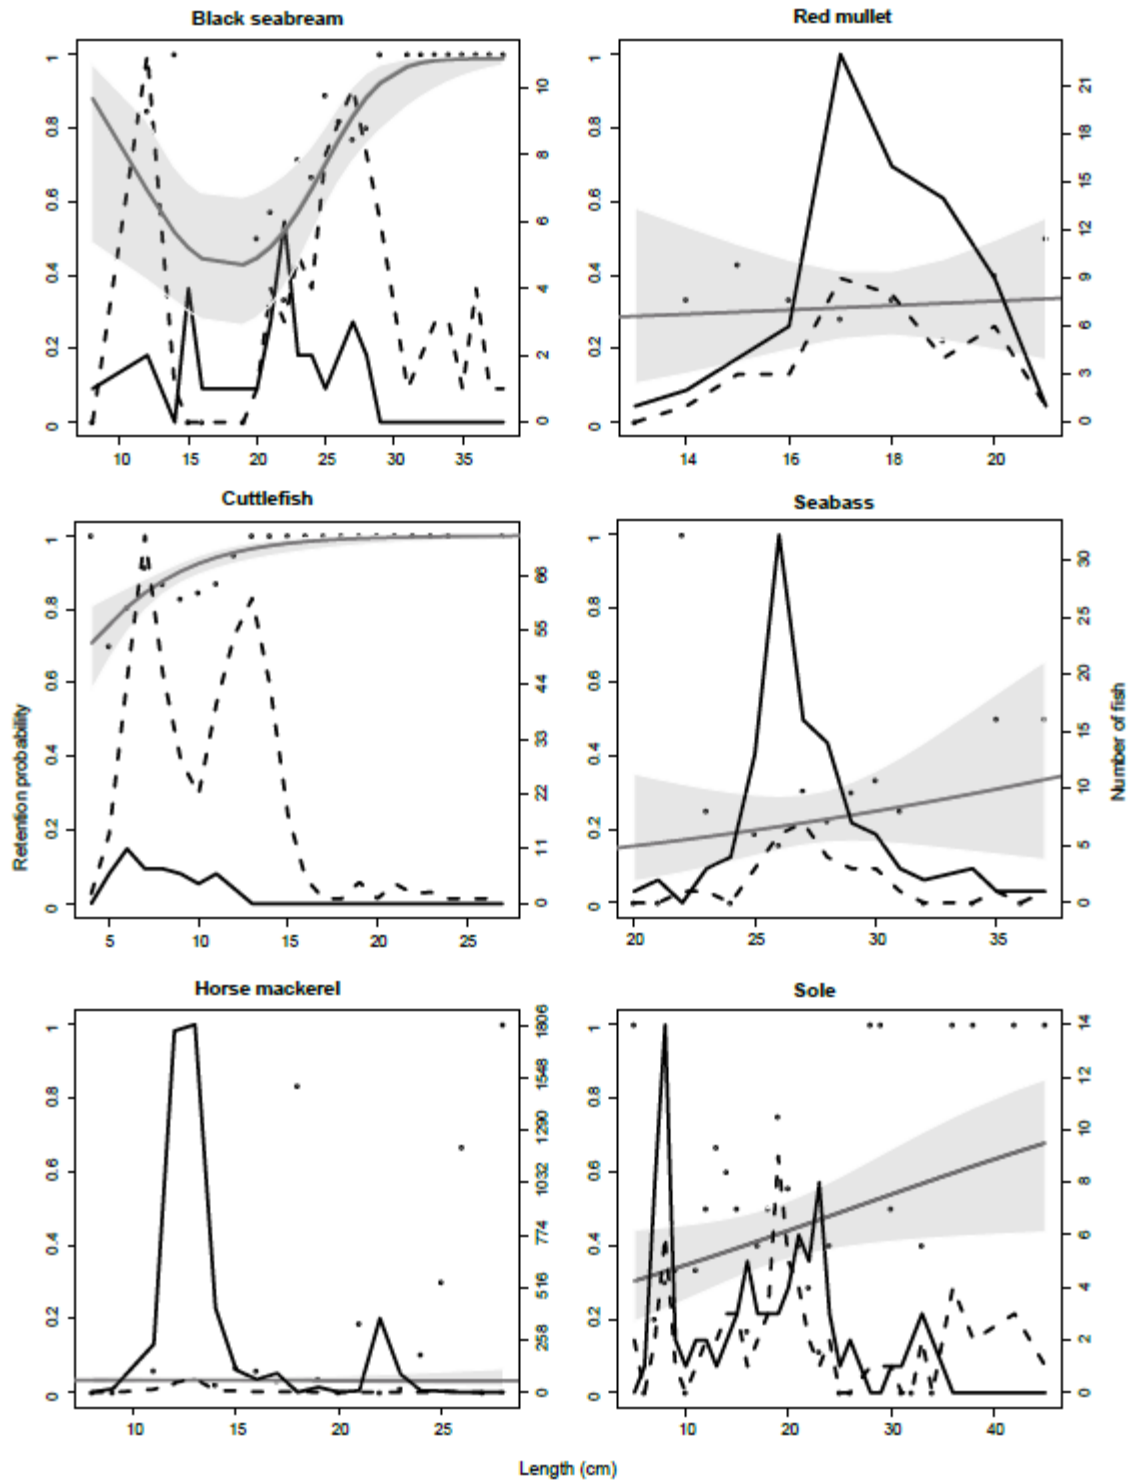

357

358 Figure 4