

### EURHISFIRM - M7.2: Final version of the data extraction system

Sébastien Adam, Simon Bouvier, Bertrand B. Coüasnon, Nathalie Girard, Camille Guerry, Aurélie Lemaitre, Iwan Le Floch, Thierry Paquet, Charles Quéguiner, Yann Ricquebourg, et al.

#### ► To cite this version:

Sébastien Adam, Simon Bouvier, Bertrand B. Coüasnon, Nathalie Girard, Camille Guerry, et al.. EURHISFIRM - M7.2: Final version of the data extraction system. [Research Report] European Union's Horizon 2020 research and innovation programme. 2021. hal-03828289

#### HAL Id: hal-03828289 https://hal.science/hal-03828289v1


Submitted on 25 Oct 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Long-term data for Europe

# EURHISFIRM

M7.2: Final version of the data extraction system

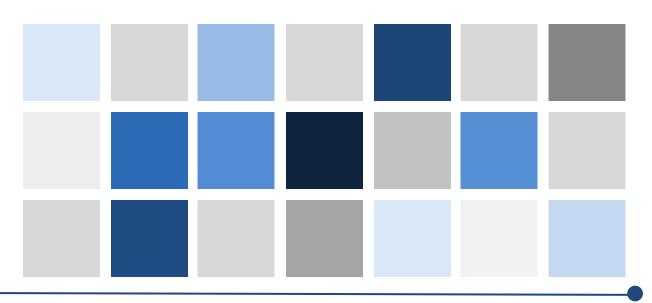



This project has received funding from

the European Union's Horizon 2020 research and innovation programme under grant agreement N° 777489

http://www.eurhisfirm.eu

Deliverable	M7.2: Final version of the data extraction system
Due Date of Deliverable	Month 39, 30/06/2021
Work Package	WP7: Data extraction and enrichment system
Tasks	т7.2, т7.3
Туре	Software Libraries

#### AUTHORS:

Sébastien ADAM (UNIVERSITÉ DE ROUEN NORMANDIE) Simon BOUVIER (INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Bertrand COÜASNON (INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Nathalie GIRARD (UNIVERSITÉ DE RENNES 1, INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Camille GUERRY (INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Aurélie LEMAITRE (UNIVERSITÉ RENNES 2, INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Iwan LE FLOCH (INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Thierry PAQUET (UNIVERSITÉ DE ROUEN NORMANDIE) Charles QUÉGUINER (UNIVERSITÉ DE RENNES 1, INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Yann RICQUEBOURG (INSTITUT NATIONAL DES SCIENCES APPLIQUÉES DE RENNES) Andres ROJAS CAMACHO (UNIVERSITÉ DE ROUEN NORMANDIE) Achille FEDIOUN (UNIVERSITÉ DE ROUEN NORMANDIE) Wassim SWAILEH (UNIVERSITÉ DE ROUEN NORMANDIE)

#### APPROVED IN 2021 BY:

Jan ANNAERT (Universiteit Antwerpen)

Wolfgang KÖNIG (Goethe-Universität Frankfurt)

Angelo RIVA (École d'Économie de Paris)



#### **Table of Contents**

1	Intro	duction		5
2	Yeart	book Inf	ormation Extraction system	5
2	2.1	Text Blo	ock Selection by Document Structure Recognition (Task 7.2)	6
	2.1.1	Syste	em	6
	2.1	.1.1	Evolution in structural analysis of yearbooks	6
	2.1	.1.2	New yearbook: Madrid 1931	8
	2.1	.1.3	Genericity	12
	2.1.2	Evalu	uation results	12
	2.1	2.1	Evaluation of bounding boxes (ZoneMap)	12
	2.1	2.2	Evaluation of table analysis	14
2	2.2	Informa	ation Extraction System (Task 7.3)	15
	2.2.1	Syste	em overview	15
	2.2.2	Proc	essing the Spanish 1931 Madrid yearbook	16
	2.2.3	Evalu	uation on all corpuses	19
	2.2	2.3.1	Annotated data for the French Yearbook	19
	2.2	2.3.2	French Yearbook Desfossés 1962, per rubric Tag evaluation	19
	2.2	2.3.3	Annotated data for the German Yearbook	22
	2.2	2.3.4	German Yearbook Handuch 1914-1915, per rubric Tag evaluation	22
	2.2	2.3.5	Annotated data for the Spanish Yearbook	24
	2.2	2.3.6	Spanish 1931 Madrid Yearbook, per rubric Tag evaluation	25
	2.2	2.3.7	Global results in yearbooks	26
2	2.3	Applica	tion of the Yearbook Information Extraction System to three yearbooks	28
3	Price	List Exti	raction system	33
Э	3.1	Strateg	y and transversal analysis	33
Э	3.2	Global	Meta Table Structure: tables of tables	34
	3.2.1	Syste	em	34
	3.2.2	Evalu	uation results	36
Э	3.3	Generio	c description of table content	38
	3.3.1	Syste	em	38



Long-term data for Europe

EURHISFIRM

	3.3.	1.1	Genericity	38
	3.3.	1.2	Evolution in structural analysis	39
	3.3.2	Eva	luation result	41
	3.3.	2.1	Columns & Headers recognition and validation	41
3.	5	Gene	al-purpose text recognizer (OCR)	43
	3.5.1	Sys	tem overview	43
	3.5.2	Da	a augmentation	44
	3.5.	2.1	Erosion/Dilatation	45
	3.5.	2.2	Lightening / Contrast modification	45
	3.5.	2.3	Change of Resolution (DPI change)	45
	3.5.	2.4	Elastic Distortion	45
	3.5.	2.5	Gaussian noise	45
	3.5.	2.6	Bounding Box modification	45
	3.5.	2.7	Image sharpness modification	45
	3.5.	2.8	Evaluation	45
	3.5.3	Fin	al experiment results	46
	3.5.	3.1	Datasets and Evaluation	46
3.	6	Evalu	ation and Application of the Price List Information Extraction System to four price list	s 49
	3.6.1	Eva	luation of Stock identification on Paris "La Coulisse" 1899, 1696 stock lines	49
	3.6.2	Da	a Extraction on 6 months of Paris "La Coulisse" 1899 price lists, 536 pages	50
	3.6.3	Ар	olication of the Price Lists Information Extraction System on EurHisFirm dataset	51
4	WP7 I	nform	nation Extraction System demonstration	56
5	Refere	ences		57



#### **1** Introduction

Work Package 7 develops an intelligent and collaborative system for the extraction of structured information from images of historical documents related to companies' financial and economic activities. The system focuses on printed sources related to listed companies such as yearbooks and exchange lists.


In the previous deliverable D7.1, we provided general software libraries, which can be used to build different prototypes of document recognition and understanding systems adapted to different kinds of documents. Deliverable D.7.2 was composed of the first version of two recognition systems: one for yearbook information extraction, and one for price lists data extraction. This deliverable D.7.4 contains the final versions of the two recognition systems with the final evaluation of those systems. The yearbook information extraction system is presented in section 2 and the price list extraction system is presented in section 3. Those systems have been applied to several corpora: the German Yearbook 1913-1914 (Handbuch der deutschen Aktiengesellschaften), the Spanish Yearbook Madrid 1931, the French Desfossés Yearbook 1962, the official price lists Brussels 1912, Madrid 1931 and Paris 1961-1962, which are the document samples dataset validated by the Steering Committee. We also present an evaluation of the complete Information Extraction System on price-lists from Paris "La Coulisse" 1899, made in the French National project ANR HBDEX. All the data extracted has been also inserted in the DFIH database. This experimentation shows the strong interest of the developed system to drastically reduce the need of human experts manual validation while generating high quality of data.

#### 2 Yearbook Information Extraction system

We implemented a generic pipeline of processes that can run similarly on the various yearbooks considered within the consortium (see *Figure 1* below). Inputs of the pipeline are images of documents and outputs are information attached to each company reported in the Yearbook. Information extracted are structured in rubrics composed of lists of named entities (i.e. list of person names, as is the case of the "governing board" rubric), or list of linked named entities (i.e. [date, amount, currency] as is the case of the "capital" rubric). This pipeline (see <u>Figure 1</u>) is composed of Optical character Recognition (OCR) followed by Layout analysis including table detection and recognition (IRISA), followed by text analysis for Named Entities extraction (LITIS). For the experiments conducted so far, a general-purpose industrial OCR was used and proved to give sufficiently good results so that LITIS and IRISA mostly concentrated on the extraction process of rubrics and Tables (IRISA), and linked named entities extraction in yearbooks (LITIS).



This project has received funding from

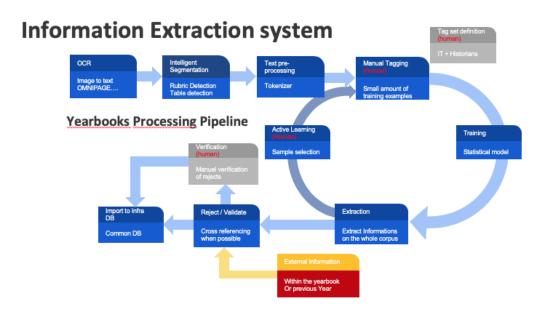

*Figure 1: Overview of the generic Information extraction pipeline in yearbooks.* 

#### 2.1 Text Block Selection by Document Structure Recognition (Task 7.2)

#### 2.1.1 System

We built a generic structure recognition system for yearbooks. It is based on the extraction of graphical components such as table separator recognition, with or without existing borders, contextual segmentation of text lines, rubric header detectors, text alignments detectors... These detected elements are then used in a generic way by a bi-dimensional grammatical description of the yearbook layout structure. They are combined to produce a structural analysis of the yearbook organization into text paragraphs (title, subtitle, rubrics) and complex table structures.

In this section, we will show the evolution of the libraries and methods of analysis of yearbooks we presented in D7.2. Then we will talk about the integration of a new yearbook and what we did to facilitate adding even more in the future.

#### 2.1.1.1 Evolution in structural analysis of yearbooks

In D7.2, we briefly exposed the structure of an issuer, which stays the same across different yearbooks: a main title contains the name of the issuer, followed by several rubrics composed of a title and a content.

To make it more flexible, and easier to switch between yearbooks, we can now define the specificities of the rubrics titles in the different yearbooks. We already saw in D7.2 that rubrics titles in the German yearbook (Handbuch 1914-1915) were extracted by a neural network. We can now have a totally different way of extracting titles in the French yearbook (Desfossés 1962) and still have the exact same structure for all rubrics, as the content is the same format (only text lines).



This project has received funding from

In the Desfossés yearbook, all rubrics titles are aligned on the left (see Figure 2), and we can detect this alignment thanks to the detector we presented in D7.2.

COMMISSAIRE D50 COUVERNEMENT : M. J. Denizet	
CONSEILLER DOBECHNIQUE : M. P. Besse	teristent an east
COMMISSAIRESORUX COMPTES : MM. M. Destombes, M. Sci	hottey.
DIREELON + MM. H. de Nonneville, AD.G.; E. Courtois,	Directeur général adjoint.
IEGE SOCIAL : Paris (16°), 25, avenue Kléber. Tél. : PAS.	
CONSTRUÉTION : Société anonyme française, constituée le 6 r	mars 1951 pour une durée de 99 ans.
susceptibles de faciliter et de développer la constru constructeurs de prêts tant à moyen terme qu'à long	ction immobiliere, notamment par l'attribution au

Figure 2: In blue, the alignment on the left used to define rubrics titles (in red)

Based on the analysis of balance sheets (see D7.2), we added the analysis of other more generic tables in the French yearbook.

These tables can have different columns of different sizes, but still have a lot in common with the balance sheet regarding their structure, especially that they have no borders.


	PRODUITS BEFFTS	BENEFICES	RÉSISTES	REPORT A NOTEAU	DIV TOTAL 41	PAR ACTION	COURS DES	OFIONS
	Transfer the	()	Cn 1.000/frai	n <u>es)</u>	an all market	(En france)		and the same
956	6.054 842	979 689	114,000	510	245 272	50869.ot	17 750	12920
95.7	7 110 810	512 047	100,000	1.196	294 450	4004 met	25 800	19 250
958	8 450 411	684 516	150.000	16824	455 929	450 Net	16 450	11 930
990	8.608.530	625,000	128,000	16274	461 978	458 net	28.500	15,890
			(En n	ouvodux franc	<b>s)</b>			
bko	87.406.985	6.254.600	1.250.000	197,256	4.615.053	4,609Ret	230,00	204,00
961 (295	sent.)						289 60	210.00

Figure 3a: Generic table in the Desfossés yearbook

One of their particularities is the possibility to find intermediate rows, often to specify a new currency for the different columns.

In that case, the currency found in the original header is replaced by this new one, still based on the nearest for each column (see Figure 3a).

To improve the detection and sizing of table columns and cells, we added a new separator to each column that indicates its width and the local slope of the text lines in the column (see <u>Figure 3b</u>).





One of the direct applications of this feature is to be able to correct the slope of the text lines inside cells, based on the slope of the separator of their respective column (see Figure 4).

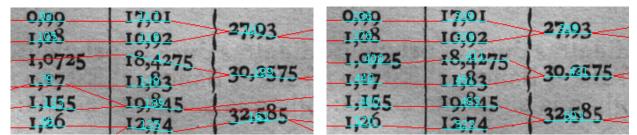


Figure 4: Comparison of cells lines before and after correcting the slope

Another type of tables found in the Desfossés are the extreme courses tables (see Figure 5), which we do not want to extract in detail because they do not present crucial information. However, they are important for the structure of the whole page, so we only detect their bounding boxes.

		COURS EX	TRÊMES DES OB	LIGATIONS		
1955	1956	1957	1958	1959	1960	1961 (30 sept.
				P. H. P. B.	(NP) P. H. P. B.	(NF) P. H. P. B.
3.850 3.675	3.976 3.350	3.680 3.275	4.210 3.400	4.280 3.835	45,75 39,70	49.90 43.50

Figure 5: Extreme courses table

There are some of the improvements we made over the year regarding the analysis of French yearbooks, and most of them also come to extend the library of document structure elements, like table structures without borders, which could be used in other yearbooks than the Desfossés. It is a way to be able to adapt our Information Extraction System by assembling different kinds of elements which will be found in a new yearbook corpus.

#### 2.1.1.2 New yearbook: Madrid 1931

This year, we also worked on a completely new type of yearbook with a Spanish one (Madrid 1931; see <u>Figure 6</u>). We could reuse some of the elements we previously created, and had to develop new ones for other specific elements.



BILBAO, S. A.	BILBAO, S. A.			
Constitución. El 30 mayo 1924, modificada en 30 julio 1928.	Constitución. El 30 mayo 1924, modificada en 30 julio 1928.			
<b>Objeto.</b> La explotación de espectáculos públicos, sin limita- ción ninguna en cuanto con ello se relacione, y aun en todo acto lícito de comercio, dedicándose preferentemente a construir, comprar, vender, arrendar y explotar teatros y cinematógrafos, o bien películas y toda clase de aparatos des- tinados a cinematógrafos.	<b>Objeto.</b> La explotación de espectáculos públicos, sin limita- ción ninguna en cuanto con ello se relacione, y aun en todo acto lícito de comercio, dedicándose preferentemente a construir, comprar, vender, arrendar y explotar teatros y cinematógrafos, o bien películas y toda clase de aparatos des- tinados a cinematógrafos.			
Domicilio. Madrid: Fuencarral, 124, «Cinema Bilbao», del que es propietaria.	Domicilio. Madrid: Fuencarral, 124, «Cinema Bilbao», del que es propietaria.			
Ejercicio social. Del 1.º enero al 31 diciembre.	Ejercicio social. Del 1.º enero al 31 diciembre.			
Duración. Indefinida.	Duración. Indefinida.			
Capital. 1.100.000 pesetas, completamente desembolsado.	Capital. 1.100.000 pesetas, completamente desembolsado.			
Accienes. 2.200, al portador, de 500 pesetas nominales cada una, numeradas correlativamente del 1 al 2.200.	Accienes. 2.200, al portador, de 500 pesetas nominales cada una, numeradas correlativamente del 1 al 2.200.			
Reparto de beneficios. Del beneficio líquido se destinarán, por este orden: un mínimum de 5 por 100 al fondo de reserva; 10 por 100 del remanente para el Conse- jo; del resto, una cantidad, que anualmente fijará el Consejo, como retribución del Director-Gerente; el sobrante, a las acciones.	Reparto de baneficios. Del beneficio líquido se destinarán, por este orden: un minimum de 5 por 100 al fondo de reserva; 10 por 100 del remanente para el Conse jo; del resto, una cantidad, que anualmente fijará el Consejo como retribución del Director-Gerente; el sobrante, a las acciones.			
Dividendos, libres de impuestos	Dividendos, libres de impuestos			
EJERCICIOS DIVIDENDO Importe Námero Pesetas Ceupón Fecha de pago	EJERCICIOS DIVIDENDO Importe Pestas cupon Fecha de pago			
1927         Unico         50         I         25 enero 1928.           1928         A cuenta         25         2         9 julio 1928.           Complementario         25         3         Enero 1929.	1927			
1929         A cuenta	1929			
	1930			

Figure 6: Analysis of a page of the Madrid yearbook

In D7.2 we talked about how we used the neural network ARU-Net [Grüning 2018] for text-lines detection. Due to the difference of scanning quality and luminosity between this new yearbook and the two others, we started by training a new model. By adding Spanish images to the training corpus, we greatly improved the network's performance on this yearbook, especially reducing the number of false-positives due to the transparency of the page.

In the Madrid yearbook, pages follow the same global structure for issuer titles and textual rubrics. As exposed in section 2.1.1.1, by specifying a new way of detecting rubrics titles, we can already extract a simple list of rubrics.


However, a difference here is the possibility to have tables between or inside rubrics (see Figure 7), so we had to adapt and improve the rubrics detector, so they can contain tables and not only text-lines.



Obligaciones. 5.000, hipotecarias y al p tas nominales, serie B, nu interés anual de 6 por 100, pagadero y enero y 1.º julio, y amortizables en tro partir de 1928. El líquido percibido por cupón en satisfecho al entrar en máquina este p sido de 13,5375 pesetas.	úmeros I al por semestr einta y cinc el último ve	5.000, con es, en 1.º co años, a encimiento
Circulación		
	Obligaciones	Pesetas
Emitidas Amortizadas	5.000 93	2.500.000 46.500

Figure 7: Example of a table inside a rubric

Some rubrics don't have the same format of title, and we have the possibility to define more than one description for rubrics titles in each yearbook. Here (in Figure 8) we have a different title for the balance rubrics, which are equivalent to balance sheets in the Desfossés, but here are rubrics instead of tables.

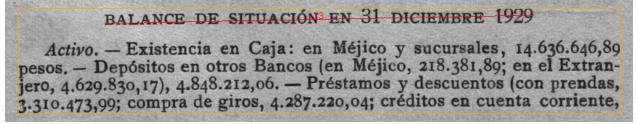

#### *Figure 8: Beginning of a balance rubric*

Even if their format is different, these have the same structure as other rubrics with a title and several text lines. They can be integrated to the global list of rubrics by simply defining their specific title.

The first major particularity of Spanish yearbooks is the format of the tables. Here we have explicitly defined columns thanks to borders, so we can build the structure of the table more accurately.



	CAP	ITAL	Fondo	Utilidades	
AÑOS	Nominal Pesetas	Desembolsado Pesetas	de reversión extraordinario <u>Pesetas</u>	líquidas Pesetas	
<b>1925</b>	.)	1.136.000	742 815	67.722 77.080 109.041	
1928 1929	. 2.000.000	2.000.000	1.452,46 6.541,10	161.209,60	

Figure 9: Spanish table before analysis

The table follows the same structure as the French ones, with columns and different rows, so we can build it the same way. However, the methods to recognise the different parts of the table are mostly different because they are based on borders recognition.

In the example above (see Figure 9), we can see that columns can be subdivided in two or more subcolumns. The same structure can be found in some tables of the French yearbook, and implementing it for the Spanish also helped with the French ones.

The second major difference in these tables is the presence of braces, used to spread a value over several rows in a column. Depending on the structure of the row and alignment between the elements, we can tell if a row belongs to a brace, and spread the values accordingly (see Figure 10).

	CAP	ITAL	Fondo	Utilidades	
A ѺO S	Nominal Pesstas	Desembolsado Pesetas	de reversión extraordinario <u>Peretas</u>	líquidas Perstas	
1925	1.250.000	1.136.000		67.722	
1 <b>920</b>	••)	1.250.000	742	771080	
1928	2,000,000	2.000.000	1.452.46	161.200.60	
929		and the Reside	6.541.10	162.047.80	

#### Figure 10: Spanish table after analysis



#### 2.1.1.3 Genericity

To have an easier adaptation to new types of documents of the information extraction on yearbooks, we built it in a generic way, where the core recognition of the structure is the same from one yearbook to another and we just have to specify the characteristics of each document before starting the generic analysis of document structure.

Examples of these characteristics are: the font size of the titles, the position of tables regarding the rubrics, the type of the tables (with/without borders), the presence of a separator between issuers, etc.

Instead of developing a new system for each yearbook, we simply build the right combination of characteristics and elements found in a new corpus. By doing so, it becomes easier to add new documents by simply specifying its characteristics. We can use some of the Desfossés characteristics and some of the Madrid ones without changing the detectors of the elements composing a page.

I pagecarac P ::= pagecarac P ::= L `(**pageType** "Handbuch") && `(pageType "Madrid") && Т Т (titleFontSize 26 ==> (titleFontSize 40 ==> (issuerSeparator "Blank" ==> (titleAcrossPages ==> Т (centeredTitle ==> (titleInCaps ==> (issuerSeparator "Blank" ==> (titleForbiddenWords (tableType "NoTab" ==> ["Obligaciones", "Capital", "Dividendos "] ==> (tablePosition "AfterRub" ==> I. (tableType "WithRulings" ==> (lineSpacing 75 ==> L (tablePosition "InsideRub" ==> L (rubTitleDef rubricTitleDE ==> (lineSpacing 125 ==> L page P)))))))). (rubTitleDef rubricTitleES ==> L L page P)))))))). I

Here are examples of how we define characteristics for different yearbooks:

To add a whole new type of document, we can use these characteristics without modifying the detectors, and when needed, we can add new characteristics and improve the related description to recognize it, so it adds up to the library in case we encounter the same needs once again in the future.

#### 2.1.2 Evaluation results

#### 2.1.2.1 Evaluation of bounding boxes (ZoneMap)

To evaluate detection and classification on all three yearbooks, we still use the ZoneMap metric [Galibert 2014] for reasons we covered in D7.2. ZoneMap results are based on bounding boxes similarity, and tend towards zero when hypothesis and ground truth are close. ZoneMap provides a score between 0 (better) and arbitrary high values.

For the Desfossés yearbook, we have the same corpus of 61 images, with 61 titles, 792 rubrics and 123 tables (including 52 generic tables, 53 balance sheets and 18 extreme courses). See Table 1, we now have a global score of 2.69 (last year was 11.01): 0.20 for the titles and 0.97 for the



This project has received funding from

rubrics, which are almost perfectly recognised, 2.08 for the generic tables, 0.65 for the balance sheets and 7.27 for the extreme courses which still have a simplistic description because we don't need a complete analysis of this type of table.

Class	Items count	Old score	Current score
Images	61	11.01	2.69
Titles	61	14.96	1.25
Rubrics	792	3.06	0.20
Tables	52	35.13	2.08
Balance sheets	53	9.08	0.65
Extreme courses	18	/	7.27

 Table 1: ZoneMap score on the French yearbook (lower is better)

For the Handbuch yearbook, we added more images to the corpus for a total of 126, with 154 titles and 1704 rubrics. See Table 3, we have a global error rate of 1.57 (3.4 last year, see Table 2): 15.19 for the titles and 1.81 for the rubrics.

Class	Items count	Old score	Current score
Images	35	3.4	2.05
Titles	48	7.55	7.45
Rubrics	524	3.19	1.83

Table 2: ZoneMap score on the German yearbook, old corpus (lower is better)

Class	Items count	Current score
Images	126	1.57
Titles	154	15.19
Rubrics	1704	1.81

Table 3: ZoneMap score on the German yearbook, new corpus (lower is better)

Note: Titles score in Handbuch increases a lot for little mistakes (such as miss-sizing the subtitle). Comparing the scores between the corpuses may be irrelevant because we added 91 images, this is why we have two different scores.

For the new Madrid yearbook, we annotated 72 pages, with 17 titles, 286 rubrics and 66 tables. See Table 4, the global score is 2.84: 0.44 for the titles, 2.10 for the rubrics, and 5.51 for the tables.



Class	Items count	Current score
Images	72	2.84
Titles	17	0.44
Rubrics	286	2.10
Tables	66	5.51

Table 4: ZoneMap score on the spanish yearbook (lower is better)

#### 2.1.2.2 Evaluation of table analysis

Because ZoneMap score is only based on bounding boxes, it was not entirely relevant for evaluating tables. We could know if tables were well sized, but not how well the elements inside were recognised and linked together.

We needed a second metric, and the more appropriate one was published by Xu Zhong in March 2020. It is based on the Tree-Edit-Distance-based Similarity (TEDS) [Pawlik and Augsten 2016]. Tables are converted to HTML format, which uses a tree-like structure and enables us to compute the TEDS between hypothesis and ground truth. By using trees, we ensure that the score depends on the links between table elements (rows, cells, braces, ...) and not only on their coordinates in the image.

This method was presented alongside the PubTabNet dataset for table evaluation (used in ICDAR 2021 Competition on Scientific Literature Parsing), and is easy to use thanks to the Python script provided by the authors.

The TEDS here is the percentage of similarity between two tables: higher is better, with 100 being the perfect score. The global score on a corpus is the average value of the scores of each table, taking into account the number of cells in the tables. If a table contains 100 cells and another only has 50, the former will weigh twice as much in the global score.

To build the evaluation corpus, we annotated 56 tables in the Desfossés yearbook and 100 tables in the Madrid yearbook. Once again, there is no data to be extracted from Handbuch tables.

Yearbook	Desfossés	Madrid
Current score	96.75%	93.31%

In Figure 11, an example of a Spanish table with its HTML equivalent is presented. The first one is the ground truth, and the bottom one is the hypothesis after analysis. The score for this table alone is 94.2%. This example shows the state of the analysis for a score close to the average score on the whole corpus.



This project has received funding from

ivib .uos.or is 1	apital, res	ervas y util	idades 💿 🕤	Renaises.	Title	Column	Column	Column	Column
erena, de 6 our	S CAP	TAL IOD.	Fondo de segu-	al poose		Currency	7		
EJERCICIOS	Nominal	Desembolsado	ros, reservas y beneficios ante riores	Utilidades líquidas	Row		Cell	Cell	Cell
	 Pesetas	– Pesetas	 Pesetas	- Pesetas	Row		Cell	Cell	Cell
1917-1918	apil aotoni	2.878.000	20.652	206.521	Row		Cell	Cell	Cell
1918-1919		2.930.000	104.531	130.152	Row	Cell	Cell	Cell	Cell
1919-1920 1920-1921	5.000.000	3.204.500	236.342 293.965	131.037	Row		Cell	Cell	Cell
1921 1922 1922-1923	and and the	3.404.500	440.619 592.044	151.425	Row		Cell	Cell	»
1923-1924	San Marchan	3.694.500	411.332	169.214	Row		Cell	Cell	Cell

twin, cool of a Capital, reservas y utilidades of announced						Column	Column	Column	Column
erena, del 6 out	SI CAP	TAL 100.	Fondo de segu-	al pones			Currency	,	
EJERCICIOS	Nominal	Desembolsado	ros, reservas y beneficios ante riores	Utilidades líquidas	Row		Cell	Cell	Cell
	Pesetas	 Pesetas	– Pesetas	- Pesotas	Row		Cell	Cell	Cell
1017#1018	relianton i	2.878.000	20,652	2061521	Row		Cell	Cell	Cell
1918-1919	in the second	2.930.000	104.531	1301152	Row	Cell	Cell	Cell	Cell
	5.000.000	3.204.500	236.342	131.037 148.570	Row		Cell	Cell	Cell
192151922 192251923	- A a solution	3.404.500	440 619 592 044	151.425	Row		Cell	Cell	
1923-1924	San March	3.694.500	411.332	169.314	Row		Cell	Cell	Cell

Figure 11: Example of a Spanish table with its HTML equivalent. The first one is the ground truth, and the bottom one is the hypothesis after analysis.

#### 2.2 Information Extraction System (Task 7.3)

#### 2.2.1 System overview

In this section, we show the new results obtained with the extraction system that was presented in D7.2. Let us recall that financial yearbooks contain a lot of textual information organised in rubrics. Each rubric is reporting about specific financial information and requires a dedicated extraction module. Some rubrics are simply lists of items such as lists of persons for which simple rules encoded with regular expressions may be enough to get the information extracted. Some other rubrics are much more difficult to analyse because the alphanumeric information of interest is occurring inside specific linguistic patterns with many variations due to phrasing variations. One typical example of such a rubric is the capital rubric which is present in every yearbook, and from which we want to extract the capital evolution through the years. Typically, we want to extract a set of triplets each containing the following information (amount - date - currency).

The system that was developed and presented in D7.2 is based on machine learning algorithms that are trained to optimize their performance using manually annotated data. The more annotated data the better



This project has received funding from

performance we can get, but we showed that an average precision higher than 0.90% was obtained with less than 3 000 annotated rubrics. Of course, the performance will vary depending on the type of rubric.

#### 2.2.2 Processing the Spanish 1931 Madrid yearbook

As was planned in our agenda, during the last period we experimented with the extraction of information on the Spanish 1931 Madrid yearbook, after having successfully demonstrated the approach on the French Desfossé 1962, and the German Handbuch 1914-15, see D7.2. In this respect we followed the protocol that was designed during our earlier experiments, which comprises the following steps:

- 1. Define the relevant rubrics to process, following the requirements of the historians
- 2. Define a TAG set to allow the extraction of the information needed
- 3. OCR each rubric
- 4. manually tag a certain amount of rubric with the collaborative web-based annotation tool that was presented in D7.2.
- 5. Train and test the extraction system
- 6. Process the whole yearbook with the system trained in 5
- 7. Show the results on the internet and export the results in a database.

In collaboration with the historian colleagues, we choose to conduct our experimentations on 5 rubrics (**Headquarters, Founding, Capital, Shares, Bonds**). A total of 24 TAGS have been defined to allow the information extraction of these 5 rubrics. Notice that most of these TAGS are not specific to the Spanish yearbook, only 7 of them were introduced specifically.

In the following we show some illustrative examples of the 5 rubrics that have been processed, and that are browsed thanks to our web-based annotation and viewing tool.

oilio.	Mad en p	rid, pas rovincia	eo de R as es el	ecoletos Banco d	, 12. E e Espai	l represe ĭa.	entante	
lcio s	ocial.	Del 1.	° enero	al 31 di	ciembre	e.		
he tokens.								
	entante <mark>en p</mark>	provincias es el	Banco de Esp	paña.				
	entantejen p	provincias es el	Banco de Es;	paña.				



This project has received funding from

http://www.eurhisfirm.eu

EURHISFIRM

Capital.       50.000.000 de pesetas; desembolsado, 45.000.000 en junio de 1930. Este capital podrá ampliarse hasta 150.000.000 de pesetas.         Vou must be signed in to annotate.       Cick on a tag to select it and apply it on the tokens.         Capital.       Currency Initial-Date [nitial-Amount] Change-Date Link         Capital.       en junio de 1930. Este capital podrá ampliarse has- ta [50] 000,000 de pesetas.
Click on a tag to select it and apply it on the tokens. Capital (Category) O Last-Amount Currency:Initial-Date (Initial-Amount) Changer-Date Link Capital. en junio de 1930. Este capital podrá ampliarse has- ta (150, 000, 000) de pesetas.
en junio de 1930. Este capital podrá ampliarse has- ta 150, 000, 000 de pesetas.
TypeAmountCurrencyDateLast150,000,000pesetas
SHARES rubric
Acciones. 100.000, al portador, de 500 pesetas nominales cada una, con desembolso del 90 por 100, o sean pesetas 450 por título, desde 1.º junio 1930. En la <i>Gaceta de Madrid</i> del 29 mayo 1929 insertóse el «Re- glamento para fijar la forma y plazos en que deben efectuarse las futuras suscripciones de acciones» de este Banco, aproba- do por el Consejo del establecimiento en sesión de 24 del mismo mes y año.
You must be signed in to annotate. Click on a tag to select it and apply it on the tokens. Shares (Category) O Number-of-Shares (type:Share Annount Upte Numeration Link
Acciones. 100. 000, al portador, de 500 pesetas nominales cada una, con desembolso del 90 por 100, o sean pesetas 450 por título, desde 1 a Tunio 1930. En la Gaceta de Mad
del 29 mayo 1929 insertóse el« Re- glamento para fijar la forma y plazos en que deben efectuarse las futuras suscripciones de acciones» de este Banco, aproba- do p el Consejo del establecimiento en sesión de 24 del mismo mes y año. Validated
Numeration     Amount     Number-of-Shares     Type-Share     Type-Amount     Date       500     100.000     all portation     pesetas     pesetas     pesetas
BONDS rubric



This project has received funding from

http://www.eurhisfirm.eu

Obligaciones. 9.500, números I al 9.500, de 500 pesetas no-minales, de las cuales los números I al 7.000 llevan fecha 31 diciembre 1907; las números 7.001 al 9.000, de 1.º febrero 1912, y las números 9.001 al 9.500, de 1.º abril 1910.

You must be signed in to annotate. Click on a tag to select it and apply it on the tol Bonds (Category) O LINX Interests Date Currency Type-Amount (		nber-of-Bond	Type-Bond Bond	-Link				
Obligaciones.								
9, 500) <mark>números () al 9, 500) de</mark> 500 <b>pe</b> (ebrero (1912, y <mark>las números 9, 001</mark> al ( Validated ⊘				os números 1 a	1 7. 000 (	levan fecha 31 dic	iembre 1907	; las números 7, 001 a 9, 000) ji @ de ji 9
	Amount	Currency	Type-Bond	Type-Amount	Number	Date	Interests	
		pesetas	1 al 9. 500	500	9. 500			
			1 al 7.000			31 diciembre 1907		
			7. 001 al 9. 000 9. 001 al 9. 500			i febrero 1912 abril 1919		
			3. 001 al 3. 000			abii 1919		
Consi	tite	ici	ón.	El	2	ener	0 1	1920.
						CHICI		1920
You must be signed in to annotate. Click on a tag to select it and apply it on the tol Founding (Category) O Date	kens.							
Constitución.								
El 2 enero 1920. Validated 🗹								
	Date							
	2 enero 1	1920						
	2 enero 1	1920						



#### 2.2.3 Evaluation on all corpuses

#### 2.2.3.1 Annotated data for the French Yearbook

French Yearbook Desfossés 1962						
TREATED RUBRIC	LABELED RUBRICS FOR THE SYSTEM					
Administrators	189					
Headquarters	190					
Founding	161					
Capital	317					
Operations	96					
Sales	175					
Financial Year	114					
Coupons	173					

#### 2.2.3.2 French Yearbook Desfossés 1962, per rubric Tag evaluation

Administrators	Precision	Recall	$F_{\beta=1}$
admin_comment	50.00%	42.86%	46.15
admin_comment_link	0.00%	0.00%	0.00
admin_family_name	98.04%	98.44%	98.24
admin_name	97.87%	98.76%	98.31
admin_next_link	97.77%	98.24%	98.00
admin_pos_link	99.01%	99.01%	99.01
admin_position	99.01%	99.01%	99.01
admin_title	0.00%	0.00%	0.00
Overall	97.30%	97.55%	97.42

Table 6: Tag evaluation results French Administrators rubric



Headquarters	Precision	Recall	$F_{\beta=1}$
arrond	98.08%	98.08%	98.08
comment	0.00%	0.00%	0.00
company	14.29%	25.00%	18.18
country	66.67%	20.00%	30.77
district	55.26%	84.00%	66.67
link	86.33%	90.24%	88.25
nextlink	54.55%	61.22%	57.69
no-str	92.94%	94.05%	93.49
str	87.63%	87.63%	87.63
town	80.09%	87.44%	83.60
type	61.90%	61.90%	61.90
Overall	80.49%	85.34%	82.85

Table 7: Tag evaluation results French Headquarters rubric

Founding	Precision	Recall	$F_{\beta=1}$
chg-duree	0.00%	0.00%	0.00
chg-enddate	40.00%	50.00%	44.44
chg-startdate	70.00%	46.67%	56.00
chg-status	46.15%	50.00%	48.00
ini-duree	97.16%	100.00%	98.56
ini-enddate	88.24%	93.75%	90.91
ini-startdate	95.32%	96.45%	95.88
ini-status	95.78%	93.53%	94.64
link	96.45%	96.17%	96.31
Overall	94.66%	94.22%	94.44

Table 8: Tag evaluation results French Founding rubric

Capital	Precision	Recall	$F_{\beta=1}$
Ini-amount	93.02%	93.02%	93.02
Ini-date	97.56%	93.02%	95.24
chg-amount	97.55%	95.50%	96.51
chg-date	93.93%	95.64%	94.77
currency	96.62%	92.45%	94.49
last-amount	94.12%	92.31%	93.20
last-date	0.00%	0.00%	0.00
link	50.35%	42.60%	46.15
Overall	90.26%	86.93%	88.57

Table 9: Tag evaluation results French Capital rubric



Operations	Precision	Recall	$F_{\beta=1}$
arrond	0.00%	0.00%	0.00
comment	16.67%	20.00%	18.18
district	100.00%	100.00%	100.00
link	87.50%	63.64%	73.68
nextlink	79.31%	92.00%	85.19
no-str	0.00%	0.00%	0.00
str	0.00%	0.00%	0.00
town	86.27%	91.67%	88.89
type	94.44%	100.00%	97.14
Overall	82.71%	76.92%	79.71

Table 10: Tag evaluation results French Operations rubric

Sales	Precision	Recall	$F_{\beta=1}$
amount	97.93%	97.93%	97.93
currency	94.92%	95.73%	95.32
link	97.05%	98.29%	97.66
year	97.93%	99.58%	98.75
Overall	97.26%	98.19%	97.72

Table 11: Tag evaluation results French Sales rubric

Financial Year	Precision	Recall	$F_{\beta=1}$
end-date	100.00%	87.50%	93.33
start-date	85.71%	100.00%	92.31
Overall	92.86%	92.86%	92.86

Table 12: Tag evaluation results French	Financial Year rubric
---	-----------------------

Coupons	Precision	Recall	$F_{\beta=1}$
Coup_amount	97.85%	96.81%	97.33
Coup_comment	86.40%	88.52%	87.45
Coup_currency	93.80%	94.90%	94.35
Coup_date	96.93%	98.37%	97.64
Coup_modality	36.36%	21.05%	26.67
Coup_nb	96.96%	97.48%	97.22
Coup_security	83.78%	79.49%	81.58
Overall	95.89%	96.17%	96.03

Table13: Tag evaluation results French Coupons rubric



#### 2.2.3.3 Annotated data for the German Yearbook

German Yearbook Handuch 1914-1915			
TREATED RUBRIC	LABELED RUBRICS FOR THE SYSTEM		
Capital	195		
Founding	900		
Financial Year	598		
Balance Sheet	130		
Voting Right	671		

Table 14: German Yearbook labeled data per rubric

#### 2.2.3.4 German Yearbook Handuch 1914-1915, per rubric Tag evaluation

Capital	Precision	Recall	$F_{\beta=1}$
Cap-decr	0.00%	0.00%	0.00
Cap-incr	84.91%	90.00%	87.38
Ini-amount	94.12%	69.57%	80.00
Ini-date	100.00%	85.71%	92.31
capital_part	100.00%	100.00%	100.00
chg-amount	90.00%	69.23%	78.26
chg-date	83.08%	75.00%	78.83
currency	95.52%	87.27%	91.21
last-amount	95.00%	100.00%	97.44
link	89.40%	73.77%	80.84
share_number	100.00%	73.85%	84.96
share_price	96.83%	88.41%	92.42
share_type	92.16%	68.12%	78.33
Overall	92.17%	79.79%	85.54

Table 15:	Таа	evaluation	results	German	Canital	ruhric
TUDIC 13.	rug	cvuluulion	resuits	German	cupitui	TUDITC



Balance Sheet	Precision	Recall	$F_{\beta=1}$
amount	96.35%	96.06%	96.21
amount_total	94.12%	94.12%	94.12
currency	100.00%	100.00%	100.00
day	100.00%	100.00%	100.00
item	91.74%	91.20%	91.47
item_total	94.12%	94.12%	94.12
link_date	100.00%	100.00%	100.00
link_item	66.67%	14.29%	23.53
link_part	96.36%	97.85%	97.10
month	100.00%	95.00%	97.44
part_assets	94.74%	94.74%	94.74
part_liabilities	100.00%	100.00%	100.00
year	95.00%	95.00%	95.00
Overall	95.12%	94.31%	94.71

Table 16: Tag evaluation results German Balance Sheet rubric

Founding	Precision	Recall	$F_{\beta=1}$
concession	100.00%	70.00%	82.35
day	97.62%	92.48%	94.98
effect	100.00%	94.12%	96.97
founder	97.06%	97.06%	97.06
general_assembly	100.00%	100.00%	100.00
ini-day	91.33%	95.14%	93.20
ini-month	75.95%	83.92%	79.73
ini-year	91.72%	88.89%	90.28
link	88.46%	84.15%	86.25
link_between	16.67%	50.00%	25.00
link_date	96.67%	94.91%	95.78
link_yearbook	88.57%	91.18%	89.86
month	78.95%	68.18%	73.17
registration	98.78%	95.29%	97.01
year	89.39%	88.72%	89.06
yearbook	88.57%	91.18%	89.86
Overall	91.25%	89.99%	90.62

Table 17: Tag evaluation results German Founding rubric



Financial Year	Precision	Recall	$F_{\beta=1}$
calendar	100.00%	96.67%	98.31
day_end	97.14%	91.89%	94.44
day_start	97.14%	89.47%	93.15
link_between	91.67%	89.19%	90.41
link_within	95.71%	90.54%	93.06
month_end	97.14%	94.44%	95.77
month_start	94.44%	89.47%	91.89
Overall	96.01%	91.38%	93.64

Table 18: Tag evaluation results German Financial Year rubric

Voting Right	Precision	Recall	$F_{\beta=1}$
currency	95.38%	93.94%	94.66
currency_amount	95.38%	93.94%	94.66
link	92.31%	87.50%	89.84
link_share_amount	0.00%	0.00%	0.00
max	0.00%	0.00%	0.00
share	89.43%	89.43%	89.43
share_amount	86.03%	90.70%	88.30
share_type	0.00%	0.00%	0.00
vote	98.33%	92.19%	95.16
vote_amount	99.17%	90.91%	94.86
Overall	91.98%	89.80%	90.88

Table 19: Tag evaluation results German Voting Right rubric

#### 2.2.3.5 Annotated data for the Spanish Yearbook

Spanish 1931 M	adrid Yearbook
TREATED RUBRIC	LABELED RUBRICS FOR THE SYSTEM
Capital	196
Founding	202
Headquarters	206
Shares	194
Bonds	137

#### Table 20: Spanish Yearbook labeled data per rubric



Bonds	Precision	Recall	$F_{B=1}$
Date	85.32%	73.51%	78.97
Link	89.29%	59.62%	71.50
Type-Bond	92.73%	15.41%	26.42
Amount	64.66%	82.69%	72.57
Currency	93.18%	22.78%	36.61
Number-of-Bond	40.54%	53.01%	48.67
Type-Amount	53.36%	44.64%	53.19
Interests	98.87%	73.60%	84.38
Overall	80.52%	72.06%	72.08

#### 2.2.3.6 Spanish 1931 Madrid Yearbook, per rubric Tag evaluation

Table 21: Tag evaluation results Spanish Bonds rubric

Capital	Precision	Recall	$F_{B=1}$
Last-Amount	97.52%	98.59%	98.05
Link	86.74%	74.97%	80.43
Currency	100.00%	49.40%	66.02
Initial-Amount	93.96%	93.96%	93.96
Change-Date	95.39%	94.24%	94.81
Change-Amount	92.76%	90.27%	91.50
Initial-Date	100.00%	62.15%	58.61
Overall	92.32%	88.19%	88.05

Table 22: Tag evaluation results Spanish Capital rubric

Founding	Precision	Recall	$F_{B=1}$
Date	99.78%	99.59%	99.68
Overall	99.78%	99.59%	99.68

Table 23: Tag evaluation results Spanish Founding rubric

Headquarters	Precision	Recall	$F_{B=1}$
City	96.86%	89.17%	92.86
Street	95.05%	97.62%	96.31
Number	94.65%	97.41%	96.01
Link	89.36%	93.87%	91.56
Extra	97.20%	97.81%	97.50
Country	100.00%	56.44%	40.89
Overall	94.52%	94.53%	94.44

Table 24: Tag evaluation results Spanish Headquarters rubric



Shares	Precision	Recall	$F_{B=1}$
Number-of-Shares	98.24%	84.67%	90.95
Link	88.39%	71.62%	79.12
Amount	97.29%	88.11%	92.47
Type-Amount	96.97%	91.00%	93.89
Type-Share	88.90%	75.34%	81.56
Date	77.90%	84.43%	81.03
Numeration	92.57%	90.00%	91.26
Overall	88.09%	87.07%	87.15

Table 25: Tag evaluation results Spanish Shares rubric

#### 2.2.3.7 Global results in yearbooks

In the following tables, we show the performance of the extraction process in the Spanish 1931 Madrid Yearbook. The two tables show the average performance (first table) and the detailed per rubric performance. For sake of comparison with the results presented in D7.2 last year, both tables recall the results obtained on the French Desfossé, and the German Handbuch. We can see that a similar level of performance was obtained on the three Yearbooks.

Yearbook	# Rubrics	# Tags	# Manually Tagged Rubrics	# Machine Tagged Rubrics	Precision
French	8	43	1415	19339	90.80%
German	6	58	2494	18711	91.75%
Spanish	5	24	935	2007	91.03%

Table 26: Global analysis of the Yearbooks and Precision



Rubric	French Precision (%)	German Precision (%)	Spanish Precision (%)
Administrators	97.3		
Headquarters	80.4		94.5
Founding	94.7	91.2	99.7
Capital	90.2	92.2	92.3
Operation	82.7		
Sales	97.3		
Financial year	92.9	96.0	
Coupon	95.9		
Balance Sheet		95.1	
Voting Right		92.0	
Loss and Profit Account		84.0	
Shares			88.0
Bonds			80.5

Table 27: Global precision per tag



#### 2.3 Application of the Yearbook Information Extraction System to three yearbooks

We have applied the data extraction system on the three yearbooks (Handbuch 1913-1914, Madrid 1931 and 1935, Desfossés 1962) *for a total of 7,453 pages and it generated 6,009 issuers, 73,853 rubrics, 2,086 tables and 1,665 balance sheets*. Using these detected rubrics, *we analyzed a total of 19 types of rubrics in three different languages and distinguished 126 different types of Named Entities. The system was able to tag and extract automatically more than 40 000 named entities exploiting 4844 hand labelled data with a precision higher than 90%.* 

The quality of the data extraction follows the different performance and recognition rates we have presented for each yearbook in this document. All the data extracted have been inserted in the WP7 Data Extraction Viewer. This viewer allows users to browse all images and the data extracted. An example on the French Desfossés 1962 is presented for the "LA FONCIERE" company with the rubric Capital selected. Once this rubric is open, the user can access the different modification of the capital automatically extracted in a structured way. On the same page the Balance Sheet is selected, we can see the hierarchical structure of the table, where the "C- Dette flottante" is selected and belongs to the liabilities section, and the extracted data is presented in Figure with for each value the associated information given by the table (liabilities, year, item, amount, currency). This demonstrator is available at this address for the three yearbooks: <a href="http://litis-eurhisfirm.univ-rouen.fr/pivan/">http://litis-eurhisfirm.univ-rouen.fr/pivan/</a>





Figure 12: WP7 Data Extraction Viewer - "LA FONCIERE" company with the rubric Capital selected




	RHISFIRM		7 Data Extrac SFIRM A Home O About O Help • F		Luser name
	NSTITUTION : Société and prorogée de 90 ans, so de « La Foncière » (Cie	us la dénominati	on « La Foncière-Trans	ports ». En 1960, à la	suite de l'absorption
OB	SJET : L'assurance des risq intérieure, des accidente vol, incendie, etc	ues de transpor s de toute natu	ts par terre et par c re pouvant atteindre l	air, des risques de nav es personnes et les cha	rigation maritime et oses, des risques de
CA	cessives le capital ava nominal à 2.500 fr. R à 375 millions par créc puis à 500 millions pa en 5 millions de NF p	s de fr., divisé it atteint 100 m legroupement en ation de 25.000 r émission à 5.5 uis porté à 10 r	en 50.000 actions de hillions en 1949 Porté actions de 5.000 fr. actions de 5.000 actions fr. de 25.000 actions pullions de NE par - 1	50 NF nominatives. 500 fr. libérées de 375 en 1954 à 250 million depuis ie 10 février 1 éparties gratuitement (1 ons (1 pour 3). Converti o Création de 20.000 ac oports Foncière incendie).	ns par élévation du 958. Porté en 1958 pour 2 regroupées), le 1ª janvier 1960
AS	SEMBLEE GENERALE : Dans				anap to ap it apply to a
		ur propositions of	du Conseil, suivant dé	surplus : 10 % au Ca cisions de l'assemblée.	onseil et 90 % aux
LIC	QUIDATION : Par les soins	du Conseil d'a	administration.		
SER	RVICE FINANCIER ET TRANS	FERTS : Au sièg	e social ; Crédit Lyon	nais, Crédit Industriel et	Commercial et dans
Category) ncy (ni=dat AL SOCI ons de f tteint 100	lle <del>chy data</del> ast date (ni-amount) ast IAL ; NF; divisé en 200.000 actions de 50 MF 0 millions an 1949 Porté en 1954 à 250 aation de 25.000 actions de 5.000 fr; féj 15 millions 36 NF; puis porté à 10 milli	nominatives. A li origine millions par élévation o parties gratuitement( 1	du nominal à 2.500 fr. Regrouper pour 2 regroupées), puis 3 500 r	ment en actions de 5.000 fr. depuis nillions par émission à 5.500 fr. de	e 10 février 1958. Porté en 1 25.000 actions( 1 pour 3). Co
<mark>1960</mark> er e incend					
1960 en e incend	Туре	Date	Amount	Currency	
	Last		Amount 10 millions	Currency	
<mark>1960</mark> er e incend		Date A l' origine			
<mark>1960</mark> er e incend	Last Initial		10 millions		
1960 en e incend	Last Initial Initial Change	A l' origine 1949	10 millions 25 millions 100 millions	NE	
<mark>1960</mark> er e incend	Last Initial Change Change	A I' origine 1949 1954	10 millions 25 millions 100 millions 250 millions	NE	
<mark>1960</mark> er e incend	Last Initial Initial Change	A l' origine 1949	10 millions 25 millions 100 millions	NE	

Figure 13: WP7 Data Extraction Viewer - Capital rubric with all the capital changes automatically extracted



#### Long-term data for Europe



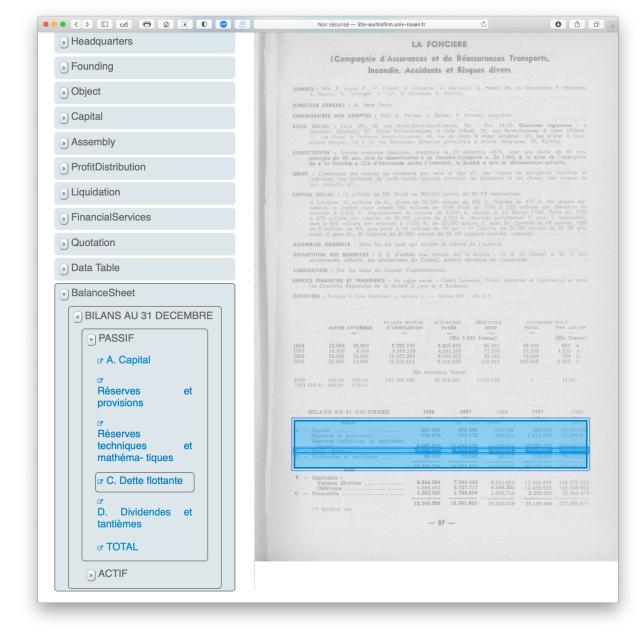

*Figure 14: WP7 Data Extraction Viewer - Balance Sheet rubric selected with the detected hierarchy of the table. The "C. Dettes flottante" liabilities line is selected* 



		Non sécur	isé — litis-eurhisfirm.u	iniv-rouen.fr	C	• 👌 ć
	EURHISFIR	M	It 😢 Help 🔍 Remar	n Viewei ®	*	Luser name password Not registered yet ?
1961 (30-9) 460,00 376,00	.0001100	011001				
BILANS AU 31 DECEMBRE	1	956	1957	1958	1959	1960
Passif		-	(En 1.000	francs)		(NF)
A. — Capital Réserves et provisions Réserves techniques et mathe	77	0.000 9.979	<b>375.000</b> 886.522	375.000 929.371	500.000 1.613.350	10.000.000 23.080.811
tiques	9.05	7.915	11.938.179	14.758.833	18.253.533	234.067.103
D. — Dette flottanre D. — Dividendes et tantièmes		10.084 15.278	2.809.688 72.222	3.397.234 82.111	<b>4.711.540</b> 110.043	57.286.374 *3.152.523
Actif	12.34	3.256	16.081.611	19.542.549	25.188.466	327.586.811
F. — Réalisable : Valeurs diverses Débiteurs G — Disponible	5.00	6.394 8.975 87.887	7.566.985 6.757.717 <b>1.756.909</b>	9.324.601 8.598.234 1.619.714	12.366.653 10.428.853 2.392.960	168.973.252 125.748.885 32.864.674
(*) Bénéfice net.	12.34	3.256	16.081.611	19.542.549	25.188.466	327.586.811
k on a tig to select it and apply it on the tokens. anceSheet (Category) EaseSt Star year anound eurency part inabilities part unknown O Dette flottante SSIF C. Dette flottante 1956 2.190.084 (En 1.000 francs) dated - SSIF C. Dette flottante 1957 2.809.688 (En 1.000 francs) dated - SSIF C. Dette flottante 1958 3.397.234 (En 1.000 francs) dated -						
k on a tap 5 select it and apply it on the tokens. anceSheet (Category) assets teal (Category) assets teal (Category) Dette flottante SSIF C. Dette flottante [1956] 2.190.084 (En [1.000 (francs)) dated - SSIF C. Dette flottante [1956] 3.397.234 (En [1.000 (francs)) dated - SSIF C. Dette flottante [1956] 4.711.540 (NF) dated - SSIF C. Dette flottante [1956] 4.711.540 (NF)	Assets Year 1	tem	Amount	Currency		
k on a tig b select it and apply it on the tokens. anceSheet (Category) anceSheet (Category) anceSheet (Category) anceSheet (Category) anceSheet (Category) Dette flottante SSIF (2) Dette flottante [1956 2:190.084] (En [1.000 francs) dated - SSIF (2) Dette flottante [1956 3:397.234] (En [1.000 francs) dated - SSIF (2) Dette flottante [1956 3:397.234] (En [1.000 francs) dated - SSIF (2) Dette flottante [1956 3:397.234] (En [1.000 francs) dated - SSIF (2) Dette flottante [1956 3:397.234] (En [1.000 francs) dated - SSIF (2) Dette flottante [1956 3:77.236.374] (NF) dated - Unknown Liabilities PASSIF	1956	C. Dette flottante	2.190.084	(En 1.000 francs)		
	1956 1957		2.190.084 2.809.688			
k on a tig b select it and apply it on the tokens. anceSheet (Category) anceSheet (Cat	1956 1957 1958 1959	C. Dette flottante C. Dette flottante	2.190.084 2.809.688 3.397.234 4.711.540	(En 1.000 francs) (En 1.000 francs)		

*Figure 15: WP7 Data Extraction Viewer - Liabilities line "C. Dette flottante" of the Balance Sheet rubric with all the data automatically extracted* 



#### 3 Price List Extraction system

This section will be about the updates we made on the price list extraction system since deliverable D7.2. The system consists of two main tasks: the document structure recognition using a cross validation module, and the definition of a general-purpose text recognizer (OCR). Most of our work focused on generalizing our processes in order to be able to analyse and extract data from price lists of different origins.

#### 3.1 Strategy and transversal analysis

As presented in D7.2, we design a global strategy to take advantage of the sequentiality of the collection and correct errors in noisy documents. Our global strategy is based on an iterative process (see Figure 16). The aim of each iteration is to recognize and validate a structural or textual element of the documents: columns, sections, stock names (table entry), and other fields.

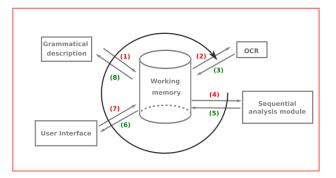



Figure 16: Overview of the global strategy

Each iteration consists of 5 steps:

- 1. a first structural analysis with a grammatical description to produce hypothesis,
- 2. the transcription of the text-lines localized in step 1,
- 3. a sequential analysis for the validation of the extracted elements from the image,
- 4. an eventual call to a user interface;
- 5. a new structural analysis that integrates the knowledge obtained in steps 2, 3 and 4.



With the user interface, we validate certain elements that could not be validated automatically because the information is not on the images. For example, when a new stock appears on the market, we need to know if it is really a new stock or an existing stock that has changed its name. Figure 17 shows another example: the text "m." has been correctly recognized, but we cannot automatically determine whether this currency refers to the German, Polish or Finnish mark. This interface presents the different questions to an expert with all the information needed to answer: the current stock quotation (in the middle), the previous day for the same stock (above) and the next day (below). The objective is to reduce at a minimum the number of questions asked to experts, thanks to the collection redundancies.

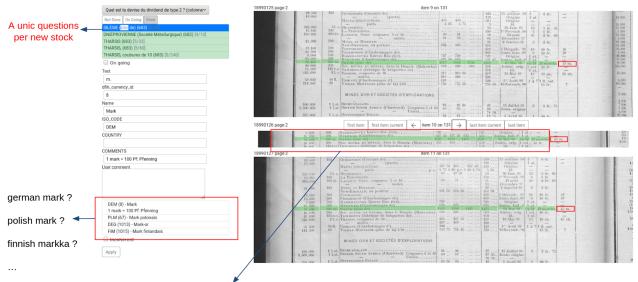

=> need of expert knowledge + contextual information



#### 3.2 Global Meta Table Structure: tables of tables

#### 3.2.1 System

The structure of price lists can vary depending on their origin and their date. The system developed in the context of the ANR project HBDEX, detailed in deliverable D7.2 is able to extract data in price lists when tables are vertically aligned. The tables that we need to detect are not ordered or presented in the same way from one price list to another. For example, a global meta table can group several price lists in each of its cells, with in some cases, a price list which starts in one cell and continues in the next cell (Figure 15). We therefore developed the recursive table structure analysis based on previous work done in [Coüasnon 2006]. It describes a global meta table structure whatever the number of rows, whatever the number of columns it is made of, and tries to detect recursively in each detected cell, another recursive table structure. This description is done using a bi-dimensional grammatical description of table structures and is able to detect the global meta table structure in any price lists tables.



The system can use double or thick vertical or horizontal line borders, and/or understand the recursive organization of the table to detect the global table. In case documents are degraded or if a line segment representing a line border is damaged, the system is also able to correctly detect the global table structure. There are actually four possible types of structures that can be recursively detected:

- A bi-dimensional table made at minimum of four cells organized in two rows and two columns
- A horizontal mono-dimensional table made at minimum of two cells
- A vertical mono-dimensional table made of two cells
- A cell

This table structure system is built on a multiresolution line segment detection [Lemaitre 2009] to extract thin lines, thick lines, multiple lines. The analysis and recognition of the global table organization is also able to understand the reading order of each cell containing a price list table. It uses the table organization and the coherence of the headers found in each price list table. Then, the price list data extraction system is applied separately on each cell.

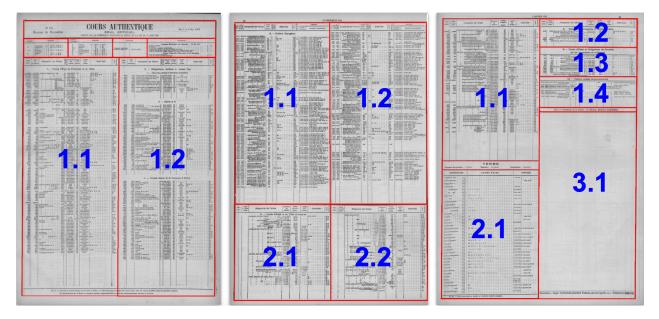


Figure 18: Brussels 1912 Price Lists: Global meta table recognition with reading order recognition



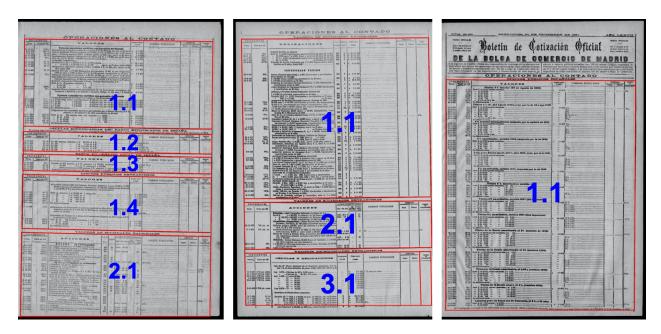


Figure 19: Madrid 1931 Price Lists: Global meta table recognition with reading order recognition

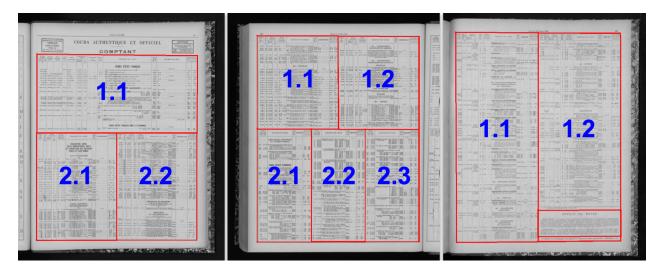


Figure 20: Paris 1961 Price Lists: Global meta table recognition with reading order recognition

# 3.2.2 Evaluation results

In order to evaluate our system, we used the ZoneMap metric [Galibert 2014] which is a metric we already used for yearbooks. ZoneMap results are based on bounding box similarity, and tend towards zero when hypothesis and ground truth are close.



We built three different corpus, one for each type of price list we have to work on : Brussel, Parquet and Madrid. Each corpus contained 30 pages and we obtained a global score of 0.52 for Brussel, 0.72 for Parquet and 1.37 for Madrid (see Table 28).

Origin	Images count	Tables count	Current score (ZoneMap)
Brussel	30	120	0.52
Parquet	30	71	0.72
Madrid	30	52	1.37

 Table 28: ZoneMap score on the Brussel, Parquet and Madrid price lists (lower is better)

Madrid's score is slightly higher because pages are more degraded in this price list than the other two, and the structure is a little harder to detect, but the score is still very low, showing that the recognition is very good. The score shown in the table is the mean of the score per page. To get an idea of the meaning of the score we can see an example in Figure 21.

18 - Mensial Gentin Hoat	18 · · · · · · · · · · · · · · · · · · ·
0         1         0	
No.         No. <td>No.         No.         No.</td>	No.         No.
	The second s

Figure 21: Meta-structure extracted on a page from Parquet price lists

Here we obtain a score of 0.88, because we correctly extracted each of the five tables composing the structure. We do not obtain a score of 0 because corners coordinates vary a bit from the ground truth. Otherwise, ZoneMap is mostly influenced by mistakes made on the detected area. For instance, a really high score (more than 1000) would appear if an entire table isn't detected. A score containing no issues is generally near 0 or 1.



## 3.3 Generic description of table content

#### 3.3.1 System

In this section, we will see the updates we made since D7.2 regarding price lists data extraction. We focused on making our system generic, and then we upgraded the structures taken into account by our data extractor.

#### 3.3.1.1 Genericity

We updated our data extraction system to make it generic and easily adaptable to new structures and price lists. In order to do this, we used the same approach as in yearbooks. Our system always analyses a document the same way, but we specify characteristics that slightly modifies the process when needed.

For instance, here is how we declare Brussels and Paris Parquet price lists specificities:

priceList P :	:=	ļ	priceList P ::=
) (typePage	"French_Parquet")	& &	``( <b>typePage</b> Belgium_Bruxelles") &&
(DECLARE ( <b>column</b> (DECLARE ( <b>grFil</b> (DECLARE ( <b>useNe</b> )	eSeparator) MultipleLinesStaggered) nSectionTitle) ter) arestLine) ( ntTitleMultipleLinesStage	( ( ( ger	<pre>(DECLARE(doubleSeparator) ( (DECLARE(thickSeparator) ( (DECLARE(titleMultipleLines) ( (DECLARE(titleMultipleLinesStaggered) ( (DECLARE(smallSectionTitle) ( (DECLARE(outOfColumnSectionTitle) ( (DECLARE(quotationMark) ( (DECLARE(quotationMark) ( (DECLARE(titles) ( (DECLARE(titles) ( (DECLARE(noBanner) ( (DECLARE(commentTitleMultipleLinesStaggere d) ( page P))))))))))))))))))))))))))))))))))))</pre>

That way, each type of document is characterized by a list of attributes and not only by their origin. These attributes could be used again in future price lists documents, to produce in an easy way an adapted version combining in a different way the different characteristics (stock on multiple lines for example).

We will now detail the major structure adaptations we had to work on for Brussel, Paris Parquet and Madrid price lists. All these adaptations describe new characteristics which are added to the library, the same way it is done on yearbooks.



# 3.3.1.2 Evolution in structural analysis

#### Section titles

The first characteristic we had to work on was the disposition of the section titles. We found two different structures regarding sections (Figure 22 and 23).

	NF		NF			13 HOTELS, CASINOS, THERMALISME	
16.000 2.000  173.400 15.000 59.115	50 50  50 300 100	  1/6/61 3/7/61 5/6/61	 6,84 \$7,50	53,70 52,70 0,15 6,10 760 2738 836	16/6/61 10/2/61 13/7/61		$56 \dots 252, 25$ $54 \dots 52 \dots$ $0, 25 \dots 6, 10$ $900 \dots 650 \dots$ $3298 \dots 2155$



			K Industries de la	Cons	CPUCTIGIE										
83351		1078	Carrières de Quenast (1re, 3º et 4	500	t octobre	148	5.				-				. 1
1785		207	" " (2º éniss.). 3 avril oct.	500	ectobre	1.							0		:
450		269	" Tacquenier 5 janv.juillet	1000	avril	1.					0				
000		1432	» PJ. Wincgz 4 ½ 15 mai nov.	500	avril	1.						1	0.03	•	
700		648	Ciments Europe Orientale 4 1/2 janv. juill.	500	122									•	:
000		5462	" North	500	mat	10	30.0	1925	100	1.00		0		•	: 1
000		3820	Merbes-le-Château	500	novembre	12	610		Sec.		•			•	: 1
600			Niel-on-Rupell.	500	décembra	1.					•	1		•	•
000		400	Tuileries du Pottelherg	500	février	1	1			•	• •	•	100	1	•

Figure 23: Example of a section title inside of a column in Parquet price list

When the section title is outside of a column, we have to look for new sections in all the width of the table. In this case we know as well that there should not be columns separators next to a section title. We developed this variation and, with the generic aspect of our system, we only have to specify depending on the corpus, whether their sections titles are outside or inside columns

#### **Multiple lines**

Our data extractor was previously analysing a table line by line and it was not possible for one stock to be on multiple lines. In our three corpora, we saw that it was possible to see titles on multiple lines. We currently described two other types of line: *staggered lines* (Figure 24) and *stock on multiple lines* (Figure 25).



12000 12000 Rome-Civita-CastelViterbe, priv 5 % recup	. 100	
--	-------	--





We need to be able to detect when a title contains data on multiple lines in order not to split one stock in two.

In the case of staggered lines, we identify them thanks to their particular structure: the first half is written on the first line, the second half on the last line and the stock name is written in several lines in between.

Stock on multiple lines consist of a stock written on only one line except for the name which can be on several lines. In order to detect this case, we have to check under each stock if there are lines only containing data in the stock name column, and decide whether we should concatenate these or not.

When adding multiple lines structures, we had to think as well about the 'idem' symbol (Figure 26).

Aviation Louis Bréguet (Ateliers d'), actions ord. (nº 1 à 250000 et 275001 à 325000) (x-c. 58). × Actions B de priorité (nºs 250001 à 275000) (ex-c. 58).....

Figure 26: Example of an 'idem' symbol (dash) after a stock on multiple lines from Parquet price list

In our original data extractor, we worked on documents where we had dash symbols under the part that had to be repeated. Here in the figure above, we have only one dash symbol standing for *Aviation Louis Bréguet*. For the first version of our system, we decided to repeat the entire first line of the multiple line because we did not have the required data to identify and separate the base stock name from data linked to it.

#### Titles

Another structure that we had to deal with were titles. Once we have the cells composing the metastructure, we apply our data extraction system in each of these as seen previously. Sometimes these cells can contain a framed title or a blank space rather than a table (Figure 27).

		En dierentes series.				-	
Se co	CEDENTES	res del Estado y se intervienen como los industriales (art. 97 de los Estatutos y sente	icias del Tribu	nal Supremo de 19 de Junio de 1907 y	de 25 de	Noviembre	e de 1910).
Fecha	Tante por 100	VALORES	Primer cupón a pagar	CAMBIOS PUBLICADOS	OFE	Dinero	Cambio de compensación

#### Figure 27: Example of a title identified in blue from Madrid price list

Instead of ignoring these, we added in our system the possibility to identify titles in addition to tables. We can thereafter apply a specific method on titles.



# 3.3.2 Evaluation result

#### 3.3.2.1 Columns & Headers recognition and validation

We test the interest of the transversal analysis strategy (see section 3.1) for the correction of recognition errors in noisy documents. We chose a subset of the collection of "La Coulisse" (French unofficial market). We select the first page of each day of quotation from 1899 to 1915. This subset is composed of 4,055 images.

We consider the results produced by step (1) alone (results before validation) and the results produced by the whole strategy (results after validation). We count the number of errors i.e., the number of documents for which the recognized structure is wrong.

		French pricelists (1899 to 1915)
	Num. of pages	4, 055
Grammatical description alone (step (1))	Num. of errors	320
	Error rate	7.89 %
Whole validation strategy	Num. of errors	18
	Error rate	0.44%

The experiment shows that thanks to our strategy we reduced the error rate from 7.89% to 0.44%. Figure 28 shows a qualitative example of improvement obtained with our strategy where columns not detected when processed as an isolated page, are detected using the collection context. A limitation of our system is that it does not manage to correctly recognize the structure when the degradation of the documents has an impact on column width (see Figure 29). This configuration explains the remaining 18 errors on a total of 4,055 pages.

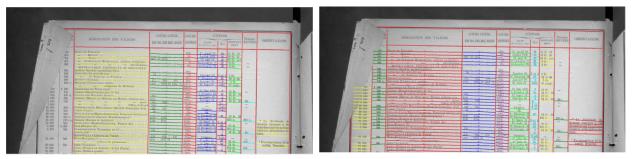


Figure 28: Example of improvement obtained with our strategy (left: before validation; right: after validation)



tres nonit	DÉSIGNATION DES VALEURS	COURS COTÉS	COURS	and the second s	UPONS	The second second	Dernier	and the second
		plus bas, plus haut, dernier	precedents	du dernier payé	Nos	MONT ANT BRUT	REVENU	OBSERVATIONS
Electron of the F	FONDS D'ÉTATS DE VILLES, DE DÉPARTEMENTS							
001.st.			660	5 A cont 00	R	9 6 20 90		
966 H	LATTI 5 0/0 Bons de Coupons	40 500 TO 1 20	571	Octobre 99	10.000	4 1 50		
875 lir.	AINT-DOMINGUE Distant		202 933	1" jany 1000	50	4 fr: 50 2 fr:		
00 101 5 5	AINT-LOUIS & O.G. oblig. Vénézuer a & O.G. Intérieur. ATS D'AUTRICHE 1854	205 230	784	Décendore 98 Novembre 90	40	40 fr:	1.	

(a) Grammatical description alone (before validation)

ombre VALR titres nomie	DÉSIGNATION DES VALEURS	plus	COURS COTÉS bas, plus haut, dernier	COURS précédents		Nos	MONT ANT	Dernier REVENU	OBSERVATIONS
Real and sold and	FONDS D'ÉTATS DE VILLES, DE DÉPARTEMENTS		27				BRUT	1.1.1.1.1.1.1.1.1	
0 000 01 0	BRESIL 2 0/0 (1895)							CONTRACTOR OF	
no oo lin l	FLOBENCE 3 0/0	-	P	660	5 A 001 09	3	9 6 90	100000000000000000000000000000000000000	
0.066	HAITI 5 0/0 Bons de Counons	10	1	571	Octobre 99		4 T 50	10.000	
9 875 lip 2	NAPLES 5 0/0	40	502 50 h 39	-392	1" jany 4000	50	4 (r. 50)	S. S. Contraction of the	
10 000 dol 1	SAINT-DOMINGUE Beelamation franco-américaine 40/0	-	3	- 833	1" Jany 1000		9 fr	65.0.30.00	
		101.00	-	784	Décembre 98	10	40 fr	1	
00 000 h 4	Vénézuera 6 0/0 Intérient 7	205	93/6	9505	Novembre 90	1	45 fr	Sale Collector	
200 000 5 9	Lors D'AUTRICHE 1855 8		0	2761/2	Juin 98	94	0.50 0/0	1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.	
				889750	1" Avril 98		10 0		

(b) Global strategy (after validation)


Figure 29: Example of a limit case of our strategy (only 18 errors for 4, 055 pages)



# 3.5 General-purpose text recognizer (OCR)

#### 3.5.1 System overview

In D7.2 we have demonstrated that high performance character recognition can be achieved when large amounts of training data are available. The strategy is based on specializing a generic OCR to a dedicated corpus for which transcriptions are available so that supervised training of a deep neural network architecture can be pushed to its highest limits in terms of performance. The figure below shows the recognition pipeline which is composed of a deep neural network made of Convolutional Layers (CNN) followed by Recurrent Layers made of Bilateral Long Short Term Memory Networks (BLSTM). This hybrid neural network provides a lattice of character hypotheses with their associated probability. Two recognition modes are available on the system. The raw OCR output is made of the sequence of characters with the highest probabilities.

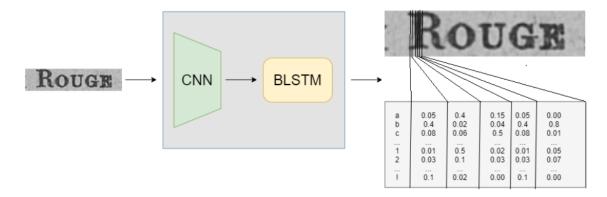

The Grammar OCR output (see figure below) is the sequence of characters allowed by the grammar, with the highest probability. This second recognition mode discards any sequence of characters that is not allowed by the grammar. There is one specific grammar for each specific column of the price lists. In some cases, the grammar simply encodes a list of possible names, or values. This is typically the case for every information that occurs similarly every day over a very long period of time whereas in some other cases, some other values are different every day, but they represent prices, dates, or any kind of numerical values that is encoded in a specific format. A grammar describes the encoding used in the price lists for any such column.



MONTANT .		VALEUR		COUP	ONS	Exercice pricédent		C	OURS D	U JOI	JR	CLOTURE	RELEVE des cours extrêmes
ÉMIS	ADMIS	neminaie	BATM darnlar payé	N.	NET BRUT	Beven: brot	DESIGNATION DES VALEURS	Premier	Plus bas	Plus bant	Dernier cours	PRÉCÉDENTE (A)	depuic e 1" Jany, 1924
10.000 44 nm 12.000 50.000 50.000 60.000 90.000 80.000 80.000 80.000	10.000 45.000 12.000 50.000 50.000 90.000 90.000 80.000 25.000 *.000 *.000	100 fr. 100 fr. 100 fr. 100 fr. 100 fr. 100 fr. 250 fr. 100 fr.	5 Mars 24 4 Juil. 23 1 <sup>er</sup> Mars 24 15 Janv. 23 17 Mars 24 5 Fév. 24 15 Déc. 23 3 Déc. 23 12 Déc. 23 12 Déc. 23 10 Juill. 23	Ι	70 fr. 6 80 fr. 6 fr. 6 fr. 8 fr. 14 00 fr. 8 fr. 14 00 fr. 8 fr. 14 00 fr. 8 fr. 15 00 fr. 8 fr. 15 00 fr. 6 fr. 92 fr. 26 fr. 5 fr. 6 fr. 13 fr. 65 fr. 5 fr. 6 fr. 13 fr. 65 fr. 5 fr. 9 fr. 5 fr. 5 fr. 9 fr. 5 fr. 5 fr. 9 fr. 5 fr.	130 fr. 12 % 40 fr. 20 fr. 5 fr. 50 fr. 50 fr. 50 fr.	PRUDHON (J.) BT C <sup>ie</sup> (Etablissements B. R. H. R) RAISIN DE CORINTHE	390 267 151 245 353 400	350		389 271 221 249 50 353	$\begin{array}{c} 386 \\ 266 \\ 725 \\ 725 \\ 160 \\ 745 \\ 298 \\ 745 \\ 298 \\ 745 \\ 261 \\ 242 \\ 340 \\ 260 \\ 11/4/24 \\ 43 \\ 11/4/24 \\ 404 \\ 11/4/24 \\ 404 \\ 11/4/24 \\ 404 \\ 11/4/24 \\ 404 \\ 100 \\ 11/4/24 \\ 404 \\ 100 \\ $	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
				_							/		
a	mou	nt ai	nd cen	ts		amo	ount, cents and a date	do	uble	am	ount	and cer	nts
	24	49	50				74 50 26/1/24	9	1	25	1	115.	-

The table below recalls the performance for the different modes of the recognizer for some experimentations made on the French corpus *La Coulisse* that were reported in the previous report D.7.2.

OCR	Character Error Rate
OMNIPAGE Nuance	26.64%
LITIS OCR V0 (hand labeled + OMNIPAGE)	12.83%
LITIS OCR V1 (hand labeled, 40 pages, 53 642 fields)	1.52%
LITIS OCR V1 + Grammar	0.55%

Table 30: Evaluation of different OCRs

#### 3.5.2 Data augmentation

During this last period of the project, we have upgraded the capability of the OCR by adding what is called "data augmentation". This method applies random treatments to the data before giving it to the system to learn. The principle lies in creating more data from the available ones. This means that instead of manually labelling 100,000 images, we can label a much smaller number of samples and then increase their number by augmenting the data, applying some random transformations on them during training. In the following we present the different treatments that are included in the augmentation process with an example and an explanation on how it helps.



Original	image	Jouis. origine
3.5.2.1	Erosion/Dilatation	Jouis. origine
3.5.2.2	Lightening / Contrast modification	Jouis. origine Jouis. origine
3.5.2.3	Change of Resolution (DPI change)	Jouis. origine
3.5.2.4	Elastic Distortion	Jouis. origine
3.5.2.5	Gaussian noise	Jouis. origine
3.5.2.6	Bounding Box modification	Jouis. origine
3.5.2.7	Image sharpness modification	Jouis. origine

Table 31: Examples of every data augmentation technique

#### 3.5.2.8 Evaluation

In order to prove how data augmentation helps to train a better OCR, we present the following result table in a test made with the *Coulisse dataset* as a benchmark. We observe a 23% relative improvement of the CER which can be considered to be very significant at this high level of performance.

OCR	Character Error Rate
LITIS OCR V1 (hand labelled, 40 pages, 53 642 fields)	1.52%
LITIS OCR V2 (hand labelled, 40 pages, 53 642 fields + Data augmentation)	1.17%
Table 32: Evaluation on the comparison between OCRs with and v	without data augmentation



#### 3.5.3 Final experiment results

#### 3.5.3.1 Datasets and Evaluation

As was planned in our agenda, we conducted a full evaluation of LITIS OCR on the different corpora of our work program. The table below reports the amount of training data that were annotated manually and then used for training the OCR either specifically on one dataset when sufficient annotated data are available or by mixing the training datasets when not enough data is available. The best character error rate (CER) is reported for each corpus of our EURHISFIRM benchmark in addition to the performance obtained on the *La Coulisse* corpus, which was made available to us as an extra dataset for comparison purposes. In the results reported we use the raw OCR outputs without any Language Model, and we compute an average performance whatever the type of field considered (stock names, prices etc...).

Corpus	Number of annotated field images	Character Error Rate			
French <i>La Coulisse</i>	53 642	1.17%			
French Le Parquet	7 146	1.61%			
Belgium Bruxelles	35 810	1.88%			
Spain Madrid	7 705	2.84%			

Table 33: Number of labeled data per corpus and Error rate on the corpus

In the following, we report the detailed performance of the OCR for each and every condition of training (without / with data augmentation (DA)) and decoding (without / with language model (LM)), and for each corpus of the benchmark.



Coulisse Price List	CER Raw	CER LM	CER Raw + DA	CER DA + LM
Number of Titles	1.48%	1.05%	1.10%	0.53%
Nominal Value	1.55%	0.94%	1.13%	0.60%
Name of Stock	2.73%	1.09%	1.39%	0.72%
Prices of the day	11.90%	4.56%	2.12%	1.10%
Yesterday's Price	8.89%	7.50%	1.95%	0.98%
Last day of payment of the Coupon	1.94%	0.65%	0.81%	0.22%
Numbers of the Coupon	0.76%	0.76%	0.70%	0.52%
Gross Amount of the Coupon	0.93%	0.07%	0.84%	0.07%
Last Income	1.03%	0.00%	0.69%	0.09%

Table 34: Evaluation on the Coulisse Corpus per column using the raw and Language Module outputs

Belgium Price List	CER Raw + DA	CER DA + LM		
Number of stocks admitted	1.54%	1.10%		
Number of active stocks	2.03%	1.02%		
Name of Stock	2.83%	0.91%		
Nominal Value	1.24%	0.85%		
Dates	1.47%	0.84%		
Prices of the day	2.25%	1.52%		
Previous price	1.56%	1.04%		
Last day of payment of the Coupon	1.93%	1.02%		
Amount and specification of the coupon	0.96%	0.60%		

Table 35: Evaluation on the Belgium Corpus per column using the raw and Language Module outputs



Parquet Price List	CER Raw + DA	CER DA + LM
Number of stocks admitted	1.77%	1.44%
Nominal Value	0.67%	0.20%
Ex-coupon date	1.25%	1.02%
Coupon net value	1.03%	0.71%
Previous prices	2.52%	1.82%
Name of Stock	2.44%	0.95%
Stock's code number	1.42%	0.54%
Spot prices	2.81%	1.42%
Extreme prices since January 1st	2.19%	1.24%

Table 36: Evaluation on the Parquet Corpus per column using the raw and Language Module outputs

Madrid Price List	CER Raw + DA	CER DA + LM		
Date of previous	2.48%	1.88%		
Percentage	2.44%	1.75%		
Name of Stock	2.98%	1.10%		
Nominal value	3.33%	1.89%		
Payout	0.98%	0.88%		
Date of last paid dividends	2.10%	1.50%		
Current year of last paid dividends	1.02%	0.7%		
First coupon to be pay from the last paid dividends	2.62%	1.53%		
Public changes	2.02%	1.62%		
Change of compensation	1.23%	0.82%		

Table 37: Evaluation on the Spanish Corpus per column using the raw and Language Module outputs



# 3.6 Evaluation and Application of the Price List Information Extraction System to four price lists

We evaluate the complete price lists information extraction system, built on the combination of the global meta table structure recognition (section 3.2), the reading order recognition (section 3.2), the price lists tables recognition (section 3.3), the General-purpose text recognizer (OCR) (section 3.4), driven by the Strategy and transversal analysis (section 3.1).

The evaluation is done on Paris "La Coulisse" price lists 1899 in the context of the French ANR HBDEX project, where the complete extraction of the data combined with expert users interaction and the insertion of all the extracted data in the DFIH database have been done.

# 3.6.1 Evaluation of Stock identification on Paris "La Coulisse" 1899, 1696 stock lines

We evaluate the complete price lists information extraction system on French price lists from "La Coulisse". We have processed the first 6 months of 1899 and we choose 4 days of quotation each composed of 4 pages (16 images) for the evaluation. This represents a total of 1696 stock lines.

We evaluate the quality of stock identification:

- 1. without any consideration of the context of the collection
- 2. with consideration of the context of the collection but without user interactions
- 3. with consideration of the context of the collection and with user interactions (the whole proposed strategy)

	without collection context	with collection context without user interactions	collection context + user interaction
Nb of true positive	1550	1580	1675
Nb of false positive	147	117	13
Nb of false negative	146	116	21
Precision	0.913	0.931	0.989
Recall	0.914	0.932	0.988
F-measure	0.914	0.931	0.988

Table 38: Evaluation on the Paris La Coulisse 1899 Corpus using the collection context and userinteraction



The experimentation (results presented in table above) shows that our strategy improves the Fmeasure from 0.914 without collection context to 0.988 with the collection context and expert user interaction.

## 3.6.2 Data Extraction on 6 months of Paris "La Coulisse" 1899 price lists, 536 pages

This quality of data extraction (F-measure of 0.988) is done while, **on 536 pages and 54,603 stock lines from 6 months of La Coulisse 1899, the number of questions to expert users is drastically reduced from 4,061 to 309 with the collection context.** Indeed, to obtain results of the same quality without the exploitation of the context of the collections, 4,061 questions would have been necessary.

On these **536 pages of 6 months of daily quotation**, a total of **491**, **427 cells**, from **54**,603 stock **lines has been extracted and produced in XML (see Figure 6) after 309 expert users interaction.** All this data has then been inserted in the DFIH database.

This experiment on Paris "La Coulisse" 1899 validates the ability of the Price Lists Information Extraction System to extract all the data found in price lists with a high quality of recognition, while minimizing the expert users interaction.

	without collection context	with collection context
Nb of days	134	134
Nb of images (6 month of quotations)	536	536
Nb of stock lines	54,603	54,603
Nb of questions required to obtained a F-measure $\ge 0.988$	4,061	309

 Table 39: Paris La Coulisse 1899: Interest of the collection context for drastically reduce expert users

 interactions



## 3.6.3 Application of the Price Lists Information Extraction System on EurHisFirm dataset

We have applied the Price List Information Extraction on the price lists EurHisFirm dataset. We present examples of results on the combination of the global meta table structure, the reading order recognition, the column and header detection, the section detection and the stock lines detection, on Brussels 1912 (Figure 30 and 31), on Madrid 1931 (Figure 32 and 33) and on Paris "Le Parquet" 1961-1962 (Figure 34 and 35).



Figure 30: Price Lists Brussels 1912: Results on three pages of global meta table recognition, reading order recognition, price list column and header recognition in each cell



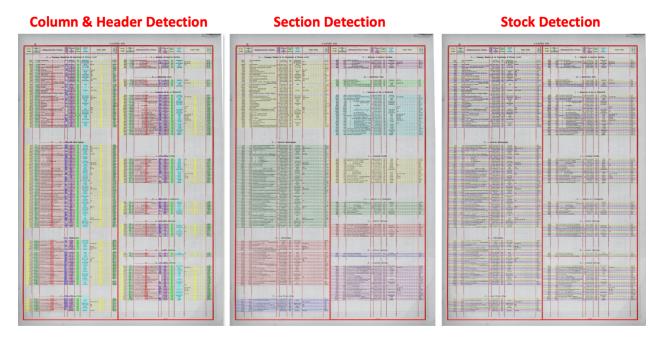


Figure 31: Price Lists Brussels 1912: Results on one page of global meta table recognition, reading order recognition with: price list column and header recognition in each cell, each color represents one column (left); section detection, each color represents one section (middle); stock detection, each color represents one stock (right)





Figure 32: Price Lists Madrid 1931: Results on three pages of global meta table recognition, reading order recognition, price list column and header recognition in each cell


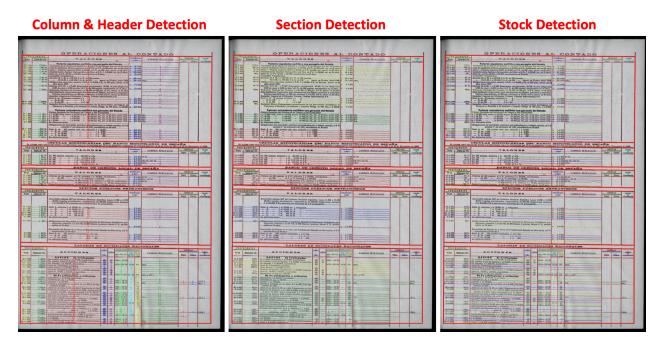


Figure 33: Price Lists Brussels 1912: Results on one page of global meta table recognition, reading order recognition with: price list column and header recognition in each cell, each color represents one column (left); section detection, each color represents one section (middle); stock detection, each color represents one stock (right)



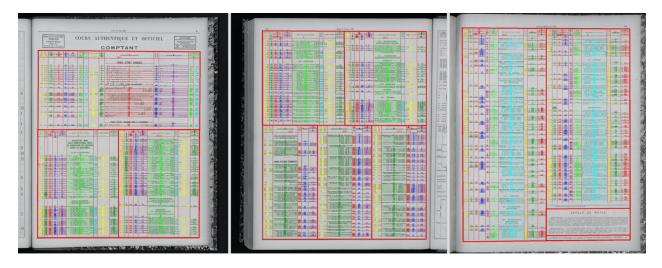

*Figure 34: Price Lists Paris "Le Parquet" 1961-1962: Results on three pages of global meta table recognition, reading order recognition, price list column and header recognition in each cell* 

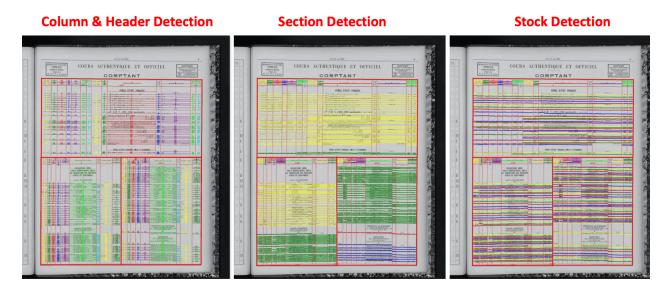


Figure 35: Price Lists Paris "Le Parquet" 1961-1962: Results on one page of global meta table recognition, reading order recognition with: price list column and header recognition in each cell, each color represents one column (left); section detection, each color represents one section (the green section starts in cell 2.1 and ends in cell 2.2)(middle); stock detection, each color represents one stock (right)



The WP7 Price Lists Information Extraction System has been applied on 1,755 pages of the four price lists datasets produced 176,382 extracted stocks (mainly domestic shares and bounds). More detailed results by price list are given in table 40.

Results of the WP7 Price Lists Information Extraction System		Paris Brussels Ma "La Coulisse" 1912 19 1899			Paris "Le Parquet" 1961-1962
Num. of pages		536	268	534	417
Domestic shares &	Num. of extracted stocks	56,603	56,350	14,562	48,083
bounds	Mean num. of stocks by day		1,466	600	1, 936
	Num. of sections and subsections		1,197		2 ,128
	Mean num. of section and subsections by day		31		85
Public bounds	Num. of extracted stocks				784
	Mean num. of stocks by day				31
	Num. of sections and subsections		49		
	Mean num. of section and subsections by day				2

Table 40: WP7 global results on the Price Lists

On the price list Paris "La Coulisse" 1899, the WP7 Information Extraction System produced data with an estimated F-measure of 0.988. The processing of **536 pages (6 months of 1899) generated 54,603 stock lines while the number of questions to expert users was reduced from 4,061 to 309 with the collection context.** All the data extracted has been produced in XML (see Figure 36) for an import in the DFIH database.



	J			≘ hbdex-che	cks.dfih.fr						1.5.4			
NOMBRE de titres	VALEUR nominale	D	ÉSIGNATION DES VALEURS	COURS plus bas, plus			OURS écédents	DATE du dernier pay	COUPONS Nos MONTANI BRUT				OBSERVA	TIONS
6,000.000 l. st. 54,000.000 lir. 70.966 430.000 4.492.875 lir. 4.500.000 dol 95.000	60 500 500	BRÉSIL 5 0/0 FLORENCE 3 HAITI 5 0/0 MINAS GERA NAPLES 5 0/ SAINT-DOMU	TATS, DE DÉPARTEMENTS, DE VILLES (1895)	40 41 365 366  230 253		···· 30 ···· 31 ···· 4 ···· 4	68 1/2. 57 68 68 84 1/4. 10 55 33 3/4.	4 février 99 Octobre 98 Janvier 99 45 Janvier 99 Janvier 99 Septembre 90 6 Mai 98	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	2 fr. 47 1 fr. 50 2 fr. 50 2 fr. 50 0 fr. 5 fr. .50 0/0			négocié, ex-	coup. 24.
<< Previous day				1899	90227									Next day >>>
			FONDS D'ÉTATS	S, DE DÉPART		· ·		[678]						
NOMBRE de	titres	VALEUR nominale	DÉSIGNATION DES VALEURS		CO plus bas	URS COT plus haut	TÉS dernier	Derniers COURS	Date du de payé		N°	Montant Brut	Dernier REVENU	Observations
000 000 Livre Ster itres admis / Total Am apital)			BRÉSIL 5 % (1895) [106559 - 207602]					68,5	1899-02-04	(DAY)		2,17 undefined		
4 000 000 Lira itres admis / Total Am apital)	ount (of		FLORENCE 3 % [104857 - 207681]					57	1898-10-01 (	(MONTH)				
0 966 itres admis / Number (	of Securities	0 undefined	HAITI 5 % Bons de Coupons [104916 - 207682]		40	41		40	1899-01-01	(MONTH)	38	1,5 Franc		
30 000 itres admis / Number (	of Securities 5	00 undefined	MINAS GERAES 5 % [4551 - 207683]		365	366		368	1899-01-15	(DAY)	3	12,5 Franc		1
492 875 Lira itres admis / Total Am apital)	ount (of		NAPLES 5 % [104858 - 207684]					84,25	1899-01-01 (	(MONTH)		2,5 Franc		
500 000 Dollar US itres admis / Total Am apital)			SAINT-DOMINGUE. Réclamation franco-américaine 4 207685]	<mark>%</mark> [105466 -				110	1898-09-01 (	(MONTH)	10	10 Franc		
5 000 itres admis / Number (	of Securities 5	00 undefined	SAINT-LOUIS 6 %. oblig. [106560 - 207603]		250	253		255	1890-11-01 (	(MONTH)	4	15 Franc		

Figure 36: Example of the WP7 Price lists data extraction system: 27 February 1899 - La Coulisse, Data extracted in XML (bottom) after the process of the page (top) in the context of a collection of 6 months of quotations. Each extracted data is linked to its location in the image (see in red "SAINT-DOMINGUE")

# 4 WP7 Information Extraction System demonstration

The results of the application of the WP7 Information Extraction System on the German Yearbook 1913-1914 (Handbuch der deutschen Aktiengesellschaften), the Spanish Yearbook Madrid 1931 and the French Desfossés Yearbook 1962 are presented with the WP7 Data Extraction Viewer on this web site:

#### • <u>http://litis-eurhisfirm.univ-rouen.fr/pivan/</u>

The results of the application of the WP7 Information Extraction System on official price lists Brussels 1912, Madrid 1931 and Paris 1961-1962, are presented with the WP7 Data Extraction Viewer on this web site:

• <u>http://litis-eurhisfirm.univ-rouen.fr/pivan/</u>

The XML results of the application of the WP7 Information Extraction System on price lists Paris "La Coulisse" 1899, done in the French National project ANR HBDEX, are presented on this web site (see Figure 36):

https://hbdex-checks.dfih.fr/batches/1899S1\_current/18990116



# **5** References

[Coüasnon 2006] Coüasnon, B. DMOS, a generic document recognition method: application to table structure analysis in a general and in a specific way. *IJDAR* **8**, 111–122 (2006). https://doi.org/10.1007/s10032-005-0148-5

[Galibert 2014] O. Galibert, J. Kahn, I. Oparin. (2014, October). The ZoneMap metric for page segmentation and area classification in scanned documents. IEEE.

[Grüning 2018] Grüning, T., Leifert, G., Strauß, T., & Labahn, R. (2018). A two-stage method for text line detection in historical documents. *arXiv preprint arXiv:1802.03345*.

[Lemaitre 2009] Aurélie Lemaitre, Bertrand Coüasnon, Jean Camillerapp. Use of Perceptive Vision for Rulling Recognition in Ancient Documents. Eighth IAPR International Workshop on Graphics RECognition (GREC 2009), Jul 2009, La Rochelle, France. pp.3-12. (hal-00545052)

[Pawlik and Augsten 2016] Mateusz Pawlik, Nikolaus Augsten, Tree edit distance: Robust and memoryefficient, Information Systems, Volume 56, 2016, Pages 157-173, ISSN 0306-4379, https://doi.org/10.1016/j.is.2015.08.004.

