

CONCERTO: Coherence & Functional Connectivity Graph Network

Bruno Aristimunha, Raphael Yokoingawa De Camargo, Walter Hugo Lopez Pinaya, Florian Yger, Marie-Constance Corsi, Sylvain Chevallier

► To cite this version:

Bruno Aristimunha, Raphael Yokoingawa De Camargo, Walter Hugo Lopez Pinaya, Florian Yger, Marie-Constance Corsi, et al.. CONCERTO: Coherence & Functional Connectivity Graph Network. Journée CORTICO 2023, May 2023, Paris, France. 2023. hal-04121445


HAL Id: hal-04121445 https://hal.science/hal-04121445

Submitted on 7 Jun2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Bruno Aristimunha^{1,4}, Raphael Y de Camargo⁴, Walter H L Pinaya⁵, F Yger³, M-C Corsi², S Chevallier¹

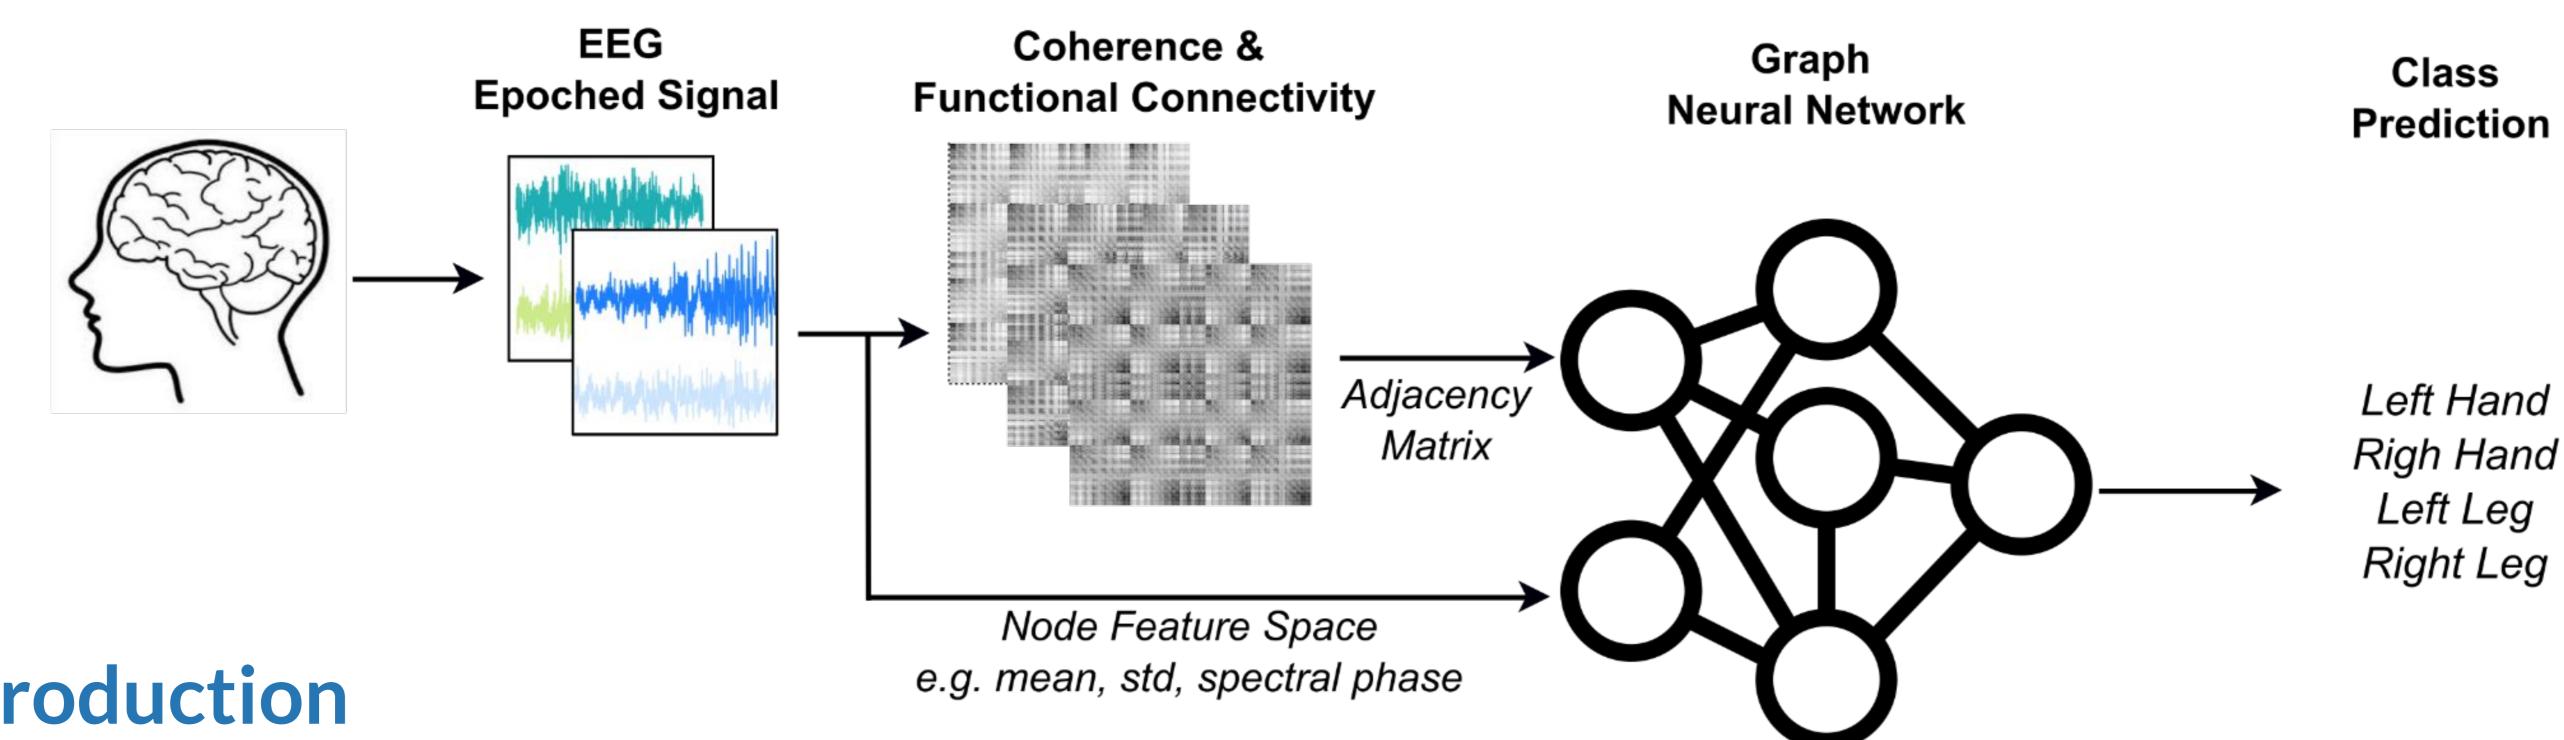


Introduction

Electroencephalography (EEG) is the most common non-invasive technique for measuring brain activity. It uses electrodes to capture the electric fields with high temporal resolution. However, analysing this data with machine learning presents several challenges, the most prominent one being the high inter/intra-subject variability (*i.e.* BCI inefficiency). One solution to tackle this challenge is to explore alternative features that capture additional types of information and help to better discriminate the subjects' mental state. For instance, complementary features that reflect *interactions between brain areas*, rather than relying solely on local measurements has proven efficient [1].

Methodology

This study proposes a GNN classifier [2] method that combines FC

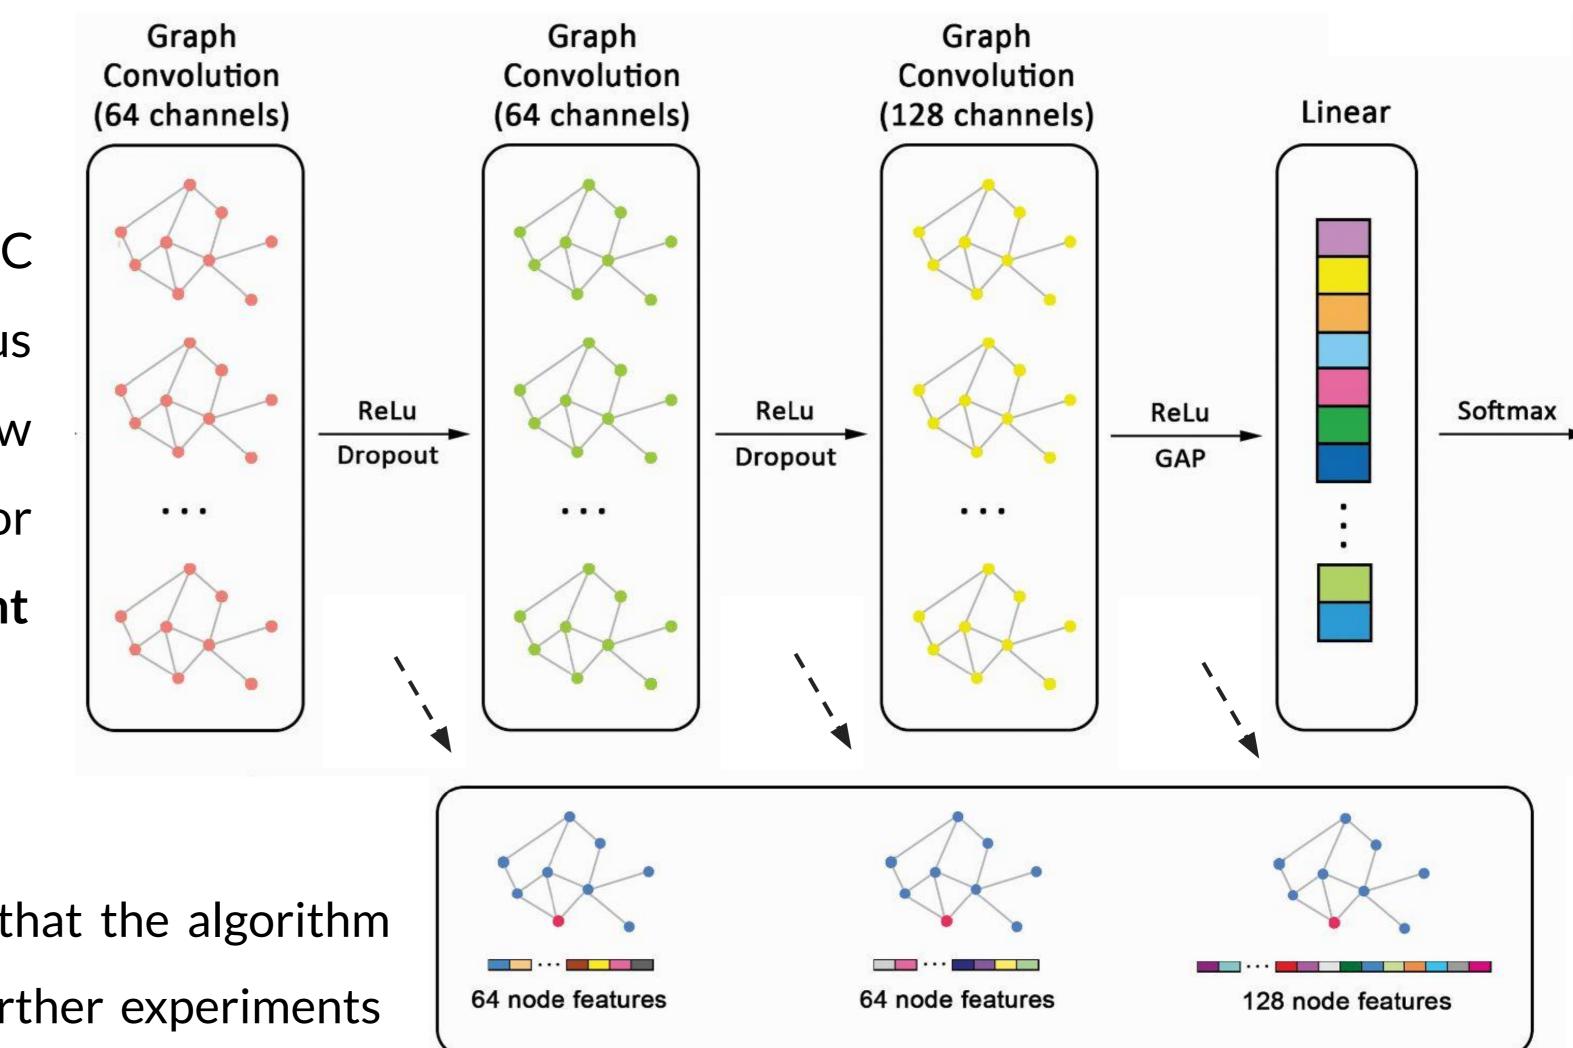

information from various estimators like the Covariance, Instantaneous

and Imaginary Coherence with traditional feature space such as raw EEG features, trial mean and standard deviation, and spectral phase for each electrode. The core feature of this network is capture invariant spatial activation patterns.

Preliminary Results

Preliminary results obtained with the High Gamma Dataset [3] show that the algorithm could successfully classify MI movements (above chance). However, further experiments are necessary to evaluate the trade-off of how much information we need to use in the node feature. At the moment, we are still on a journey to find the best balance in the case of BCI decoding.

References

[1] Corsi, M. C., Chevallier, S., Fallani, F. D. V., & Yger, F. (2022). Functional connectivity ensemble method to enhance BCI performance (FUCONE). IEEE Transactions on Biomedical

Model used in the initial experiments,

figure extracted from [2] with authorization.

Engineering, 69(9), 2826-2838.

[2] Lei, D., Qin, K., Pinaya, W. H., Young, J., Van Amelsvoort, T., Marcelis, M., ... & Mechelli, A. (2022). Graph convolutional networks reveal network-level functional dysconnectivity in schizophrenia. Schizophrenia Bulletin, 48(4), 881-892.

[3] Schirrmeister, R. T., Springenberg, J. T., Fiederer, L. D. J., Glasstetter, M., Eggensperger, K., Tangermann, M., ... & Ball, T. (2017). Deep learning with convolutional neural networks for EEG decoding and visualization. *Human brain mapping*, 38(11), 5391-5420.00







France



3. LAMSADE, PSL, Université Paris Dauphine, France



4. Center for Mathematics, Computing and Cognition (CMCC), Federal University of ABC (UFABC), São

Paulo, Brazil

5. Department of Biomedical Engineering, School of Biomedical Engineering and Imaging Sciences, King's



PARIS-SACLAY

