



**HAL**  
open science

# The Spherical Retractable Bubble Space: an Egocentric Graph Visualization throughout a Retractable Visualization Space

Piriziwè Kobina, Thierry Duval, Laurent Brisson

► **To cite this version:**

Piriziwè Kobina, Thierry Duval, Laurent Brisson. The Spherical Retractable Bubble Space: an Egocentric Graph Visualization throughout a Retractable Visualization Space. *Information*, 2023, 14 (10), pp.531. 10.3390/info14100531 . hal-04217852

**HAL Id: hal-04217852**

**<https://hal.science/hal-04217852>**

Submitted on 26 Sep 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

## Article

# The Spherical Retractable Bubble Space: an Egocentric Graph Visualization throughout a Retractable Visualization Space

Piriziwè Kobina <sup>†,1</sup> , Thierry Duval <sup>†,2</sup> \* and Laurent Brisson <sup>†,3</sup> <sup>†</sup> IMT Atlantique, Lab-STICC, UMR CNRS 6285, F-29238 Brest<sup>1</sup> paulkobina001@gmail.com<sup>2</sup> thierry.duval@imt-atlantique.fr<sup>3</sup> laurent.brisson@imt-atlantique.fr

\* Correspondence: thierry.duval@imt-atlantique.fr

**Abstract:** In this paper we present a new egocentric metaphor for graph visualization that consists in positioning a graph between two concentric spheres of different radii. It improves the expansion of the nodes in space, contrary to the 3D spatialization algorithms. Edge drawing is optimized by pushing all the edges into the area delimited by our two concentric spheres, so that a user can move freely without being encumbered by edges. Our new metaphor also makes it possible to reduce the display angles to have a global view of the graph without leaving the egocentricity.

**Keywords:** Immersive Analytics ; Big Data Visualization ; Virtual Reality

## 1. Introduction

An essential task in graph representation is to determine an appropriate geometric arrangement of nodes and edges. Several criteria, such as minimization of edge crossings, homogeneity of edge lengths, and rational distribution of nodes, are used to evaluate the quality of a graph representation. The most commonly used methods to represent a graph are the force-directed algorithms [1–3]. Among those algorithms, we can mention the Fruchterman-Reingold algorithm [1], the Kamada-Kawai algorithm [2], the ForceAtlas2 [4] and the Fast Multipole Multilevel Method (FM<sup>3</sup>) [5]. The Fruchterman-Reingold algorithm's objective is to minimize energy based on spring and electrostatic forces. It scales well with large graphs; balancing between attraction and repulsion crucial for convergence. However, it may not handle dense graphs effectively, and sensitive to parameters. The Kamada-Kawai algorithm's objective is to minimize the dissimilarity between actual and desired distances. It is better suited for well-connected graphs and produces more even layouts. However, it is computationally more intensive and may not scale well for large graphs. The ForceAtlas2 handles large graphs well by balancing attraction, repulsion, and gravity forces, but it is sensitive to parameter tuning. It is also computationally intensive for very large graphs. The FM<sup>3</sup> employs a nearest neighbor search to compute forces between nodes [6]. It however requires careful parameter tuning. Overall, the presented force-directed algorithms are not always suitable for graphs containing several thousand of nodes and edges [7].

Other algorithms have been proposed in order to improve the representation of graphs in terms of quality and algorithmic efficiency, especially for large graphs. Some of these algorithms are based on a variant of the MDS dimension reduction methods [7,8] and aim at minimizing the stress. In these approaches, the goal of stress minimization is to determine the position of nodes so that the Euclidean distance between two nodes approximates their theoretical distance, i.e. the distance of the shortest path between these nodes. However, such distance-based approaches tend to cluster nodes for graphs with small diameters (the largest distance between two nodes in a graph [9]), especially graphs that represent real-world data.



**Citation:** Kobina, P.; Duval, T.; Brisson, L. The Spherical Retractable Bubble Space. *Information* **2023**, *1*, 0. <https://doi.org/>

Received: 28/07/2023

Revised: 11/09/2023, 18/09/2023

Accepted: 26/09/2023

Published:




**Copyright:** © 2023 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

However, all these methods may be less practical for large graphs due to the lack of display space. One can notice a presence of many node and edge occlusions. Some methods [10,11] have been proposed to reduce the occlusion by clustering edges, while others have proposed to exploit 3D to distribute nodes well and to improve the perception of connectivity between nodes [12,13]. Methods exploiting 3D are limited when combined with a conventional environment (2D display), as depth cues in 3D can make understanding a large graph more complex [14]. Some works have suggested that immersion in the data can mitigate this complexity and make depth a viable channel for encoding data [15,16]. Thus, several methods for graph visualization in immersive environments have been proposed [17–19]. Most of these methods used an exocentric approach in which a user was outside the representation of a graph [20] to provide an overview of the graph, but some other works suggest that an egocentric approach may be useful for graph visualization [17]. An egocentric visualization of a graph involves placing a user, for example a graph analyst, inside a graph. Other work argues that it can also increase user engagement and reduce the symptoms of cybersickness that can be observed with an exocentric approach [20,21]. However, a study by Yang et al. [22] showed that exploring maps from an egocentric perspective resulted in poorer performance than any other representation in an immersive environment.


In order to exploit the potential of immersive 3D and enhance graph exploration, we propose a new egocentric visualization metaphor with a retractable space where a user can flexibly switch from an egocentric detailed view to an overview of the graph while remaining in an egocentric mode. However, we have not yet been able to conduct experiments to validate our approach through performance evaluation and a case study with users. In this paper, we first present work on egocentric graph visualization, and then we present our egocentric approach and its advantages and limitations.

## 2. State of the art about egocentric visualization


Adapting visualization to new modalities, such as immersive environments, may require new ways of representing and interacting with data [23]. Several works have therefore explored ways to interactively manipulate, navigate, and represent graphs in virtual reality. Kwon et al. [17,18] introduced an egocentric approach in which a graph is laid out on a sphere so that all nodes in the graph are equally visible to the user (see figures 1 and 2). Edges are bundled to reduce node occlusion. They then compared the performance of their method with classical 2D visualization through a user study (figure 3) [18]. Interactions are made using the mouse, and evaluation tasks included finding common neighbors to two given nodes, finding a node that has the greatest degree, finding a path between two nodes, and recalling the position of certain nodes. The results of their evaluation showed that participants achieved better results with fewer interactions using spherical visualization than using 2D visualization, particularly for more difficult tasks and large graphs.

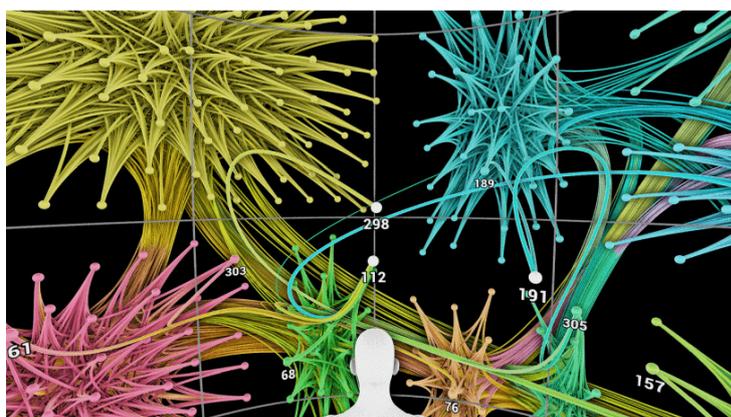

**Figure 1.** Spherical visualizations of graphs (Image is from Kwon et al. [18], © 2016, IEEE).

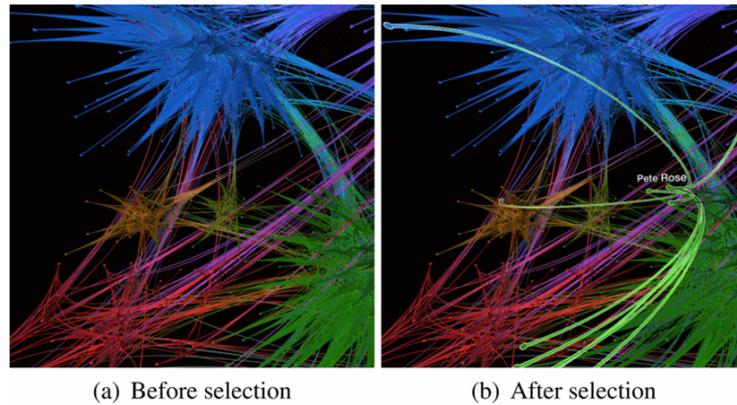


**Figure 2.** Spherical graph visualizations (Image is from Kwon et al. [17], © 2015, IEEE). When a user selects a node, this node and its neighboring nodes are brought closer to the user.

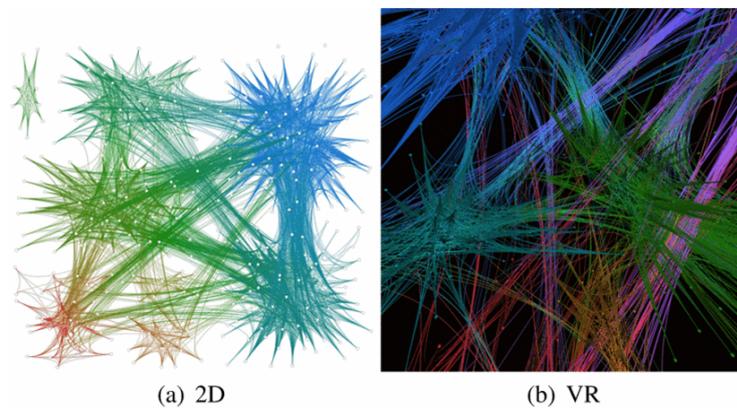

**Figure 3.** In this 2D visualization, the entire graph may be visible, but it is difficult to discern the connectivity of certain nodes. In the immersive environment, only a small section of the graph is visible at any given time, but the structure is more tangible. (Image is from Kwon et al. [17], © 2015, IEEE).

To improve graph exploration in an immersive environment, Sorger et al. proposed two egocentric visualizations (*Ego-highlight* and *Ego-bubble*) in which a user can take the place of a node in order to analyze its connectivity (see Figure 4). In the *Ego-highlight* approach, the user can take the place of a node and identify the neighboring nodes that are automatically highlighted. The edges connecting this node to its neighbors are removed from the user's view to reduce visual clutter. However, we can note occlusions and some nodes can be very far from the user because of the force-directed algorithm used. The *Ego-bubble* approach is an extension of the *Ego-highlight* approach. To further mitigate occlusions in the user's local view, direct neighbor nodes are moved to be evenly distributed around the user. Edges passing close to the user are clipped to avoid view obstructions. Sorger et al. [21] expected that exploring a graph using egocentric visualization might lead to a trade-off that affects several factors such as visual search efficiency, navigation, spatial orientation and cybersickness. Thus, they then carried out an experimental study to quantify these trade-offs, but also to assess the advantages and limitations of egocentricity for graph exploration in immersive environments. The aim of their evaluation was to compare the effectiveness and efficiency of certain graph analysis tasks between classical visualization in an immersive environment and their methods. Conventional visualization is the result of a force algorithm, and a user can move closer to a node to analyze its connectivity. However, he or she may be hindered by edges and occlusions may occur. The evaluation was based on graph analysis tasks such as finding a neighbor node, finding common neighbor nodes, estimating the degree of a given node (counting the number of edges) and finding a path between two nodes. The evaluation results confirm their

basic hypothesis that egocentric graph visualizations are more effective than conventional immersive visualization. Sorger et al. [21] argue that visual search is clearly facilitated by a de-cluttered egocentric visualization. As far as egocentric visualization is concerned, classic immersive visualization achieved the highest average scores. Thus, the results of their evaluation showed that egocentric visualization can significantly increase visual search efficiency. These results also suggest that egocentricity can reduce symptoms of cybersickness, compared with traditional immersive visualizations.

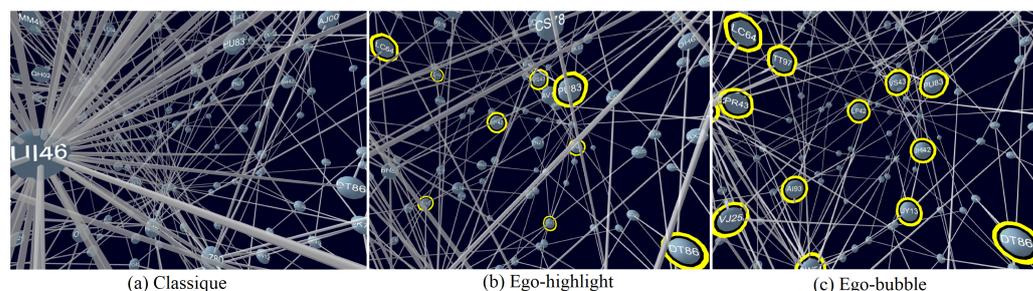

**Figure 4.** Immersive exploration of the node's neighbors. (a) Classic: the user inspects the *UI46* node up close. (b) Ego-highlight: the user takes the position of the *UI46* node, with direct neighbors highlighted in yellow. (c) Ego-bubble: direct neighbors are positioned equidistant from the user. (Images taken from Sorger et al. [21]).

However, to get a global view of a graph, one will have to leave the egocentric mode proposed by Sorger et al, i.e. one has to move away from the graph. Some nodes will appear very distant, and therefore, it will be difficult to observe their connectivity. Thus, the egocentric approach proposed by Kwon et al. [17] seems more practical for an overall view of a graph. Indeed, with the Ego-highlight and Ego-bubble approaches, highlighting a node's neighbors is only possible if a user takes the node's place, whereas a graph analyst might be interested in identifying a node's neighbors without necessarily getting close to it. In the Ego-bubble approach, edges passing close to the user are cut to avoid view obstructions. However, this can confuse a graph analyst in identifying certain connectivities if they are cut off. A node's direct neighbors are positioned equidistant from the user in the Ego-bubble approach. However, this could cause the user to lose orientation by shifting node positions, even though Sorger et al. [21] have proposed to animate this shift when the user moves to another node.

In conclusion, the egocentric approaches of Sorger et al. [21] allow a graph analyst to study the connectivity of a node by taking its place in the graph. However, these approaches are impractical for getting an overview of the graph. Moreover, they do not improve the result of the node spatialization algorithm. For example, if the force-directed algorithm used provides a result where some nodes appear clustered, that result would be used as is. As a result, a graph analyst might have difficulty identifying certain connectivities. Thus, improving spatialization would improve the perception of connectivity between nodes. In a traditional immersive approach, a user becoming entangled in nodes and edges may cause discomfort during visualization. It could also cause or increase cybersickness. Clipping edges near the user can affect the understanding of some connectivity. Therefore, it may be useful to represent edges differently instead of clipping them.

### 3. The Spherical Retractable Bubble Space Metaphor

According to our analysis of the state of the art, our egocentric metaphor aims to improve the result of a node spatialization algorithm and the representation of edges. It also aims to provide an overall view of the graph.

Indeed, evaluation results of egocentric approaches proposed by Sorger et al. [21] have shown that egocentric visualization and well-suited interaction design can provide significant benefits in immersive graph exploration, this is why we propose the Spherical

Retractable Bubble Space Metaphor, which is an egocentric graph visualization throughout a retractable visualization space.


### 3.1. The Spherical Bubble Space Concept

Thus, in order to improve spatialization and avoid a user getting entangled in nodes and edges we create an empty area in its close surroundings. This empty area is a sphere with a minimum radius  $r_{int}$  of 2.5m so that the sphere completely envelops the user in immersion. Note that the user has the possibility to leave this zone (see figure 5b). We then position the nodes (result of a 3D spatialization algorithm) between the user's zone and another sphere of radius  $r_{ext} > r_{int}$ . The minimum value of  $r_{ext}$  is by default equal to  $2 \times r_{int}$  and its maximum value depends on the number of nodes in the graph. The maximum value of  $r_{int}$  is defined as a function of the current value of  $r_{ext}$ . Equation 1 illustrates how we compute the position of a node  $i$  between the spheres:

$$P'_i = d'_i \cdot \frac{P_i}{\|P_i\|} \quad (1)$$

where:

- $P_i$  is the position of node  $i$  using a 3D spatialization algorithm;
- $P'_i$  is the position of node  $i$  between the spheres;
- $d'_i = r_{int} + \frac{\|P_i\|}{d_{max}} \cdot (r_{ext} - r_{int})$  is the new distance between a node  $i$  and the center, and  $d_{max}$  is the distance between a most distant node and the center.

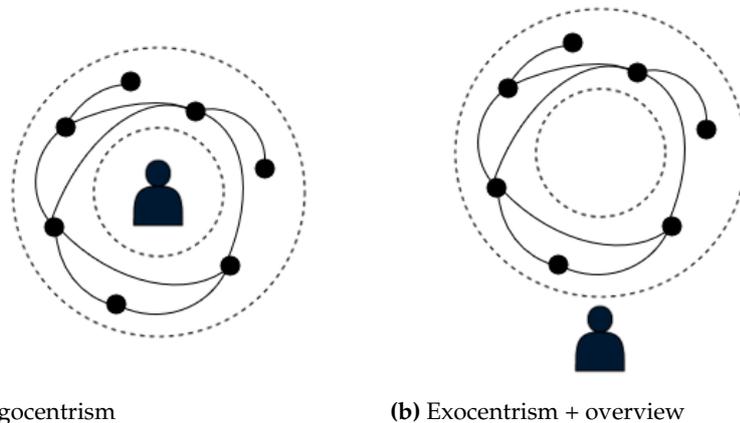


**Figure 5.** (a) The user is placed at the center of the inner sphere and some edges are projected out. (b) Global view of the graph by moving out of the spheres, but some nodes will appear far from the user.

To improve the edge drawing, we do not let any edge cross the empty space of the user (the inner sphere). To do this we push the edges into the area delimited by our two concentric spheres (figure 5a). We first segmented the edges into a number of points, we then applied the same principle as for the nodes to push them between the spheres. Thus, the user can move freely in his space without being encumbered by edges.

Figures 6 shows a 3D visualization of the graph of the dataset "Karate Club" (34 nodes and 78 edges) with a spatialization of the nodes carried out, respectively, by Fruchterman and Reingold's algorithm [1] and by our egocentric metaphor. The result in figure 6b shows a good expansion of the nodes with our method, compared to the result of Fruchterman and Reingold's algorithm (figure 6a).

### 3.2. Contraction of the Spherical Bubble Space

With the egocentric approaches of Sorger et al. the user may lose the perception of some nodes and their connectivity. It is the same for a traditional immersive method. Having a detailed view alone cannot enable a user to identify interesting areas in a graph.

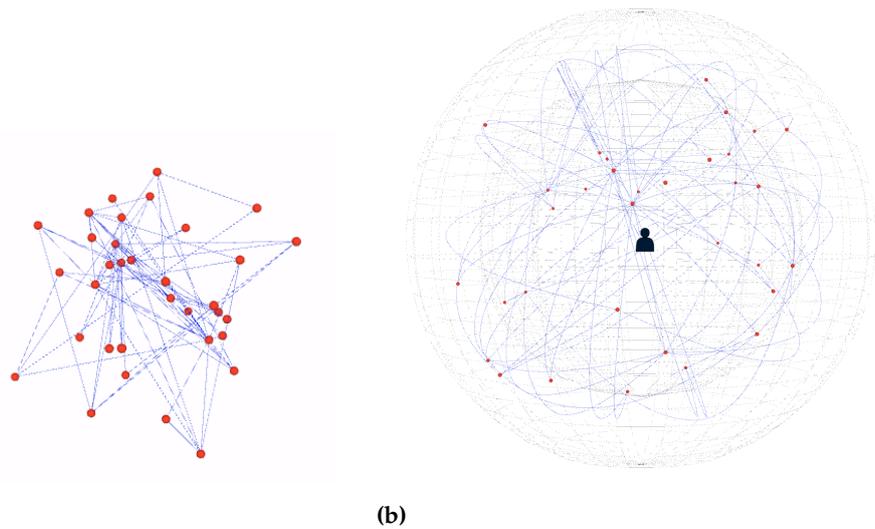

**Figure 6.** Visualization of the karate club graph (34 nodes and 78 edges) [24]. (a) visualization using Fruchterman and Reingold’s algorithm; (b) our egocentric metaphor where the graph is positioned between two concentric spheres.

Thus, it may be useful to combine an overview of a graph with an egocentric view to allow an analyst to switch from one view to the other. However, this introduces several new challenges about how to display nodes that are behind a user or outside their field of view.

This is why we propose a possibility to retract the graph display space along the vertical and horizontal axes (see figure 7 while remaining egocentric. It can be considered as a kind of flexible extension of the 360° cylindric view proposed by the Pano through-the-lens technique [25], based on a dynamic spherical reduction of the space rather than on a predetermined portion of cylinder.

The retraction of the graph display space is related to the orientation of the camera. So, we first retrieve the direction (forward vector) in which the user (camera) is looking. We then retrieve the right vector of the camera’s view. The right vector corresponds to the  $x$ -axis in world space. We finally take the cross product of the forward and right vectors. This cross product gives us the vector pointing upwards relative to the camera’s orientation.

We describe below the various steps that are relevant to our proposed method of projecting the position of the nodes onto the retracted surface. As previously mentioned, the projection is influenced by two planes along the vertical and horizontal axes. The projection of a vector  $\vec{u}$  onto a plane can be calculated as follows:

$$Proj_{Plane}(\vec{u}) = \vec{u} - \frac{\vec{u} \cdot \vec{n}}{\|\vec{n}\|^2} \cdot \vec{n} \quad (2)$$

where  $\vec{n}$  is the plane normal vector.

1. Projection onto the first plane defined by the vertical axis:

- We first project the direction of the camera onto the plane. According to the equation 2,  $\vec{u}$  corresponds to the forward vector of the camera and  $\vec{n}$  corresponds to the vector pointing upwards relative to the camera’s orientation.
- We then find the initial position’s projection within the plane. In the above equation 2,  $\vec{u}$  corresponds to  $P_i$ , the initial position of the node  $i$  and  $\vec{n}$  is the upwards vector relative to the camera’s orientation.
- We calculate the signed angle between the projected direction and the projected initial position around the vertical axis. We then scale it based on the current horizontal axis slider value (see equation 3).

$$\theta^{y'} = \theta^y \cdot \frac{h}{180} \quad (3)$$

where  $\theta^y = \text{acos}(\frac{D'_c \cdot P_i^y}{\|D'_c\| \cdot \|P_i^y\|})$  is the signed angle between the projected direction  $D'_c$  and the projected initial position  $P_i^y$  of the node  $i$ , and  $h(0 \leq h \leq 180)$  is the current value of the horizontal axis slider.

- We then update the projected initial position by applying the calculated angle-based rotations to it (see equation 4).

$$P_i^y = R_{\theta^y} \cdot R_{\theta^{y'}} \cdot P_i \tag{4}$$

where  $R_{\theta^y}$  and  $R_{\theta^{y'}}$  are respectively the rotation by  $\theta^y$  and  $\theta^{y'}$  about  $y - axis$ .

- We finally normalize the projected initial position to lie on the retracted surface (see equation 5). Let  $P_i^j$  be the normalized position.

$$P_i^j = \|P_i\| \cdot \frac{P_i^y}{\|P_i^y\|} \tag{5}$$

2. Projection onto the second plane defined by the horizontal axis:

- We project the normalized position from the equation 5 onto the second plane defined by the right vector of the camera's view. As previously mentioned, the right vector corresponds to the  $x - axis$  in world space. Let  $P_i^x$  be the result of the projected position. In the equation 2,  $\vec{u}$  corresponds to  $P_i^j$  and  $\vec{n}$  corresponds to the right vector of the camera's view.
- We then calculate the signed angle between the projected direction (at item 1) and  $P_i^x$  around the horizontal axis. We scale it based on the current vertical axis slider value (see equation 6).

$$\theta^{x'} = \theta^x \cdot \frac{v}{180} \tag{6}$$

where  $\theta^x = \text{acos}(\frac{D'_c \cdot P_i^x}{\|D'_c\| \cdot \|P_i^x\|})$  is the signed angle between the projected direction  $D'_c$  and  $P_i^x$  (see equation 5), and  $v(0 \leq v \leq 180)$  is the current value of the vertical axis slider.

- We update the final projected position by applying the determined angle-based rotations to it (see equation 7) and finally normalize it to lie on the retracted surface (see equation 8). Let  $P_i^{x'}$  be the result of the applied rotations, and  $P_i''$  be the final position of the node  $i$  on the retracted surface.


$$P_i^{x'} = R_{\theta^x} \cdot R_{\theta^{x'}} \cdot P_i^j \tag{7}$$

where  $R_{\theta^x}$  and  $R_{\theta^{x'}}$  are respectively the rotation by  $\theta^x$  and  $\theta^{x'}$  about  $x - axis$ .


$$P_i'' = \|P_i\| \cdot \frac{P_i^{x'}}{\|P_i^{x'}\|} \tag{8}$$

Using a slider to control the horizontal axis and a slider to control the vertical axis, an analyst can retract the display space of a graph horizontally and/or vertically to be able to get an overall view of the graph without changing its structure. This can also be done using many other interaction methods. This type of egocentric graph visualization provides perceptual advantages that allow an analyst to understand the graph structure more quickly than with an exocentric visualization.

Figure 8 illustrates some inside view aspects of the retraction of the display space of the karate club graph.

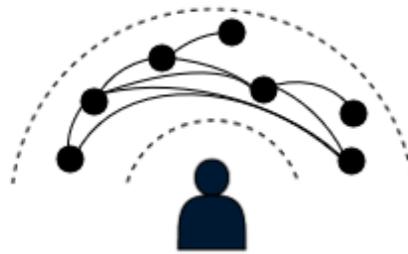

**Figure 7.** Overview: a user can retract the graph display space in order to have a global view while remaining egocentric.

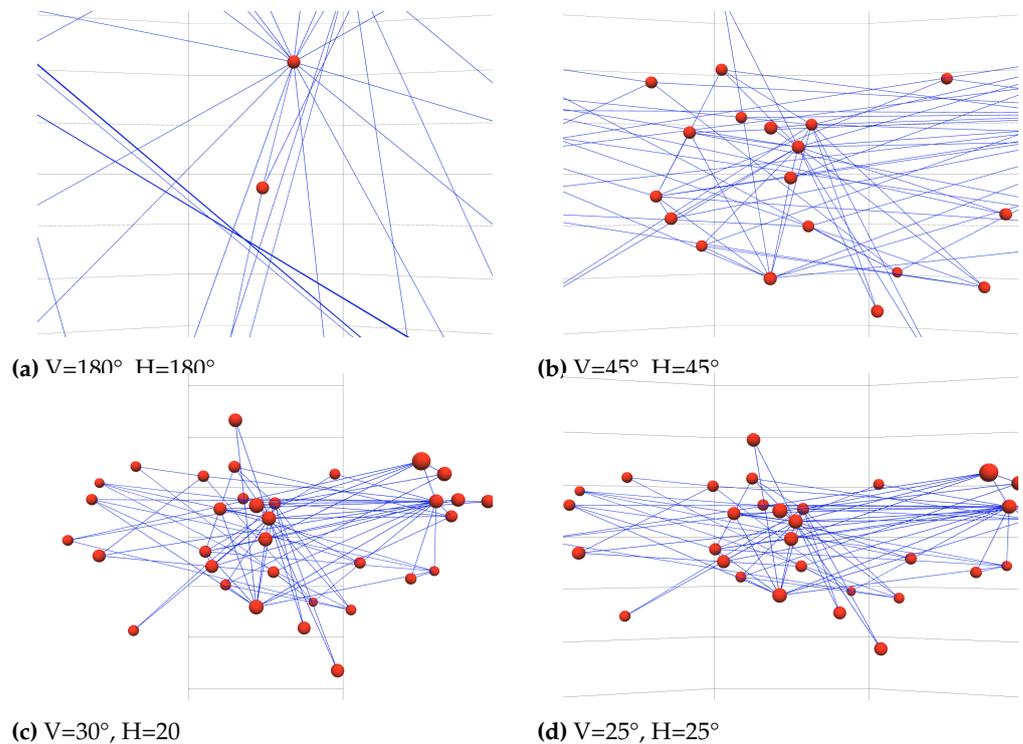

**Figure 8.** Retraction of the Spherical Bubble Space (from inside view of the user):  $V$  = angle along the vertical axis and  $H$  = angle along the horizontal axis.

### 3.3. Discussion

Visual clutter is still a crucial problem of some graph visualization techniques, and therefore many improvements on graph visualization continue to be presented [26] such as immersive techniques.

However, some work has shown that virtual environments have drawbacks such as cybersickness [27,28]. But evaluation results of the egocentric metaphor proposed by Sorger et al. [21] suggest that egocentricity has the potential to overcome some of the inherent drawbacks of virtual environments (e.g., visual clutter and cybersickness).

In our egocentric approach, the user becomes the center of attention within a 3D space enclosed by spheres. Therefore, placing the user at the center of a sphere makes them possible to have a user-centric view of the graph. This means that the user is not merely an observer but an active participant in the exploration of the graph.

Our egocentric approach therefore helps improve graph exploration, since the user has free space around them. Placing the user inside a sphere creates an engaging experience that leads to a deeper understanding of the graph's structure. Shrinking the edges between

the area delimited by our two concentric spheres also improves the visibility of connectivity between graph nodes. The user therefore gains a better sense of spatial relationships between nodes. Our retractable space approach makes an analyst possible to switch between a detailed and an overview view of the graph. This approach is useful for identifying dense areas of the graph in global mode and then understanding the connectivity between nodes in a given area. Moreover, navigating within the spheres can be more intuitive than traditional 2D graph visualizations, as the user can move their head or body to explore different parts of the graph.

However, switching from a detailed view to an overview by shrinking the graph display space can lead to edge occlusions. An edge grouping algorithm can then be an alternative to reduce this visual clutter and improve the readability of the graph.

#### 4. Conclusion

Our egocentric graph visualization metaphor makes it possible to improve the visibility of the nodes connectivity in a graph as it places the user inside the graph in a safe bubble without neither any nodes nor any edges. It also enables the user to have a global view of the graph by retracing the graph display space along the vertical and horizontal axes. Overall, our egocentric method has the potential to provide deeper insights and enhance the understanding of graphs, particularly for complex network structures.

However, we do not have conducted any experimentation yet to compare our proposal with other existing approaches in terms of performance. In addition, its effectiveness may vary depending on the user's familiarity with immersive technologies. Nevertheless, as the evaluation results of the egocentric approach proposed by Sorger et al. show that an egocentric visualization and an adapted interaction design can bring significant advantages in immersive graph exploration, our Spherical Retractable Bubble Space can be an improvement for graph exploration.

In the future, we can also make it possible to move the inner personal sphere of the user inside the global sphere to get yet other different points of view on the global graph visualization, and as our users will have to cope with a limited physical space for their movements, we will first consider that this inner sphere is similar to the stage of the IIVC model [29] in order to convey this stage in the virtual immersive environment dedicated to the whole graph visualization. This will be done by coupling our Spherical Retractable Bubble Space metaphor with other VR navigation metaphors such as the "Bubble" technique [30] or the "Magic Barrier Tape" technique [31] that are both navigation techniques dedicated to navigation within limited physical workspace.

**Acknowledgments:** This work has been funded by a grant from Brittany region, France, and this work was also supported by French government funding managed by the National Research Agency under the Investments for the Future program (PIA) grant ANR-21- ESRE-0030 (CONTINUUM). We also gratefully acknowledge the support of NVIDIA Corporation with the donation of the Titan Xp GPU used for this research.

1. Fruchterman, T.M.J.; Reingold, E.M. Graph drawing by force-directed placement. *Software: Practice and Experience* **1991**, *21*, 1129–1164. <https://doi.org/https://doi.org/10.1002/spe.4380211102>.
2. Kamada, T.; Kawai, S. An algorithm for drawing general undirected graphs. *Information Processing Letters* **1989**, *31*, 7–15. [https://doi.org/https://doi.org/10.1016/0020-0190\(89\)90102-6](https://doi.org/https://doi.org/10.1016/0020-0190(89)90102-6).
3. Walshaw, C. A Multilevel Algorithm for Force-Directed Graph Drawing. *Journal of Graph Algorithms and Applications* **2003**, *7*, 253–285. [https://doi.org/10.1007/3-540-44541-2\\_17](https://doi.org/10.1007/3-540-44541-2_17).
4. Jacomy, M.; Venturini, T.; Heymann, S.; Bastian, M. ForceAtlas2, a Continuous Graph Layout Algorithm for Handy Network Visualization Designed for the Gephi Software. *PLOS ONE* **2014**, *9*, 1–12. <https://doi.org/10.1371/journal.pone.0098679>.
5. Hachul, S.; Jünger, M. Large-graph layout with the fast multipole multilevel method **2005**.

6. Zellmann, S.; Weier, M.; Wald, I. Accelerating Force-Directed Graph Drawing with RT Cores. In Proceedings of the 2020 IEEE Visualization Conference (VIS), 2020, pp. 96–100. <https://doi.org/10.1109/VIS47514.2020.00026>.
7. Brandes, U.; Pich, C. An experimental study on distance-based graph drawing. In Proceedings of the Graph Drawing; Tollis, I.G.; Patrignani, M., Eds.; Springer Berlin Heidelberg: Berlin, Heidelberg, 2009; Number 5417 in Lecture Notes in Computer Science, pp. 218–229. [https://doi.org/10.1007/978-3-642-00219-9\\_21](https://doi.org/10.1007/978-3-642-00219-9_21).
8. Brandes, U.; Pich, C. Eigensolver Methods for Progressive Multidimensional Scaling of Large Data. In Proceedings of the Graph Drawing, 14th International Symposium, GD 2006, Karlsruhe, Germany, September 18–20, 2006. Revised Papers; Kaufmann, M.; Wagner, D., Eds. Springer, 2006, Vol. 4372, *Lecture Notes in Computer Science*, pp. 42–53. [https://doi.org/10.1007/978-3-54-0-70904-6\\_6](https://doi.org/10.1007/978-3-54-0-70904-6_6).
9. Erdős, P.; Pach, J.; Pollack, R.; Tuza, Z. Radius, diameter, and minimum degree. *Journal of Combinatorial Theory, Series B* **1989**, *47*, 73–79.
10. Ersoy, O.; Hurter, C.; Paulovich, F.; Cantareiro, G.; Telea, A. Skeleton-Based Edge Bundling for Graph Visualization. *IEEE Transactions on Visualization and Computer Graphics* **2011**, *17*, 2364–2373. <https://doi.org/10.1109/TVCG.2011.233>.
11. Hurter, C.; Ersoy, O.; Telea, A. Graph Bundling by Kernel Density Estimation. *Computer Graphics Forum* **2012**, *31*, 865–874. <https://doi.org/10.1111/j.1467-8659.2012.03079.x>.
12. Ware, C.; Mitchell, P. Visualizing Graphs in Three Dimensions. *ACM Transactions on Applied Perception* **2008**, *5*. <https://doi.org/10.1145/1279640.1279642>.
13. Lu, J.; Si, Y.W. Clustering-based force-directed algorithms for 3D graph visualization. *The Journal of Supercomputing* **2020**, *76*, 1–62. <https://doi.org/10.1007/s11227-020-03226-w>.
14. Zacks, J.; Levy, E.; Tversky, B.; Schiano, D. Reading Bar Graphs: Effects of Extraneous Depth Cues and Graphical Context. *Journal of Experimental Psychology: Applied* **1998**, *4*, 119–138. <https://doi.org/10.1037/1076-898X.4.2.119>.
15. Greffard, N.; Picarougne, F.; Kuntz, P. Beyond the classical monoscopic 3D in graph analytics: An experimental study of the impact of stereoscopy. In Proceedings of the 2014 IEEE VIS International Workshop on 3DVis (3DVis), 2014, pp. 19–24. <https://doi.org/10.1109/3DVis.2014.7160095>.
16. Cliquet, G.; Perreira, M.; Picarougne, F.; Prié, Y.; Vigier, T. Towards HMD-based Immersive Analytics. In Proceedings of the Immersive Analytics workshop of IEEE VIS 2017, 2017.
17. Kwon, O.H.; Muelder, C.; Lee, K.; Ma, K.L. Spherical layout and rendering methods for immersive graph visualization. In Proceedings of the 2015 IEEE Pacific Visualization Symposium (PacificVis), 2015, pp. 63–67. <https://doi.org/10.1109/PACIFICVIS.2015.7156357>.
18. Kwon, O.H.; Muelder, C.; Lee, K.; Ma, K.L. A Study of Layout, Rendering, and Interaction Methods for Immersive Graph Visualization. *IEEE Transactions on Visualization and Computer Graphics* **2016**, *22*, 1802–1815. <https://doi.org/10.1109/TVCG.2016.2520921>.
19. Brisson, L.; Duval, T.; Sahl, R. Visualisation Immersive de Graphes en 3D pour explorer des graphes de communautés. *EGC-VIF* **2018**.
20. Marriott, K.; Chen, J.; Hlawatsch, M.; Itoh, T.; Nacenta, M.A.; Reina, G.; Stuerzlinger, W., Immersive Analytics: Time to Reconsider the Value of 3D for Information Visualisation. In *Immersive Analytics*; Springer International Publishing, 2018; pp. 25–55. [https://doi.org/10.1007/978-3-030-01388-2\\_2](https://doi.org/10.1007/978-3-030-01388-2_2).
21. Sorger, J.; Arleo, A.; Kán, P.; Knecht, W.; Waldner, M. Egocentric Network Exploration for Immersive Analytics. *Computer Graphics Forum* **2021**, *40*, 241–252. <https://doi.org/https://doi.org/10.1111/cgf.14417>.
22. Yang, Y.; Jenny, B.; Dwyer, T.; Marriott, K.; Chen, H.; Cordeil, M. Maps and Globes in Virtual Reality. *Computer Graphics Forum* **2018**, *37*, 427–438. <https://doi.org/10.1111/cgf.13431>.
23. Sadana, R.; Setlur, V.; Stasko, J. Redefining a Contribution for Immersive Visualization Research. In Proceedings of the Proceedings of the 2016 ACM Companion on Interactive Surfaces and Spaces. Association for Computing Machinery, 2016, ISS '16 Companion, p. 41–45. <https://doi.org/10.1145/3009939.3009946>.
24. Zachary, W.W. An Information Flow Model for Conflict and Fission in Small Groups. *Journal of anthropological research* **1977**, *33*, 452–473.
25. Clergeaud, D.; Guitton, P. Pano: Design and evaluation of a 360° through-the-lens technique. In Proceedings of the 2017 IEEE Symposium on 3D User Interfaces (3DUI), 2017, pp. 2–11. <https://doi.org/10.1109/3DUI.2017.7893311>.

26. Sassa, H.; Itoh, T.; Yoshida, M. 3D Visualization of Network Including Nodes with Labels. In Proceedings of the 2019 23rd International Conference Information Visualisation (IV), 2019, pp. 19–24. <https://doi.org/10.1109/IV.2019.00013>.
27. So, R.H.Y.; Ho, A.; Lo, W.T. A Metric to Quantify Virtual Scene Movement for the Study of Cybersickness: Definition, Implementation, and Verification. *Presence: Teleoperators and Virtual Environments* **2001**, *10*, 193–215. <https://doi.org/10.1162/105474601750216803>.
28. So, R.H.Y.; Lo, W.T.; Ho, A.T.K. Effects of Navigation Speed on Motion Sickness Caused by an Immersive Virtual Environment. *Human Factors* **2001**, *43*, 452–461. <https://doi.org/10.1518/001872001775898223>.
29. Fleury, C.; Chauffaut, A.; Duval, T.; Gouranton, V.; Arnaldi, B. A Generic Model for Embedding Users' Physical Workspaces into Multi-Scale Collaborative Virtual Environments. In Proceedings of the ICAT 2010 (20th International Conference on Artificial Reality and Telexistence); , 2010.
30. Dominjon, L.; Lecuyer, A.; Burkhardt, J.M.; Andrade-Barroso, G.; Richir, S. The "Bubble" technique: interacting with large virtual environments using haptic devices with limited workspace. In Proceedings of the First Joint Eurohaptics Conference and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems. World Haptics Conference, 2005, pp. 639–640. <https://doi.org/10.1109/WHC.2005.126>.
31. Cirio, G.; Marchal, M.; Regia-Corte, T.; Lécuyer, A. The Magic Barrier Tape: A Novel Metaphor for Infinite Navigation in Virtual Worlds with a Restricted Walking Workspace. In Proceedings of the Proceedings of the 16th ACM Symposium on Virtual Reality Software and Technology; Association for Computing Machinery: New York, NY, USA, 2009; VRST '09, p. 155–162. <https://doi.org/10.1145/1643928.1643965>.