



HAL
open science

Accumulated micro-motion representations for lightweight online action detection in real-time

Yu Liu, Fan Yang, Dominique Ginhac

► **To cite this version:**

Yu Liu, Fan Yang, Dominique Ginhac. Accumulated micro-motion representations for lightweight online action detection in real-time. *Journal of Visual Communication and Image Representation*, 2023, 95, pp.103879. 10.1016/j.jvcir.2023.103879 . hal-04347183

HAL Id: hal-04347183

<https://hal.science/hal-04347183>

Submitted on 15 Dec 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Journal of Visual Communication and Image Representation

Accumulated Micro-Motion Representations for Lightweight Online Action Detection in Real-time

--Manuscript Draft--

Manuscript Number:	
Article Type:	Research paper
Keywords:	Motion representation; Spatiotemporal action localization; Online action detection; Real-time computing; Embedded system
Corresponding Author:	Yu Liu University of Burgundy FRANCE
First Author:	Yu Liu
Order of Authors:	Yu Liu Fan Yang Dominique Ginhac
Abstract:	<p>Recently, rapidly growing vision sensors and human-centric videos have driven numerous application demands for automating spatiotemporal action detection. State-of-the-art approaches mainly concentrate on competitive accuracy, relying on heavy 3D CNN or fine-grained optical flow to extract space-time representations. However, the adoption of such expensive modules is not compliant with vast real-world applications which mandate continuous and instantaneous processing under limited computational budgets. Jointly addressing detection accuracy, speed, and complexity for practical settings, we customize a cost-effective 2D-CNN tubelet detection framework coined Accumulated Micro-Motion Action detector (AMMA). AMMA encodes and accumulates actions' motion boundaries that can be generated on-the-fly from RGB frames in real-time. It leverages a coarse-scale detection paradigm, inferring actions from clip-level visual-dynamic cues. Further, its anchor-free detector head cooperatively models action instances as moving points across video clips. Overall, AMMA achieves competitive accuracy on public benchmarks while reducing model size, computational cost, and processing time by multiple folds.</p>
Suggested Reviewers:	<p>Su Ruan Professor, University of Rouen su.ruan@univ-rouen.fr</p> <p>Matthieu Arzel Professor, IMT Atlantique matthieu.arzel@imt-atlantique.fr</p> <p>Pascal Vasseur Professor, University of Picardy pascal.vasseur@u-picardie.fr</p>
Opposed Reviewers:	

Dear Editorial Manager,

We wish to submit an original research article entitled “Accumulated Micro-Motion Representations for Lightweight Online Action Detection in Real-time” for consideration by *Journal of Visual Communication and Image Representation*.

In this manuscript, we propose an innovative solution to the challenging problem of online spatiotemporal action localization. Unlike many previous works who focus solely on gaining accuracy at the cost of employing heavy detection pipelines/architectures (e.g., 3D CNN, optical flow, and transformer, etc.), we propose an efficient alternative that is more pertinent to the stringent criteria of practical deployment, such as real-time performance and limited computing budgets. Our proposed method integrates 2D-CNN tubelet detection and learnable dynamic representations. This approach proves to significantly reduce inference time and computational cost (MACs) by multiple folds while retaining competitive accuracy on public benchmarks.

We believe our manuscript is appropriate for publication by your journal as it fits well to its principal objectives and contributions.

We declare that this work is original and has not been published elsewhere, nor is it currently under consideration for publication elsewhere. Moreover, we have no conflicts of interest to disclose.

We deeply appreciate your consideration of our manuscript, and we look forward to receiving comments from you and/or the reviewers. If you have any queries, please don't hesitate to contact us at: yu_liu@etu.u-bourgogne.fr.

Thank you for your consideration of this manuscript.

Sincerely,

Yu Liu

ImViA EA7535, Univ. Bourgogne Franche-Comté, Dijon 21078, France



Contents lists available at ScienceDirect

Journal of Visual Communication and Image Representation

journal homepage: www.elsevier.com/locate/jvci

Accumulated Micro-Motion Representations for Lightweight Online Action Detection in Real-time

Yu Liu^{a,*}, Fan Yang^a, Dominique Ginhac^a^aImViA EA7535, Univ. Bourgogne Franche-Comté, Dijon 21078, France

ARTICLE INFO

Article history:

2000 MSC: 41A05, 41A10, 65D05, 65D17

Keywords: Motion Representation, Spatiotemporal Action Localization, Online Action Detection, Real-time Computing, Embedded System

ABSTRACT

In the last decade, the explosive growth of vision sensors and video content has driven numerous application demands for automating human action detection in space and time. State-of-the-art action detection pipelines mainly concentrate on competitive accuracy, relying on 3D Convolutional Neural Network (CNN) or optical flow to extract spatiotemporal representations. However, aside from reliable precision, vast real-world application scenarios such as abnormal state detection, robot services, and driver assistance systems also mandate continuous, instantaneous processing of ongoing actions under limited computational budgets. Inherently, existing studies are widely hindered by heavy 3D convolution and fine-grained optical flow estimation, excluding them from practical deployment. Aiming strictly at a better mixture of detection accuracy, speed, and complexity for online detection settings, we customize a cost-effective 2D-CNN-based tubelet detection framework coined Accumulated Micro-Motion Action detector (AMMA). It adopts a coarse-level detection paradigm that sparsely extracts visual and complementary dynamic cues of actions spanning a longer temporal sequence. Lifting reliance on expensive optical flow estimation, AMMA utilizes accumulated micro-motion to encode actions' short-term dynamics that can be learned and efficiently generated on-the-fly from RGB frames. On top of AMMA's motion-aware 2D backbone, we adopt an anchor-free detector to cooperatively model action instances as moving points in the time span. When paired with highly compact CNN backbones, the proposed action tubelet detector achieves competitive accuracy on public benchmarks while excelling in model size, computational cost, and processing time reduction by multiple folds (6 million parameters, 1 GMACs, and 100 FPS respectively). Codes are available at <https://github.com/alphadadajuju/AMMA>.

© 2022 Elsevier B. V. All rights reserved.

1. Introduction

In recent years, spatiotemporal action detection/localization has been an active area of research driven by numerous application demands such as unmanned surveillance, driver-assistance systems, and interactive robot services, etc. (Hu et al. (2022)). When compared to the task of video action recognition, detecting actions in space and time poses more challenges, as it aims to predict the

*Corresponding author: E-mail: yu.liu@etu.u-bourgogne.fre-mail: fanyang@u-bourgogne.fr (Fan Yang), dominique.ginhac@ubfc.fr (Dominique Ginhac)

spatial positions, temporal boundaries, and action categories of individual action instances in the video (rather than inferring a global action label). On top of the complex nature of the problem, action detection becomes more difficult when it needs to fulfill online settings, *i.e.*, continuously observing ongoing actions (from streaming videos) and updating detection results in an efficient and real-time fashion. These criteria are crucial in many of the above application scenarios but often overlooked by ongoing research, which solely address high-precision detection while disregarding computational budgets.

Modern solutions for action detection mostly rely on adopting CNN (Convolutional Neural Network) detectors to localize action instances. To extract the temporal cues from actions, one leading approach is to employ the two-stream CNN architecture pioneered by Simonyan and Zisserman (2014). This architecture decouples spatiotemporal reasoning into separate learning of frame-wise RGB and optical flow features, followed by designated fusion strategies such as those proposed by Peng and Schmid (2016) and Singh *et al.* (2017). Other approaches further model short-term appearance variations by extending frame-wise detection to the clip-level (Kalogeiton *et al.* (2017); Zhao and Snoek (2019); Yang *et al.* (2019); Li *et al.* (2020)). These methods input a sequence of consecutive frames from which they directly infer action tubelets (*i.e.*, a sequence of bounding boxes). When integrated with the two-stream architecture, action tubelet detectors achieve state-of-the-art performance with 2D CNN backbones. Inspired by leading techniques for action recognition, the latest action detectors also leverage 3D CNN to augment frame-wise prediction with additional spatiotemporal context (Yang *et al.* (2019); Köpüklü *et al.* (2019); Hou *et al.* (2017); Gu *et al.* (2018); Zhao *et al.* (2021)). Equipped with stacked 3D convolutional filters to simultaneously model spatial and temporal variations over consecutive frames, 3D CNN-based detectors are capable of learning high-dimensional video representations from RGB images alone. Fusing optical flow cues proves to further enhance the temporal modeling capability and detection accuracy in the above methods (Sun *et al.* (2018); Su *et al.* (2019); Li *et al.* (2020)).

In spite of the aforementioned advancements, we argue that trending action detection pipelines have been tailored to solely obtain superior detection scores in public benchmarks. In turn, they are sub-optimal in terms of efficiency for practical deployment. Firstly, short-term dynamics in the form of optical flow are often exploited to model temporal structures of actions. Under this setup, however, optical flow inevitably needs to be prepared in advance as it is expensive and time-consuming to acquire on-site, not only incurring wasteful data storage, but also prohibiting online detection. Meanwhile, even though 3D CNNs can extract spatiotemporal cues directly from RGB frames, they introduce significantly higher computational cost and training difficulty by an order of magnitude than their 2D counterpart. Due to the above drawbacks, existing detectors hardly meet the requirements of vast real-world applications, which seek many other qualities beyond just accuracy, for instance high-speed and continuous workflow. Lately, moving the computation closer to the sensor has become even more critical in order to manage enormous data flow (*i.e.*, video streams). Such migration in the sensing paradigm shifts the dependence from powerful workstation GPUs to resource-limited embedded/edge devices, further demanding drastic reduction in the computational cost of deployed methods.

In this paper, we propose an action detection solution more pertinent to the stringent criteria of practical detection scenarios, termed **Accumulated Micro-Motion Action** detector (AMMA, as summarized in Figure 1). AMMA is a real-time tubelet detector operating on lightweight 2D CNN backbones and raw video clips. It adopts the tubelet detection scheme, acquiring actions' spatiotemporal context by combining successively sampled RGB visuals and complementary dynamic cues. To encode short-term action dynamics in an efficient manner, we devise a simple yet effective motion representation loosely inspired by optical flow by accumulating learnable motion boundaries captured at each video clip (referred to as "micro-motion"). In AMMA's 2D-CNN backbones, micro-motion is computed on-the-fly from RGB frames, whose abstract features can then be adaptively fused with the appearance ones at multiple convolutional scales to produce temporal-aware features.

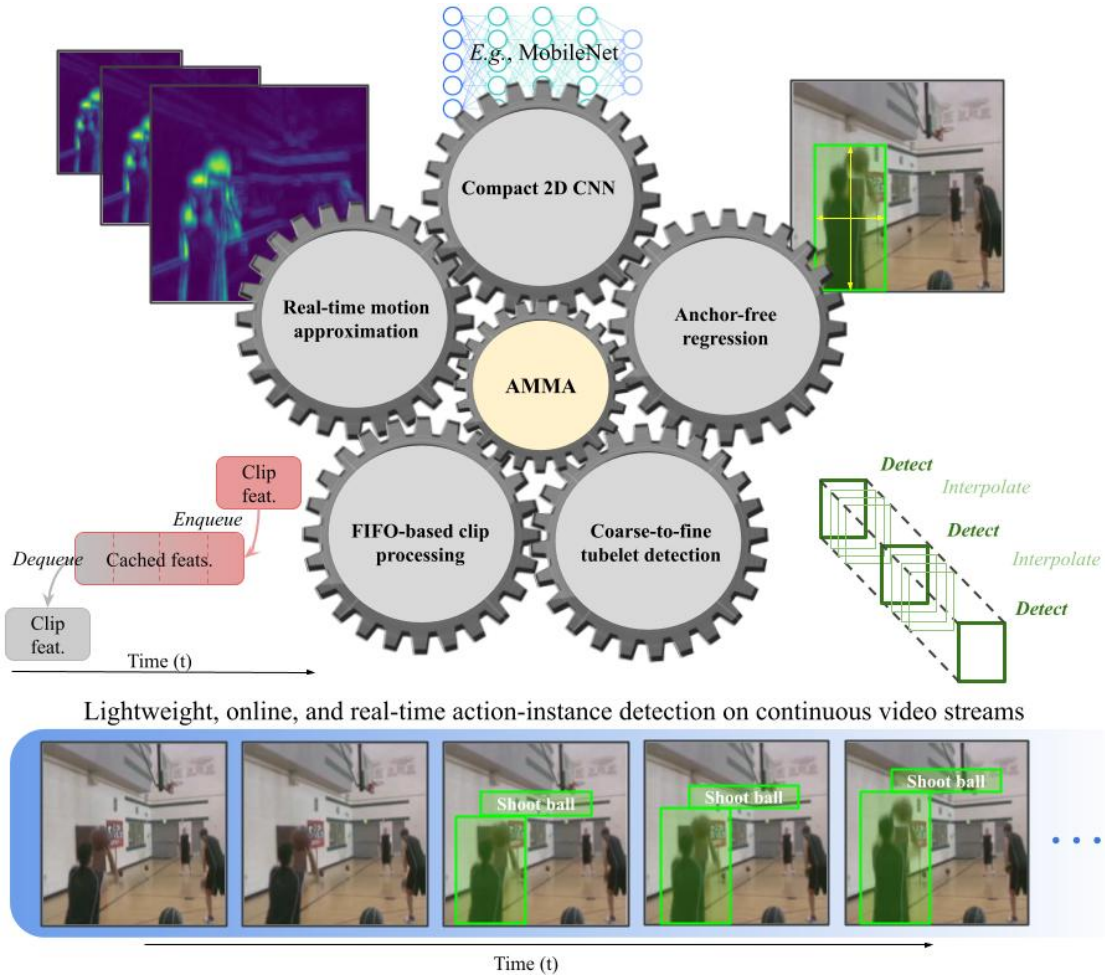


Fig. 1. AMMA overview. Given continuous video frames, AMMA aims to incrementally detect underlying action instances by their bounding boxes and categories. Different from existing accuracy-dominating detectors, the designs of AMMA and its components strictly and jointly consider reliable detection precision as well as low cost (time and computation) for practical deployment purposes (*e.g.*, online and real-time detection under limited computation budgets).

On top of its spatiotemporal backbone, AMMA aggregates multiple temporal-aware features from successive clips at its detector head, permitting longer-range action modeling. Precisely, it adopts an anchor-free detector head popularized by Zhou *et al.* (2019), which is computationally more efficient than mainstream detectors such as SSD (Liu *et al.* (2016)) and YOLO (Redmon and Farhadi (2017)) who rely on pre-defined anchor boxes densely distributed across the entire scene. Inspired by the recent work of Li *et al.* (2020), AMMA's detector head consists of three cooperative branches for coarsely recognizing and localizing action instances' centers, modeling their movement over time, and regressing their sizes. Furthermore, due to the smoothness nature of continuous actions, our detector can efficiently infer temporally coarse action tubelets across an extended temporal window while interpolating intra-frame detection. When handling online video streams in real-time, AMMA incrementally detects coarse tubelets and link them over time to yield long-range action tubes for spatiotemporal action localization.

To the best of our knowledge, AMMA is one of the few works primarily focusing on highly efficient action detection solutions for realistic deployment on low-end devices. The main contributions of our work can be summarized as follows :

- We propose a compact micro-motion representation to encode short-term action dynamics. Compensating for the low efficiency of traditional optical flow methods, our motion representation can be generated on-the-fly from video streams in real-time.

- We devise a lightweight action tubelet detector integrating 2D CNN backbones, micro-motion generation & fusion, and cooperative detection branches. It adopts a coarse-to-fine detection paradigm to efficiently infer actions in online settings.
- We tailor the proposed detection pipeline with three ultra-lightweight CNN backbones and validate their superior mixture of performances in precision, speed, and complexity on spatiotemporal action benchmarks.

2. Related Work

Different from action recognition or temporal action detection, spatiotemporal action detection not only requires localizing when actions occur along the time span, but also spatial localization down to the frame level. Hence, leading methods in the field typically leverage varied temporal modeling techniques on top of CNN-based object detectors. In this section, we briefly review recent progresses in object detection and spatiotemporal action detection.

2.1. CNN-based object detection

Existing object detectors mostly deduce objects' categories and locations from pre-defined proposals of bounding boxes (*i.e.*, "anchor" boxes) densely placed over the input image. Under the anchor-based framework, two detection pipelines are widely explored. R-CNN and follow-up research (Ren *et al.* (2015); Dai *et al.* (2016); Lin *et al.* (2017)) adopt a two-stage approach. In the first stage, class-agnostic region-of-interest (RoIs) are regressed from a set of anchors via the Region Proposal Network (RPN). Next, features pooled from each RoI are further categorized, and that RoI's spatial extent is refined to form the final bounding box. Such a two-stage workflow imposes a bottleneck upon real-time inference speed. To accelerate detection, single-stage detectors such as YOLO by Redmon and Farhadi (2017) and SSD by Liu *et al.* (2016) remove the intermediate region proposal step. In a single forward-pass, they directly perform bounding box regression and classification on anchors across every grid of the image feature. With this pipeline, one-stage detectors can operate in real-time while retaining competitive accuracy as the two-stage variants.

Integrating anchor boxes has become the mainstream design choice in modern detectors. Nevertheless, utilizing anchors introduces excessively more design parameters associated with anchor sizes, aspect ratios, and number of pre-defined boxes, etc. These hyperparameters largely impact the final detection performance and require heuristic tuning for different datasets. Further, anchors incur complicated intersection-over-union (IoU) computation when matched with groundtruth boxes. In contrast, some newly proposed detectors demonstrate comparable accuracy by directly regressing objects' shapes and locations without pre-defined anchors (such as the works by Law and Deng (2018); Zhou *et al.* (2019); Liu *et al.* (2020); Tian *et al.* (2020); Xie *et al.* (2021)). For instance, Zhou *et al.* (2019)'s CenterNet represents an object by its bounding box's center, converting the detection task to a keypoint estimation problem. After acquiring image features, the network predicts objects' center points in the form of a multi-channel heatmap. Peaks within the heatmap are regarded as the center locations of detected objects, and each channel is associated with a class. Objects' bounding boxes can then be regressed from image features whose locations match those of the deduced centers. In a similar spirit, Law and Deng (2018)'s CornerNet detects objects as pairs of keypoints by predicting two separate heatmaps, each encoding all top-left and bottom-right corners of objects' bounding boxes. Detected corners are considered belonging to the same objects and then grouped together based on their similarity embedding.

2.2. Spatiotemporal action detection

Many efforts have been made to extend image-based object detectors to video action detection. One popular approach to embed temporal information for action reasoning is to adapt the two-stream CNN architecture pioneered by Simonyan and Zisserman

1
2
3 (2014). In this architecture, appearance and motion features are independently extracted from RGB and optical flow inputs using
93 4 two feed-forward networks. Fusing the results from both modalities first demonstrates beneficial for action recognition accuracy,
94 5 inspiring many subsequent works in related fields (Li et al. (2020), Yang et al. (2021), Suneetha et al. (2021)). Under the hood,
95 6 Sevilla-Lara et al. (2018) found that fusing optical flow with RGB modalities not only provides additional temporal information,
96 7 but also helps to capture appearance-invariant structures (*i.e.*, moving targets' "boundaries"). This facilitates model generalization
97 8 against vast inter-class appearance variations across action videos. Building upon the two-stream framework, Saha et al. (2016)
98 9 and Peng and Schmid (2016) employ two parallel R-CNNs (*i.e.*, for RGB and optical flow) and combine action proposals from
99 10 both RPNs to augment detection. Frame-wise results of the entire video is then linked over time into action tubes by solving two
100 11 energy maximization problems, ensuring optimal temporal coherence and smoothness. Alternatively, Singh et al. (2017) employ
101 12 two SSD, a real-time optical flow estimator, and an incremental linking algorithm to enable online action detection in real-time.
102 13 Under a similar setup, Zhang et al. (2020) integrates an optical flow sub-network within the detection framework which allows joint
103 14 optimization of optical flow generation tailored to the task of action detection.
104 15
105 16

106 17 To further encode the intra-frame temporal relationships between action regions spanning continuous video frames, Kalogeiton
107 18 et al. (2017) and Yang et al. (2019) take a short clip of consecutive RGB frames as input, regressing 3D anchor cuboids to obtain
108 19 tubelet detection. Saha et al. (2020) also formulate a similar clip-based learning scheme utilizing two successive frames (but
109 20 not necessarily consecutive), enabling learning from action sequences without dense per-frame annotation. Inspired by recent
110 21 advancements in various 3D CNN architectures which can model highly abstracted video representations with proper pretraining
111 22 (Carreira and Zisserman (2017)), 3D CNN has been widely exploited in the latest studies of action detection (Hou et al. (2017); Gu
112 23 et al. (2018); Qiu et al. (2019); Zhao et al. (2021); Sun et al. (2018); Su et al. (2019); Li et al. (2020)). More recently, the adoption
113 24 of self-attention and transformer architecture by Vaswani et al. (2017) for modeling actions over long sequences also receives rising
114 25 attention (Girdhar et al. (2019); Zhao et al. (2021)).
115 26
116 27

117 28 Extracting relevant spatiotemporal cues from actions is a challenging problem that often relies on convoluted strategies at high
118 29 computational cost (*e.g.*, 3D CNN or optical flow generation). Alternatively, several research seek more efficient architectures or
119 30 workflows to cope with action detection toward practical configurations. Instead of employing parallel CNNs, Zhao and Snoek
120 31 (2019) leverage an innovative two-stream fusion scheme, only extracting shallow optical flow context and using it to directly
121 32 modulate low-level RGB features for efficiency gains. As computing optical flow itself imposes bottleneck upon online and real-
122 33 time inference, Zhang et al. (2019) propose gathering motion boundaries by finding the temporal offsets between shallow-CNN
123 34 features, lifting reliance on traditional optical flow. To avoid the heuristic anchor design adopted by most tubelet detector, Li et al.
124 35 (2020) extends CenterNet by treating each actor as a point, and further models actions over time via the trajectory of moving
125 36 points. Considering that dense per-frame detection is redundant for efficient action inference, Li et al. (2020) further introduces a
126 37 progressive paradigm, which initially estimates coarse spatiotemporal action tubes spanning the entire video and then selectively
127 38 refines these tubes at sampled timestamps. Even though the above works do not specifically address spatiotemporal action detection
128 39 in online settings, they share our incentives of approaching action reasoning jointly from the point-of-view of high accuracy and
129 40 efficiency.
130 41
131 42
132 43
133 44
134 45
135 46
136 47
137 48
138 49
139 50
140 51
141 52
142 53
143 54
144 55
145 56

146 57 **3. Methodology**

147 58 **3.1. Overview**

148 59 Our proposed detection framework, termed Accumulated Micro-Motion Action detector (AMMA), is an end-to-end 2D-CNN-
149 60 based tubelet detector. As summarized in Figure 2, AMMA takes multiple short video clips as input and produces temporally coarse
150 61
151 62
152 63
153 64
154 65

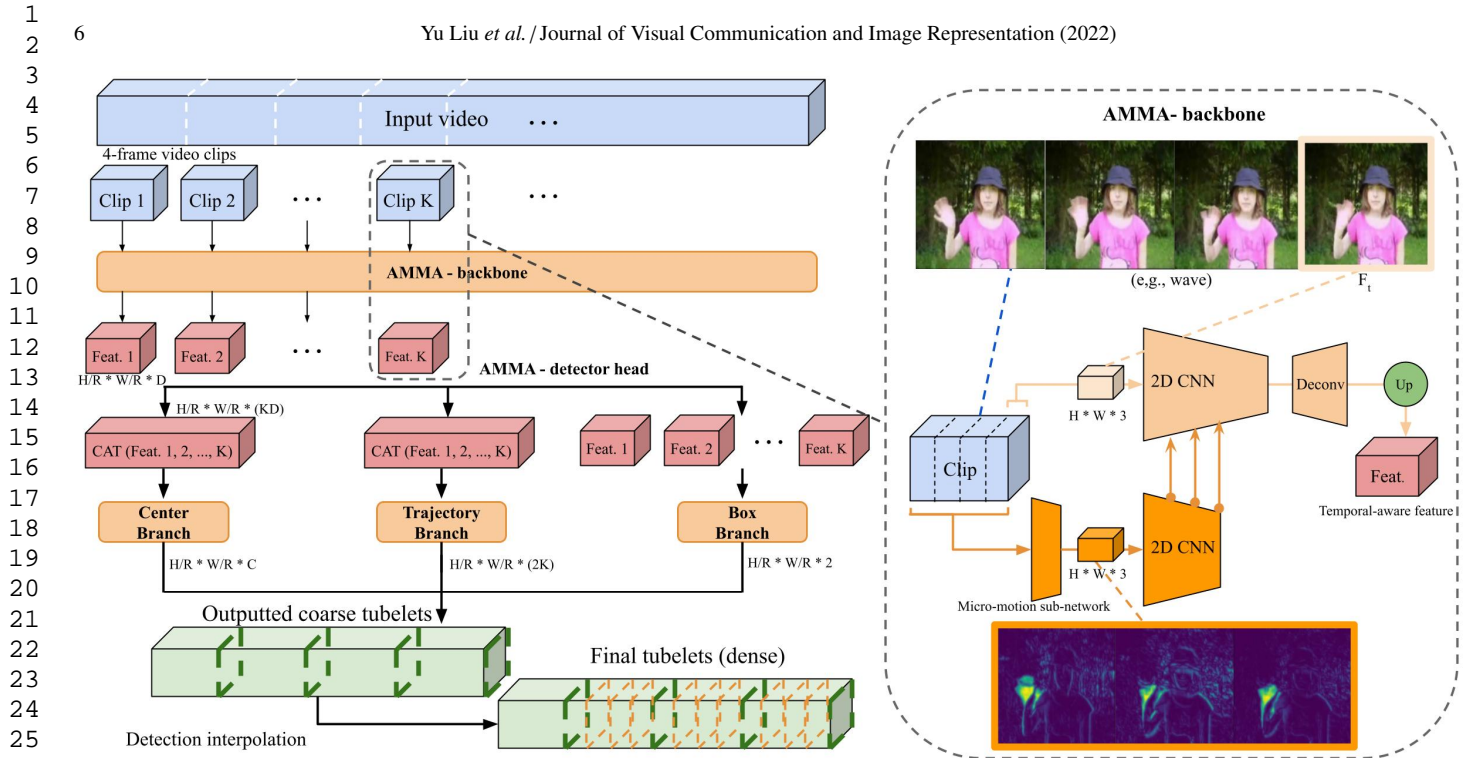


Fig. 2. Overview of AMMA. AMMA’s backbone takes a video clip of t frames as input at a time ($t = 4$ in this study), encode short-term action dynamics as accumulated micro-motion, and outputs a motion-aware feature tensor by merging appearance (from F_t) and complementary motion information via lateral fusion. Beyond a single clip, AMMA enables long-range spatiotemporal modeling by aggregating multiple clip-level features at its detector head consisting of three cooperative branches. After merging results of the detector branches, the predicted tubelets are coarse in time. From the coarse tubelets, dense frame-wise detection can be interpolated between any two clips in a later stage. All figures in this paper are best viewed in color.

action tubelets spanning the input sequence. Each video clip comprises t consecutive frames. From each video clip, appearance information is extracted from the latest frame (F_t) by the 2D CNN backbone. Alongside appearance feature extraction, each clip is fed to our micro-motion sub-network which generates and accumulates short-term dynamics of actions. From the micro-motion, temporal cues are further extracted and fused with the appearance features from F_t via multiple lateral connections to encode short-term spatiotemporal context for the clip.

To model longer spatiotemporal structures across multiple video clips, AMMA aggregates their respective temporal-aware features by stacking them in the channel dimension at its detector head. In essence, the aggregated features are fed to three branches to recognize and spatially localize action instances’ centers, model the trajectories of action centers over time, and regress their spatial extent (e.g., height and width). Cooperative modeling of the three branches produces action tubelets that are temporally coarse where detection takes place only at F_t of each clip. Action tubelets can be incrementally detected and linked over time following the designated matching strategy, forming long-range action tubes for spatiotemporal localization. Finally, dense frame-wise detection is acquired by intra-frame interpolation between any two detection. The following sections describe each working module of AMMA in detail.

3.2. AMMA-backbone

Clip-level appearance information. We define an input video clip V_{cp} to contain t consecutive RGB frames, where $V_{cp} = [F_1, F_2, \dots, F_t]$. The dimension of each frame is $H \times W \times 3$. Since neighboring frames share highly resembling visual cues, we only extract appearance information from F_t via a 2D CNN. Formally, we adopt a reduced variant of the encoder-decoder architecture used by Zhou et al. (2019) as the 2D backbone. Originally, three deconvolution layers have been added at the end of ResNet’s (He et al. (2016)) final convolution layer as the decoder. This serves to adaptively project highly abstracted features onto a spatially larger

feature map to facilitate dense detection of small/overlapped objects. Different from object detection, it can be reasonably assumed that the likelihood of actors emerging densely in a scene is low. With this insight, AMMA's backbone decoder is implemented with only one deconvolution layer followed by bilinear upsampling. The resulted appearance feature is a tensor with dimension $\frac{H}{R} \times \frac{W}{R} \times D$, where R and D correspond to the downsampling ratio and channel dimension of the feature, respectively. In practice, R and D are 8 and 256, respectively.

Accumulated micro-motion as clip-level action dynamics. A short sequence of t frames still potentially embeds crucial dynamic information which F_t alone does not carry. Such a motion cue, often encoded in optical flow, consistently grants two-stream CNN networks better discriminating capacity to recognize actions. Alternative to optical flow which is commonly prepared in advance due to its high computational cost, we devise a simpler, adaptive motion representation which highlights the small displacements of motion boundaries.

We uncover motion information of a clip by simply accumulating the appearance variation between F_t and its precedent frames in the shallow-CNN feature space. Specifically, shallow-CNN features tend to reflect local patterns (*e.g.*, edges or textures) with low receptive fields. The difference map between two such low-level features within close temporal proximity inherently encapsulates the temporal evolution of various general patterns. We refer to our implicit motion representation as accumulated micro-motion.

Formally, we define the shallow convolutional block, $Conv_{5 \times 5}$, as eight 5×5 convolutions with strides of 1 and paddings of 3. The input to the convolutional block is any clip V_{cp} where all its frames are first downsampled by two via a max pooling layer. The downsampling operation comes from our observation that the difference map between two shallow features within close temporal proximity retains values near 0 in most areas, *i.e.*, it only contains high responses in motion salient regions. As the difference map exhibits high sparsity, it is more efficient to process it in a low-resolution space without much loss of information. Concretely, the above steps are described as follows:

$$[f_1, f_2, \dots, f_t] = Conv_{5 \times 5}(MaxPool([F_1, F_2, \dots, F_t])) \quad (1)$$

$$MM_i^d(x, y) = f_i^d(x, y) - f_{i-1}^d(x, y), \text{ for } i = 1 : t - 1, \quad (2)$$

where in Equation 1, f_1, f_2, \dots, f_t represent shallow-CNN features of frames in V_{cp} , each with a dimension of $\frac{H}{2} \times \frac{W}{2} \times 8$. In Equation 2, $f^d(x, y)$ denotes the intensity of a feature at its d^{th} channel and pixel location (x, y) . As expressed in this equation, each micro-motion MM_i corresponds to the feature-level difference between the respective frame F_i and F_{i-1} . Note that our design of shallow layers is intentional, as deep-CNN features with large receptive fields have been overly abstracted and lost essential spatial information associated with the boundaries of moving targets.

To efficiently encode motion variation across different feature spaces and time steps, all MM^d are first accumulated into one channel to manifest the motion magnitude, as shown in Equation 3:

$$AMM_i(x, y) = \sqrt{\sum_{d=1}^8 (MM_i^d(x, y))^2}, \text{ for } i = 1 : t - 1. \quad (3)$$

Note that unlike optical flow fields which typically encode horizontal and vertical motion vectors, each AMM cue is an appearance-invariant saliency map reflecting small displacement of motion boundaries. To further incorporate temporal structures of the clip, we concatenate all $t - 1$ AMM_i in the channel dimension, followed by a bilinear upsampling operation so that the final clip-level micro-motion matches the spatial dimension of the original frames (we first downsampled the frames via max pooling in Equation 1). In practice, clip length t is defined as 4 in this study; the accumulated micro-motion of a clip thus has the same dimension as an RGB frame (*i.e.*, $H \times W \times 3$).

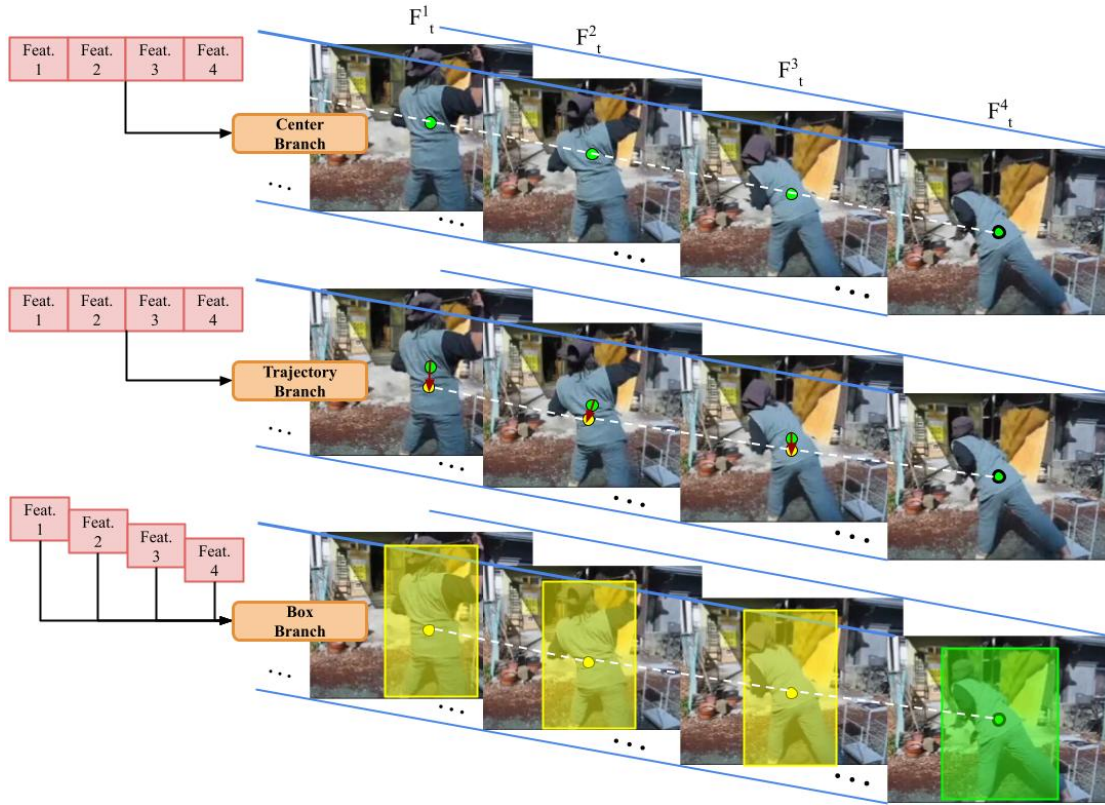


Fig. 3. Overview of AMMA's detector head. Given an input sequence of K clips ($K = 4$ in this figure), Center branch (TOP) detects action centers at F_t^K . Trajectory branch (MIDDLE) infers center offsets with respect to Center branch's prediction, and adjusts action centers for $F_t^1, F_t^2, \dots, F_t^{K-1}$ accordingly. Finally, Box branch (BOTTOM) regresses action instances' spatial extent (*i.e.*, height and width) at action centers deduced by the other two branches.

Multi-scale spatiotemporal fusion. In AMMA's backbone, multi-scale lateral fusion is utilized to incorporate micro-motion features into the appearance ones. We partially duplicate the 2D CNN from the RGB stream, and feed the smaller network with the accumulated micro-motion. Essentially in the above setup, each CNN backbone dedicates to extracting clip-level spatial or temporal information. Lateral connections are established between designated layers of the two CNNs, where weighted summation is carried out to fuse their respective features. Specifically, we devise uni-lateral fusion connections; only the spatial CNN is aware of the complementary motion context when a clip is inputted.

In AMMA, the weights to sum spatial and temporal information are learnable scalars (ranging from 0 to 1) that add up to 1. In addition, the number of lateral connections dictates the extent of fusion between actions' visual and dynamic cues, which will be studied more thoroughly in Section 4.2. Since fusion is conducted by summation at the spatial CNN, the dimension of the short-term motion-aware features remains $\frac{H}{R} \times \frac{W}{R} \times D$.

3.3. AMMA-detector head

Once consecutive clip-level features are extracted from their respective clips, AMMA's detector head aggregates them for richer spatiotemporal context and action tubelet inference. The detector head is composed of three branches: Center branch, Trajectory branch, and Box branch. The function of each branch is summarized in Figure 3.

Center branch. Given a sequence of K clip-level features, Center branch aggregates these features and locates action instances by their centers at the end of the sequence. In other words, it finds centers of actions taking place at the final frame of the K^{th} clip (*i.e.*, F_t^K). To aggregate clip-wise context, all K features are first stacked together in the channel dimension to form video feature representation $f_{stack} \in \mathbb{R}^{\frac{H}{R} \times \frac{W}{R} \times KD}$. Afterwards, f_{stack} is fed to a standard 3×3 and 1×1 convolutional layer interleaved with ReLU

non-linearity, outputting action heatmap $\hat{L} \in \mathbb{R}^{\frac{H}{R} \times \frac{W}{R} \times C}$ for F_t^K , where C corresponds to the number of action classes. Each grid of $\hat{L}_{x,y,c}$ reflects the probability of detecting action instance of class c at location (x, y) of the heatmap.

To train Center branch, the groundtruth heatmap $L \in \mathbb{R}^{\frac{H}{R} \times \frac{W}{R} \times C}$ associated with a K -clip sequence is first derived from the groundtruth center location (x_{c_i}, y_{c_i}) of F_t^K , where c_i corresponds to the true class of action instance i . We set heatmap $L_{x,y,c} = 0$ for all classes except for the true class. When $c = c_i$, a Gaussian kernel is applied to generate soft heatmap $L_{x,y,c_i} = \exp(-\frac{(x-x_{c_i})^2 + (y-y_{c_i})^2}{2\sigma^2})$, where the salient region surrounds (x_{c_i}, y_{c_i}) , and its dimension is determined by σ^2 derived from the groundtruth instance's size. The training objective for Center branch follows the same focal loss used by Zhou et al. (2019) as shown below:

$$l_{Center} = -\frac{1}{n} \sum_{x,y,c} \begin{cases} (1 - \hat{L}_{xyc})^\alpha \log(\hat{L}_{xyc}), & \text{if } L_{xyc} = 1 \\ (1 - L_{xyc})^\beta (\hat{L}_{xyc})^\alpha \log(1 - \hat{L}_{xyc}), & \text{otherwise,} \end{cases} \quad (4)$$

where n is the number of groundtruth instances; α and β are hyperparameters of the focal loss.

At the inference stage, the resulted heatmap is further filtered independently for each class to only keep local peaks that are greater than their 8-connected neighbors. Finally, the top N peaks across all classes are considered candidate action centers. In this study, we follow the work of Zhou et al. (2019) and set α, β , and N to 2, 4, and 100 respectively.

Trajectory branch complements Center branch by modeling action instances' center movement between frames $F_t^1, F_t^2, \dots, F_t^{K-1}$ and F_t^K . Similar to Center branch, Trajectory branch first aggregates K clip-level features by concatenation across the channel dimension, followed by a standard 3×3 and 1×1 convolution interleaved with ReLU. The output of the branch is movement map $\hat{m}^{F_t^K} \in \mathbb{R}^{\frac{H}{R} \times \frac{W}{R} \times 2K}$, where $2K$ denotes the center offsets (in X and Y directions) sequentially for $F_t^1, F_t^2, \dots, F_t^K$ with respect to action centers at F_t^K .

For training, groundtruth action centers at $F_t^1, F_t^2, \dots, F_t^K$ are first computed the same way as for Center branch. Then, the groundtruth movement ($m^{F_t^K}$) of any action instance with respect to F_t^K is simply the offset between its center at F_t^K and those at other frames. Finally, movement map $\hat{m}_i^{F_t^K}$ is optimized based on L1 loss as follows:

$$l_{Trajectory} = \frac{1}{n} \sum_{i=1}^n |\hat{m}_i^{F_t^K} - m_i^{F_t^K}|, \quad (5)$$

where i indicates the i^{th} out of n action instances.

During inference, Center Branch obtains action centers at the end of the input sequence as references, while Trajectory branch adjusts all action centers at the end of each clip according to the predicted offsets with respect to the reference centers. Note that the predicted center offset at F_t^K from itself is expected to be zero; as a result, we do not adjust action centers at F_t^K .

Box branch. Box branch serves to regress the spatial extent of action instances at $[F_t^1, F_t^2, \dots, F_t^K]$, whose locations have been previously deduced by Center and Trajectory branch. Unlike these first two branches, incorporating temporal information from multiple frames contributes less to frame-wise class-agnostic bounding box regression. Hence, our Box branch regresses actions' width and height for each clip independently. It comprises a 3×3 and 1×1 convolutional layer in sequence (interleaved with ReLU) as the other branches, and generates spatial prediction map $\hat{s} \in \mathbb{R}^{\frac{H}{R} \times \frac{W}{R} \times 2}$, where 2 corresponds to the height and width prediction. As Box branch is shared by all K clip-level features, it outputs K spatial maps, each one being associated with the size prediction at $F_t^1, F_t^2, \dots, F_t^K$. We optimize this branch by summing the L1 loss at all clips as follows:

$$l_{Box} = \frac{1}{n} \sum_{i=1}^n \sum_{j=1}^K |\hat{s}_i^j - s_i^j|, \quad (6)$$

where s_i^j corresponds to the groundtruth height and width of the i^{th} action instance (out of n instances) belonging to the j^{th} clip.

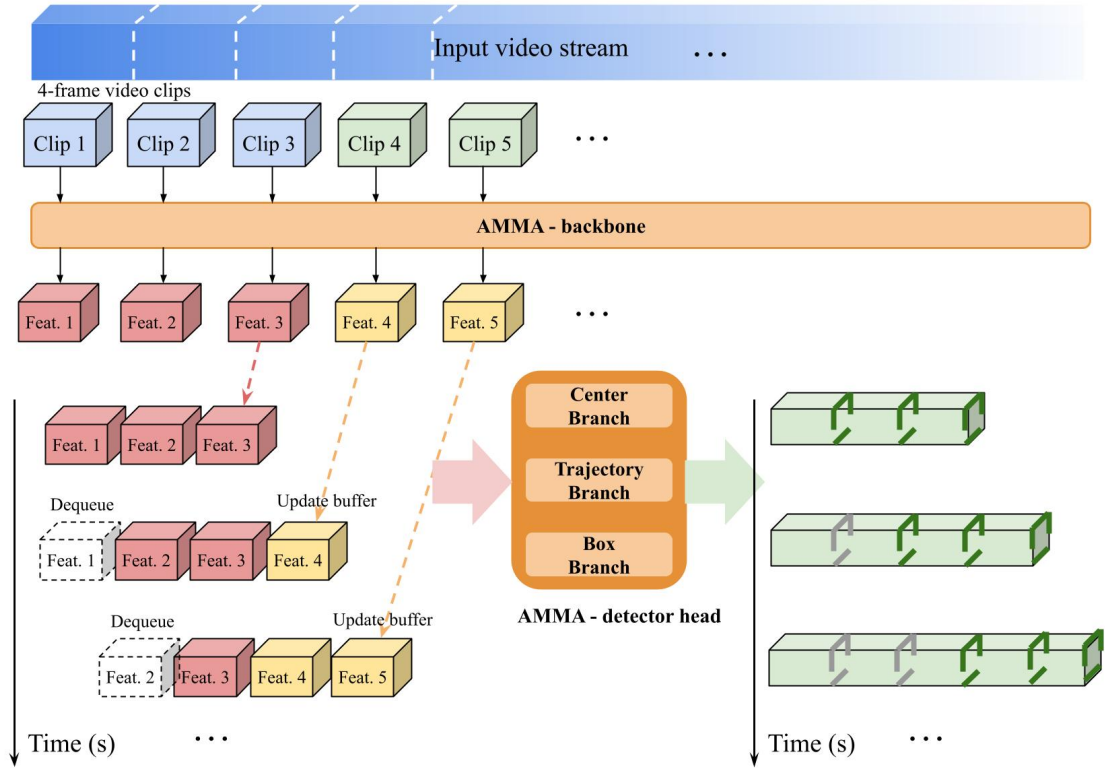


Fig. 4. AMMA's incremental feature-caching-dequeuing mechanism for online action detection on streaming videos.

The overall training objective of AMMA is shown in Equation 7, where hyperparameter a , b , and c are set to 1, 1, and 0.1 respectively in accordance with Zhou et al. (2019).

$$l_{AMMA} = al_{Center} + bl_{Trajectory} + cl_{Box} \quad (7)$$

3.4. Online/Incremental detection via feature-caching-dequeuing

Our proposed action detector requires only RGB frames as input. As it generates motion representations on-the-fly, AMMA can be applied directly to real-time video streams. To efficiently and continuously handle incoming video frames, we employ a simple feature-caching mechanism that allows AMMA to focus on extracting relevant features only from the current clip while still being able to exploit clip-level features from the past for longer-range spatiotemporal reasoning. Figure 4 illustrates such an online detection workflow.

In detail, given that K clips are needed for action inference, AMMA's backbone initially obtains K clip-level features from which action tubelets are regressed at the detector head. Meanwhile, the K clip-level features are also cached in AMMA's buffer. Once enough incoming frames are gathered as a valid new clip (*i.e.*, reaching t frames), our detector only extracts the K^{th} clip-level feature from this new clip. The past $K - 1$ features can be efficiently retrieved from the buffer and combined with the current one, from which the detector head predicts new action tubelets. Clip-level feature-caching and dequeuing enable AMMA to incrementally infer action tubelets covering past and incoming new frames while processing only the newly arrived clip. During video streaming, AMMA's buffer will be updated accordingly to only keep the most recent K features.

3.5. From coarse tubelets to dense action tubes

Given an incoming video stream, AMMA detects tubelets on top of the latest K clips. Notably, the lastly detected tubelets have a temporal overlap with the previous ones by a duration of $(K - 1)$ clips (as illustrated in the bottom-right corner of Figure 4). When

1
2
3 tubelet results within the temporal overlaps are consistent, AMMA can incrementally link local tubelets over time into action tubes,
4
5 yielding long-range space-time proposals for localizing actions in trimmed/untrimmed videos.

6
7 We adopt an online linking algorithm similar to the one used by Kalogeiton *et al.* (2017). Given a video stream with sufficient
8 frames as input, AMMA detects N initial tubelets. Among them, the top ten tubelets with the highest confidence scores are kept as
9
10 "active" action links for subsequent tubelet linking. As the video continues to be streamed, we incrementally extend active links
11
12 with new tubelet candidates if their detections at corresponding temporal positions match (*i.e.*, the average IoU exceeds threshold
13 $\tau = 0.5$). It is noteworthy that each candidate tubelet can only be assigned to an active link. On the other hand, an active link stops
14
15 extending and is terminated ("inactive") either when there no longer exists temporal overlaps with the newly detected tubelets, or
16
17 the video stops being streamed.

18 The final action tubes are constructed from all the inactive action links, where each tube's confidence score is calculated as the
19
20 average score of all its enclosed tubelets. The temporal extent of any action tube is determined by the starting frame of the initialized
21
22 tubelet and the end frame of the last tubelet. Lastly, we discard any final action tube having either a low confidence score or a short
23
24 temporal duration. To acquire temporally dense (*i.e.*, frame-wise) detection, we apply coordinate-wise linear interpolation between
25
26 bounding boxes located at separate clips to infer detection for intermediate frames. This design form is reasonable as transitions of
27
28 actions across consecutive frames are typically smooth and continuous.

28 4. Experiments

29 4.1. Experimental Setup

30
31 **Dataset.** Our proposed action detector is evaluated on two popular action datasets: UCF-24 (Soomro *et al.* (2012)) and JHMDB-
32
33 21 (Jhuang *et al.* (2013)). The former one is composed of 3207 temporally trimmed/untrimmed sports videos of 24 classes. The
34
35 number of action instances varies in this dataset. The latter consists of 928 short videos (maximum of 40 frames) divided into three
36
37 splits, with 21 action categories in daily life such as *sit*, *stand*, and *walk*, etc. Each video is temporally trimmed and has a single
38
39 action instance. For JHMDB-21, the experimental results are reported over the average of its three splits. **Unlike datasets for**
40
41 **action recognition or temporal action detection, both of the above datasets provide actions' temporal extent and frame-level**
42
43 **bounding-box annotations which AMMA strictly seeks for model training.**

44
45 **Metrics.** Following previous studies in spatiotemporal action detection, we evaluate the accuracy of our proposed detector using
46
47 frame-mAP and video-mAP (mean Average Precision). The former metric validates the IoU between the detected and groundtruth
48
49 boxes at each frame and is independent of the online linking strategy. For frame-mAP, the IoU threshold is fixed at 0.5 throughout
50
51 all experiments. On the other hand, video-mAP inspects spatiotemporal overlaps between linked action tubes and groundtruth tubes
52
53 at multiple IoU thresholds. Furthermore, to evaluate the efficiency of AMMA, we also report its model size (number of trainable
54
55 parameters), MACs (number of multiply-accumulate operations), and speed (frame-per-second, or FPS).

56
57 **Implementation details.** Aiming to conduct highly accelerated and efficient detection, we first employ ResNet-18 as AMMA's
58
59 main 2D CNN backbone. All RGB frames inputted to our model are resized to 288×288 . AMMA's backbone includes an
60
61 encoder-decoder feature extractor followed by a bilinear upsampling layer, transforming video clips to clip-level representations of
62
63 dimension $36 \times 36 \times 256$. Prior to AMMA's detector head, clip-level features are first fed to another 1×1 convolutional layer to
64
65 reduce their channel dimension by 4 in order to gain efficiency at Center and Trajectory branches (who operate on channel-wise
66
67 stacked features).

68
69 Within AMMA's backbone, the fusion of spatial and temporal information is realized by lateral fusion. In the case of ResNet-18,
70
71 we establish uni-lateral connections at the "stage" level. To investigate the influence of combining micro-motion and RGB features
72
73
74
75

at different scales, we vary the extent of fusion by progressively adding a lateral connection at the output of each stage (up to five connections for ResNet-18).

To verify our detection framework on ultra-lightweight architectures for resource-constrained devices, we also evaluate its integration with MobileNet-V2 (Sandler et al. (2018)) and ShuffleNet-V2 (Ma et al. (2018)). The weights of all 2D CNN backbones are initialized with COCO pretrain (except for ShuffleNet-V2 which uses ImageNet pretrain).

During training, we apply common practices of data augmentation such as photometric transformation, scale jittering, random cropping/expansion, and location jittering, etc. To train AMMA on K-clip sequences, each action tubelet is expected to last $K \times t$ frames. For any action video having a shorter duration, we pad the beginning of its K-clip sequence by the first frame of the video until the minimum length requirement is met, simulating an action without movement at the beginning. At AMMA's detector head, only the groundtruth associated with the final frame of a clip (*i.e.*, F_t^K) is used to train Center branch. On the other hand, Trajectory and Box branch learn to regress movement and spatial dimension of action instances over all the clips, thus requiring groundtruth labels of $F_t^1, F_t^2, \dots, F_t^K$.

We use the Adam optimizer to train our models. An initial learning rate of $5e^{-4}$, $2.5e^{-4}$, and $2.5e^{-4}$ is applied when employing ResNet-18, MobileNet-V2 and ShuffleNet-V2 as AMMA's backbone, respectively. For JHMDB-21, we train AMMA for 10 epochs while reducing the learning rate by a factor of 10 at the 6th and 8th epoch. Likewise, UCF-24 is trained for 10 epochs, but with the learning rate reduced by half at every epoch after the second one. In our experiments, all the training is conducted on an NVIDIA Titan V GPU while the mini-batch size is fixed to 16.

4.2. Ablation study

In this section, we investigate various architectural configurations of AMMA. For efficient exploration, the following studies are conducted using ResNet-18 unless specified otherwise.

Effect of input duration and micro-motion fusion. The core of AMMA lies in detecting action tubelets across successive video clips. Intuitively, combining more clips as input encapsulates richer spatiotemporal context. However, longer sequences could potentially introduce irrelevant background cues, as well as raising difficulty to track tubelets' trajectories. To investigate how the input duration affects the proposed detector, we conduct experiments on both JHMDB-21 and UCF-24 by varying the number of input clips (denoted as "RGB"). To jointly examine the influence of incorporating dynamic features under varied input length, we replicate the above experiment while introducing micro-motion fusion ("RGB + MM"). In these experiments, the extent of motion fusion is fixed to three lateral connections (at the output of the first three stages in ResNet-18). The corresponding frame-mAP results are depicted in Figure 5.

From the above experiments, we first observe that AMMA generally produces more accurate tubelets the longer video sequences it sees. This result matches our hypothesis that reasoning from longer video clips enriches spatiotemporal feature learning. Notably, AMMA's accuracy continues to benefit on JHMDB-21 as K increases. We observe that longer input sequences improve accuracy mainly by reducing false-positive detection in videos where ambiguous visual cues are present. Figure 6 displays several examples where AMMA manages to detect correctly when enlarging its temporal receptive field across longer video sequences. We stop increasing the number of clips at 5 (equivalent to 20 frames), as that nearly takes up half of the frames in most videos of this dataset. We adopt a similar setup when evaluating UCF-24. Interestingly, although input duration and accuracy remain positively correlated, AMMA performs best when $K = 3$. We deduce that as UCF-24 consists of temporally untrimmed videos, AMMA is prone to produce more temporal false-positive detection (on frames having no groundtruth action) when assigning a unified action label to a longer sequence.

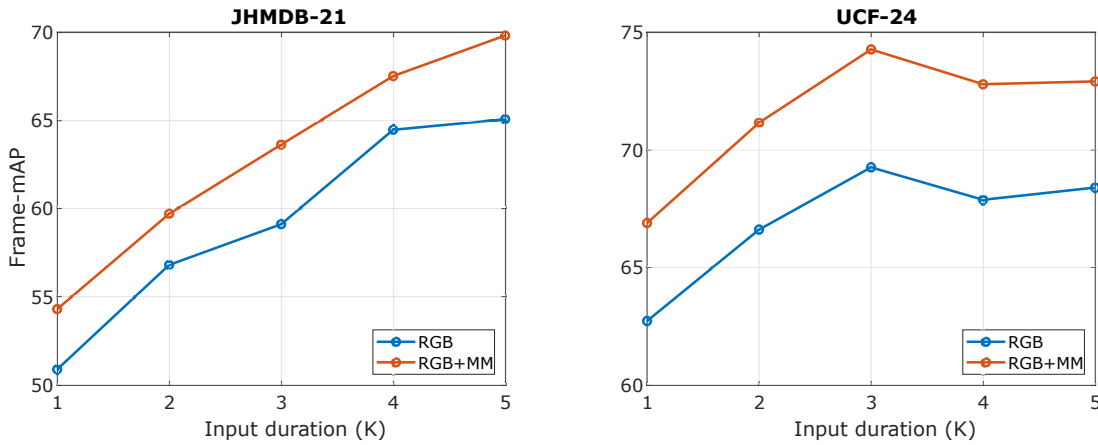


Fig. 5. Frame-mAP performance under varied input duration (*i.e.*, number of clips). "MM" denotes micro-motion.

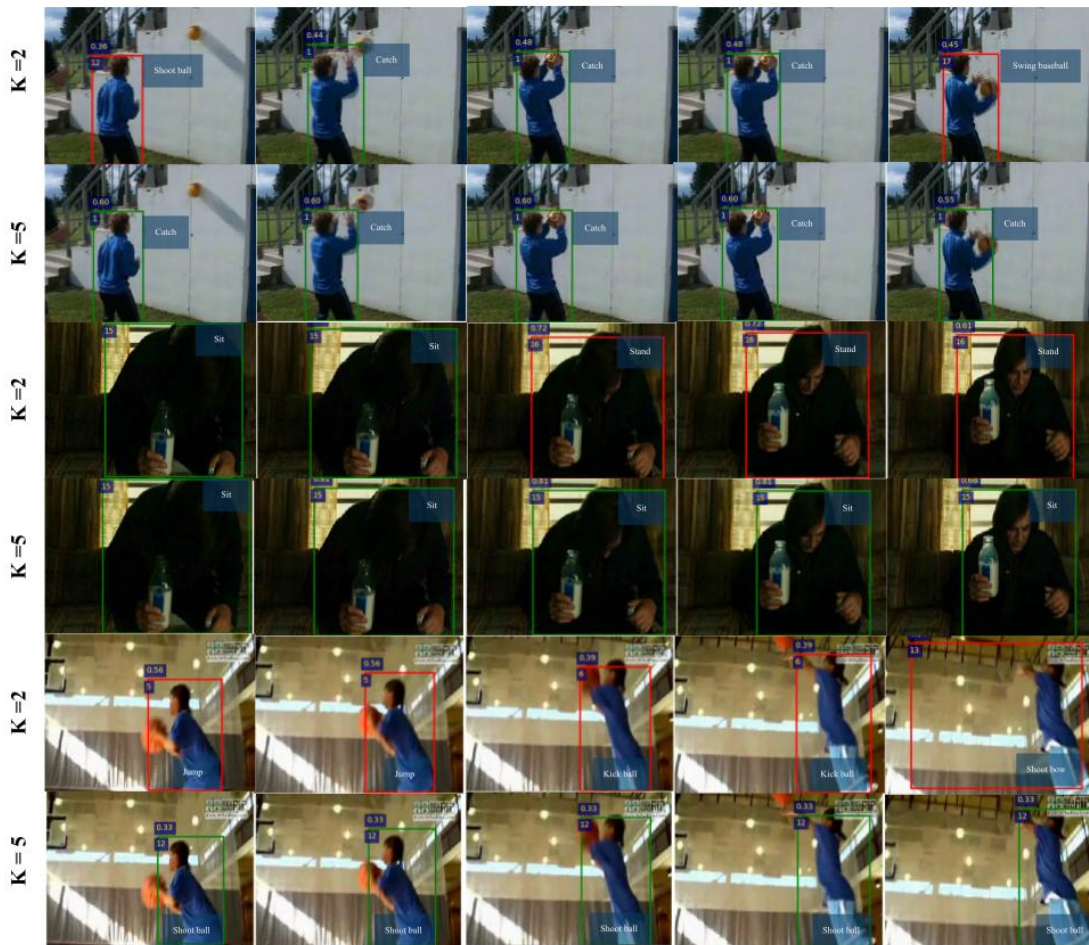


Fig. 6. Examples of short-tubelet ($K = 2$) and long-tubelet ($K = 5$) detection on JHMDB-21. The groundtrue actions (from top to bottom) are *catch*, *sit*, and *shoot.ball*. The green and red boxes correspond to correct and incorrect detection, respectively. Each colored box also displays the detected class and associated confidence score. Longer input sequences help to reduce false-positive detection which are prone to occur in the presence of ambiguous visual cues (*e.g.*, confusion between *sit* & *stand*, or *catch* & *shoot.ball*.)

Alongside varied input duration, all the configurations with micro-motion feature fusion consistently outperform those using only appearance cues, confirming the efficacy of modeling short-term dynamic motion to help differentiate actions. For instance, the baseline configuration $K = 1$ ("RGB") is the least accurate due to a complete lack of temporal modeling (neither incorporating

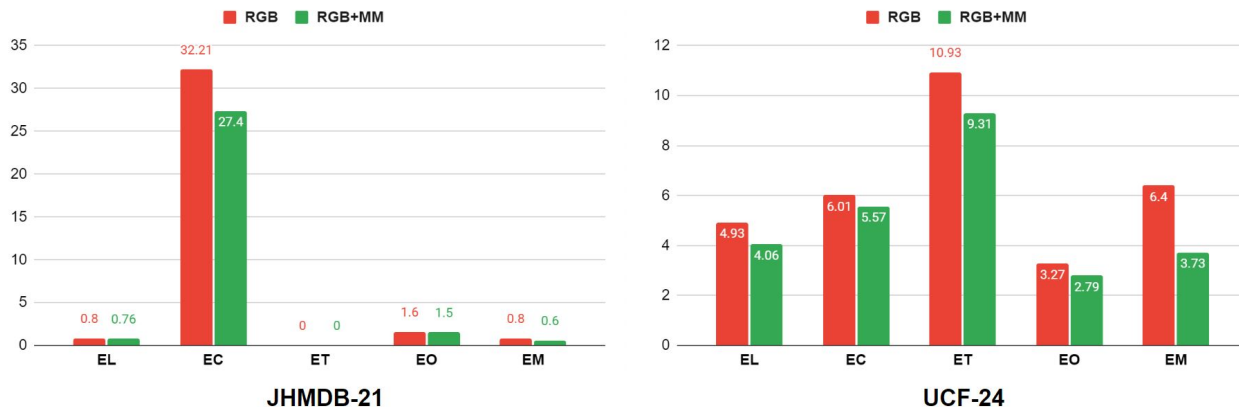


Fig. 7. Frame-mAP error distribution before and after micro-motion (“MM”) feature fusion (JHMDB-21 and UCF-24). Each bar corresponds to a specific type of error (out of five error categories). A model is more accurate when incurring lower error rates.

short-term dynamic nor successive appearance variation cues). To better understand predicted tubelets’ accuracy with and without motion fusion, we examine five mutually exclusive factors that result in the final frame-mAP. Following common practices adopted by Kalogeiton *et al.* (2017), we define five sources of errors, namely localization error (E_L), classification error (E_C), time error (E_T), other error (E_O), and missing-detection error (E_M). In brevity, E_L is associated with detection that contains the correct class, but does not precisely localize the target. In contrast, E_C is raised when a detection properly bounds the underlying target, but the predicted class is incorrect. E_T refers to having a detection in an untrimmed video for the correct class, but the groundtruth temporal extent of the action does not cover this frame. E_O corresponds to detection that is falsely detected in terms of both localization and classification. Finally, E_M refers to false-negative detection. Note that the sum of these errors subtracted by 100 results in the obtained frame-mAP of a particular model.

Figure 7 reports the error distribution comparison before and after fusing micro-motion features. On JHMDB-21, one can perceive that most of AMMA’s false detection comes from E_C while the rest of errors are small and scattered ($E_T = 0$ as JHMDB-21 is a temporally trimmed dataset). Specifically, the “RGB+MM” model significantly outperforms the “RGB” one by improving E_C for nearly 5% (27.4 vs. 32.21), which gives rise to the discrepancy between their frame-mAP. This demonstrates that integrating micro-motion features plays an essential role to induce learning action-specific dynamics and reduce false-positive classification. Our results are aligned with many previous studies which find motion cues particularly useful for JHMDB-21. Different from JHMDB-21, the highest frame-mAP loss for UCF-24 originates from time error E_T while the remaining loss is scattered across all other types of errors. One can observe that fusing the proposed motion features raises AMMA’s overall frame-mAP by reducing false-positive and false-negative detection throughout all error categories.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65**Table 1. Performance summary of different forms of micro-motion on JHMDB-21. Input duration is fixed to 5 clips, and three lateral connections are attached to the output of the first three stages in ResNet-18.**

	Frame-mAP	GMACs	# params (M)
RGB only	65.08	3.49	15.07
RGB + MM_{Diff}	67.69	5.14	15.75
RGB + MM_{Conv_Diff}	69.74	5.40	15.75

Table 2. Performance summary of varied extents of fusion between appearance and micro-motion features on JHMDB-21. Input duration is fixed to 5 clips.

	Frame-mAP	GMACs	# params (M)
—	65.08	3.49	15.07
Stage 1	66.58	3.95	15.08
Stage 1-2	68.74	4.72	15.23
Stage 1-3	69.74	5.40	15.75
Stage 1-4	70.22	6.08	17.85
Stage 1-5	72.48	6.76	26.24

More on micro-motion generation, fusion, and complexity. The previous experiments demonstrate AMMA’s extensible temporal modeling capacity along with varied input duration, as well as the benefit of incorporating micro-motion features. Here, we further investigate different forms of micro-motion generation and fusion, along with associated computational cost.

Table 1 summarizes AMMA’s detection accuracy and computation on JHMDB-21 in accordance with varied input forms. Building upon the input-duration experiment, we adopt the 5-clip input and three stages of lateral connections (when fusion is applied). To approximate our model’s complexity under the streaming-video setting, we report the MACs needed for tubelet inference over K clips and then divide it by K . The model size in terms of number of parameters is also recorded. In addition, to verify the necessity of our micro-motion sub-network operating on shallow patterns (expressed as MM_{Conv_Diff}), we implement a simpler micro-motion variant (coined MM_{Diff}) which directly accumulates RGB difference maps to encode motion.

Our experiments show that at minor increase in the model size, fusing MM_{Conv_Diff} features largely enhances AMMA’s accuracy from that of only using RGB frames. Relative to the model size, which rises due to adding the micro-motion sub-network and duplicating three early stages of ResNet-18, the elevation is more prominent in the required MACs. We found that the additional operations associated with fusing MM_{Conv_Diff} all take place toward early layers of AMMA’s backbone where target tensors still retain large spatial dimensions, resulting in a more noticeable raise in multiply-accumulate operations than in model size. On the other hand, fusing MM_{Conv_Diff} obtains higher accuracy than MM_{Diff} by more than 2 frame-mAP at a negligible increase in GMACs and model size. This suggests that the temporal evolution of general patterns better encodes dynamic information than raw RGB differences, which are more likely to carry local noises. In Figure 8, we show some examples of our micro-motion representation which successfully captures motion boundaries near moving subjects.

Next, We explore different extents of fusion between appearance and micro-motion information by incrementally increasing the number of lateral connections. As shown in Table 2, the more stages lateral fusion takes place, the more accurate AMMA becomes, indicating that motion boundary features, from shallow to abstracted forms, facilitate detection accuracy. Multi-scale lateral fusion ensures AMMA to simultaneously learn complementary spatiotemporal information throughout the backbone. In exchange for enhanced accuracy, more lateral fusion inevitably raises the model size and computation associated with extracting micro-motion features at deeper layers. To conclude, AMMA’s capacity to jointly model actions’ visual and dynamic information can be improved when adopting deep fusion. In spite of that, with the aim of keeping an overall efficient detection architecture, we continue leveraging 3 stages of lateral fusion throughout the rest of the experiments.

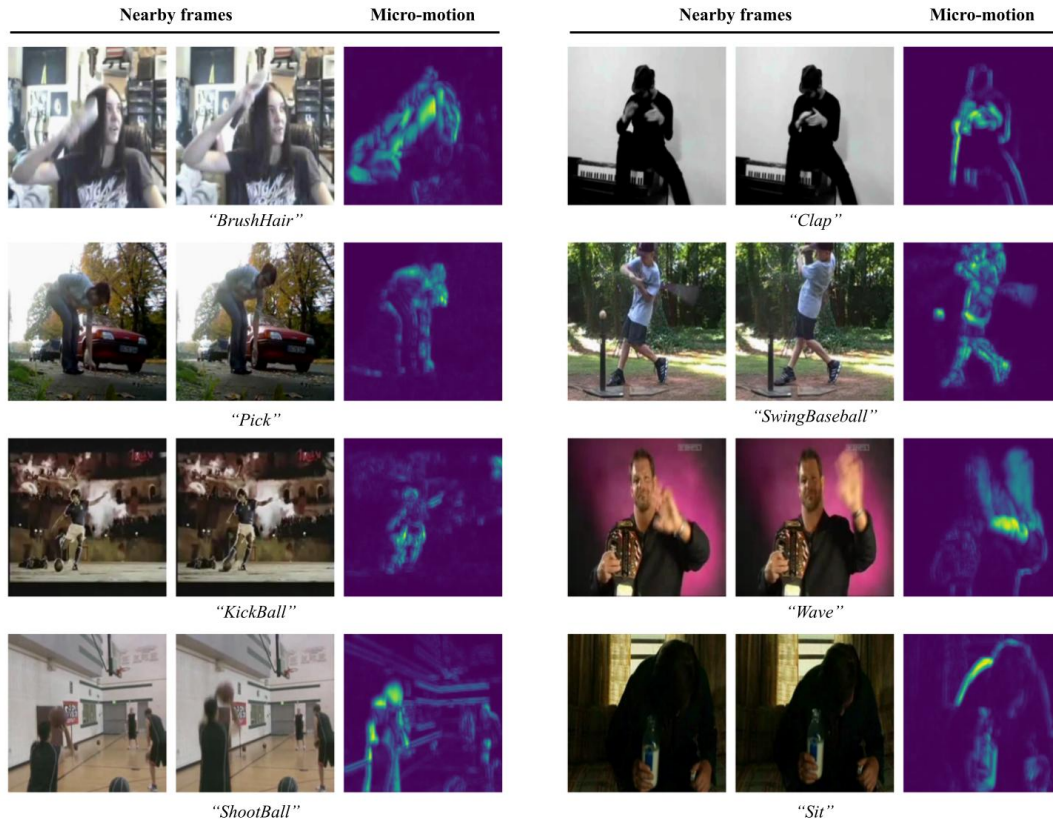


Fig. 8. Visualization of micro-motion cues between pairs of action frames.

From lightweight to ultra-lightweight architectures. Ultimately aiming at deploying the detector onto resource-constrained devices, we examine AMMA’s generalization ability on ultra-lightweight mobile architectures: MobileNet-V2 and ShuffleNet-V2. Both detection accuracy (*e.g.*, frame-mAP and video-mAP) and model efficiency (*e.g.*, inference speed, model complexity, and size) are assessed. In particular, speed is recorded based on the per-frame processing time of the entire action detection pipeline, *i.e.*, the total runtime of generating action proposals for all videos divided by the total number of their frames.

Integration of micro-motion and lateral fusion in these mobile-friendly architectures closely follows our design in ResNet-18. With MobileNet-V2 as the backbone, we append three lateral connections at the output of the 1st, 3rd, and 6th bottleneck residual block (MobileNet-V2 consists of 17 of these building blocks). For ShuffleNet-V2, three lateral connections are established at the output of "Conv1", "Stage2", and "Stage3" (naming of these layers/blocks follow the same conventions in Ma *et al.* (2018)). The resulting models are represented by AMMA₁₈ (ResNet-18), AMMA_M (MobileNet-V2), and AMMA_S (ShuffleNet-V2) for simplicity. Note that we apply different clip-lengths on the two datasets following their most accurate configurations found in Figure 5.

Results of the three AMMA variants are reported in Table 3. We observe that AMMA₁₈ consistently obtains higher accuracy than the other two (especially reflected in video-mAP at high detection thresholds). This is expected as ResNet has higher capacity to extract richer visual context in general than the mobile architectures prioritizing efficiency. Indeed, both datasets consist of actions embedding prominent appearance cues such as *shoot_bow* and *pole_vault* that could benefit from a more powerful feature extractor. In terms of efficiency, the average GMACs of AMMA_M and AMMA_S are approximately 1/4 and 1/5 of that of AMMA₁₈ due to their highly optimized architectural design. Similarly, the model size of AMMA_M and AMMA_S are also significantly smaller.

Countering the above observations, the two ultra-lightweight variants have slightly slower runtime than AMMA₁₈ even though

Table 3. Performance summary of integrating different 2D CNN backbones.

	JHMDB-21 ($K = 5$)							
	Frame-mAP	Video-mAP				GMACs	Param. (M)	FPS
		@0.2	0.5	0.75	0.5:0.95			
AMMA ₁₈	69.7	73.7	72.7	60.1	50.3	5.2	15.8	80
AMMA _M	66.1	70.0	69.0	53.7	45.3	1.3	6.8	77
AMMA _S	67.7	72.3	70.9	47.9	43.0	1.0	6.0	75
	UCF-24 ($K = 3$)							
	Frame-mAP	Video-mAP				GMACs	Param. (M)	FPS
		@0.2	0.5	0.75	0.5:0.95			
AMMA ₁₈	74.6	81.1	53.5	24.6	26.3	5.2	15.8	115
AMMA _M	71.8	78.0	49.7	22.0	23.5	1.3	6.8	110
AMMA _S	71.3	78.7	47.4	20.9	22.5	1.0	6.0	100

their computational cost is substantially lower. On the one hand, this phenomenon has been addressed by Orsic *et al.* (2019), which points out that the implementation of depth-wise separable convolution is not optimized in the cuDNN library (therefore, MobileNet-V2 tends to be slower than ResNet-18 in standard experimental setups). Moreover, computational complexity does not necessarily guarantee faster runtime as GMAC does not take into account factors such as memory access cost and platform characteristics (Ma *et al.* (2018)). Further, even though all AMMA models are equipped with three lateral connections, their extents of spatial-temporal fusion still differ according to the architectural designs of their backbone CNNs. For example, ShuffleNet-V2 has more convolutional layers in "Stage3" than those in ResNet-18 to process motion cues. All of our models still exceed real-time performance by a large margin.

One may have noticed AMMA's conspicuous difference in speed between JHMDB-21 and UCF-24, as shown in the last column of Table 3. Such discrepancy is mainly associated with the choice of input sequence length. In Figure 9, we demonstrate the influence of sequence length ($K = \{2, 3, 4, 5\}$) on AMMA₁₈'s runtime based on UCF-24. The average runtime (millisecond, or ms) of a detection cycle can be decomposed into tubelet inference (including feature extraction) and tubelet linking (including intra-frame interpolation); the average FPS is plotted in red. Note that the tubelet inference time is nearly invariant to K , as our detector exploits an efficient feature-caching and retrieval workflow on clip-level features (see Figure 4). In fact at a larger K , the minor increase in runtime is related to filling AMMA's buffer with K clip features during initialization, as well as a slight increase of computation at the detector head. On the other hand, the runtime associated with tubelet linking prominently rises along sequence length. As tubelet linking depends on calculating the mean IoUs of detection across $K - 1$ overlapping frames, determining whether two tubelets match becomes more computationally demanding when longer tubelets are considered. These results pin-point the importance of a carefully chosen sequence length for balancing AMMA's accuracy and speed performance.

4.3. Comparison with state-of-the-arts

In this section, we evaluate AMMA against several state-of-the-art methods on JHMDB-21 and UCF-24. **We emphasize that as our tubelet detector concurrently seeks competitive accuracy, low complexity, and real-time runtime for practical deployment, only state-of-the-arts with loosely comparable architectures as AMMA are listed in Table 4. Recent top-performing approaches/models that employ much heavier configurations (such as those relying on both 3D CNN and optical flow) are excluded for fair comparison.**

It can be observed from Table 4 that AMMA₁₈ achieves competitive accuracy on both datasets. Notably, our proposed model utilizes the most lightweight feature backbone than all other methods on the list, such as two-stream VGG16, two-stream DLA-34, C3D, I3D, and S3D, etc. Furthermore, leveraging only RGB frames as input, AMMA₁₈ still outperforms most of the other

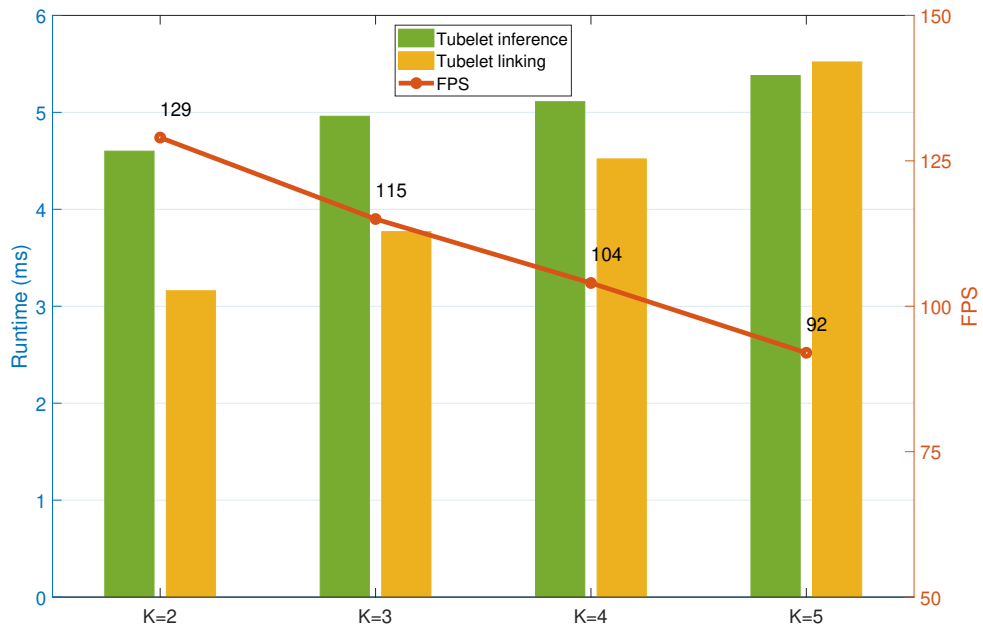


Fig. 9. AMMA₁₈'s runtime breakdown over varied sequence length (K) evaluated on UCF-24. The bar graph (referencing Y-axis on the left) captures the decomposition of detection runtime. The red plot (referencing Y-axis on the right) describes the average FPS at each configured K .

Table 4. Comparison with the state-of-the-art methods. Under column "Input", "+OF" indicates applying optical flow as the additional input modality (alongside RGB input).

Method	Input	JHMDB-21				UCF-24					
		F-mAP	Video-mAP				F-mAP	Video-mAP			
			0.2	0.5	0.75	0.5:0.95		0.2	0.5	0.75	0.5:0.95
2D backbone											
Saha et al. (2016)	+OF	--	72.6	71.5	43.3	40.0	--	66.7	35.9	7.90	14.4
Peng and Schmid (2016)	+OF	58.5	74.3	73.1	--	--	--	73.5	32.1	2.70	7.30
Saha et al. (2020)	+OF	--	73.5	72.8	59.7	48.1	--	78.5	49.7	22.2	24.0
Kalogeiton et al. (2017)	+OF	65.7	74.2	73.7	52.1	44.8	69.5	76.5	49.2	19.7	23.4
Singh et al. (2017)	+OF	--	73.8	72.0	44.5	41.6	--	73.5	46.3	15.0	20.4
Yang et al. (2019)	+OF	--	--	--	--	--	75	76.6	--	--	--
Zhao and Snoek (2019)	+OF	--	--	74.7	53.3	45.0	--	78.5	50.3	22.2	24.5
Song et al. (2019)	+OF	65.5	74.1	73.4	52.5	44.8	72.1	77.5	52.9	21.8	24.1
Zhang et al. (2020)	+OF	37.8	--	--	--	--	67.7	74.8	46.6	16.7	21.9
Li et al. (2020)	+OF	68.0	76.2	75.4	68.5	54.0	76.9	81.3	54.4	29.5	28.4
Liu et al. (2022)	---	64.7	67.9	67.4	53.7	44.7	70.8	74.6	50.4	21.8	25.0
AMMA₁₈	---	69.7	73.7	72.7	60.1	50.3	74.6	81.1	53.5	24.6	26.3
AMMA_M	---	66.1	70.0	69.0	53.7	45.3	71.8	78.0	49.7	22.0	23.5
AMMA_S	---	67.7	72.3	70.9	47.9	43.0	71.3	78.7	47.4	20.9	22.5
3D backbone											
Hou et al. (2017)	---	61.3	78.4	76.9	--	--	67.3	73.1	--	--	--
Gu et al. (2018)	---	73.2	--	--	--	--	77.0	--	--	--	--
Qiu et al. (2019)	---	--	77.3	74.2	--	--	--	69.3	--	--	--
Li et al. (2020)	---	--	84.8	83.7	62.4	51.8	69.7	79.4	62.7	--	25.5
Zhao et al. (2021)	---	--	--	79.5	--	58.0	--	--	52.0	--	25.2

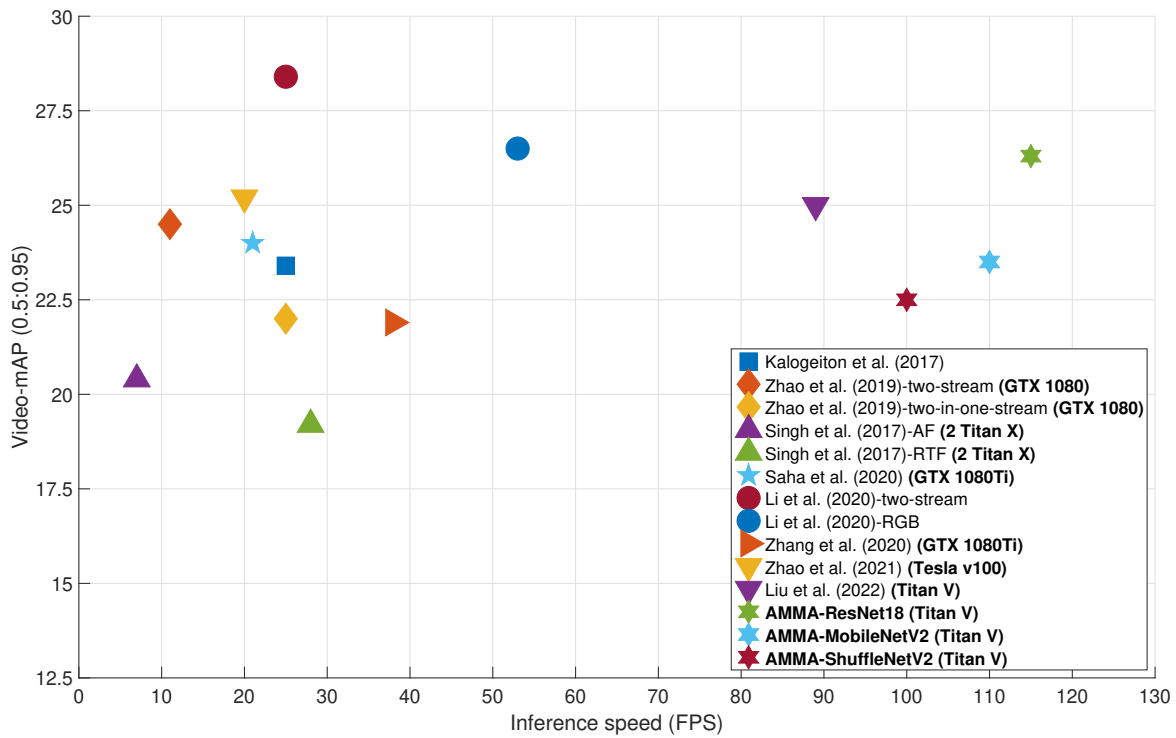


Fig. 10. Comparisons of runtime-accuracy trade-off between AMMA and state-of-the-arts on UCF-24 (video-mAP). "AF" and "RTF" denote accurate flow and real-time flow, respectively. It is noteworthy that methods that depend on externally calculated optical flow typically omit this part of the computation in their runtime measurement.

two-stream methods relying on fine-grained optical flow (especially reflected in its frame-mAP and video-mAP at high detection thresholds). Further, AMMA₁₈ scores competitively against several 3D CNN-based methods even though ResNet-18 has far less capacity to reason spatiotemporal information, indicating the effectiveness of fusing coarse-scale visuals and complementary dynamic cues at limited computational budgets. Finally for AMMA_M and AMMA_S, due to their CNN backbones being less capable of abstracting visual patterns in exchange for substantially lower computational cost, there remains a perceivable margin from the accuracy of other top-performing detectors.

Beyond competitive accuracy, the evident strength of AMMA lies in its cost-effective architecture and workflow tailored for real-world scenarios and deployment. Specifically, the vast improvement in AMMA's processing efficiency is attributed to its coarse-detection paradigm as well as being free of expensive optical flow extraction. The former not only bypasses redundancy associated with dense per-frame detection, but also facilitates capturing actions' prominent appearance variation over time. Adopting on-the-fly motion cues instead of pre-computed optical flow, AMMA supports detecting actions in an online manner from video streams when exploiting feature-caching and interpolation from coarse-level detection. As shown in Figure 10, while retaining competitive video-mAP on UCF-24, our models considerably outperform other action detectors reporting real-time or near-real-time performance.

Note that speed performances can be impacted by other elements such as hardware devices and manners of measurement. For example, the delay in generating optical flow was not considered in works such as Kalogeiton et al. (2017), Zhao and Snoek (2019), and Li et al. (2020). On the other hand, efficiency measures in terms of MACs and model size are independent of the above factors. We refer our readers to Table 3 for such information. To summarize, our most lightweight model (AMMA_S) incurs 1 GMACs in the online detection setting while requiring 6M parameters. To put these values in perspective, the standard SSD which is widely used

in the domain of spatiotemporal action detection such as Singh et al. (2017), Kalogeiton et al. (2017), Saha et al. (2020), and Zhao and Snoek (2019), has around 27M trainable parameters (54M in the two-stream setup). Similarly, the two-stream SSD architecture incurs approximately 32 GMACs (with input image size of 300×300), which is nearly 32 times more computationally expensive than our lightest model. Methods leveraging 3D CNN (Gu et al. (2018) and Sun et al. (2018)) such as I3D or S3D as the feature backbone, are estimated to exceed 45 and 32 GMACs, respectively.

5. Conclusion and Future works

In this paper, we present a lightweight, online action tubelet detector based on 2D CNN (termed AMMA). It makes use of a coarse detection paradigm to efficiently model actions from underlying appearance and variation cues over video sequences. Specifically, AMMA incorporates complementary motion dynamics by accumulating adaptive micro-motion representations generated on-the-fly, facilitating learning appearance-motion correspondences. Our integrated solution conforms to stringent design constraints sought after in many practical application scenarios. As demonstrated in two challenging action benchmarks, AMMA achieves competitive precision (frame and video-mAP) while utilizing significantly more compact backbones and executing at an inference speed far beyond real-time (up to 100 FPS).

In the future, we will evaluate AMMA on more challenging public benchmarks, *e.g.*, AVA, which contains more complex scenes and sophisticated action categories. Note that our coarse detection pipeline is designed to smoothly adapt to the sparse training annotations of this dataset. We also attempt to extend AMMA's 2D backbones to ultra-lightweight 3D CNN for enhancing its spatiotemporal modeling capacity. Further, aiming at a fully resource-efficient vision system for deployment, we will also precisely customize AMMA for embedding onto different edge devices such as NVIDIA Jetson TX2 or Xavier GPUs.

Acknowledgments

This work was supported by the H2020 ITN project ACHIEVE (H2020-MSCA-ITN-2017: agreement no. 765866).

References

- X. Hu, J. Dai, M. Li, C. Peng, Y. Li, S. Du, Online human action detection and anticipation in videos: A survey, *Neurocomputing* 491 (2022) 395–413.
- K. Simonyan, A. Zisserman, Two-stream convolutional networks for action recognition in videos, in: *NIPS*, 2014, pp. 568–576.
- X. Peng, C. Schmid, Multi-region two-stream r-cnn for action detection, in: *ECCV*, Springer, 2016, pp. 744–759.
- G. Singh, S. Saha, M. Sapienza, P. H. Torr, F. Cuzzolin, Online real-time multiple spatiotemporal action localisation and prediction, in: *IEEE ICCV*, 2017, pp. 3637–3646.
- V. Kalogeiton, P. Weinzaepfel, V. Ferrari, C. Schmid, Action tubelet detector for spatio-temporal action localization, in: *IEEE ICCV*, 2017, pp. 4405–4413.
- J. Zhao, C. G. Snoek, Dance with flow: Two-in-one stream action detection, in: *IEEE CVPR*, 2019, pp. 9935–9944.
- X. Yang, X. Yang, M.-Y. Liu, F. Xiao, L. S. Davis, J. Kautz, Step: Spatio-temporal progressive learning for video action detection, in: *IEEE CVPR*, 2019, pp. 264–272.
- Y. Li, Z. Wang, L. Wang, G. Wu, Actions as moving points, in: *European Conference on Computer Vision*, Springer, 2020, pp. 68–84.
- O. Köpüklü, X. Wei, G. Rigoll, You only watch once: A unified cnn architecture for real-time spatiotemporal action localization, *arXiv preprint arXiv:1911.06644* (2019).
- R. Hou, C. Chen, M. Shah, Tube convolutional neural network (t-cnn) for action detection in videos, in: *Proceedings of the IEEE international conference on computer vision*, 2017, pp. 5822–5831.
- C. Gu, C. Sun, D. A. Ross, C. Vondrick, C. Pantofaru, Y. Li, S. Vijayanarasimhan, G. Toderici, S. Ricco, R. Sukthankar, et al., Ava: A video dataset of spatio-temporally localized atomic visual actions, in: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 6047–6056.
- J. Zhao, X. Li, C. Liu, S. Bing, H. Chen, C. G. Snoek, J. Tighe, Tuber: Tube-transformer for action detection, *arXiv preprint arXiv:2104.00969* (2021).
- C. Sun, A. Shrivastava, C. Vondrick, K. Murphy, R. Sukthankar, C. Schmid, Actor-centric relation network, in: *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 318–334.
- R. Su, W. Ouyang, L. Zhou, D. Xu, Improving action localization by progressive cross-stream cooperation, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 12016–12025.
- Y. Li, W. Lin, J. See, N. Xu, S. Xu, K. Yan, C. Yang, Cfad: Coarse-to-fine action detector for spatiotemporal action localization, in: *European Conference on Computer Vision*, Springer, 2020, pp. 510–527.
- X. Zhou, D. Wang, P. Krähenbühl, Objects as points, in: *arXiv preprint arXiv:1904.07850*, 2019.
- W. Liu, D. Anguelov, D. Erhan, C. Szegedy, S. Reed, C.-Y. Fu, A. C. Berg, Ssd: Single shot multibox detector, in: *ECCV*, Springer, 2016, pp. 21–37.
- J. Redmon, A. Farhadi, Yolo9000: better, faster, stronger, in: *IEEE CVPR*, 2017, pp. 7263–7271.
- S. Ren, K. He, R. Girshick, J. Sun, Faster r-cnn: Towards real-time object detection with region proposal networks, in: *NIPS*, 2015, pp. 91–99.

- 1
2
3
484 4 J. Dai, Y. Li, K. He, J. Sun, R-fcn: Object detection via region-based fully convolutional networks, in: NIPS, 2016, pp. 379–387.
485 4 T.-Y. Lin, P. Dollár, R. Girshick, K. He, B. Hariharan, S. Belongie, Feature pyramid networks for object detection, in: Proceedings of the IEEE Conference on
486 5 Computer Vision and Pattern Recognition (CVPR), 2017.
487 6 H. Law, J. Deng, Cornernet: Detecting objects as paired keypoints, in: Proceedings of the European conference on computer vision (ECCV), 2018, pp. 734–750.
488 7 Z. Liu, T. Zheng, G. Xu, Z. Yang, H. Liu, D. Cai, Training-time-friendly network for real-time object detection, in: Proceedings of the AAAI Conference on
489 8 Artificial Intelligence, volume 34, 2020, pp. 11685–11692.
490 9 Z. Tian, C. Shen, H. Chen, T. He, Fcos: A simple and strong anchor-free object detector, IEEE Transactions on Pattern Analysis and Machine Intelligence (2020).
491 9 Y. Xie, J. Zheng, X. Hou, Y. Xi, F. Tian, Dynamic dual-peak network: A real-time human detection network in crowded scenes, Journal of Visual Communication
492 10 and Image Representation 79 (2021) 103195.
493 11 Y. Li, B. Ji, X. Shi, J. Zhang, B. Kang, L. Wang, Tea: Temporal excitation and aggregation for action recognition, in: Proceedings of the IEEE/CVF conference on
494 12 computer vision and pattern recognition, 2020, pp. 909–918.
495 13 J. Yang, Y. Huang, Z. Shao, C. Liu, Learning discriminative motion feature for enhancing multi-modal action recognition, Journal of Visual Communication and
496 14 Image Representation 79 (2021) 103263.
497 15 M. Suneetha, M. Prasad, P. Kishore, Multi-view motion modelled deep attention networks (m2da-net) for video based sign language recognition, Journal of Visual
498 16 Communication and Image Representation 78 (2021) 103161.
499 16 L. Sevilla-Lara, Y. Liao, F. Güney, V. Jampani, A. Geiger, M. J. Black, On the integration of optical flow and action recognition, in: German conference on pattern
500 17 recognition, Springer, 2018, pp. 281–297.
501 18 S. Saha, G. Singh, M. Sapienza, P. H. S. Torr, F. Cuzzolin, Deep learning for detecting multiple space-time action tubes in videos, CoRR abs/1608.01529 (2016).
502 19 D. Zhang, L. He, Z. Tu, S. Zhang, F. Han, B. Yang, Learning motion representation for real-time spatio-temporal action localization, Pattern Recognition 103
503 20 (2020) 107312.
504 20 S. Saha, G. Singh, F. Cuzzolin, Two-stream amtnet for action detection, CoRR abs/2004.01494 (2020).
505 21 J. Carreira, A. Zisserman, Quo vadis, action recognition? a new model and the kinetics dataset, in: IEEE CVPR, 2017, pp. 6299–6308.
506 22 Z. Qiu, T. Yao, C.-W. Ngo, X. Tian, T. Mei, Learning spatio-temporal representation with local and global diffusion, in: Proceedings of the IEEE/CVF Conference
507 23 on Computer Vision and Pattern Recognition, 2019, pp. 12056–12065.
508 24 A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, I. Polosukhin, Attention is all you need, Advances in neural information
509 25 processing systems 30 (2017).
510 25 R. Girdhar, J. Carreira, C. Doersch, A. Zisserman, Video action transformer network, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern
511 26 Recognition, 2019, pp. 244–253.
512 27 C. Zhang, Y. Zou, G. Chen, L. Gan, Pan: Persistent appearance network with an efficient motion cue for fast action recognition, in: Proceedings of the 27th ACM
513 28 International Conference on Multimedia, 2019, pp. 500–509.
514 29 K. He, X. Zhang, S. Ren, J. Sun, Deep residual learning for image recognition, in: Proceedings of the IEEE conference on computer vision and pattern recognition,
515 30 2016, pp. 770–778.
516 30 K. Soomro, A. R. Zamir, M. Shah, Ucf101: A dataset of 101 human actions classes from videos in the wild, arXiv preprint arXiv:1212.0402 (2012).
517 31 H. Jhuang, J. Gall, S. Zuffi, C. Schmid, M. J. Black, Towards understanding action recognition, in: IEEE ICCV, 2013, pp. 3192–3199.
518 32 M. Sandler, A. Howard, M. Zhu, A. Zhmoginov, L.-C. Chen, Mobilenetv2: Inverted residuals and linear bottlenecks, in: Proceedings of the IEEE conference on
519 33 computer vision and pattern recognition, 2018, pp. 4510–4520.
520 34 N. Ma, X. Zhang, H.-T. Zheng, J. Sun, Shufflenet v2: Practical guidelines for efficient cnn architecture design, in: Proceedings of the European conference on
521 35 computer vision (ECCV), 2018, pp. 116–131.
522 36 M. Orsic, I. Kreso, P. Bevandic, S. Segvic, In defense of pre-trained imagenet architectures for real-time semantic segmentation of road-driving images, in:
523 37 Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2019, pp. 12607–12616.
524 38 L. Song, S. Zhang, G. Yu, H. Sun, Tacnet: Transition-aware context network for spatio-temporal action detection, in: Proceedings of the IEEE/CVF Conference on
525 39 Computer Vision and Pattern Recognition, 2019, pp. 11987–11995.
526 39 Y. Liu, F. Yang, D. Ginjac, Teddet: Temporal feature exchange and difference network for online real-time action detection, IEEE Access 10 (2022) 37870–37881.

40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Declaration of interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

The authors declare the following financial interests/personal relationships which may be considered as potential competing interests: