



**HAL**  
open science

## The Bright Side of Timed Opacity (extended version)

Étienne André, Sarah Dépernet, Engel Lefauchaux

► **To cite this version:**

Étienne André, Sarah Dépernet, Engel Lefauchaux. The Bright Side of Timed Opacity (extended version). 2024. hal-04631012v2

**HAL Id: hal-04631012**

**<https://hal.science/hal-04631012v2>**

Preprint submitted on 4 Jul 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# The Bright Side of Timed Opacity<sup>\*</sup>

Étienne André<sup>1,2</sup> , Sarah Dépernet<sup>3,4</sup> , and Engel Lefaucheur<sup>4</sup> 

<sup>1</sup> Université Sorbonne Paris Nord, LIPN, CNRS UMR 7030, F-93430 Villetaneuse, France

<sup>2</sup> Institut universitaire de France (IUF)

<sup>3</sup> Université de Bordeaux, France

<sup>4</sup> Université de Lorraine, CNRS, Inria, LORIA, F-54000 Nancy, France

**Abstract.** In 2009, Franck Cassez showed that the timed opacity problem, where an attacker can observe some actions with their timestamps and attempts to deduce information, is undecidable for timed automata (TAs). Moreover, he showed that the undecidability holds even for subclasses such as event-recording automata. In this article, we consider the same definition of opacity for several other subclasses of TAs: with restrictions on the number of clocks, of actions, on the nature of time, or on a new subclass called observable event-recording automata. We show that opacity can mostly be retrieved, except for one-action TAs and for one-clock TAs with  $\epsilon$ -transitions, for which undecidability remains. We then exhibit a new decidable subclass in which the number of observations made by the attacker is limited.

## 1 Introduction

The notion of *opacity* [21,15] concerns information leaks from a system to an attacker; that is, it expresses the power of the attacker to deduce some secret information based on some publicly observable behaviors. If an attacker observing a subset of the actions cannot deduce whether a given sequence of actions has been performed, then the system is opaque. Time particularly influences the deductive capabilities of the attacker. It has been shown in [19] that it is possible for models that are opaque when timing constraints are omitted, to become non-opaque when those constraints are added to the models.

Timed automata (TAs) [2] are an extension of finite automata that can measure and react to the passage of time, extending traditional finite automata with the ability to handle real-time constraints. They are equipped with a finite set of clocks that can be reset and compared with integer constants, enabling the modeling and verification of real-time systems.

### 1.1 Related works

There are several ways to define opacity problems in TAs, depending on the power of the attacker. The common idea is to ensure that the attacker cannot

---

<sup>\*</sup> This work is partially supported by ANR BisoUS (ANR-22-CE48-0012).

1 deduce from the observation of a run whether it was a private or a public run.  
 2 The attacker in [16] is able to observe a subset  $\Sigma_o \subseteq \Sigma$  of actions with their  
 3 timestamps. In this context, a timed word  $w$  is said to be opaque if there exists a  
 4 public run that produces the projection of  $w$  following  $\Sigma_o$  as an observed timed  
 5 word. In this configuration, one can consider the opacity problem consisting of  
 6 determining, knowing a TA  $\mathcal{A}$  and a set of timed words, whether all words in  
 7 this set are opaque in  $\mathcal{A}$ . This problem has been shown to be undecidable for  
 8 TAs [16]. This notably relates to the undecidability of timed language inclusion  
 9 for TAs [2]. However, the undecidability holds in [16] even for the restricted class  
 10 of event-recording automata (ERAs) [3] (a subclass of TAs), for which language  
 11 inclusion is decidable. The aforementioned negative results leave hope only if the  
 12 definition or the setting is changed, which was done in three main lines of works.

13 First, in [24,25], the input model is simplified to *real-time automata* [17],  
 14 a restricted formalism compared to TAs. In this setting, (initial-state) opacity  
 15 becomes decidable [24,25].

16 Second, in [5], the authors consider a time-bounded notion of the opacity  
 17 of [16], where the attacker has to disclose the secret before an upper bound, using  
 18 a partial observability. This can be seen as a secrecy with an *expiration date*. In  
 19 addition, the analysis is carried over a time-bounded horizon. The authors prove  
 20 that this problem is decidable for TAs.

21 Third, in [9,8], the authors present an alternative definition to Cassez’ opacity  
 22 by studying *execution-time opacity*: the attacker has only access to the execu-  
 23 tion time of the system, as opposed to Cassez’ partial observations with some  
 24 observable events (with their timestamps). In that case, most problems become  
 25 decidable (see [7] for a survey).

26 Regarding non-interference for TAs, some decidability results are proved  
 27 in [11,12,6], while control was considered in [13]. General security problems for  
 28 TAs are surveyed in [10].

## 29 1.2 Contributions

30 Considering the negative results from [16] we have mainly two directions: one can  
 31 consider more restrictive classes of automata, or one can limit the capabilities  
 32 of the attacker—we address both directions in this work.

33 We address here  $\exists$ -opacity (“there exists a pair of runs, one visiting and  
 34 one not visiting the private locations set, that cannot be distinguished”), weak  
 35 opacity (“for any run visiting the private locations set, there is another run not  
 36 visiting it and both cannot be distinguished”) and full opacity (weak opacity,  
 37 but with the other direction holding as well).

38 Our attacker model is as follows: the attacker knows the TA modeling the  
 39 system and can observe (some) actions, but does never gain access to the values  
 40 of the clocks, nor knows which locations are visited. Their goal is to deduce from  
 41 these observations whether a private location was visited.

42 Our set of contributions is threefold.

1 *Inter-reducibility* Our first contribution is to prove that weak opacity and full  
2 opacity are inter-reducible. This result, interesting *per se*, also allows us to con-  
3 sider only one of both cases in the remainder of the paper.

4 *Opacity in subclasses of TAs* Throughout the second part of this paper (Sec-  
5 tion 5), we consider the same attacker settings as in [16] but for natural subclasses  
6 of TAs: first we deal with one-action TAs, then with one-clock TAs (both with  
7 and without  $\varepsilon$ -transitions—which makes a difference in decidability), TAs over  
8 discrete time, and a new subclass which we call observable ERAs. Precisely, we  
9 show that:

- 10 1. The problem of  $\exists$ -opacity is decidable for general TAs and thus for all sub-  
11 classes of TAs we consider as well (Section 5.1).
- 12 2. The problems of weak and full opacity are both undecidable for TAs with  
13 only one action (Section 5.2) or two clocks (Section 5.3).
- 14 3. These two problems are also undecidable for TAs with a single clock, un-  
15 less we forbid  $\varepsilon$ -transitions, in which case the problems become decidable  
16 (Section 5.3).
- 17 4. These two problems are decidable for unrestricted TAs over discrete time  
18 (Section 5.4), and for observable ERAs (Section 5.5).

19 These results overall build on existing results from the literature, with rather  
20 straightforward proofs. They still allow us to draw a clear border between decid-  
21 ability and undecidability. Moreover, we provide the exact complexity for most  
22 of the decidable results, which in some cases, complexify the proofs.

23 As a proof ingredient for Section 5.4, we also show that language inclusion  
24 is decidable for TAs over discrete time (a rather unsurprising—yet interesting—  
25 result, of which we could not find a proof in the literature).

26 *Reducing the attacker power* Then, in the third part (Section 6), we introduce a  
27 new approach in which we reduce the visibility of the attacker to a *finite* number  
28 of actions occurring at the beginning of the run, on an unrestricted TA. This  
29 models the case of an attacker with a limited attack budget, while considering  
30 the maximal class of TAs. This more elaborate result (with its quite technical  
31 proof) allows us to retrieve decidability.

### 32 1.3 Outline

33 Section 2 recalls necessary preliminaries. Section 3 defines the problems of inter-  
34 est. Section 4 proves inter-reducibility of weak and full opacity. Section 5  
35 addresses opacity for subclasses of TAs, while Section 6 reduces the power of the  
36 attacker to a finite set of observations. Section 7 concludes.

## 37 2 Preliminaries

38 We denote by  $\mathbb{N}, \mathbb{Z}, \mathbb{Q}_{\geq 0}, \mathbb{R}_{\geq 0}$  the sets of non-negative integers, integers, non-  
39 negative rationals and non-negative reals, respectively. If  $a$  and  $b$  are two integers  
40 with  $a \leq b$ , the set  $\{a, a + 1, \dots, b - 1, b\}$  is denoted by  $\llbracket a; b \rrbracket$ .

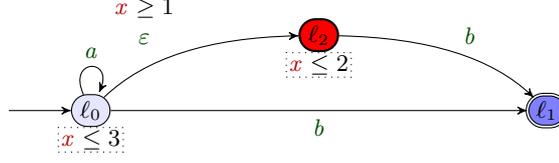


Fig. 1: A TA example

We let  $\mathbb{T}$  be the domain of the time, which will be either non-negative reals  $\mathbb{R}_{\geq 0}$  (continuous-time semantics) or naturals  $\mathbb{N}$  (discrete-time semantics). Unless otherwise specified, we assume  $\mathbb{T} = \mathbb{R}_{\geq 0}$ .

*Clocks* are real-valued variables that all evolve over time at the same rate. Throughout this paper, we assume a set  $\mathbb{X} = \{x_1, \dots, x_H\}$  of *clocks*. A *clock valuation* is a function  $\mu : \mathbb{X} \rightarrow \mathbb{T}$ , assigning a non-negative value to each clock. We write  $\mathbf{0}$  for the clock valuation assigning 0 to all clocks. Given a constant  $d \in \mathbb{T}$ ,  $\mu + d$  denotes the valuation s.t.  $(\mu + d)(x) = \mu(x) + d$ , for all  $x \in \mathbb{X}$ . If  $R$  is a subset of  $\mathbb{X}$  and  $\mu$  a clock valuation, we call *reset* of the clocks of  $R$  and denote by  $[\mu]_R$  the valuation s.t. for all clock  $x \in \mathbb{X}$ ,  $[\mu]_R(x) = 0$  if  $x \in R$  and  $[\mu]_R(x) = \mu(x)$  otherwise.

We assume  $\bowtie \in \{<, \leq, =, \geq, >\}$ . A constraint  $C$  is a conjunction of inequalities over  $\mathbb{X}$  of the form  $x \bowtie d$ , with  $d \in \mathbb{Z}$ . Given  $C$ , we write  $\mu \models C$  if the expression obtained by replacing each  $x$  with  $\mu(x)$  in  $C$  evaluates to true.

## 2.1 Timed automata

A TA is a finite automaton extended with a finite set of real-valued clocks. We also add to the standard definition of TAs a special private locations set, which is then used to define the subsequent opacity concepts.

**Definition 1 (TA [2]).** A TA  $\mathcal{A}$  is a tuple  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$ , where: 1)  $\Sigma$  is a finite set of actions, 2)  $L$  is a finite set of locations,  $\ell_0 \in L$  is the initial location, 3)  $L_{priv} \subseteq L$  is a set of private locations,  $L_f \subseteq L$  is a set of final locations, 4)  $\mathbb{X}$  is a finite set of clocks, 5)  $I$  is the invariant, assigning to every  $\ell \in L$  a constraint  $I(\ell)$  over  $\mathbb{X}$  (called invariant), 6)  $E$  is a finite set of edges  $e = (\ell, g, a, R, \ell')$  where  $\ell, \ell' \in L$  are the source and target locations,  $a \in \Sigma \cup \{\varepsilon\}$  (where  $\varepsilon$  denotes an unobservable action),  $R \subseteq \mathbb{X}$  is a set of clocks to be reset, and  $g$  is a constraint over  $\mathbb{X}$  (called guard).

*Example 1.* In Fig. 1, we give an example of a TA with three locations  $\ell_0$ ,  $\ell_1$  and  $\ell_2$ , three edges, two action  $\{a, b\}$ , and one clock  $x$ .  $\ell_0$  is the initial location,  $\ell_2$  is the (unique) private location, and  $\ell_1$  is the (unique) final location.  $\ell_0$  has an invariant " $x \leq 3$ " and the edge from  $\ell_0$  to  $\ell_2$  has a guard " $x \geq 1$ ".

**Definition 2 (Semantics of a TA).** Given a TA  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$ , the semantics of  $\mathcal{A}$  is given by the timed transition system  $\mathfrak{T}_{\mathcal{A}} = (\mathfrak{S}, \mathfrak{s}_0, \Sigma \cup \{\varepsilon\} \cup \mathbb{R}_{\geq 0}, \rightarrow)$ , with

- 1 1.  $\mathfrak{S} = \{(\ell, \mu) \in L \times \mathbb{R}_{\geq 0}^{\mathbb{X}} \mid \mu \models I(\ell)\}$ ,  $\mathfrak{s}_0 = (\ell_0, \mathbf{0})$ ,
- 2 2.  $\rightarrow \subseteq \mathfrak{S} \times E \times \mathfrak{S} \cup \mathfrak{S} \times \mathbb{R}_{\geq 0} \times \mathfrak{S}$  consists of the discrete and (continuous)
- 3 delay transition relations:
- 4 (a) discrete transitions:  $((\ell, \mu), e, (\ell', \mu')) \in \rightarrow$ , and we write  $(\ell, \mu) \xrightarrow{e} (\ell', \mu')$ ,
- 5 if  $(\ell, \mu), (\ell', \mu') \in \mathfrak{S}$ ,  $e = (\ell, g, a, R, \ell') \in E$ ,  $\mu' = [\mu]_R$ , and  $\mu \models g$ .
- 6 (b) delay transitions:  $((\ell, \mu), d, (\ell, \mu + d)) \in \rightarrow$ , and we write  $(\ell, \mu) \xrightarrow{d} (\ell, \mu +$
- 7  $d)$ , if  $d \in \mathbb{R}_{\geq 0}$  and  $\forall d' \in [0, d]$ ,  $(\ell, \mu + d') \in \mathfrak{S}$ .

8 Moreover we write  $(\ell, \mu) \xrightarrow{(d,e)} (\ell', \mu')$  for a combination of a delay and discrete  
9 transition if  $\exists \mu'' : (\ell, \mu) \xrightarrow{d} (\ell, \mu'') \xrightarrow{e} (\ell', \mu')$ .

10 Given a TA  $\mathcal{A}$  with semantic  $(\mathfrak{S}, \mathfrak{s}_0, \Sigma \cup \{\varepsilon\} \cup \mathbb{R}_{\geq 0}, \rightarrow)$ , we refer to the el-  
11 ements of  $\mathfrak{S}$  as the *configurations* of  $\mathcal{A}$ . A (finite) *run* of  $\mathcal{A}$  is an alternating  
12 sequence of configurations of  $\mathcal{A}$  and pairs of delays and edges starting from  
13 the initial configuration  $\mathfrak{s}_0$  and ending in a final configuration (i.e., whose loca-  
14 tion is final), of the form  $(\ell_0, \mu_0), (d_0, e_0), (\ell_1, \mu_1), \dots, (\ell_n, \mu_n)$  for some  $n \in \mathbb{N}$ ,  
15 with  $\ell_n \in L_f$  and for  $i = 0, 1, \dots, n-1$ ,  $\ell_i \notin L_f$ ,  $e_i \in E$ ,  $d_i \in \mathbb{R}_{\geq 0}$ , and  
16  $(\ell_i, \mu_i) \xrightarrow{(d_i, e_i)} (\ell_{i+1}, \mu_{i+1})$ . A *path* of  $\mathcal{A}$  is a prefix of a run ending with a config-  
17 uration.

## 18 2.2 Region automaton

19 We recall that the region automaton is obtained by quotienting the set of clock  
20 valuations out by an equivalence relation  $\simeq$  recalled below.

21 Given a TA  $\mathcal{A}$  and its set of clocks  $\mathbb{X}$ , we define  $M : \mathbb{X} \rightarrow \mathbb{N}$  the map that  
22 associates to a clock  $x$  the greatest value to which the interpretations of  $x$  are  
23 compared within the guards and invariants; if  $x$  appears in no constraint, we set  
24  $M(x) = 0$ .

25 Given  $\alpha \in \mathbb{R}$ , we write  $\lfloor \alpha \rfloor$  and  $\text{frac}(\alpha)$  respectively for the integral and  
26 fractional parts of  $\alpha$ .

27 **Definition 3 (Equivalence relation  $\simeq$  for valuations [2]).** Let  $\mu, \mu'$  be  
28 two clock valuations (with values in  $\mathbb{R}_{\geq 0}$ ). We say that  $\mu$  and  $\mu'$  are equivalent,  
29 denoted by  $\mu \simeq \mu'$  when, for each  $x \in \mathbb{X}$ , either  $\mu(x) > M(x)$  and  $\mu'(x) > M(x)$   
30 or the three following conditions hold:

- 31 1.  $\lfloor \mu(x) \rfloor = \lfloor \mu'(x) \rfloor$ ;
- 32 2.  $\text{frac}(\mu(x)) = 0$  if and only if  $\text{frac}(\mu'(x)) = 0$ ;
- 33 3. for each  $y \in \mathbb{X}$ ,  $\text{frac}(\mu(x)) \leq \text{frac}(\mu(y))$  if and only if  $\text{frac}(\mu'(x)) \leq$
- 34  $\text{frac}(\mu'(y))$ .

35 The equivalence relation is extended to the configurations of  $\mathcal{A}$ : let  $\mathfrak{s} =$   
36  $(\ell, \mu)$  and  $\mathfrak{s}' = (\ell', \mu')$  be two configurations in  $\mathcal{A}$ , then  $\mathfrak{s} \simeq \mathfrak{s}'$  if and only if  $\ell =$   
37  $\ell'$  and  $\mu \simeq \mu'$ .

38 The equivalence class of a valuation  $\mu$  is denoted  $[\mu]$  and is called a *clock*  
39 *region*, and the equivalence class of a configuration  $\mathfrak{s} = (\ell, \mu)$  is denoted  $[\mathfrak{s}]$

1 and called a *region* of  $\mathcal{A}$ . Clock regions are denoted by the enumeration of the  
 2 constraints defining the equivalence class. Thus, values of a clock  $x$  that go  
 3 beyond  $M(x)$  are merged and described in the regions by “ $x > M(x)$ ”.

4 The set of regions of  $\mathcal{A}$  is denoted by  $\mathcal{R}_{\mathcal{A}}$ . These regions are in finite number:  
 5 this allows us to construct a finite “untimed” regular automaton, the region  
 6 automaton  $\mathcal{RA}_{\mathcal{A}}$ . Locations of  $\mathcal{RA}_{\mathcal{A}}$  are regions of  $\mathcal{A}$ , and the transitions of  
 7  $\mathcal{RA}_{\mathcal{A}}$  convey the reachable valuations associated to each configuration in  $\mathcal{A}$ .

8 To formalize the construction, we need to transform discrete and time-  
 9 elapsing transitions of  $\mathcal{A}$  into transitions between the regions of  $\mathcal{A}$ . To do that, we  
 10 define a “time-successor” relation that corresponds to time-elapsing transitions.

11 **Definition 4 (Time-successor relation [8]).** *Let  $r = (\ell, [\mu]), r' = (\ell', [\mu']) \in$*   
 12  *$\mathcal{R}_{\mathcal{A}}$ . We say that  $r'$  is a time-successor of  $r$  when  $r \neq r', \ell = \ell'$  and for each*  
 13 *configuration  $(\ell, \mu)$  in  $r$ , there exists  $d \in \mathbb{R}_{\geq 0}$  such that  $(\ell, \mu + d)$  is in  $r'$  and for*  
 14 *all  $d' < d, (\ell, \mu + d') \in r \cup r'$ .*

15 A region  $r = (\ell, [\mu])$  is *unbounded* when, for all  $x$  in  $\mathbb{X}$  and all  $\mu' \in [\mu]$ ,  
 16  $\mu'(x) > M(x)$ .

17 **Definition 5 (Region automaton [2]).** *Given a TA  $\mathcal{A} =$*   
 18  *$(\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$ , the region automaton is the tuple  $\mathcal{RA}_{\mathcal{A}} =$*   
 19  *$(\Sigma_{\mathcal{R}}, \mathcal{R}, r_0, \mathcal{R}_f, E_{\mathcal{R}})$  where 1)  $\Sigma_{\mathcal{R}} = \Sigma \cup \{\varepsilon\}$ ; 2)  $\mathcal{R} = \mathcal{R}_{\mathcal{A}}$ ; 3)  $r_0 = [\mathfrak{s}_0]$ ;*  
 20 *4)  $\mathcal{R}_f$  is the set of regions which first component is a final location  $\ell_f \in L_f$ ;*  
 21 *5) i) (discrete transitions) For every  $r = (\ell, [\mu])$  with  $\ell \notin L_f, r' = (\ell', [\mu']) \in \mathcal{R}_{\mathcal{A}}$*   
 22 *and  $a \in \Sigma \cup \{\varepsilon\}$ :*

$$(r, a, r') \in E_{\mathcal{R}} \text{ if } \exists \mu'' \in [\mu], \exists \mu''' \in [\mu'], (\ell, \mu'') \xrightarrow{a} (\ell', \mu''')$$

23 *with  $e = (\ell, g, a, R, \ell') \in E$ . ii) (delay transitions) For every  $r = (\ell, [\mu])$  with*  
 24  *$\ell \notin L_f, r' \in \mathcal{R}_{\mathcal{A}}$ :*

$$(r, \varepsilon, r') \in E_{\mathcal{R}} \text{ if } r' \text{ is a time-successor of } r \text{ or if } r = r' \text{ is unbounded.}$$

25 As in TAs, a *run* of  $\mathcal{RA}_{\mathcal{A}}$  is an alternating sequence of regions of  $\mathcal{RA}_{\mathcal{A}}$   
 26 and actions starting from the initial region  $r_0$  and ending in a final region, of  
 27 the form  $r_0, a_0, r_1, a_1, \dots, r_{n-1}, a_{n-1}, r_n$  for some  $n \in \mathbb{N}$ , with  $r_n \in R_f$  and for  
 28  $i \in \llbracket 0; n-1 \rrbracket, r_i \notin R_f$ , and  $(r_i, a_i, r_{i+1}) \in E_{\mathcal{R}}$ . A *path* of  $\mathcal{RA}_{\mathcal{A}}$  is a prefix of  
 29 a run ending with a region and the trace of a path of  $\mathcal{RA}_{\mathcal{A}}$  is the sequence of  
 30 actions ( $\varepsilon$  excluded) contained in this path.

### 31 3 Opacity problems in timed automata

#### 32 3.1 Timed words, private and public runs

33 Given a TA  $\mathcal{A}$  and a run  $\rho = (\ell_0, \mu_0), (d_0, e_0), (\ell_1, \mu_1), \dots, (\ell_n, \mu_n)$  on  $\mathcal{A}$ , we say  
 34 that  $L_{priv}$  is *visited in*  $\rho$  if there exists  $m \in \mathbb{N}$  such that  $\ell_m \in L_{priv}$ . We denote  
 35 by  $Visit^{priv}(\mathcal{A})$  the set of runs visiting  $L_{priv}$ , and refer to them as *private runs*.

1 Conversely, we say that  $L_{priv}$  is *avoided in*  $\rho$  if the run  $\rho$  does not visit  $L_{priv}$ .  
 2 We denote the set of the runs avoiding  $L_{priv}$  by  $Visit^{\overline{priv}}(\mathcal{A})$ , referring to them  
 3 as *public* runs.

4 A timed word is a sequence of pairs made of an action and a non-decreasing  
 5 timestamp in  $\mathbb{R}_{\geq 0}$ . We denote by  $TW^*(\Sigma)$  the set of all finite timed words  
 6 on the alphabet  $\Sigma$ . A run  $\rho$  on a TA  $\mathcal{A}$  defines a timed word: if  $\rho$  is of  
 7 the form  $(\ell_0, \mu_0), (d_0, e_0), (\ell_1, \mu_1), \dots, (\ell_n, \mu_n)$  where for each  $i \in \llbracket 0; n-1 \rrbracket$ ,  
 8  $e_i = (\ell_i, g_i, a_i, R_i, \ell_{i+1})$  and  $a_i \in \Sigma \cup \{\varepsilon\}$ , then it generates the timed  
 9 word  $(a_{j_0}, \sum_{i=0}^{j_0} d_i)(a_{j_1}, \sum_{i=0}^{j_1} d_i) \dots (a_{j_m}, \sum_{i=0}^{j_m} d_i)$ , where  $j_0 < j_1 < \dots < j_m$  and  
 10  $\{j_k \mid k \in \llbracket 0; m \rrbracket\} = \{i \in \llbracket 0; n-1 \rrbracket \mid a_i \neq \varepsilon\}$ . We denote by  $Tr(\rho)$  and call *trace*  
 11 of  $\rho$  the timed word generated by the run  $\rho$  and, by extension, given a set of  
 12 runs  $\Omega$ , we denote by  $Tr(\Omega)$  the set of the traces of runs in  $\Omega$ .

13 The set of timed words recognized by a TA  $\mathcal{A}$  is the set of traces generated  
 14 by its runs,  $Tr(Visit^{priv}(\mathcal{A}) \cup Visit^{\overline{priv}}(\mathcal{A}))$  (thus a subset of  $(\Sigma \times \mathbb{R}_{\geq 0})^*$ ). To  
 15 shorten these notations, we use  $Tr(\mathcal{A})$  for the set of timed words recognized  
 16 by  $\mathcal{A}$ , also called *language* of  $\mathcal{A}$ . Similarly, we use  $Tr^{priv}(\mathcal{A}) = Tr(Visit^{priv}(\mathcal{A}))$   
 17 to denote the set of traces of private runs, and  $Tr^{\overline{priv}}(\mathcal{A}) = Tr(Visit^{\overline{priv}}(\mathcal{A}))$  for  
 18 the set of traces of public runs.

19 In Cassez's original definition [16], actions were partitioned into two sets,  
 20 depending on whether an attacker could observe them or not. For simplicity,  
 21 here we replaced every unobservable transition in  $\mathcal{A}$  by  $\varepsilon$ -transitions. Projecting  
 22 the sequence of actions in a run onto the observable actions, as done by Cassez,  
 23 is equivalent to replacing these actions by  $\varepsilon$  and taking the trace of the run.  
 24 Therefore, with respect to opacity, our model is equivalent to [16].

### 25 3.2 Defining timed opacity

26 In this section, a definition of timed opacity based on the one from [16] is intro-  
 27 duced, with three variants inspired by [7]: existential, full and weak opacity. If  
 28 the attacker observes a set of runs of the system (i.e., observes their associated  
 29 traces), we do not want them to deduce whether  $L_{priv}$  was visited or not during  
 30 these observed runs. Opacity holds when the traces can be produced by both  
 31 private and public runs.

32 We are thus first interested in the existence of an opaque trace produced  
 33 by the TA, that is, a trace that cannot allow the attacker to decide whether it  
 34 was generated by a private or a public run.  $\exists$ -opacity, which can be seen as the  
 35 weakest form of opacity, is useful to check if there is at least one opaque trace;  
 36 if not, the system cannot be made opaque by restraining the behaviors.

37 **Definition 6 ( $\exists$ -opacity).** A TA  $\mathcal{A}$  is  $\exists$ -opaque if  $Tr^{priv}(\mathcal{A}) \cap Tr^{\overline{priv}}(\mathcal{A}) \neq \emptyset$ .

**$\exists$ -opacity decision problem:**

38 INPUT: A TA  $\mathcal{A}$

PROBLEM: Is  $\mathcal{A}$   $\exists$ -opaque?

1 Ideally and for a stronger security of the system, one can ask the system to be  
 2 opaque *for all* possible traces of the system: a TA  $\mathcal{A}$  is fully opaque whenever for  
 3 any trace in  $Tr(\mathcal{A})$ , it is not possible to deduce whether the run that generated  
 4 this trace visited  $L_{priv}$  or not. Sometimes, a weaker notion is sufficient to ensure  
 5 the required security in the system, i.e., when the compromising information  
 6 solely comes from the identification of the private runs.

7 **Definition 7 (Full and weak opacity).** A TA  $\mathcal{A}$  is fully opaque if  
 8  $Tr^{priv}(\mathcal{A}) = Tr^{\overline{priv}}(\mathcal{A})$ . A TA  $\mathcal{A}$  is weakly opaque if  $Tr^{priv}(\mathcal{A}) \subseteq Tr^{\overline{priv}}(\mathcal{A})$ .

**Full (resp. weak) opacity decision problem:**

9 INPUT: A TA  $\mathcal{A}$

PROBLEM: Is  $\mathcal{A}$  fully (resp. weakly) opaque?

*Example 2.* The TA  $\mathcal{A}$  depicted in Fig. 1 is  $\exists$ -opaque and weakly opaque but  
 not fully opaque. Indeed,

$$Tr^{priv}(\mathcal{A}) = \{(a, \tau_1) \dots (a, \tau_n)(b, \tau_{n+1}) \mid n \in \mathbb{N} \wedge \forall i \in \llbracket 1, n \rrbracket, \tau_i \leq \tau_{i+1} \leq 2 \wedge \tau_{n+1} \geq 1\}$$

$$Tr^{\overline{priv}}(\mathcal{A}) = \{(a, \tau_1) \dots (a, \tau_n)(b, \tau_{n+1}) \mid n \in \mathbb{N} \wedge \forall i \in \llbracket 1, n \rrbracket, \tau_i \leq \tau_{i+1} \leq 3\}$$

10 This TA verifies  $Tr^{priv}(\mathcal{A}) \subseteq Tr^{\overline{priv}}(\mathcal{A})$  and  $Tr^{priv}(\mathcal{A}) \cap Tr^{\overline{priv}}(\mathcal{A}) \neq \emptyset$  since  
 11  $(b, 1.5) \in Tr^{priv}(\mathcal{A})$ .

## 12 4 Inter-reducibility of weak and full opacity

13 In this section, we prove a new result relating weak and full opacity (Section 4.2).  
 14 To this end, we first introduce in Section 4.1 a construction—that will also be  
 15 useful to prove our subsequent results in Sections 5 and 6.

### 16 4.1 $\mathcal{A}_{priv}$ and $\mathcal{A}_{pub}$

17 First, we need a construction of two TAs  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$  that recognize timed  
 18 words produced respectively by private and public runs of a given TA  $\mathcal{A}$ .

19 The public runs TA  $\mathcal{A}_{pub}$  is the easiest to build: it suffices to remove the  
 20 private locations from  $\mathcal{A}$  to eliminate every private run in the system. (See  
 21 formal definition in Definition 11 in Appendix A.)

22 The private runs TA  $\mathcal{A}_{priv}$  is obtained by duplicating all locations and transi-  
 23 tions of  $\mathcal{A}$ : one copy  $\mathcal{A}_S$  corresponds to the paths that already visited the private  
 24 locations set, and the other copy  $\mathcal{A}_{\bar{S}}$  corresponds to the paths that did not (this  
 25 is a usual way to encode a Boolean, here “ $L_{priv}$  was visited”, in the locations  
 26 of a TA). For each private location  $\ell_{priv}$  in  $\mathcal{A}$  we copy all transitions leading  
 27 to the copy of  $\ell_{priv}$  in  $\mathcal{A}_{\bar{S}}$  and redirect them to the copy of  $\ell_{priv}$  in  $\mathcal{A}_S$ . The  
 28 initial location is the one from  $\mathcal{A}_{\bar{S}}$  and the final locations are the ones from  $\mathcal{A}_S$ .  
 29 Hence all runs need to go from  $\mathcal{A}_{\bar{S}}$  to  $\mathcal{A}_S$  before reaching a final location, which  
 30 requires visiting a private location.

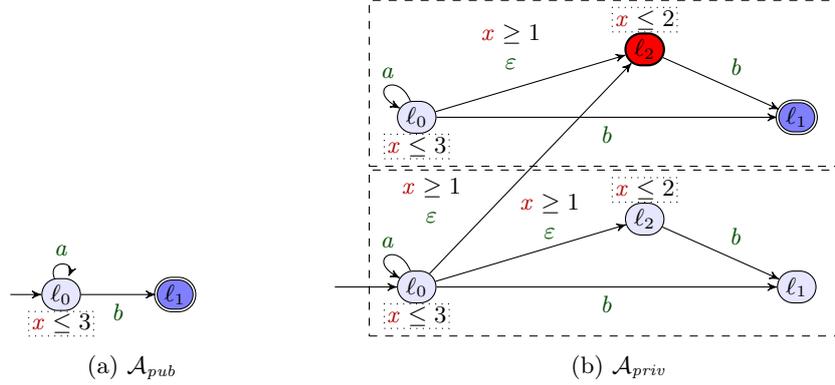


Fig. 2:  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$  with the example from Fig. 1

**Definition 8 (Private runs TA  $\mathcal{A}_{priv}$ ).**

Let  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  be a TA. The private runs TA  $\mathcal{A}_{priv} = (\Sigma, L_S \uplus L_{\bar{S}}, \ell_0^S, L_{priv}^S, L_f^S, \mathbb{X}, I', E')$  is defined as follows:

1.  $L_S = \{\ell^S \mid \ell \in L\}$  and  $L_{\bar{S}} = \{\ell^{\bar{S}} \mid \ell \in L\}$ .
2.  $L_f^S = \{\ell_f^S \mid \ell_f \in L_f\}$  is the set of final locations, and  $L_{priv}^S = \{\ell_{priv}^S \mid \ell_{priv} \in L_{priv}\}$  is the set of private locations;
3.  $I'$  is defined such as  $I'(\ell^S) = I'(\ell^{\bar{S}}) = I(\ell)$
4.  $E' = E_S \uplus E_{\bar{S}} \uplus E_{\bar{S} \rightarrow S}$  where  $E_S$  and  $E_{\bar{S}}$  are the two disjoint copies of  $E$  respectively associated to the sets of locations  $L_S$  and  $L_{\bar{S}}$ , and  $E_{\bar{S} \rightarrow S}$  is a copy of the set of all transitions that go toward  $L_{priv}^S$  where the target location  $\ell_{priv}^{\bar{S}}$  has been changed into  $\ell_{priv}^S$ . More formally:

$$\begin{aligned}
 E_S &= \{(\ell^S, g, a, R, \ell'^S) \mid (\ell, g, a, R, \ell') \in E\} \\
 E_{\bar{S}} &= \{(\ell^{\bar{S}}, g, a, R, \ell'^{\bar{S}}) \mid (\ell, g, a, R, \ell') \in E\} \\
 E_{\bar{S} \rightarrow S} &= \{(\ell^{\bar{S}}, g, a, R, \ell_{priv}^S) \mid (\ell, g, a, R, \ell_{priv}) \in E\}.
 \end{aligned}$$

*Example 3.* We illustrate these constructions in Fig. 2 with  $\mathcal{A}$  from Fig. 1.

The languages of  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$  are respectively  $Tr^{priv}(\mathcal{A})$  and  $Tr^{\overline{priv}}(\mathcal{A})$ .

*Remark 1.* By a minor modification on  $\mathcal{A}_{priv}$ , one can build a TA  $\mathcal{A}_{memo}$  that recognizes exactly the same language as  $\mathcal{A}$  and that stores in each location whether the private locations set has been visited. To do so, we add the set  $\{\ell_f^S \mid \ell_f \in L_f\}$  to the set of final locations in  $\mathcal{A}_{priv}$  and we remove each  $\ell_{priv}^{\bar{S}} \in L_{priv}^{\bar{S}}$  from  $L_{\bar{S}}$  in the same way as we did in  $\mathcal{A}_{pub}$ : the private locations of  $\mathcal{A}_{memo}$  are exactly those of  $\mathcal{A}_{priv}$ . Notably,  $\mathcal{A}$  is weakly (resp. fully) opaque if and only if  $\mathcal{A}_{memo}$  is weakly (resp. fully) opaque.

## 4.2 Inter-reducibility of weak and full opacity

While the distinction between weak and full notions of opacity can lead to meaningful changes [7], within our framework both associated problems are inter-reducible.

**Theorem 1.** *The weak opacity decision problem and the full opacity decision problem are inter-reducible.*

*Proof.* Let us first show that the full opacity decision problem reduces to the weak opacity decision problem. Let  $\mathcal{A}$  be a TA. In order to test whether  $\mathcal{A}$  is fully opaque, we can test both inclusions:  $Tr^{priv}(\mathcal{A}) \subseteq Tr^{\overline{priv}}(\mathcal{A})$  and  $Tr^{priv}(\mathcal{A}) \supseteq Tr^{\overline{priv}}(\mathcal{A})$ . The first inclusion can be decided directly by testing whether  $\mathcal{A}$  is weakly opaque. In order to test the second inclusion, we need to build a TA  $\mathcal{A}_{memo}$  where private and public runs are inverted. To do so, we first build  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$  and then define  $\mathcal{A}'$  as the TA constituted of  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$  as well as two new locations  $\ell'_0$  and  $\ell'_{priv}$ . The location  $\ell'_0$  is the initial location of  $\mathcal{A}'$  and  $\ell'_{priv}$  is the only private location. For  $x \in \mathbb{X}$ , both  $\ell'_0$  and  $\ell'_{priv}$  have the invariant  $x = 0$ , ensuring no time may elapse in those locations. From  $\ell'_0$ , with a transition labeled by  $\varepsilon$ , one may reach either the initial location of  $\mathcal{A}_{priv}$  ( $\ell_0^S$ ) or  $\ell'_{priv}$ , from which an  $\varepsilon$ -transition leads to the initial location of  $\mathcal{A}_{pub}$  ( $\ell_0$ ). The final locations of  $\mathcal{A}'$  are the final locations of  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$ . The public runs of  $\mathcal{A}'$  are the ones starting in  $\ell'_0$ , going immediately to  $\ell_0^S$ , and then following a run of  $\mathcal{A}_{priv}$  until a final location of  $\mathcal{A}_{priv}$  is reached. As the initial transition is labeled by  $\varepsilon$ , we have  $Tr^{\overline{priv}}(\mathcal{A}') = Tr^{priv}(\mathcal{A})$ . Similarly, the private runs of  $\mathcal{A}'$  are the ones starting in  $\ell'_0$ , going immediately to  $\ell'_{priv}$  followed immediately by going to  $\ell_0^S$ , and then follows a run of  $\mathcal{A}_{pub}$  until a final location of  $\mathcal{A}_{pub}$  is reached. As the two initial transitions are labeled by  $\varepsilon$ , we have  $Tr^{priv}(\mathcal{A}') = Tr^{\overline{priv}}(\mathcal{A})$ . Hence,  $\mathcal{A}$  is fully opaque if and only if  $\mathcal{A}$  and  $\mathcal{A}'$  are weakly opaque.

Let us now show the converse reduction. Let  $\mathcal{A}$  be a TA. We will define a TA  $\mathcal{A}'$  such that  $\mathcal{A}'$  is fully opaque if and only if  $\mathcal{A}$  is weakly opaque. To do so, we want that  $Tr^{\overline{priv}}(\mathcal{A}') = Tr^{\overline{priv}}(\mathcal{A})$  and  $Tr^{priv}(\mathcal{A}') = Tr^{\overline{priv}}(\mathcal{A}) \cup Tr^{priv}(\mathcal{A})$ . Indeed, if these equalities hold,  $Tr^{priv}(\mathcal{A}') = Tr^{\overline{priv}}(\mathcal{A}')$  would be equivalent to  $Tr^{\overline{priv}}(\mathcal{A}) = Tr^{\overline{priv}}(\mathcal{A}) \cup Tr^{priv}(\mathcal{A})$  which holds if and only if  $Tr^{priv}(\mathcal{A}) \subseteq Tr^{\overline{priv}}(\mathcal{A})$ . As for the first reduction,  $\mathcal{A}'$  contains a copy of  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$  as well as two new locations  $\ell'_0$  and  $\ell'_{priv}$ . The location  $\ell'_0$  is the initial location of  $\mathcal{A}'$  and  $\ell'_{priv}$  is the only private location. For  $x \in \mathbb{X}$ , both  $\ell'_0$  and  $\ell'_{priv}$  have the invariant  $x = 0$ , ensuring no time may elapse in those locations. From  $\ell'_0$ , with a transition labeled by  $\varepsilon$ , one may reach either the initial location of  $\mathcal{A}_{pub}$  ( $\ell_0^S$ ) or  $\ell'_{priv}$ , from which an  $\varepsilon$ -transition leads either to  $\ell_0^S$  or to the initial location of  $\mathcal{A}_{pub}$  ( $\ell_0$ ). The final locations of  $\mathcal{A}'$  are the final locations of  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$ . The public runs of  $\mathcal{A}'$  are the ones starting in  $\ell'_0$ , going immediately to  $\ell_0$ , and then following a run of  $\mathcal{A}_{pub}$  until a final location of  $\mathcal{A}_{pub}$  is reached. As the initial transition is labeled by  $\varepsilon$ , we have  $Tr^{\overline{priv}}(\mathcal{A}') = Tr^{\overline{priv}}(\mathcal{A})$ . Similarly, the private runs of  $\mathcal{A}'$  are the ones starting in  $\ell'_0$ , going immediately to  $\ell'_{priv}$  followed

immediately by going to  $\ell_0^S$  followed by a run of  $\mathcal{A}_{priv}$ , or to  $\ell_0$ , followed by a run of  $\mathcal{A}_{pub}$  until a final location of  $\mathcal{A}_{pub}$  is reached. As the two initial transitions are labeled by  $\varepsilon$ , we have  $Tr^{priv}(\mathcal{A}') = Tr^{priv}(\mathcal{A}) \cup Tr^{\overline{priv}}(\mathcal{A})$ . Hence,  $\mathcal{A}$  is weakly opaque if and only if  $\mathcal{A}'$  is fully opaque.  $\square$

## 5 Opacity problems for subclasses of timed automata

In this section, we consider the decidability status and complexities of the three opacity problems presented in Section 3 for several subclasses of TAs: TAs with one clock, TAs with one action, TAs under discrete time and observable ERAs. We first show the decidability of the  $\exists$ -opacity problem in the general case. Then, we focus on each class of TAs listed above to study weak and full opacity.

### 5.1 $\exists$ -opacity problem

We show here (see Appendix B) that in general the  $\exists$ -opacity problem is PSPACE-complete relying on the reachability problem in TAs, which is known to be PSPACE-complete [2] as well, even for TA with two clocks [18]. This theorem considers multiple subclasses of TAs as well that we will describe more in depth in future sections.

**Theorem 2.** *Given a TA  $\mathcal{A}$ , deciding the  $\exists$ -opacity problem for  $\mathcal{A}$  is PSPACE-complete, even when restricting  $\mathcal{A}$  to be a one-action TA, discrete-time TA, an oERA, or a single clock TA where integers appearing in guards are given in binary.*

*If the number of clocks in  $\mathcal{A}$  is fixed and integers appearing in guards are given in unary, the  $\exists$ -opacity problem is in NLOGSPACE.*

### 5.2 Timed automata with a single action

Recall that the universality problem consists in deciding whether a TA  $\mathcal{A}$  accepts the set of all timed words. In [23], it is shown that the class of one-action TAs is one of the simplest cases for which the universality problem is undecidable among TAs. Therefore, this gives the intuition (see Appendix C for proof) that the weak and full opacity problems are undecidable as well for one-action TAs ( $|\Sigma| = 1$ ).

**Theorem 3.** *The full and weak opacity problems for TAs with one action are undecidable.*

*Remark 2.* The problems of execution-time opacity introduced in [7] are a particular *decidable* subcase of these undecidable opacity problems with one-action TAs. Indeed, the execution time is equivalent to a *unique* timestamp associated to the last action of the system.

### 5.3 Timed automata with a single clock

Following the same reasoning as in Section 5.2 (based on a different existing result on TAs), we show that full opacity is undecidable for one-clock TAs.

**Theorem 4.** *The full and weak opacity problems for one-clock TAs are undecidable.*

*Proof.* By reusing the same proof argument as in Theorem 3, using the fact that universality for one-clock TAs (with  $\varepsilon$ -transitions) is undecidable [1].

**Without  $\varepsilon$ -transitions** We now prove that the weak and full opacity problems become both decidable in the context of one-clock TAs ( $|\mathbb{X}| = 1$ ) *without*  $\varepsilon$ -transitions, relying on the fact that the language inclusion problem for one-clock TAs without  $\varepsilon$ -transitions is decidable [23].

By definition, a TA is weakly opaque if  $Tr^{priv}(\mathcal{A})$  is included in  $Tr^{\overline{priv}}(\mathcal{A})$ . As  $Tr^{priv}(\mathcal{A})$  and  $Tr^{\overline{priv}}(\mathcal{A})$  are respectively recognized by  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$ , the decidability of the weak opacity problem is directly obtained from the decidability of the inclusion of two languages. Full opacity follows immediately, from the bidirectional language inclusion.

**Theorem 5.** *Full and weak opacity are decidable for one-clock TAs without  $\varepsilon$ -transitions.*

Note however that, while decidable, this problem cannot be effectively solved currently as the algorithm given by [23] is non-primitive recursive.

In addition, due to the undecidability of language universality for TAs with at least two clocks [23, Theorem 21], we can prove the following with the same construction as in Theorem 3:

**Theorem 6.** *Full and weak opacity are undecidable for TAs with  $\geq 2$  clocks.*

### 5.4 Timed automata over discrete time

In the general case, clocks are real-valued variables, with valuations thus ranging over  $\mathbb{T} = \mathbb{R}_{\geq 0}$ . TAs over discrete time however restrict the clock's behavior to valuations over  $\mathbb{T} = \mathbb{N}$ . Since the arguments used in [2] to prove the undecidability of the universality problem in TAs rely on the continuous time, this proof cannot be used to establish undecidability of opacity over discrete time. In fact, relying on the region automaton (defined in Section 2.2) in discrete time and classical results on finite regular automata, we show *decidability* of the opacity problems.

If  $\mu, \mu'$  are two discrete clock valuations (i.e., with values in  $\mathbb{N}$ ), the definition of  $\simeq$  from Section 2.2 can be simplified into:  $\mu \simeq \mu'$  if and only if for each  $x \in \mathbb{X}$ , either  $\mu(x) = \mu'(x)$  or  $\mu(x) > M(x)$  and  $\mu'(x) > M(x)$ .

Over continuous time, for each run of the TA, there is a unique corresponding run of the region automaton. Over discrete time, thanks to the simplified form

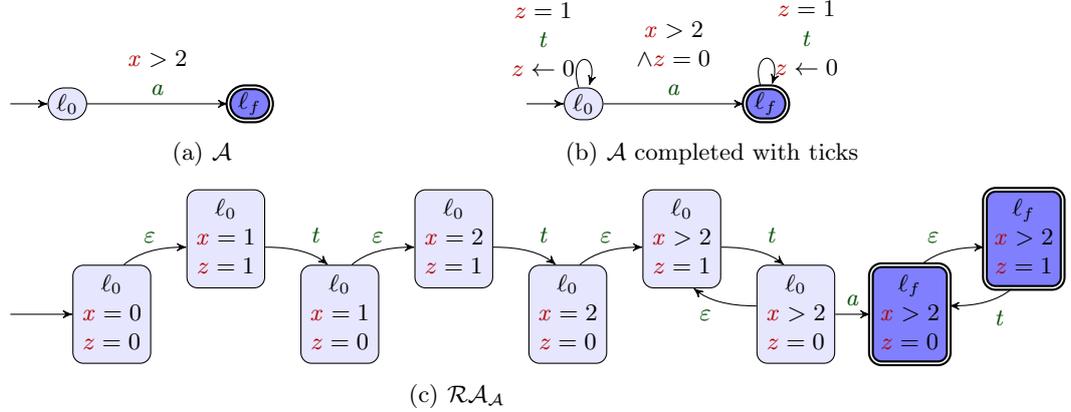


Fig. 3: A discrete-time region automaton example

of the definition of  $\simeq$ , the converse statement that a run of the region automaton corresponds to a unique run of the TA nearly holds. Loss of information however remains when every clock goes beyond their maximum constant, as time elapsing is not measured beyond this point. In order to measure it, we add a letter  $t$  for ticks which occurs each time that an (integral) time unit passes in the region automaton. This change can be operated directly on the TA  $\mathcal{A}$  so that the correspondence between paths of  $\mathcal{A}$  and  $\mathcal{RA}_{\mathcal{A}}$  becomes immediate.

More precisely, we add a clock  $z$  and add self-loop transitions  $e_t = (\ell, (z = 1), t, \{z\}, \ell)$  on each location  $\ell \in L$  of  $\mathcal{A}$ . We also add the guard “ $z = 0$ ” to each discrete transition of  $\mathcal{A}$ .

We illustrate the resulting TA on a simple example in Fig. 3. We depict a discrete-time TA  $\mathcal{A}$ , its transformation by the procedure we just described and finally its region automaton  $\mathcal{RA}_{\mathcal{A}}$  (over discrete time).

With this construction, time information become superfluous in the TA as it can be deduced from the number of ticks that were produced, which also appears within a path of the region automaton. For instance, consider the run on the  $\mathcal{A}$  of Fig. 3a that remains four time units in  $\ell_0$  before going to  $\ell_f$ . The timed word  $(a, 4)$  on the original TA  $\mathcal{A}$  becomes  $(t, 1)(t, 2)(t, 3)(t, 4)(a, 4)$  in our transformed TA. The untimed word obtained in  $\mathcal{RA}_{\mathcal{A}}$  is  $tttta$ , which means that four ticks occurred before the action  $a$  was produced. From this information, the original timed word  $(a, 4)$  can be reconstructed. In the rest of this subsection, we only consider TAs enhanced with ticks. From the previous discussion, we have (see Appendix D):

**Lemma 1.** *The language of a discrete-time TA and the language of its region automaton are in bijection.*

Thus, we show that the language inclusion problem for discrete-time TAs can be reduced to its decidable equivalent for finite regular automata. This

1 result was indirectly proven recently in [20], our contribution hence lies mainly  
2 in establishing exact complexity.

3 **Proposition 1.** *Language inclusion in discrete-time TAs is EXPSPACE-*  
4 *complete.*

5 We can then adapt this result to the weak and full opacity problems in a  
6 similar way as done in Section 5.3.

7 **Theorem 7.** *Weak and full opacity of discrete-time TAs are EXPSPACE-*  
8 *complete.*

## 9 5.5 Observable Event-Recording Automata

10 In [16], the opacity problems were shown to be undecidable for Event-Recording  
11 Automata (ERAs) [3], a subclass of TAs where every clock  $x$  is associated to a  
12 specific event  $a_x$  and  $x$  is reset on a transition iff this transition is labeled by  $a_x$ .  
13 Due to this, the valuations of clocks are entirely determined by the duration  
14 since the last occurrence of the associated events. One of the main interest of  
15 ERAs is that they are determinizable [3]. This determinization is carried out  
16 through the standard subset construction.

17 The undecidability result from [16] on ERAs required to make the events  $a_x$   
18 unobservable. Hence, in our framework they would be replaced by  $\varepsilon$ -transitions.  
19 We define observable ERAs (oERAs) as ERAs where the actions resetting the  
20 clocks must be observable. This means that the information required for the  
21 determinization now belongs to the trace that is observed.

22 Given an oERA  $\mathcal{A}$ , we can thus build through the subset construction a TA  
23  $Det_{\mathcal{A}}$  such that any path  $\rho$  in  $\mathcal{A}$  corresponds to a path  $\rho_D$  in  $Det_{\mathcal{A}}$  with the  
24 same trace and ending in a location labeled by the set of all the locations of  $\mathcal{A}$   
25 that can be reached with a run that has the same trace as  $\rho$ . This information,  
26 combined with the construction of  $\mathcal{A}_{memo}$  (Remark 1) which stores in the state  
27 of the TA whether the private location was visited or not, provides the following  
28 result (see Appendix E).

29 **Theorem 8.** *Weak and full opacity are PSPACE-complete for oERAs.*

## 30 6 Opacity with limited attacker budget

31 One of the causes for the undecidability of the opacity problems in [16] stems  
32 from the unbounded memory the attacker might require to remember a run of  
33 the TA. As a consequence, one can wonder whether the opacity problems remain  
34 undecidable when the attacker performs only a *finite* number of observations.  
35 This models the case of an attacker with a limited attack budget. In this section,  
36 we prove that the weak and full opacity problems become decidable whenever,  
37 given  $N \in \mathbb{N}$ , the attacker only observes the first  $N$  actions (with their times-  
38 tamps). To the best of our knowledge, this is *i*) the second result of the literature

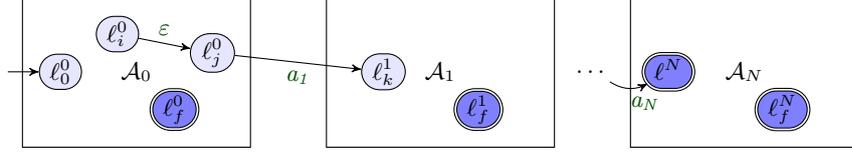


Fig. 4: The construction on an  $N$ -observation unfolded TA

1 (after [9]) providing a decidable opacity result for the full class of TAs over dense  
 2 time, and *ii*) the first result limiting the number of observations of an attacker  
 3 in the context of opacity for TAs.

4 For instance, if  $(a, 1.2)(b, 1.4)(b, 1.5)(a, 2.1)$  is the trace of a public run of the  
 5 system, and  $N = 2$ , then the attacker only observes the trace  $(a, 1.2)(b, 1.4)$ .  
 6 If  $(a, 1.2)(b, 1.4)(c, 1.6)$  is the trace of a private run, the trace observed by the  
 7 attacker is  $(a, 1.2)(b, 1.4)$  again and the attacker cannot conclude a private run  
 8 occurred or not.

9 Formally, and in order to define new variants of opacity representing this  
 10 framework, given a TA  $\mathcal{A}$ , we define a new TA (depicted in Fig. 4) which emulates  
 11 the behavior of  $\mathcal{A}$  up to the  $N$ th observation. This TA is an unfolding of  $\mathcal{A}$  with  
 12  $N + 1$  copies of  $\mathcal{A}$ , where  $\varepsilon$ -transitions are taken within each copy, and transitions  
 13 with an observable action lead to the next copy. A run ends when either a final  
 14 location or the final copy is reached.

15 **Definition 9 ( $N$ -observation unfolding of a TA).**

16 Let  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  be a TA and let  $N \in \mathbb{N}$ . We call  $N$ -  
 17 unfolding of  $\mathcal{A}$  the TA  $Unfold_N(\mathcal{A}) = (\Sigma, L', \ell_0^0, L'_{priv}, L'_f, \mathbb{X}, I', E')$  where

- 18 1.  $L' = \bigcup_{i=0}^N L^i$  where the sets  $L^i$  are  $N + 1$  disjoint copies of  $L$  where each  
 19 location  $\ell \in L$  has been renamed  $\ell^i \in L^i$ : for  $0 \leq i \leq N$ ,  $L^i = \{\ell^i \mid \ell \in L\}$ ;  
 20 2.  $\ell_0^0 \in L^0$  is the initial location;  
 21 3.  $L'_{priv} = \bigcup_{i=0}^{N-1} L^i_{priv}$  where  $L^i_{priv}$  are the copies within  $L^i$  of the private locations  
 22 of  $\mathcal{A}$ ;  
 23 4.  $L'_f = (\bigcup_{i=0}^N L^i_f) \cup L^N$  where  $L^i_{priv}$  are the copies within  $L^i$  of the final locations  
 24 of  $\mathcal{A}$ ;  
 25 5.  $I'(\ell^i) = I(\ell)$  for  $\ell \in L$  and  $i \leq N$  extends  $I$  to each  $L^i$ ;  
 26 6.  $E' = \bigcup_{i=0}^{N-1} E^i \cup E^{i \rightarrow i+1}$  is the set of transitions where, given  $0 \leq i < N$   
 27 -  $E^i = \{(\ell^i, \varepsilon, g, R, \ell^i) \mid (\ell, \varepsilon, g, R, \ell) \in E\}$ ;  
 28 -  $E^{i \rightarrow i+1} = \{(\ell^i, a, g, R, \ell^{i+1}) \mid (\ell, a, g, R, \ell) \in E \wedge a \in \Sigma\}$ .

29 **Definition 10 (Opacity w.r.t.  $N$  observations).** Let  $\mathcal{A}$  be a TA and let  
 30  $N \in \mathbb{N}$ . We say that  $\mathcal{A}$  is weakly (resp. fully) opaque w.r.t.  $N$  observations when  
 31  $Unfold_N(\mathcal{A})$  is weakly (resp. fully) opaque.

1 We now state our main result. The proof is quite technical, so we only give  
 2 a high-level sketch. The full proof can be found in [Appendix F](#).

3 **Theorem 9.** *The problem of deciding, given a TA  $\mathcal{A}$  and  $N \in \mathbb{N}$ , whether  $\mathcal{A}$  is*  
 4  *$\exists$ -opaque is PSPACE-complete.*

5 *The problems of weak or full opacity w.r.t.  $N$  observations are in 2-*  
 6 *EXPSPACE.*

7 *Proof (sketch).*  $\exists$ -opacity can be checked in PSPACE through the same approach  
 8 as [Theorem 2](#). Indeed, even if  $N$  is given in binary, and thus  $Unfold_N(\mathcal{A})$  is of  
 9 exponential size, the region automaton of  $Unfold_N(\mathcal{A})$  remains simply exponential  
 10 in the size of  $\mathcal{A}$ . Hardness can be achieved with  $N = 0$  with the same method  
 11 as [Theorem 2](#).

12 Concerning the problems of weak and full opacity w.r.t.  $N$  observations, as in  
 13 [Section 5.4](#), our goal is to rely on the region automaton to translate the opacity  
 14 problems from the TA to another problem on a finite automaton. However, there  
 15 is no immediate correspondence between runs of the TA and runs of the region  
 16 automaton, leading to a more involved proof.

17 More precisely, given a  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  and  $N \in \mathbb{N}$ . We  
 18 build the unfolding of the TA  $\mathcal{A}_{memo}$  described in [Remark 1](#). Recall that  $\mathcal{A}_{memo}$   
 19 recognizes the same language as  $\mathcal{A}$  but stores within the locations the information  
 20 whether  $L_{priv}$  was visited. As such,  $\mathcal{A}_{memo}$  has the same opacity properties as  $\mathcal{A}$ ,  
 21 so we can consider  $Unfold_N(\mathcal{A}_{memo})$  instead of  $Unfold_N(\mathcal{A})$  to study the opacity  
 22 of  $\mathcal{A}$ .

23 Additionally, we enrich this TA with ticks. In [Section 5.4](#), we added a single  
 24 tick to the automaton which counted the time elapsed since the start of the run.  
 25 Here, the TA includes as well, for each  $0 < k \leq N$ , a tick clock counting the  
 26 time elapsed since the  $k$ 'th observation. As multiple ticks may need to occur at  
 27 the same time, we develop the alphabet of ticks to describe the set of tick clocks  
 28 that need to be reset, i.e., the tick  $t_{\{k_1, \dots, k_m\}}$  is produced by the TA if for every  
 29  $0 \leq i \leq m$ , the  $k_i$ 'th observation (or the start of the run if  $k_i = 0$ ) occurred an  
 30 integer number of time units beforehand.

31 Note that the addition of these ticks immediately uses the assumption that  
 32 only  $N$  actions are observed.

33 In the new ticked automaton, we will establish a correspondence between  
 34 runs of the TA, and paths of the region automaton, allowing us to reduce the  
 35 opacity problems to non-reachability of bad states in the determinization of the  
 36 region automaton, implying decidability.

37 Considering the complexity, the unfolding of the TA, assuming  $N$  is in bi-  
 38 nary, is exponential in the number of states. Adding the ticks means adding  
 39 an exponential number of clocks as well. Hence the region automaton is doubly  
 40 exponential in the original TA, and its determinization is triply exponential.  
 41 Reachability being in NLOGSPACE implies the 2-EXPSPACE algorithm.

A full proof with all technical details can be found in [Appendix F](#). □

Table 1: Summary of Section 5 ( $\checkmark$  = decidability,  $\times$  = undecidability)

Subclass	$\exists$ -opacity	weak opacity	full opacity
$ \Sigma  = 1$		$\times$ Theorem 3	
$ \mathbb{X}  = 1$ without $\varepsilon$ -transitions		$\checkmark$ Theorem 5 (PSPACE-c)	
$ \mathbb{X}  = 1$	$\checkmark$ Theorem 2 (PSPACE-c)	$\times$ Theorem 4	
$ \mathbb{X}  = 2$		$\times$ Theorem 6	
$\mathbb{T} = \mathbb{N}$		$\checkmark$ Theorem 7 (EXSPACE-c)	
<b>oERAs</b>		$\checkmark$ Theorem 8 (PSPACE-c)	

## 7 Conclusion and perspectives

In this paper, we addressed three definitions of opacity on subclasses of TAs, to circumvent the undecidability from [16]. We first proved the inter-reducibility of weak and full opacity. Then, while undecidability remains for one-action TAs, we retrieve decidability for one-clock TAs without  $\varepsilon$ -transitions, or over discrete time, or for observable ERAs. Our result for one-clock TAs without  $\varepsilon$ -transitions is tight, since we showed that increasing the number of clocks or adding  $\varepsilon$ -transitions leads to undecidability. Finally, we studied the case of an attacker with an observational power with a limited budget, i.e., that can only perform a finite set of observations. We proved this latter case to be decidable on the full TA formalism. We summarize the results from Section 5 in Table 1.

*Future work* Perspectives include begin able to build a controller to ensure a TA is opaque, as well as investigating parametric versions of these problems, where timing constants considered as parameters (à la [4]) can be tuned to ensure opacity.

Finally, our result in Section 6 considers an attacker with a fixed attack budget; an interesting future work would be to *derive* a maximum attack budget such that the system remains opaque.

## References

- [1] Abdulla, P.A., Deneux, J., Ouaknine, J., Quaas, K., Worrell, J.: Universality analysis for one-clock timed automata. *FI* **89**(4), 419–450 (2008)
- [2] Alur, R., Dill, D.L.: A theory of timed automata. *TCS* **126**(2), 183–235 (Apr 1994). [https://doi.org/10.1016/0304-3975\(94\)90010-8](https://doi.org/10.1016/0304-3975(94)90010-8)
- [3] Alur, R., Fix, L., Henzinger, T.A.: Event-clock automata: A determinizable class of timed automata. *TCS* **211**(1-2), 253–273 (1999). [https://doi.org/10.1016/S0304-3975\(97\)00173-4](https://doi.org/10.1016/S0304-3975(97)00173-4)
- [4] Alur, R., Henzinger, T.A., Vardi, M.Y.: Parametric real-time reasoning. In: Kosaraju, S.R., Johnson, D.S., Aggarwal, A. (eds.) *STOC*. pp. 592–601. ACM, New York, NY, USA (1993). <https://doi.org/10.1145/167088.167242>
- [5] Ammar, I., El Touati, Y., Yeddes, M., Mullins, J.: Bounded opacity for timed systems. *Journal of Information Security and Applications* **61**, 1–13 (Sep 2021). <https://doi.org/10.1016/j.jisa.2021.102926>

- 1 [6] André, É., Kryukov, A.: Parametric non-interference in timed au-  
2 tomata. In: Li, Y., Liew, A. (eds.) ICECCS. pp. 37–42 (2020).  
3 <https://doi.org/10.1109/ICECCS51672.2020.00012>
- 4 [7] André, É., Lefauchaux, E., Lime, D., Marinho, D., Sun, J.: Configuring timing pa-  
5 rameters to ensure execution-time opacity in timed automata. In: ter Beek, M.H.,  
6 Dubslaff, C. (eds.) TiCSA. Electronic Proceedings in Theoretical Computer Sci-  
7 ence, vol. 392, pp. 1–26 (2023). <https://doi.org/10.4204/EPTCS.392.1>, invited  
8 paper.
- 9 [8] André, É., Lefauchaux, E., Marinho, D.: Expiring opacity problems in parametric  
10 timed automata. In: Ait-Ameur, Y., Khendek, F. (eds.) ICECCS. pp. 89–98 (2023).  
11 <https://doi.org/10.1109/ICECCS59891.2023.00020>
- 12 [9] André, É., Lime, D., Marinho, D., Sun, J.: Guaranteeing timed opacity using  
13 parametric timed model checking. *ACM Transactions on Software Engineering  
14 and Methodology* **31**(4), 1–36 (Oct 2022). <https://doi.org/10.1145/3502851>
- 15 [10] Arcile, J., André, É.: Timed automata as a formalism for expressing security: A  
16 survey on theory and practice. *ACM Computing Surveys* **55**(6), 1–36 (Jul 2023).  
17 <https://doi.org/10.1145/3534967>
- 18 [11] Barbuti, R., Francesco, N.D., Santone, A., Tesei, L.: A notion of non-interference  
19 for timed automata. *FI* **51**(1-2), 1–11 (2002)
- 20 [12] Barbuti, R., Tesei, L.: A decidable notion of timed non-interference. *FI* **54**(2-3),  
21 137–150 (2003)
- 22 [13] Benattar, G., Cassez, F., Lime, D., Roux, O.H.: Control and synthesis of non-  
23 interferent timed systems. *International Journal of Control* **88**(2), 217–236 (2015).  
24 <https://doi.org/10.1080/00207179.2014.944356>
- 25 [14] Bouyer, P.: Timed automata. In: Pin, J. (ed.) *Handbook of Automata Theory*, pp.  
26 1261–1294. European Mathematical Society Publishing House, Zürich, Switzer-  
27 land (2021). <https://doi.org/10.4171/AUTOMATA-2/12>, [https://doi.org/10.](https://doi.org/10.4171/Automata-2/12)  
28 [4171/Automata-2/12](https://doi.org/10.4171/Automata-2/12)
- 29 [15] Bryans, J.W., Koutny, M., Mazaré, L., Ryan, P.Y.A.: Opacity generalised to tran-  
30 sition systems. *International Journal of Information Security* **7**(6), 421–435 (2008).  
31 <https://doi.org/10.1007/s10207-008-0058-x>
- 32 [16] Cassez, F.: The dark side of timed opacity. In: Park, J.H., Chen, H., Atiquzzaman,  
33 M., Lee, C., Kim, T., Yeo, S. (eds.) *ISA. LNCS*, vol. 5576, pp. 21–30. Springer  
34 (2009). [https://doi.org/10.1007/978-3-642-02617-1\\_3](https://doi.org/10.1007/978-3-642-02617-1_3)
- 35 [17] Dima, C.: Real-time automata. *Journal of Automata, Languages and Combina-  
36 torics* **6**(1), 3–23 (2001). <https://doi.org/10.25596/jalc-2001-003>
- 37 [18] Fearnley, J., Jurdzinski, M.: Reachability in two-clock timed automata  
38 is PSPACE-complete. *Information and Computation* **243**, 26–36 (2015).  
39 <https://doi.org/10.1016/J.IC.2014.12.004>
- 40 [19] Gardey, G., Mullins, J., Roux, O.H.: Non-interference control syn-  
41 thesis for security timed automata. *ENTCS* **180**(1), 35–53 (2007).  
42 <https://doi.org/10.1016/j.entcs.2005.05.046>
- 43 [20] Klein, J., Kogel, P., Glesner, S.: Verifying opacity of discrete-timed automata.  
44 In: Plat, N., Gnesi, S., Furia, C.A., Lopes, A. (eds.) *FormaliSE*. pp. 55–65. ACM  
45 (2024). <https://doi.org/10.1145/3644033.3644376>
- 46 [21] Mazaré, L.: Using unification for opacity properties. In: Ryan, P. (ed.) *WITS*. pp.  
47 165–176 (Apr 2004)
- 48 [22] Meyer, A.R., Stockmeyer, L.J.: The equivalence problem for regular expressions  
49 with squaring requires exponential space. In: *IEEE*. pp. 125–129 (1972), <https://api.semanticscholar.org/CorpusID:206585190>

- 1 [23] Ouaknine, J., Worrell, J.: On the language inclusion problem for timed automata:  
2 Closing a decidability gap. In: LICS. pp. 54–63. IEEE Computer Society (2004).  
3 <https://doi.org/10.1109/LICS.2004.1319600>
- 4 [24] Wang, L., Zhan, N.: Decidability of the initial-state opacity of real-time au-  
5 tomata. In: Jones, C.B., Wang, J., Zhan, N. (eds.) Symposium on Real-Time  
6 and Hybrid Systems - Essays Dedicated to Professor Chaochen Zhou on the  
7 Occasion of His 80th Birthday, LNCS, vol. 11180, pp. 44–60. Springer (2018).  
8 [https://doi.org/10.1007/978-3-030-01461-2\\_3](https://doi.org/10.1007/978-3-030-01461-2_3)
- 9 [25] Wang, L., Zhan, N., An, J.: The opacity of real-time automata. IEEE Transactions  
10 on Computer-Aided Design of Integrated Circuits and Systems **37**(11), 2845–2856  
11 (2018). <https://doi.org/10.1109/TCAD.2018.2857363>

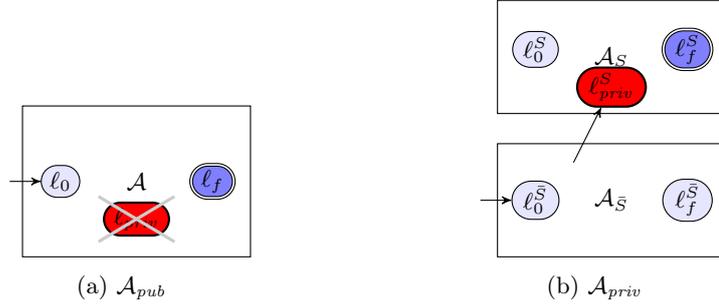


Fig. 5: Illustrating  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$

## 1 A Formal definitions

### 2 Definition 11 (Public runs automaton $\mathcal{A}_{pub}$ ).

3 Let  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  be a TA. We define the public runs TA  
 4  $\mathcal{A}_{pub} = (\Sigma, L \setminus L_{priv}, \emptyset, L_f \setminus L_{priv}, \mathbb{X}, I', E')$  with  $I'$  and  $E'$  precised as follows:

- 5 1.  $I'$  is the restriction  $I|_{L \setminus L_{priv}}$  of  $I$  to the set of locations of  $\mathcal{A}_{pub}$ ;
- 6 2.  $E' = E \setminus \{(\ell, g, a, R, \ell') \in E \mid \ell \in L_{priv} \vee \ell' \in L_{priv}\}$  is the remaining set of  
 7 transitions when private locations are removed from  $L$ .

8 *Example 4.* We illustrate the constructions of  $\mathcal{A}_{pub}$  and  $\mathcal{A}_{priv}$  in Figs. 5a and 5b.

## 9 B Complexity of the $\exists$ -opacity problem

### 10 B.1 $\exists$ -opacity problem for general TAs

11 Let us first show that the  $\exists$ -opacity problem for TA lies in PSPACE.

12 *Proof.* Let  $\mathcal{A}$  be a TA. We build  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$  from  $\mathcal{A}$  as described in Sec-  
 13 tion 4.1. Noting that the product of two TAs recognizes the intersection of  
 14 their languages [2, Theorem 3.15] (assuming the two TAs share no clock), we  
 15 build the TA  $\mathcal{A}_{priv} \times \mathcal{A}_{pub}$ , product of  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$ , which language is  
 16  $Tr^{priv}(\mathcal{A}) \cap Tr^{\overline{priv}}(\mathcal{A})$ . To build this product, we can rename all clocks from  
 17  $\mathcal{A}_{pub}$  so that  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$  share no clock.

The  $\exists$ -opacity problem is by definition the non-emptiness of the intersection  
 of  $Tr^{priv}(\mathcal{A})$  and  $Tr^{\overline{priv}}(\mathcal{A})$ . Moreover, the reachability of a final location of  
 $\mathcal{A}_{priv} \times \mathcal{A}_{pub}$  is equivalent to the non-emptiness of the language of  $\mathcal{A}_{priv} \times \mathcal{A}_{pub}$ ,  
 and thus of the set  $Tr^{priv}(\mathcal{A}) \cap Tr^{\overline{priv}}(\mathcal{A})$ . Since reachability is decidable in  
 PSPACE in TAs [2], the same holds for the  $\exists$ -opacity problem.  $\square$

18 We now reduce the reachability problem for timed automata, known to be  
 19 PSPACE-complete, to the  $\exists$ -opacity problem.

<sup>1</sup> *Proof.* Let  $\mathcal{A} = (\Sigma, L, \ell_0, \emptyset, L_f, \mathbb{X}, I, E)$  be a timed automaton.  
<sup>2</sup> We suppose that  $\mathbb{X}$  is not empty and define (see Fig. 6)  $\mathcal{A}' =$   
<sup>3</sup>  $(\Sigma, L \cup \{\ell'_0, \ell'_1, \ell'_f\}, \ell'_0, L_f, L_f \cup \{\ell'_f\}, \mathbb{X}, I', E')$  where  $I'$  an invari-  
<sup>4</sup> ant extending  $I$  such that  $I'(\ell'_0) = I'(\ell'_1) = I'(\ell'_f) = \text{true}$  and  
<sup>5</sup>  $E' = E \cup \{(\ell'_0, \varepsilon, (x=0), \emptyset, \ell_0), (\ell'_0, \varepsilon, (x=0), \emptyset, \ell'_1), (\ell'_1, \varepsilon, \text{true}, \emptyset, \ell'_f)\} \cup$   
<sup>6</sup>  $\{(\ell'_f, a, \text{true}, \emptyset, \ell'_f) \mid a \in \Sigma\}$  for some  $x \in \mathbb{X}$ .

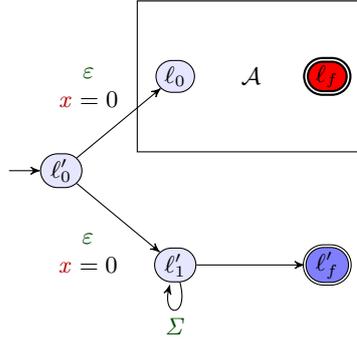


Fig. 6: TA  $\mathcal{A}'$  for the PSPACE-hardness of  $\exists$ -opacity

<sup>7</sup> The timed automaton  $\mathcal{A}'$  is  $\exists$ -opaque if and only if a final location is reachable  
<sup>8</sup> in  $\mathcal{A}$ . Indeed, the set  $Tr^{\overline{priv}}(\mathcal{A}')$  contains all the possible timed traces with the  
<sup>9</sup> action set  $\Sigma$ , and the private runs on  $\mathcal{A}'$  correspond exactly to runs on  $\mathcal{A}$ . Hence  
<sup>10</sup>  $Tr^{\overline{priv}}(\mathcal{A}') \cap Tr^{priv}(\mathcal{A}') \neq \emptyset$  if and only if  $Tr^{priv}(\mathcal{A}') \neq \emptyset$ , i.e., if there is a  
<sup>11</sup> run on  $\mathcal{A}$  that reaches a final location. Since the reachability problem in TA is  
<sup>12</sup> PSPACE-complete, we deduce from this construction that the  $\exists$ -opacity problem  
<sup>13</sup> is PSPACE-hard.

<sup>14</sup> Note that this reduction holds as well for one-action TAs, discrete-time TAs and  
<sup>15</sup> oERAs.

## <sup>16</sup> B.2 $\exists$ -opacity problem for TAs with a fixed number of clocks

<sup>17</sup> Fix  $N$  as a constant. We consider now the  $\exists$ -opacity problem for TAs with  $N$   
<sup>18</sup> clocks.

<sup>19</sup> In the previous section, the  $\exists$ -opacity problem for TAs was shown to be within  
<sup>20</sup> PSPACE. The algorithm reduces the problem to a reachability query on the prod-  
<sup>21</sup> uct automaton  $\mathcal{A}_{priv} \times \mathcal{A}_{pub}$  (a TA with  $2N$  clocks). The reachability problem for  
<sup>22</sup> TAs is usually solved by studying reachability in the associated region automata.  
<sup>23</sup> Reachability in automata being in NLOGSPACE and the region automata  
<sup>24</sup> being exponential in general produces the result. More precisely, the number of

1 states of the region automata is bounded by  $|L|(N! \cdot 2^N \cdot \prod_{x \in \mathbb{X}} (2M + 2))$  [2] where  
2  $M$  is the highest constant occurring in guards and invariants. Note that, since  
3  $N$  is a constant, this number becomes polynomial when integers in guards and  
4 invariants (and thus  $M$ ) are given in unary. Hence the reachability problem falls  
5 to NLOGSPACE, which implies the  $\exists$ -opacity problem also lies in NLOGSPACE  
6 then.

7 Concerning the hardness, let us show that the  $\exists$ -opacity problem remains  
8 PSPACE-hard for one-clock automata with constants in binary. Note that the  
9 reduction of the previous section does not apply, as reachability in TA with  
10 one clock is not PSPACE-hard. We reduce the reachability problem in two-clock  
11 automata, known to be PSPACE-complete [18], to the  $\exists$ -opacity problem in one-  
12 clock automata.

13 Let  $\mathcal{A}_{x,y} = (\Sigma, L, \ell_0, \emptyset L_f, \mathbb{X}, I, E)$  a TA with clocks  $x$  and  $y$ . First we relabel  
14 every transition (including silent transitions) of  $\mathcal{A}_{x,y}$  with a new alphabet  $\Sigma' =$   
15  $\{a_i \mid 1 \leq i \leq |E|\}$  such that each letter of  $\Sigma'$  labels exactly one transition of  
16  $\mathcal{A}_{x,y}$ . We denote the obtained automaton by  $\mathcal{A}'_{x,y}$ .

17 Given a guard  $g$ , we define  $g_x$  and  $g_y$  as respectively the constraints in  $g$  over  
18  $x$  and  $y$ . Hence,  $g = g_x \wedge g_y$ . For  $z \in \{x, y\}$ , we then define the automaton  $\mathcal{A}_z =$   
19  $(\Sigma, L, \ell_0, \emptyset, L_f, \{z\}, I_z, E_z)$  with  $E_z = \{(\ell, a, g_z, R \cap \{z\}, \ell') \mid (\ell, a, g, R, \ell') \in E\}$   
20 and  $I_z$  is similarly obtained by only keeping the  $z$  part of the invariant.

21 We have that a word accepted by  $\mathcal{A}'_{x,y}$  is also accepted by  $\mathcal{A}'_x$  and by  $\mathcal{A}'_y$ , as  
22 each of those TAs have less constraints. Moreover, if a word is accepted by  $\mathcal{A}'_x$   
23 and by  $\mathcal{A}'_y$ , as the corresponding run is entirely characterized by its trace (since  
24 each transition has its own label) and satisfied the constraints on both clocks,  
25 then it is accepted by  $\mathcal{A}'_{x,y}$ .

26 We build the TA  $\mathcal{B}$  over the single clock  $x$  as the classical union construc-  
27 tion of  $\mathcal{A}'_x$  and  $\mathcal{A}'_y$ , and set as private locations the final locations of  $\mathcal{A}'_x$ . More  
28 precisely, we add a new initial location  $\ell'_0$  from which one can reach the initial  
29 location of  $\mathcal{A}'_x$  and  $\mathcal{A}'_y$  by a transition labelled by a new letter  $\sharp$  and with the  
30 guard ( $x = 0$ ). Moreover, we relabel every occurrence of  $y$  in the copy of  $\mathcal{A}'_y$  into  
31  $x$ .

32 As the runs of  $\mathcal{A}'_x$  (resp.  $\mathcal{A}'_y$ ) provide the private (resp. public) runs of  $\mathcal{B}$ ,  $\mathcal{B}$   
33 is  $\exists$ -opaque if and only if there is a pair of runs of same trace accepted by  $\mathcal{A}'_x$   
34 and  $\mathcal{A}'_y$ , thus a word accepted by  $\mathcal{A}'_{x,y}$  or equivalently a reachable final location  
35 in  $\mathcal{A}_{x,y}$ . Moreover,  $\mathcal{B}$  is polynomial in the size of  $\mathcal{A}_{x,y}$ . Therefore the  $\exists$ -opacity  
36 problem in one-clock automata is PSPACE-hard.

## 37 C Opacity of one-action TAs

38 *Proof.* We first prove the undecidability of the full opacity problem. Let  $\mathcal{A}$  be  
39 a TA with a single action. We want to build a TA such that if we can answer  
40 the full opacity problem of this TA, then we can decide the universality problem  
41 for  $\mathcal{A}$ . We consider the following TA: we add an initial location exited by two  
42  $\varepsilon$ -transitions that must be taken urgently (i.e., no time may elapse before taking  
43 them). The first  $\varepsilon$ -transition leads to a secret location which leads (again via

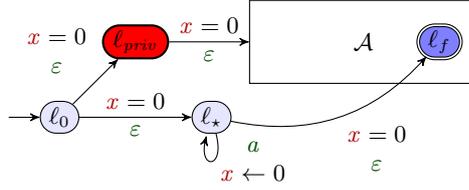


Fig. 7: Automaton  $\mathcal{B}$ : Reduction from universality to full opacity

1 an urgent  $\varepsilon$ -transition) to the initial location of the TA  $\mathcal{A}$  and the other leads  
 2 to a location where every finite timed words on  $\Sigma$  can be read before reaching  
 3 a final location. We denote this TA  $\mathcal{B}$  and illustrate its construction in Fig. 7.  
 4 The language recognized by  $\mathcal{A}$  corresponds exactly to the traces of private runs  
 5 of  $\mathcal{B}$ , and the traces of public runs of  $\mathcal{B}$  are all the finite timed words on  $\Sigma$ .  
 6 Therefore,  $\mathcal{B}$  is fully opaque iff  $Tr^{priv}(\mathcal{B}) = Tr^{\overline{priv}}(\mathcal{B})$  iff  $Tr(\mathcal{A}) = TW^*(\Sigma)$  iff  
 7  $\mathcal{A}$  is universal. Since universality for TAs with one action is undecidable [23], we  
 8 conclude that the full opacity problem for one-action TAs is undecidable.

Finally, with Theorem 1, we deduce the undecidability of weak opacity for  
 TAs with one action.  $\square$

## 9 D Opacity of TAs over discrete time

10 **Lemma 1.** *The language of a discrete-time TA and the language of its region*  
 11 *automaton are in bijection.*

12 *Proof.* Let  $\mathcal{A}$  be a discrete-time TA. We explicit the bijection of the lemma.

13 Given a path  $\rho$  of  $\mathcal{A}$  generating the timed word  $w$ , as  $\mathcal{A}$  includes ticks,  $w$  is  
 14 of the form

$$(t, 1) \dots (t, \tau_0)(a_0, \tau_0) (t, \tau_0+1) \dots (t, \tau_1)(a_1, \tau_1) \dots (t, \tau_{n-1}+1) \dots (t, \tau_n)(a_n, \tau_n).$$

15 To the timed word  $w$ , we associate the untimed word produced within the region  
 16 automaton by the path  $[\rho]$  corresponding to  $\rho$ :

$$\underbrace{tt \dots t}_{\tau_0 \text{ times}} a_0 \underbrace{tt \dots t}_{(\tau_1 - \tau_0) \text{ times}} a_1 \dots \underbrace{tt \dots t}_{(\tau_n - \tau_{n-1}) \text{ times}} a_n.$$

17 This association is injective as the sequence  $(\tau_i)_{i \leq n}$  which was removed  
 18 in the transformation depends only on the number of  $t$  of the timed  
 19 word. Moreover, it is surjective as given an untimed word in  $\mathcal{RA}_{\mathcal{A}}$   $w' =$   
 20  $\underbrace{tt \dots t}_{k_0 \text{ times}} a_0 \underbrace{tt \dots t}_{k_1 \text{ times}} a_1 \dots \underbrace{tt \dots t}_{k_n \text{ times}} a_n$  produced by a path  $[\rho']$  of the region au-  
 21 tomaton, defining

$$w = (t, 1) \dots (t, k_0)(a_0, k_0)(t, k_0 + 1) \dots (t, k_0 + k_1)(a_1, k_0 + k_1) \dots (a_n, \sum_{i=0}^n k_i)$$

we have that  $w$  is the timed word generated by the unique path of the TA corresponding to  $\rho'$  and  $w$  is associated to  $w'$ .  $\square$

**Proposition 1.** *Language inclusion in discrete-time TAs is EXPSPACE-complete.*

We separate both directions of the proof, due to how voluminous the hardness is. We start by showing that the language inclusion in discrete-time TAs can be achieved in EXPSPACE.

*Proof.* Let  $\mathcal{A}$  and  $\mathcal{B}$  be two discrete-time TAs, and let  $\mathcal{RA}_{\mathcal{A}}$  and  $\mathcal{RA}_{\mathcal{B}}$  be their respective region automata. Then from Lemma 1, we have

$$\text{Tr}(\mathcal{A}) \subseteq \text{Tr}(\mathcal{B}) \text{ if and only if } \text{Tr}(\mathcal{RA}_{\mathcal{A}}) \subseteq \text{Tr}(\mathcal{RA}_{\mathcal{B}})$$

Thus deciding the language inclusion in discrete-time TAs amounts to solving the language inclusion problem in the context of finite regular automata, which can be done in PSPACE in the size of the region automata. Noting that the region automata of the ticked TA is exponential in the size of the initial TA, this produces an EXPSPACE algorithm.  $\square$

Let us now show that the language inclusion in discrete-time TAs is EXPSPACE-hard. To do so, we will reduce a succinct variant of the equality of rational expressions.

**Definition 12 (Rational expressions with square).** *The expressions  $\emptyset$ ,  $\varepsilon$ , and  $a$  with  $a \in \Sigma$  are rational expressions with square. If  $exp_1$  and  $exp_2$  are rational expressions with square, then so are  $exp_1 + exp_2$ ,  $exp_1 \cdot exp_2$ ,  $exp_1^*$  and  $exp_1^2$ .*

*A rational language with square is a set of words on  $\Sigma$  represented by a rational expression with square.*

The operators on the rational expressions are interpreted in the usual way. For instance, the expression  $(a + ab)^2$  represents the set of words  $\{aa, aab, aba, abab\}$ . There can be several expressions representing the same language.

The expressivity of rational languages with square is exactly the same as of rational languages since using the square is equivalent to concatenating an expression with itself. However, the description of a language with square may be exponentially more succinct. Hence why we have

**Proposition 2.** *[22] Let  $L_1$  and  $L_2$  be two rational languages with square. Deciding whether  $L_1 = L_2$  is EXPSPACE-complete.*

*Proof (Proof of the hardness of language inclusion for discrete-time TA).* Let  $L$  be a rational language with square and  $exp$  be the rational expression with squares that represents it. From the structure of  $exp$ , we will build a timed automaton which untimed language is  $L$ .

Since we will compare the timed language of TAs, and we only want to compare their untimed languages, we need to impose a standard for the timestamps

1 of their words. We choose that each action must occur at an even number of time  
 2 units. More precisely, if the automaton recognizes words of at least one letter it  
 3 will read the first one without any delay and waits two time units between each  
 4 letter. To do this we use the clock  $x$  which is reused for all the constructions,  
 5 and which is reset only when a letter occurs. Every operation, beside reading a  
 6 letter, must then be done in time 0. In particular, our constructions always start  
 7 and end with  $x = 0$ , and only allows time to elapse when a letter is read. We  
 8 present in the following table (Fig. 8) the inductive constructions corresponding  
 9 to the basic rational expressions and the operators  $+$ ,  $\cdot$ ,  $*$ . The case of the square  
 10 operator is explained separately.

Rational expression with square $exp$	Timed automaton $\mathcal{A}_{exp}$
$\varepsilon$	
$a \in \Sigma$	
$exp_1 \cdot exp_2$	
$exp_1 + exp_2$	
$exp^*$	

Fig. 8: Table of timed automata constructions  $\mathcal{A}_{exp}$  for regular expressions

1

2 For the square construction  $\mathcal{A}_{exp^2}$  (Fig. 9) we need to add three additional  
 3 clocks per square occurrence: the first one,  $z$ , manages the particular case of the  
 4 empty word  $\varepsilon$  by detecting whether some time has passed during the crossing of  
 5  $\mathcal{A}_{exp}$ , while the clocks  $y$  and  $v$  are used to force exactly two passages in  $\mathcal{A}_{exp}$ .

6 Indeed, the shift between the clocks  $x$ ,  $y$  and  $v$  (with values kept between zero  
 7 and two all along the run) permits to keep in memory the number of remaining  
 8 passage in  $\mathcal{A}_{exp}$  by being modified once during the first passage (①), a second  
 9 time between the first as second passage (②), and being checked at the end of  
 10 the second passage (③). These added clocks cannot be reused in nested squares  
 11 constructions. Thus we introduce a number of clocks equal to three times the  
 12 maximal number of nested squares in the expression to build the corresponding  
 13 timed automaton.

14 More precisely, the previously built TA  $\mathcal{A}_{exp}$  is modified into  $\tilde{\mathcal{A}}_{exp}$  by adding  
 15 on every location silent loop transitions resetting  $y$  and  $v$  when they reach 2, as  
 16 well as a silent loop transition with guard  $x = 1 \wedge y = 1$  and reset set  $\{y, v\}$ .  
 17 At most one of the latter loops, denoted by ①, is taken during an execution,  
 18 and it requires at least one letter to be triggered. This transition ensures that  
 19  $y = v \neq x$  in the following. This property is necessary to take the transition ②,  
 20 which now ensures that  $x = v \neq y$ , which will allow taking the transition ③.  
 21 As mentionned, taking the transition ① requires at least one letter to be read,  
 22 hence why, when  $exp$  contains the empty word, we need the clock  $z$  to give an  
 23 alternative way to exit the gadget. Formally, we have

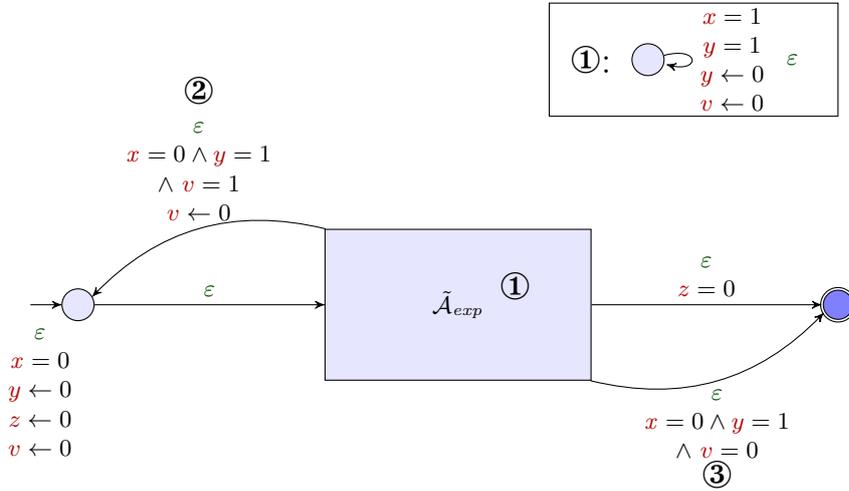


Fig. 9: TA  $\mathcal{A}_{exp^2}$   
 $\tilde{\mathcal{A}}_{exp}$  is the automaton  $\mathcal{A}_{exp}$  modified through ①.

1 **Definition 13 (Square construction).** Let  $\mathcal{A}_{exp} = (\Sigma, L, \ell_0, \emptyset, L_f, \mathbb{X}, I, E)$  be  
2 the timed automaton corresponding to the rational expression with square  $exp$ .  
3 Then, the TA corresponding to  $exp^2$  is  $\mathcal{A}_{exp^2} = (\Sigma, L \cup \{\ell'_0, \ell'_f\}, \ell'_0, \emptyset, \{\ell'_f\}, \mathbb{X} \cup$   
4  $\{v, y, z\}, I', E')$  where  
5 –  $I'$  is the extension of  $I$  such that  $I'(\ell'_0) = I'(\ell'_f) = true$ ,  
–

$$E' = E \cup \{(\ell'_0, \varepsilon, true, \emptyset, \ell_0)\} \cup$$

$$\bigcup_{\ell \in L} \{(\ell, \varepsilon, y = 2, \{y\}, \ell), (\ell, \varepsilon, v = 2, \{v\}, \ell), (\ell, \varepsilon, x = 1 \wedge y = 1, \{v, y\}, \ell)\} \cup$$

$$\bigcup_{\ell_f \in L_f} \{(\ell_f, \varepsilon, x = 0 \wedge y = 1 \wedge v = 1, \{v\}, \ell'_0), (\ell_f, \varepsilon, z = 0, \emptyset, \ell'_f), (\ell_f, \varepsilon, x = 0 \wedge y = 1 \wedge v = 0, \emptyset, \ell'_f)\}.$$

Two rational languages with square  $L_1$  and  $L_2$ , respectively represented by the expressions  $exp_1$  and  $exp_2$ , are equal if and only if the automata  $\mathcal{A}_{exp_1}$  and  $\mathcal{A}_{exp_2}$  recognize the same timed language. The obtained automata are timed automata with discrete time of polynomial size in the rational expressions. Thus from Proposition 2 follows the EXPSPACE-hardness of language inclusion for discrete-time TA.  $\square$

6 **Theorem 7.** *Weak and full opacity of discrete-time TAs are EXPSPACE-*  
7 *complete.*

8 *Proof.* Let  $\mathcal{A}$  be a discrete-time automaton with private locations set  $L_{priv}$ . The  
9 construction in Section 4.1 is still compatible with discrete time clocks so we can  
10 build two discrete-time TAs  $\mathcal{A}_{priv}$  and  $\mathcal{A}_{pub}$  such that  $Tr(\mathcal{A}_{priv}) = Tr^{priv}(\mathcal{A})$   
11 and  $Tr(\mathcal{A}_{pub}) = Tr^{priv}(\mathcal{A})$ . Then testing the weak opacity property on  $\mathcal{A}$  is  
12 equivalent to testing the inclusion  $Tr(\mathcal{A}_{priv}) \subseteq Tr(\mathcal{A}_{pub})$ . Therefore the weak  
13 opacity problem in discrete-time TAs is in EXPSPACE.

14 EXPSPACE-hardness can easily be obtained by the following reduction: Given  
15 two TA  $\mathcal{A}$  and  $\mathcal{B}$ , one can build a TA which private runs are the runs of  $\mathcal{A}$  and  
16 which public ones are those of  $\mathcal{B}$ . We do this by making the initial location of  $\mathcal{A}$   
17 private and considering the natural construction of the union of  $\mathcal{A}$  and  $\mathcal{B}$ . Hence  
18 comparing the languages of  $\mathcal{A}$  and  $\mathcal{B}$  amounts to testing weak opacity on the  
19 built automaton.

As before, thanks to Theorem 1, we can extend this result to the full opacity problem.  $\square$

## 20 E PSPACE-completeness of weak / full opacity for oERAs

21 Let us first explain why the algorithm for weak opacity presented in the main  
22 document is in PSPACE. As a summary, this algorithm consists in, given an  
23 oERA  $\mathcal{A}$ , building the corresponding  $\mathcal{A}_{memo}$ , determining it through the subset

1 construction, taking its region automaton, and then testing reachability of a  
 2 location containing a final private location, but no final public location.

3 The determinization of the oERA causes the number of locations to become  
 4 exponential in the size of the entry, and the construction of the region automaton  
 5 gives an exponential number of clock regions, bounded by  $|\mathbb{X}| \cdot 2^{|\mathbb{X}|} \cdot \prod_{x \in \mathbb{X}} (2M(x) +$   
 6  $2)[2]$ . The size of the region automaton is thus exponential in the number of  
 7 locations and the number of clocks of  $\mathcal{A}$ . On the region automaton, testing the  
 8 reachability of a location can be done in NLOGSPACE. Hence the problem of  
 9 weak opacity in oERA is in PSPACE.

10 Let us now explain why these problems are PSPACE-hard. We reduce from  
 11 the reachability problem for TA, which is PSPACE-complete.

12 Let  $\mathcal{A}$  be a timed automaton, with a set of final locations  $L_f$ . We consider  
 13  $\mathcal{A}'$  the TA obtained by setting in  $\mathcal{A}$  the set of private locations to  $L_f$ . This way,  
 14 every run of  $\mathcal{A}'$  are private. Thus  $\mathcal{A}'$  is weakly opaque if and only if no final  
 15 location of  $\mathcal{A}$  is reachable. Hence, the weak opacity problem in oERA is hence  
 16 PSPACE-hard.

17 These results extend to full opacity thanks to [Theorem 1](#).

## 18 F Opacity with $N$ observations

19 Given a  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  and  $N \in \mathbb{N}$ . We build the unfolding of  
 20 the TA  $\mathcal{A}_{memo}$  described in [Remark 1](#). Recall that  $\mathcal{A}_{memo}$  recognizes the same  
 21 language as  $\mathcal{A}$  but stores within the locations the information whether  $L_{priv}$   
 22 was visited. As such,  $\mathcal{A}_{memo}$  has the same opacity properties as  $\mathcal{A}$ , so we can  
 23 consider  $Unfold_N(\mathcal{A}_{memo})$  instead of  $Unfold_N(\mathcal{A})$  to study the opacity of  $\mathcal{A}$ .

24 Additionally, we enrich this TA with ticks. In [Section 5.4](#), we added a single  
 25 tick to the automaton which counted the time elapsed since the start of the run.  
 26 Here, the TA includes as well, for each  $0 < k \leq N$ , a tick counting the time  
 27 elapsed since the  $k$ 'th observation. As multiple ticks may need to occur at the  
 28 same time, we develop the alphabet of ticks to describe the set of tick clocks  
 29 that need to be reset, i.e., the tick  $t_{\{k_1, \dots, k_m\}}$  is produced by the TA if for every  
 30  $0 \leq i \leq m$ , the  $k_i$ 'th observation (or the start of the run if  $k_i = 0$ ) occurred an  
 31 integer number of time units beforehand. Note that the addition of these ticks  
 32 immediately uses the assumption that only  $N$  actions are observed.

### 33 Definition 14 (Addition of ticks to the Unfolding construction).

34 Let  $\mathcal{A} = (\Sigma, L, \ell_0, L_{priv}, L_f, \mathbb{X}, I, E)$  be a TA,  $N \in \mathbb{N}$  and let  $Unfold_N(\mathcal{A}) =$   
 35  $(\Sigma, L', \ell_0^0, L'_{priv}, L'_f, \mathbb{X}, I', E')$  the unfolding of  $\mathcal{A}$ . We define the Tick construction  
 36  $Tick(Unfold_N(\mathcal{A})) = (\Sigma', L', \ell_0^0, L'_{priv}, L'_f, \mathbb{X}', I', E'')$  where

- 37 1.  $\Sigma' = \Sigma \cup \Sigma^0 \cup \Sigma_t$  where  $\Sigma^0 = \{a^0 \mid a \in \Sigma\}$  is a copy of the alphabet  $\Sigma$  that  
 38 is used to represent within the action's name that it occurred at the same  
 39 time as the previous action, and  $\Sigma_t = \{t_K \mid K \subseteq \llbracket 0; N \rrbracket, K \neq \emptyset\}$  is the set of  
 40 ticks associated to each set of added clocks;
- 41 2.  $\mathbb{X}' = \mathbb{X} \cup \mathbb{X}_t$  where  $\mathbb{X}_t = \{x_i \mid i \in \llbracket 0; N \rrbracket\}$  is the set of the  $N + 1$  tick clocks;

$$\begin{aligned}
& 3. E'' = \bigcup_{i=0}^{N-1} E^i \cup E^{i \rightarrow i+1} \text{ is the set of transitions where, given } 0 \leq i < N \\
& - E^i = \{(\ell^i, \varepsilon, g \wedge \bigwedge_{k=0}^i (x_k < 1), R, \ell^i) \mid (\ell, \varepsilon, g, R, \ell') \in E'\} \cup \\
& \quad \{(\ell^i, t_K, \bigwedge_{k \in K} (x_k = 1) \wedge \bigwedge_{m \in [0; i] \setminus K} (0 < x_m < 1), \{x_k \mid k \in K\}, \ell^i) \mid \ell^i \in \\
& \quad L^i \wedge K \subseteq [0; i] \wedge K \neq \emptyset\}; \\
& - E^{i \rightarrow i+1} = \{(\ell^i, a^0, g \wedge \bigwedge_{k=0}^i (x_k < 1) \wedge \bigvee_{m=0}^i (x_m = 0), R \cup \{x_{i+1}\}, \ell^{i+1}) \mid \\
& \quad (\ell, a, g, R, \ell') \in E'\} \cup \{(\ell^i, a, g \wedge \bigwedge_{k=0}^i (0 < x_k < 1), R \cup \{x_{i+1}\}, \ell^{i+1}) \mid \\
& \quad (\ell, a, g, R, \ell') \in E'\}.
\end{aligned}$$

We obtain in this way the timed automaton  $Tick(Unfold_N(\mathcal{A}_{memo}))$ . Let  $\mathcal{RA}_{Tick(Unfold_N(\mathcal{A}_{memo}))}$  be the region automaton of this automaton. Thanks to the added ticks, paths of  $\mathcal{RA}_{Tick(Unfold_N(\mathcal{A}_{memo}))}$  sharing the same trace correspond to runs of  $\mathcal{A}$  for which the (at most)  $N$  observations occurred within the same time intervals (due to the tick representing the total time) and the fractional part of the timing of those observations have the same order. This is the information we mainly need, and thus we wish to regroup every path of the region automaton with the same trace. As the region automaton is a finite automaton, we can realize usual operations on it, that is, first remove  $\varepsilon$ -transitions (by fusing them with the following non- $\varepsilon$ -transition) and then determinizing the automaton through the subset construction. We denote by  $\mathcal{B}(\mathcal{A})$  the resulting automaton. We call *beliefs* the states of  $\mathcal{B}(\mathcal{A})$ , i.e., they describe the set of regions the attacker believes the system may be in.

Let  $B$  be a belief of  $\mathcal{B}(\mathcal{A})$  and  $B_{priv}$  (resp.  $B_{pub}$ ) be the subset of  $B$  containing the regions which associated location in  $\mathcal{A}_{memo}$  is private (resp. public) and final. We say that  $B$  is weakly (resp. fully) *discriminating* if  $B_{priv} \neq \emptyset$  and  $B_{pub} = \emptyset$  (resp. if either  $B_{priv} \neq \emptyset$  and  $B_{pub} = \emptyset$  or  $B_{priv} = \emptyset$  and  $B_{pub} \neq \emptyset$ ). The discriminating beliefs in  $\mathcal{B}(\mathcal{A})$  allow to characterize the opacity problems.

**Proposition 3 (Relation between opacity and discriminating belief).**  
*A TA  $\mathcal{A}$  is weakly (resp. fully) opaque w.r.t.  $N$  observations iff  $\mathcal{B}(\mathcal{A})$  does not contain any weakly (resp. fully) discriminating belief.*

*Proof.* We focus on weak opacity, the full opacity case can be treated similarly.

– Assume first that  $\mathcal{B}(\mathcal{A})$  contains a weakly discriminating belief  $B$ . Let  $r$  be a region in  $B_{priv}$  and  $w$  be the trace of a path leading from the initial belief of  $\mathcal{B}(\mathcal{A})$  to  $B$ . By construction of the region automaton, there exists a run  $\rho$  of  $Tick(Unfold_N(\mathcal{A}_{memo}))$  whose untimed trace (i.e., the trace of  $\rho$  projected on the actions) is  $w$  and such that the run corresponding to  $\rho$  in the region automaton ends in  $r$ . In particular,  $\rho$  is a private run. Moreover, any run whose untimed trace is  $w$  ends in a region of  $B$ . Thus, there is no public run with trace  $w$  and in particular  $Tr(\rho) \in Tr^{priv}(Tick(Unfold_N(\mathcal{A}_{memo})))$  and  $Tr(\rho) \in Tr^{\overline{priv}}(Tick(Unfold_N(\mathcal{A}_{memo})))$ , hence  $Tick(Unfold_N(\mathcal{A}_{memo}))$  is not weakly opaque and  $\mathcal{A}$  is not weakly opaque w.r.t.  $N$  observations.

1 – Assume now that  $\mathcal{A}$  is not weakly opaque w.r.t.  $N$  ob-  
 2 servations. Let  $\rho$  be a run of  $\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}}))$  such  
 3 that  $\text{Tr}(\rho) \in \text{Tr}^{\text{priv}}(\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}})))$  and  $\text{Tr}(\rho) \notin$   
 4  $\text{Tr}^{\text{priv}}(\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}})))$ . Let  $[\rho]$  be the run corresponding to  $\rho$   
 5 in the region automaton.<sup>5</sup> We denote by  $T([\rho])$  the set of traces of runs of  
 6  $\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}}))$  associated to  $[\rho]$ .

7 **Lemma 2.** Denoting  $w = a_0, \dots, a_m$  the trace of  $[\rho]$ ,  $T([\rho])$  contains exactly  
 8 the words  $(a_0, \tau_0) \dots (a_m, \tau_m)$  satisfying the following constraints:

- 9 1.  $\forall i \in \llbracket 0; m \rrbracket, (a_i \in \Sigma \cup \Sigma_t \implies \tau_i - \tau_{i-1} > 0) \wedge (a_i \in \Sigma^0 \implies \tau_i - \tau_{i-1} = 0)$   
 10 (where  $\tau_{-1} = 0$ ), meaning that two consecutive observable actions occur  
 11 at the same time if and only if the second one is in  $\Sigma^0$ .
- 12 2.  $\forall i, j \in \llbracket 0; m \rrbracket, \forall J \subseteq \llbracket 0; N \rrbracket, \forall I \subseteq J, (i < j \wedge a_i = t_I \wedge a_j = t_J \wedge \forall k \in$   
 13  $\llbracket i+1; j-1 \rrbracket, \forall K \subseteq \llbracket 0; N \rrbracket (a_k = t_K \implies K \cap J = \emptyset)) \implies \tau_j - \tau_i = 1,$   
 14 meaning that two successive ticks of the same clocks are separated by  
 15 exactly 1 time unit.
- 16 3.  $\tau_m \geq 1 \implies (\exists i \in \llbracket 0; m \rrbracket, \exists I \subseteq \llbracket 0; N \rrbracket \forall j < i, a_i = t_I \wedge 0 \in I \wedge \tau_i =$   
 17  $1 \wedge (a_j \notin \Sigma_t)),$  meaning that the first occurrence of the tick of the clock  
 18  $x_0$  is at time 1.
- 19 4.  $\forall i \in \llbracket 0; m \rrbracket, (a_i \in \Sigma \cup \Sigma^0 \wedge \tau_m - \tau_i \geq 1) \implies (\exists k \in$   
 20  $\llbracket 0; m \rrbracket, \exists K \subseteq \llbracket 0; N \rrbracket, a_k = t_K \wedge \{j \in \llbracket 0; i \rrbracket \mid a_j \in \Sigma \cup \Sigma^0\} \in K \wedge \tau_k -$   
 21  $\tau_i = 1)$  meaning that each of the  $N$  observations is followed by its corre-  
 22 sponding tick exactly one time unit after it.
- 23 5.  $\forall i \in \llbracket 0; m \rrbracket, \forall I \subseteq \llbracket 0; N \rrbracket, (a_i = t_I \wedge \tau_m - \tau_i \geq 1) \implies \exists j \in \llbracket i+1; m \rrbracket, \exists J \subseteq$   
 24  $\llbracket 0; N \rrbracket, (I \subseteq J \wedge a_j = t_J)$  meaning that if a clock ticked and the run is  
 25 still at least one time unit long, then there will be a new tick of this clock  
 26 within the rest of the run.

27 Due to its size, we postpone the proof of this lemma to the bottom of this  
 28 section.

Note that this lemma implies that  $T([\rho])$  depends exclusively on the trace  $w$ ,  
 not on the path within the region automaton. Hence, given  $[\rho']$  such that the  
 trace of  $[\rho']$  is  $w$ , we have  $T([\rho']) = T([\rho])$ . In particular, let  $B$  be the belief  
 reached in  $\mathcal{B}(\mathcal{A})$  with trace  $w$ . For any region  $r \in B$  associated to a final  
 location, there exists a run  $\rho'$  such that  $\text{Tr}(\rho) = \text{Tr}(\rho')$  and  $[\rho']$  ends in  $r$ .  
 As  $\text{Tr}(\rho) \notin \text{Tr}^{\text{priv}}(\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}})))$  by assumption, we have that  $r$   
 is a region associated to a private location. Hence  $B_{\text{priv}} \neq \emptyset$  and  $B_{\text{pub}} = \emptyset$ ,  
 thus  $B$  is a weakly discriminating belief.  $\square$

29 *Proof (Proof of Theorem 9).* From Proposition 3, deciding weak and full opacity  
 30 of  $\mathcal{A}$  amounts to checking the existence of a discriminating belief in  $\mathcal{B}(\mathcal{A})$ . This  
 31 is simply achieved by a reachability test in the finite automaton  $\mathcal{B}(\mathcal{A})$ .

<sup>5</sup> The notation  $[\cdot]$  represents that  $[\rho]$  implicitly defines an equivalence class of runs  
 of  $\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}}))$ . For a run  $\rho'$  of  $\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}}))$ , we thus write  
 $\rho' \in [\rho]$  to say that the run associated to  $\rho'$  in the region automaton is  $[\rho]$ .

Considering the complexity, the unfolding of the TA, assuming  $N$  is in binary, has exponentially many states. Adding the ticks means adding an exponential number of clocks as well. Hence the region automaton is doubly exponential and its determinisation is triply exponential. Reachability being in NLOGSPACE implies the 2-EXPSPACE algorithm. If  $N$  is given in unary, the complexity falls to EXPSPACE.  $\square$

1 Let us finally establish Lemma 2. For ease of readability, we separate the  
2 proofs of the two inclusions implying the lemma.

3 **First direction of the proof** We first show the easy direction of the proof:  
4 the timed words in  $T([\rho])$  satisfy the five properties.

5 *Proof.* Let  $u = (a_0, \tau_0) \dots (a_m, \tau_m)$  be in  $T([\rho])$ . Since  $u \in T([\rho])$ , there exists a  
6 run  $\rho'$  in  $[\rho]$  on  $Tick(Unfold_N(\mathcal{A}_{memo}))$  which produces the trace  $u$ :

$$\rho' = (\ell_0, \mu_0) \xrightarrow{(d_0, e_0)} \dots (\ell_{j_i-1}, \mu_{j_i-1}) \xrightarrow{(d_{j_i-1}, e_{j_i-1})} (\ell_{j_i}, \mu_{j_i}) \dots (\ell_n, \mu_n)$$

7 Recall the link between the trace of a run and its transitions: for every  $i \in \llbracket 0; m \rrbracket$ ,  
8 the  $j_i$  index corresponds to the  $i$ -th observable action, i.e.,  $j_i$  satisfies  $\tau_i = \sum_{k=0}^{j_i} d_k$   
9 and  $e_{j_i}$  is labeled by  $a_i$ . We set  $\tau_{-1} = 0$ .

10 – *Property 1.* Let  $i \in \llbracket 0; m \rrbracket$ . The set of clocks reset by  $\varepsilon$ -transitions is included  
11 in  $\mathbb{X}$ . By definition of the indices  $j_i$ , there are only  $\varepsilon$ -transitions between the  
12 configurations  $(\ell_{j_{i-1}+1}, \mu_{j_{i-1}+1})$  if  $i > 0$  or the initial configuration if  $i = 0$ ,  
13 and  $(\ell_{j_i}, \mu_{j_i})$ . Thus, no clock from  $\mathbb{X}_t$  is reset among these transitions and  
14 we have  $\mu_{j_{i-1}+1}(x) + \sum_{k=j_{i-1}+1}^{j_i-1} d_k = \mu_{j_i}(x)$  for each  $x \in \mathbb{X}_t$ . Assume  $a_i \in \Sigma^0$ .

15 As  $a_i \in \Sigma^0$ , the guard of  $e_{j_i}$  is of the form  $g \wedge \bigwedge_{k=0}^h (x_k < 1) \wedge \bigvee_{k=0}^h (x_k = 0)$  with  
16 some guard  $g$  and the copy number  $h \leq i$  of  $e_{j_i} \in E^{h \rightarrow h+1}$  (in other words,  
17 the integer  $h$  such that the transition of the original automaton starts in the  
18 copy  $L^h$ ). In particular, there exists a clock  $x \in \mathbb{X}_t$  such that  $\mu_{j_i}(x) + d_{j_i} = 0$ .

19 Therefore we obtain  $\mu_{j_{i-1}+1}(x) + \sum_{k=j_{i-1}+1}^{j_i} d_k = 0$ , which implies  $\tau_i - \tau_{i-1} = 0$ .

20 Let us now assume that  $a_i \in \Sigma \cup \Sigma_t$ , and show that  $\tau_i - \tau_{i-1} > 0$ . Depending  
21 on whether  $a_i$  is in  $\Sigma$  or in  $\Sigma_t$ , the guard of the transition  $e_{j_i}$  can be of two

22 forms :  $g \wedge \bigwedge_{k=0}^h (0 < x_k < 1)$  with  $g$  some guard and  $h$  some copy number, if  
23  $a_i \in \Sigma$ ; or  $\bigwedge_{k \in K} (x_k = 1) \wedge \bigwedge_{m \in \llbracket 0; h \rrbracket \setminus K} (0 < x_m < 1)$  with  $K \subseteq \llbracket 0; h \rrbracket$  non-empty  
24 and  $h$  a copy number, if  $a_i \in \Sigma_t$ . In both cases, we must have  $\mu_{j_i}(x_k) + d_{j_i} > 0$   
25 for each  $x_k \in \mathbb{X}_t$  such that  $k \leq h$ . However the last observable transition  
26  $e_{j_{i-1}}$  resets one of those clocks  $x$ , which gives  $\mu_{j_{i-1}+1}(x) = 0$ . Hence  $0 <$

$$27 \mu_{j_i}(x) + d_{j_i} = \mu_{j_{i-1}+1}(x) + \sum_{k=j_{i-1}}^{j_i} d_k = \sum_{k=j_{i-1}}^{j_i} d_k .$$

- 1 – *Property 2.* Let  $i, i' \in \llbracket 0; m \rrbracket$ , with  $i < i'$ . Assume there are  $I' \subseteq \llbracket 0; N \rrbracket$  and  
2  $I \subseteq I'$  such that  $a_i = t_I$  and  $a_{i'} = t_{I'}$ . Suppose that for every  $k \in \llbracket i+1; i'-1 \rrbracket$   
3 and for each  $K \subseteq \llbracket 0; N \rrbracket$ ,  $a_k = t_K \implies K \cap I' = \emptyset$ . Let us show that  
4  $\tau_{i'} - \tau_i = 1$ .
- 5 Let  $x \in \{x_k \mid k \in I\} \subseteq \mathbb{X}_t$ . After the reset applied by  $e_{j_i}$ , we have:  $\mu_{j_{i+1}} =$   
6  $[\mu_{j_i} + d_{j_i}]_{\{x_k \mid k \in I\}} \models (x = 0)$ . In order to take the transition  $e_{j_{i'}}$ , the clock  
7 valuation  $\mu_{j_{i'}} + d_{j_{i'}}$  needs to satisfy the guard  $(x = 1)$ . It remains to show  
8 that  $x$  is not reset between  $e_{j_i}$  and  $e_{j_{i'}}$ . Let  $e$  be a transition between  $e_{j_i}$   
9 and  $e_{j_{i'}}$ . If  $e$  is an  $\varepsilon$ -transition, it does not reset any clock in  $\mathbb{X}_t$ . If  $e$  is labeled  
10 by a letter in  $\Sigma \cup \Sigma^0$ , it is in some  $E^{h' \rightarrow h'+1}$  with  $h' \geq h$  and  $h$  the copy  
11 number of the configuration preceding  $e_{j_i}$ . The only clock  $e$  resets that is not  
12 in  $\mathbb{X}$  is  $x_{h'+1}$ , and cannot be  $x$  since  $I \subseteq \llbracket 0; h \rrbracket$ . Finally, if  $e = (\ell, t_K, g, R, \ell')$   
13 is labeled by a tick  $t_K$  for some  $K \subseteq \llbracket 0; N \rrbracket$ , the hypothesis  $K \cap I' = \emptyset$  in  
14 the property ensures that  $x$  is not part of the set of clocks reset by  $e$ . Hence,  
15 we obtain  $\mu_{j_{i'}}(x) + d_{j_{i'}} = [\mu_{j_i} + d_{j_i}]_{\{x_k \mid k \in I\}} + \sum_{k=j_i+1}^{j_{i'}} d_k = \tau_{i'} - \tau_i = 1$ , which  
16 concludes the proof of the second point.
- 17 – *Properties 3 and 4.* Both properties 3 and 4 are similar and require the first  
18 tick of a clock in  $\mathbb{X}_t$  to occur one time unit after reaching the corresponding  
19 copy of the automaton. Indeed Property 3 is the particular case of  $h = 0$  in  
20 the following proof, and Property 4 is the case  $h > 0$ . Let  $h \in \llbracket 0; N \rrbracket$ . We  
21 focus on the clock  $x_h \in \mathbb{X}_t$ . Let  $i$  be the index of the  $h$ -th observation in the  
22 trace, that is to say the  $h$ -th letter of the trace that is in  $\Sigma \cup \Sigma^0$ . If  $h = 0$ ,  
23 we set  $i = -1$ . In any cases  $\tau_i$  is the time of arrival in the copy  $h$  via the  
24 transition  $e_{j_i} \in E^{h-1 \rightarrow h}$ , and at this precise moment  $x_h = 0$ . Every guard  
25 of the transitions of  $E^{h'}$  and  $E^{h' \rightarrow h'+1}$  with  $h' \geq h$  requires that  $x_h < 1$ ,  
26 except for the transitions labeled by  $t_K$  with  $h \in K$ , which reset  $x_h$  and  
27 require  $x_h = 1$ . Thus,  $x_h$  must have been reset if the run lasts more than one  
28 time unit after the  $h$ -th observation, i.e., if  $\tau_m - \tau_i \geq 1$ . The only transitions  
29 from the copy  $h$  that can reset  $x_h$  are those labeled by  $t_K$  with  $h \in K$ ; their  
30 guards require  $x_h = 1$  so the first reset of  $x_h$  after reaching the copy  $h$  needs  
31 to occur at time  $\tau_i + 1$ .
- 32 – *Property 5.* We use the same argument as Properties 3 and 4 to prove the fifth  
33 property. Let  $i \in \llbracket 0; m \rrbracket$ , and suppose  $a_i = t_I$  for some non-empty  $I \subseteq \llbracket 0; N \rrbracket$   
34 and  $\tau_m - \tau_i \geq 1$ . The transitions following  $e_{j_i}$  require  $\bigwedge_{k \in I} (x_k < 1)$ , unless they  
35 reset all the clocks in  $R_I = \{x_k \mid k \in I\}$ . As  $\tau_m - \tau_i \geq 1$ , an observable action  
36 occurs at least one time unit after  $e_{j_i}$  and the clocks of  $R_I$  thus needed to  
37 be reset. Hence there is a tick transition labeled by  $t_J$  with  $I \subseteq J$  happening  
38 after  $e_{j_i}$ .

□

39 **Second direction of the proof** Now we tackle the second direction of the  
40 proof: we show that if  $a_0 \dots a_m$  is the trace of a run  $[\rho]$ , then all the timed words

1  $(a_0, \tau_0) \dots (a_m, \tau_m)$  that satisfy the five properties of the lemma are in  $T([\rho])$ ,  
 2 i.e., there are runs in  $[\rho]$  which produce these timed traces.

3 *Proof.* Let  $w = a_0 \dots a_m$  be a trace in  $\mathcal{RA}_{Tick(Unfold_N(\mathcal{A}_{memo}))}$ , and let  
 4  $\tau = (\tau_0, \dots, \tau_m)$  be a timestamps sequence such that the timed word  
 5  $(a_0, \tau_0) \dots (a_m, \tau_m)$  verifies the five properties of the lemma. We define the se-  
 6 quence  $(f_i)_{0 \leq i \leq N}$  of the timestamps' fractional parts associated to each tick  
 7 clock. For each  $i \in \llbracket 0; N \rrbracket$  we set  $J_i = \{j \in \llbracket 0; m \rrbracket \mid \exists I \subseteq \llbracket 0; N \rrbracket, i \in I \wedge a_j = t_I\}$ .  
 8 Let  $first(i) = \min \{j \in \llbracket 0; m \rrbracket \mid \{k \in \llbracket 0; j \rrbracket \mid a_k \in \Sigma \cup \Sigma^0\} \mid = i\}$  (be the subscript  
 9 of the  $i$ -th observation) if  $i > 0$  and  $first(0) = -1$ . Thus  $first(i)$  is the subscript of  
 10 the first observation in  $w$  that resets the clock  $x_i \in \mathbb{X}_t$ . We set  $f_i = \text{frac}(\tau_{first(i)})$ .  
 11 Then, from properties 2 and 4 we have that for each  $i$  in  $\llbracket 0; N \rrbracket$  and for each  
 12  $j \in J_i$ ,  $\text{frac}(\tau_j) = f_i$ . From property 3, we get  $f_0 = 0$ .

13 If  $i, i' \in \llbracket 0; N \rrbracket$  with  $i < i'$ , then property 1 ensures that  $f_i = f_{i'}$  if and only  
 14 if there exist  $j \in J_i \cup \{first(i)\}$  such that  $j + 1 = first(i')$  and  $a_{first(i')} \in \Sigma^0$ .  
 15 Note that the sequence  $(f_i)_{0 \leq i \leq N}$  depends only on the timed trace and not on  
 16 the path in the region automaton.

17 Let  $[\rho] : r_0, b_0, r_1, \dots, b_{p-1}, r_p$  be a run in  $Tick(Unfold_N(\mathcal{A}_{memo}))$  of trace  $w$ .  
 18 For  $n \in \llbracket 0; p \rrbracket$  we define (deduced from  $\tau$ ) the constraint  $C_{\tau, r_n}$  on the tick clocks,  
 19 in order to produce a run of  $[\rho]$  that corresponds to  $\tau$ . We denote by  $\ell_n^h$  the  
 20 location of  $r_n$  with  $h$  the number of the copy of  $L$  it belongs to, and by  $[\mu_n]$  the  
 21 clock region of  $r_n$ .

22 We distinguish two cases depending on whether  $r_n$  is a region where at least  
 23 one tick clock has integer value (noting that, by property of the region automa-  
 24 ton, if one valuation of  $[\mu_n]$  give an integer value to a clock, then all valuations  
 25 of  $[\mu_n]$  do).

–  $\exists x_i \in \mathbb{X}_t, \mu_n(x_i) \in \mathbb{N}$ : In this case and if  $i \leq h$  we set (*type 1 constraint*)

$$\begin{aligned} C_{\tau, r_n} &= \bigwedge_{k=0}^h ((f_k \leq f_i \implies \text{frac}(x_k) = f_i - f_k) \\ &\quad \wedge (f_i < f_k \implies \text{frac}(x_k) = f_i - f_k + 1)) \\ &\quad \wedge \bigwedge_{k=h+1}^N (\text{frac}(x_k) = x_0) \end{aligned}$$

26 –  $\forall x_i \in \mathbb{X}_t, \mu_n(x_i) \notin \mathbb{N}$ :

27 Let  $i$  be the index of one of the last tick clocks that were reset in  $[\rho]$  before  $r_n$ .  
 28 If there is no tick clock reset before  $r_n$ , we set  $i = 0$ . Similarly, we consider  
 29  $j \in \llbracket 0; h+1 \rrbracket$  one of the clock indices of the next tick clock reset after  $r_n$ . If  
 30 there is no tick clock reset after  $r_n$ , we take the next tick clock reset that is  
 31 supposed to occur, i.e.,  $j = \min \{j' \in \llbracket 1; h \rrbracket \mid f_i < f_{j'}\}$  or  $j = 0$  if this set is  
 32 empty.

33 If  $j \in J_0$ , we set (*type 2 constraint*)

$$C_{\tau, r_n} = \exists \delta \in (0; 1) \bigwedge_{k=0}^h (f_i - f_k < x_k < 1 - f_k \wedge 1 - f_k - x_k = \delta) \wedge \bigwedge_{k=h+1}^N (\text{frac}(x_k) = x_0)$$

Otherwise, and if we have  $0 < j < h+1$  and  $j \notin J_0$ , we set (*type 3 constraint*)

$$\begin{aligned} C_{\tau, r_n} = & \exists \delta \in (0; 1) \bigwedge_{k=0}^h ((f_k < f_j \implies (f_i - f_k < x_k < f_j - f_k \wedge f_j - f_k - x_k = \delta)) \\ & \wedge (f_j \leq f_k \implies (f_i - f_k + 1 < x_k < f_j - f_k + 1 \wedge f_j - f_k + 1 - x_k = \delta))) \\ & \wedge \bigwedge_{k=h+1}^N (\text{frac}(x_k) = x_0) \end{aligned}$$

If  $j = h+1$  we operate a slight change on this formula to obtain the following one: (*type 4 constraint*)

$$\begin{aligned} C_{\tau, r_n} = & \exists \delta \in (0; 1) \bigwedge_{k=0}^h ((f_k < f_{h+1} \implies (f_i - f_k < x_k \leq f_{h+1} - f_k \wedge f_{h+1} - f_k - x_k = \delta)) \\ & \wedge (f_{h+1} < f_k \implies (1 - f_k < x_k \leq f_{h+1} - f_k + 1 \wedge f_{h+1} - f_k + 1 - x_k = \delta))) \\ & \wedge \bigwedge_{k=h+1}^N (\text{frac}(x_k) = x_0) \end{aligned}$$

1

2 Now we combine this information to the constraints of the clock regions of a  
3 run in the region automaton to build a set of runs in  $\text{Tick}(\text{Unfold}_N(\mathcal{A}_{\text{memo}}))$ .

4 For  $n \in \llbracket 0; p \rrbracket$  we define the set of valuations

$$M_n := \{\mu \in [\mu_n] \mid \mu \models C_{\tau, r_n}\}.$$

5 We denote by  $[\rho]_{\tau}$  the subset of  $[\rho]$  defined by  $r'_0, b_0, r'_1, \dots, b_{p-1} r'_p$  where for each  
6  $n \in \llbracket 0; p \rrbracket$ ,  $r'_n = (\ell_n^h, M_n)$ . The idea is that the successive clock valuations of runs  
7 of  $[\rho]_{\tau}$  are in these sets  $M_n$  of valuations which correspond to region changes:  
8 a tick clock reaches or exits an integer value each time the next clock valuation  
9  $\mu'_{n+1}$  does no more satisfy  $C_{\tau, r_n}$ .

10 We prove by induction that  $[\rho]_{\tau}$  is not empty. The set  $M_0$  contains at least  
11  $\mu_0$  since it verifies  $C_{\tau, r_0} = (\text{frac}(x_0) = 0) \wedge \bigwedge_{k=1}^N \text{frac}(x_k) = 0$ . Assume now  
12 there is a path  $(\ell_0^0, \mu'_0), b_0, \dots, (\ell_n^h, \mu'_n)$  with  $\mu'_j \in M_j$  for each  $j \in \llbracket 0; n \rrbracket$ . We  
13 show there exists  $\mu'_{n+1} \in M_{n+1}$  such that  $(\ell_0^0, \mu'_0), b_0, \dots, (\ell_n^h, \mu'_n), \mu'_{n+1}$  is a  
14 path in  $r'_0, b_0, r'_1 \dots r'_{n+1}$ . It is well known [14] that in the region automaton,  
15  $((\ell, [\mu]), a, (\ell', [\mu'])) \in E_R$  if and only if for all  $\mu \in [\mu]$  there exists  $\mu' \in [\mu']$   
16 such that  $(\ell, \mu) \xrightarrow{e} (\ell', \mu') \in E$ , with  $e$  being the transition associated to  
17  $((\ell, [\mu]), a, (\ell', [\mu']))$  in the timed automaton. Since  $\mu'_n \in [\mu_n]$ , by the above prop-  
18 erty we can find  $\mu'_{n+1} \in [\mu_{n+1}]$  following the transition  $(r_n, b_n, r_{n+1})$ . We show  
19 that there is such a  $\mu'_{n+1}$  that is also in  $M_{n+1}$ , i.e., such that  $\mu'_{n+1} \models C_{\tau, r_{n+1}}$ .

20 – Suppose first  $(r_n, b_n, r_{n+1})$  is a discrete transition, with reset set  $R$ . Only  
21 one clock valuation  $\mu'_{n+1}$  can succede to  $\mu'_n$  in this case. We show it is in

$M_{n+1}$ . If  $b_n \in \Sigma$  (resp.  $\Sigma^0$ ), then  $\mu'_n$  verifies a type 1 (resp. 4) constraint. We move to copy  $h+1$  with a reset of some tick clocks (including  $x_{h+1}$ ) so the next constraint to be verified is of type 1. The clock valuation  $\mu'_{n+1}$  is entirely determined by  $\mu'_n$  and the clock reset set. Since we move to copy  $h+1$ , the clock  $x_{h+1}$  is now part of the tick clocks indexed from 0 to the current copy number, and  $\mu'_{n+1}(x_{h+1}) = 0$ , which is required by the constraint  $C_{\tau, r_{n+1}}$ . Moreover the constraints on the other clocks did not change. Thus the new type 1 constraint  $C_{\tau, r_{n+1}}$  is verified by  $\mu'_{n+1}$ . Now, if  $b_n \in \Sigma_t$ , only clocks reaching 1 are reset so their fractional part is not affected and the clock valuation  $\mu'_{n+1}$  still satisfies  $C_{\tau, r_n}$ . The constraint  $C_{\tau, r_{n+1}}$  depends on the time elapsed since the last tick and whether the transition was an observation, so in this case  $C_{\tau, r_{n+1}} = C_{\tau, r_n}$ . Finally, if  $b_n$  is an  $\varepsilon$ -transition, it only resets clocks from  $\mathbb{X}$  and we have again  $C_{\tau, r_{n+1}} = C_{\tau, r_n}$ . Since this constraint restricts only clocks from  $\mathbb{X}_t$  and since their valuation does not change,  $\mu'_{n+1}$  still verifies  $C_{\tau, r_n}$  and is in  $M_{n+1}$ .

– We now assume that  $(r_n, b_n, r_{n+1})$  is a delay transition: there is  $d_n \in (0; 1)$  such that  $\mu'_{n+1} = \mu'_n + d_n$ . This delay must verify some conditions because  $\mu'_n$  is fixed and a transition can change region only once. In all this paragraph, we take  $i$  (resp.  $j$ ) some index of the last (resp. next) reset tick clocks. Suppose that  $C_{\tau, r_n}$  is a constraint of type 2, 3 or 4. Assume in the first case that  $x_j \in \mathbb{X}_t$  is such that  $\mu_{n+1}(x_j) \in \mathbb{N}$  (so the next constraint  $C_{\tau, r_{n+1}}$  is of type 1). Thus this clock has reached 1 ( $\mu'_{n+1}(x_j) = 1$ ) and  $C_{\tau, r_n}$  is a type 2 or 3 constraint. This setting entirely determines the unique reachable clock valuation  $\mu'_{n+1}$ . From the fact that  $\mu'_n$  models  $C_{\tau, r_n}$ , we have some  $\delta \in (0; 1)$  such that  $1 + f_j - f_j - \mu'_n(x_j) = \delta$ . Consequently  $d_n = \delta$ . We easily verify that the obtained  $\mu_{n+1}$  satisfies  $C_{\tau, r_{n+1}}$ . Now if the next clock to be reset is  $x_{h+1}$  and there is no other delay transition before the next observation, then  $C_{\tau, r_n}$  is a type 4 constraint and we need to have  $\mu'_{n+1}(x_{h+1}) = f_{h+1}$ , which means that  $d_n = f_{h+1} - \mu'_n(x_0)$ . The next constraint  $C_{\tau, r_{n+1}}$  is still the same as  $C_{\tau, r_n}$ . We have some  $\delta$  for  $C_{\tau, r_n}$  and obtain the new  $\delta' = \delta - d_n = 0$  to satisfy  $C_{\tau, r_{n+1}}$ .

Suppose now that there will be at least one other delay transition before the next tick clock reset. Assume  $C_{\tau, r_n}$  is of type 2, 3 or 4. Then, if this transition changes region, it only concerns clocks from  $\mathbb{X}$  and we have  $C_{\tau, r_n} = C_{\tau, r_{n+1}}$ . The preceding constraint gives  $\delta = 1 - \mu'_n(x_j)$  if  $C_{\tau, r_n}$  is of type 2 or 3 and  $\delta = f_j - \mu'_n(x_j)$  if it is of type 4. The delay  $d_n$  cannot reach  $\delta$  (otherwise  $\mu'_{n+1}(x_j) \in \mathbb{N}$  or the transition crosses more than one clock region at once, two excluded cases). We can construct the new  $\delta' = \delta - d_n$  involved in  $\mu'_{n+1} \models C_{\tau, r_{n+1}}$  and verify that  $\mu'_{n+1}$  is thus still in  $M_{n+1}$ . Assume now that  $C_{\tau, r_n}$  is of type 1. Then the next region must give a constraint of type 2, 3 or 4. This case is similar to the last tackled one, and for the same reasons the delay  $d_n$  cannot reach  $1 - f_i + f_*$  where  $f_* \in \{-f_j, 1 - f_j\}$ . In both cases we obtain from the  $\delta$  of  $C_{\tau, r_n}$  the new one  $\delta' = \delta - d_n$  for  $C_{\tau, r_{n+1}}$ , which is verified.

Hence and by induction,  $[\rho]_\tau$  is not empty.

It remains to show that the timed trace these runs produce is  $(a_0, \tau_0) \dots (a_m, \tau_m)$  (recall that is is the trace of  $[\rho]$  timed by a timestamp  $\tau$  which verifies the five properties of the lemma). Let  $\rho' \in [\rho]_\tau$ . Let  $(a_i, \tau_i)$  be a letter of the timed trace. Suppose the action  $a_i$  occurs in  $\rho'$  at time  $\tau'_i$  following the clock region  $[\mu_{j_i}]$ . Then the number of ticks of  $x_0$  before  $a_i$  is given by the trace and is exactly  $\lfloor \tau_i \rfloor = \lfloor \tau'_i \rfloor$ . We know that  $\text{frac}(\tau'_i) = \text{frac}(\mu_{j_i}(x_0))$ . Moreover,  $a_i$  occurs at the same time as the reset of a clock  $x_k$ . If  $a_i$  is a tick, the constraint of  $M_{j_i}$  forces  $\mu_{j_i}(x_0) = f_k$  and we have  $i \in J_k$  so  $\text{frac}(\tau'_i) = f_k = \text{frac}(\tau_i)$ . Otherwise  $a_i$  is an observation, so there exists  $h \in \llbracket 0; N - 1 \rrbracket$  such that  $i = \text{first}(h + 1)$ . The clock  $x_{h+1}$  has never been reset yet so  $\tau'_i = \mu_{j_i}(x_{h+1})$ . The constraint of  $M_{j_i}$  gives  $\text{frac}(\mu_{j_i}(x_{h+1})) = f_{h+1}$  and  $\text{frac}(\mu_{j_i}(x_0)) = f_{h+1}$ . Since  $i = \text{first}(h + 1)$ , we obtain  $\text{frac}(\tau_i) = f_{h+1} = \mu_{j_i}(x_0) = \text{frac}(\tau'_i)$ .  $\square$