



HAL
open science

Vibrational properties of selected multicomponent perovskites

Maria Gazda, Tadeusz Miruszewski, D. Jaworski, M. Winiarski, Philippe Colombari

► To cite this version:

Maria Gazda, Tadeusz Miruszewski, D. Jaworski, M. Winiarski, Philippe Colombari. Vibrational properties of selected multicomponent perovskites. 7th International Workshop Prospects on Protonic Ceramic Cells - PPCC 2024, Université de Dijon, Jun 2024, Dijon, France. <hal-04684657>

HAL Id: hal-04684657

<https://hal.science/hal-04684657v1>

Submitted on 3 Sep 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire HAL, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Vibrational properties of selected multicomponent perovskites

M. Gazda¹, T. Miruszewski¹, D. Jaworski¹, M. Winiarski¹, Ph. Colomban²

¹ Gdańsk University of Technology, Narutowicza 11/12, 80-233 Gdańsk, Poland

² Sorbonne Université, CNRS, MONARIS UMR8233, 4 Place Jussieu

75252 PARIS CEDEX 05, France

In this work, we present selected properties of multicomponent perovskite oxides, i.e. $\text{BaZr}_{0.2}\text{Hf}_{0.2}\text{Ti}_{0.2}\text{Sn}_{0.2}\text{Me}_{0.2}\text{O}_{3-x}$, where Me = Ce, Y, Yb, Sm, In and Nb. Raman spectroscopic analyses were carried out using a spectrometer equipped with a green (514 nm) and blue (457 nm) laser. Non-resonance spectra were collected. Exemplary results obtained with the 457 nm laser are presented in Fig. 1.

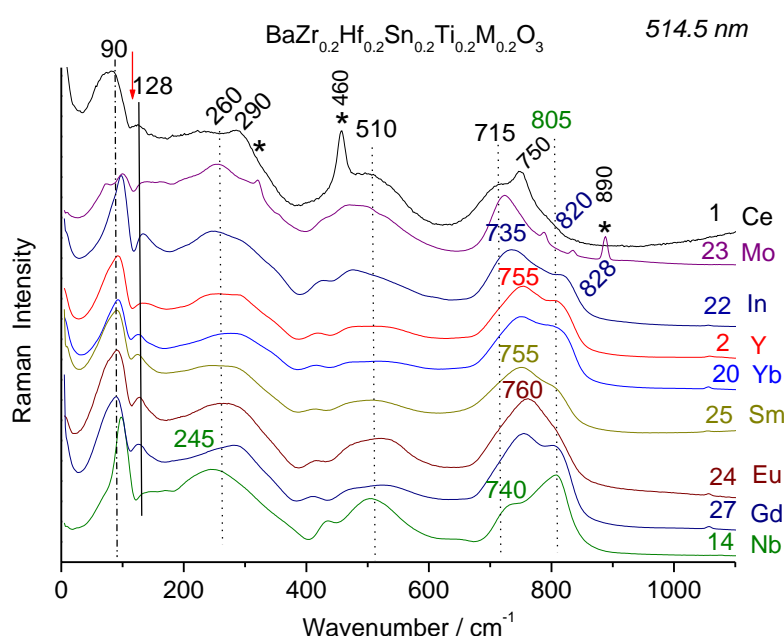


Figure 1. Raman spectra obtained with the blue laser excitation.

The spectra consist of several maxima (~ 100 (lattice mode), 250, 500 and 750 cm^{-1} (librational, bending and stretching mode of MO_6 octahedron) though the samples, within the accuracy of the X-ray diffractometry, are single-phase cubic perovskites. The lowest intensity of the Raman signals is observed in the $\text{BaZr}_{0.2}\text{Hf}_{0.2}\text{Ti}_{0.2}\text{Sn}_{0.2}\text{Ce}_{0.2}\text{O}_3$ oxide, which does not contain either acceptor- or donor-type constituents according a more cubic structure. The results are compared to those obtained in poly- and monocrystalline BaZrO_3 cubic perovskite [1]. Possible distortions from the cubic perovskite symmetry related to the presence of 5 B-site constituents are discussed.

[1] Dong-Hyeon Gim, , Yeahan Sur, Yoon Han Lee, Jeong Hyuk Lee, Soonjae Moon, Yoon Seok Oh and Kee Hoon Kim, **Pressure-Dependent Structure of BaZrO_3 Crystals as Determined by Raman Spectroscopy**, *Materials*, (15), 4286 (2022)