



**HAL**  
open science

## Fantastic squeaks and where to find them: producing and analysing audible acoustics from leipäjuusto

Elina Nurkkala, Craig Stuart Carlson, Anu Hopia, Michiel Postema

### ► To cite this version:

Elina Nurkkala, Craig Stuart Carlson, Anu Hopia, Michiel Postema. Fantastic squeaks and where to find them: producing and analysing audible acoustics from leipäjuusto. *Current Directions in Biomedical Engineering*, 2024, Proceedings of the 58th Annual Meeting of the German Society of Biomedical Engineering (18 – 20 September 2024, Stuttgart), 10 (4), pp.465-468. 10.1515/cdbme-2024-2114 . hal-04737473v2

**HAL Id: hal-04737473**

**<https://hal.science/hal-04737473v2>**

Submitted on 18 Dec 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

Elina Nurkkala, Craig S. Carlson\*, Anu Hopia, and Michiel Postema

# Fantastic squeaks and where to find them: producing and analysing audible acoustics from leipäjuusto

<https://doi.org/10.1515/cdbme-2024-2114>

**Abstract:** Chewing not only converts food chunks to digestible proportions, it also conveys audible acoustics resulting in a perception on the type and condition of the food being eaten. As biomedical engineers, we may want to reproduce the same eating experience for those who cannot chew or for those who have allergic reactions to some foods. But to understand this psychoacoustic phenomenon better, it is crucial to understand what produces the sound of specific foods. The purpose of this paper is to present a straightforward methodology to produce audible acoustics from a notoriously loud Finnish delicacy and analyse the sound produced. One hundred samples of leipäjuusto and one hundred samples of Gouda cheese for controls were subjected to shear between a bamboo board and a wetted blade. All leipäjuusto samples and none of the Gouda cheese samples produced audible squeaks. A 0.1-s delay between blade displacement and sound production was observed. We attribute this delay to the buildup to release. The frequency spectra from pushing and pulling movements were observed to have only negligible differences. This indicated that the internal structure between events did not change. Therefore, the hypothesis that a disruptive event underlies the squeaking process is less plausible.

**Keywords:** psychoacoustics, chewing sensation, Fourier analysis, Savitzky-Golay filter, slip stick motion.

\*Corresponding author: **Craig S. Carlson**, Department of Electrical Engineering and Automation, Aalto University, Maarintie 8, 02150 Espoo, FI; Department of Biomedical Technology, Faculty of Medicine and Health Technology, Tampere University, Korkeakoulunkatu 3, 33720 Tampere, FI and School of Electrical and Information Engineering, University of the Witwatersrand, Johannesburg, 1 Jan Smutslaan, Braamfontein 2050, ZA. email: [craig.carlson@aalto.fi](mailto:craig.carlson@aalto.fi)

**Elina Nurkkala**, Department of Biomedical Technology, Faculty of Medicine and Health Technology, Tampere University, Tampere, FI.

**Anu Hopia**, Functional Foods Forum, Faculty of Medicine, University of Turku, Turku, FI.

**Michiel Postema**, Department of Biomedical Technology, Faculty of Medicine and Health Technology, Tampere University, Tampere, FI and School of Electrical and Information Engineering, University of the Witwatersrand, Johannesburg, Braamfontein, ZA.

## 1 Introduction

Food acoustics convey emotions. Whilst the loud sounds produced by biting apples, carrots, and potato chips [1] convey nuisance to their surroundings, it is hard to imagine eating these in the absence of the accompanying sounds. The specific clack of the division of a chocolate tablet in the mouth, the crunch of a cookie, and the sparkling sound of popping candy typically create an instant fulfillment, even if the flavour itself is rather one-dimensional. In fact, it has been posed that the sound of food influences the perception of its flavour [2].

It is therefore safe to assume that experiencing food acoustics is as old as eating itself. Crackling sounds of a crusty baguette tell us that it is fresh, whilst the sound of bubbles that come from a cask may tell us that the fluid inside is fermenting [3, 4]. Apart from these passive acoustics, active acoustics have been used to measure texture and quality of food [5–7]. In the multiphase food cheese, active acoustics and tapping have been used to monitor the presence of cracks and the formation of eyes [8–10]. Scientific research into the sounds that give squeaky cheeses their name is sparse. Admittedly, potential applications such as accelerating and decelerating ripening processes by understanding the nature of the squeaks may seem a little futuristic. However, that does not make squeak production any less entertaining.

Squeaky cheese is the common term for a family of cheeses that includes halloumi, mozzarella, bread cheese (justoleipä, leipäjuusto), Oaxaca, and cheese curd [11–14]. When biting or chewing any of these, a squeaky sound is occasionally perceived. In attempts to reveal the internal structure of cheese, it has been studied with the aid of scanning electron microscopy, magnetic resonance imaging, and micro-computed tomography [15–19]. As some cheeses have been known to exude water after manufacture [20], it has been proposed that connecting cavities inside squeaky cheese form a resonating chamber. Alternatively, shear forces created by the teeth when biting cheese might force preexisting cavities to get physically connected to form such a chamber [21].

The purpose of this paper is to present a straightforward methodology to produce audible acoustics from these so-called squeaky cheeses, and analyse the resulting sounds.

## 2 Materials and methods

Acoustic experiments were performed on commercially available leipäjuusto, using a method previously published [19]. Gouda cheese was chosen for controls.

Elätuli Juustoleipä bread cheese (Vaasan Juustola Oy, Vaasa, Finland), prepackaged in 200-g pieces and Frico Gouda cheese (Koninklijke FrieslandCampina N.V., Amersfoort, The Netherlands), prepackaged in  $440 \pm 10$ -g pieces (Riitan Herkku Oy, Mustasaari, Finland), were manually cut into  $x \times y \times z = 14 \times 20 \times 5$ -mm<sup>3</sup> cuboids prior to experiments at room temperature. The standard deviations of the cuboid edges were determined to be less than 2 mm in each dimension using a standard ruler. Any squeaking during cutting was ignored.


A Leikkuulautu bamboo board (Tokmanni Oy, Mäntsälä, Finland) was marked with an area for consistent sample placement. The board was positioned on top of SOEHNLE Page Compact 300 scales (Leifheit AG, Nassau, Germany). Immediately after cheese sample placement on the board, a wetted 6.8003.22 steel blade (Victorinox AG, Ibach-Schwyz, Switzerland) was held sideways and manually slid over the sample, twice in positive and twice in negative direction of displacement, whilst pushing down to ensure a weight indication of  $4 \pm 2$  N. Audio footage was collected with a cell phone at a 40.1-kHz sampling frequency and stored in .m4a format for offline processing. Video footage was captured with another cell phone at a 30-Hz frame rate and stored in .mp4 format for ensuring reproducibility of the experiments and for offline processing. The display of the scales and the timer of the audio-recording cell phone were in the field of view of the video-recording cell phone, allowing for offline synchronizing.

Audio and video recordings were synchronised using Audacity® 2.3.2 software (Audacity Team, retrieved 08/05/2019 from <https://audacityteam.org/>) on a laptop computer. The audio data were divided and cropped into 800-ms segments, each starting at blade movement. Each segment was subjected to a 501-points fifth degree Savitzky-Golay filter in the frequency domain, using MATLAB® (The MathWorks, Inc., Natick, MA).

## 3 Results and discussion

Figure 1a shows an example of the sound produced by bread cheese. Blade displacement has been displayed on the same time scale.

It was noted that audible sound was produced with a delay of 0.1 s with respect to initial displacement of the blade. Sound production continued until 0.1 s after blade displacement had stopped. The displacement of the blade was measured to be

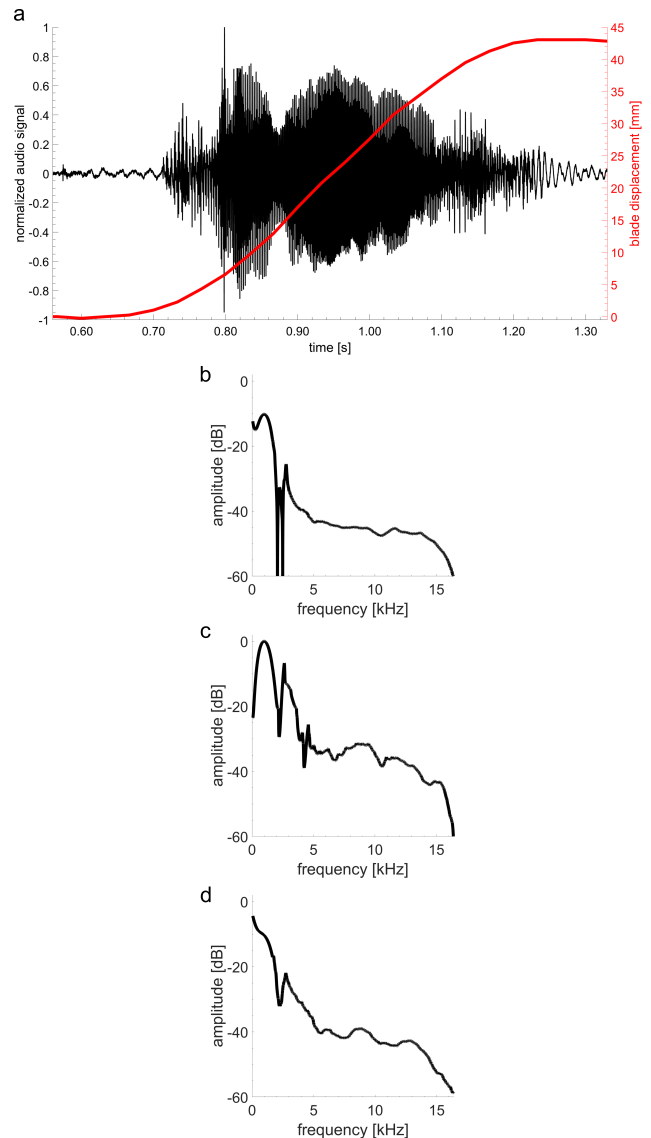

**Fig. 1:** Normalised audio signal (black) of a bread cheese squeak (a) and Fourier spectra of three windows of 0.15-s duration, starting at timestamps 0.60 s (b), 0.90 s (c), and 1.15 s (d), respectively. Blade displacement (red) has been superimposed in (a).

2.5 mm before sound production. This displacement was consistent throughout the experiments.

To find an explanation for this delay, let us briefly consider the working of quite a different string instrument. With a viola, friction force builds up during an attack with steady bow force and acceleration. The first slip happens when friction can no longer hold the string, as the static-friction limit is reached [22]. Later slips create periodic force spikes that in turn trigger string releases [22]. To use the viola analogy on squeaky cheese: if the connecting cavities are the chamber, the cheese fibers are the strings, and the blade is the bow. Thus,

we attribute the delay before sound production to the buildup to release. For purely academic purposes, it would be interesting to attack squeaky cheese with a viola bow, rather than a wetted blade, or the other way around.

Frequency spectra of the three stages of a squeak have been shown in Figure 1b–d. The first stage was a rubbing sound, the second stage a clearer tone, and the third stage a thudding sound. In all three spectra, peaks were observed at a fundamental frequency of 1 kHz. The second stage showed pronounced higher harmonics at 3 kHz and 5 kHz.

With the bread cheese, all four hundred rubs produced audible squeaks. None of the four hundred rubs over Gouda cheese produced a squeak. Therefore, for the cheeses chosen, there was no need to automate or roboticise the experimental process.

Figure 2 shows the frequency spectra of the synchronised bread cheese squeaks in positive (push) and negative displacement (pull) directions.

At frequencies greater than 8 kHz, the control spectra were overlapping the bread cheese spectra. The spectra from first versus second movements were observed to have only negligible differences. This indicated that the internal structure between events did not change.


It would be interesting to investigate whether these experiments can be downscaled to allow for ultrasonic palpography on biological samples. As a futuristic medical application, we are thinking of ultrasonic imaging of the shear from incisions by surgical blades.

## 4 Conclusions

A method to produce audible squeaks from bread cheese was presented, only requiring a wetted blade and a bamboo board. Due to the negligible differences between push and pull generated sounds, the hypothesis that a disruptive event underlies the squeaking process is less plausible.

### Author Statement

**Research funding:** This work was supported by the Academy of Finland, Grant Number 340026, by the Kone Foundation, and by the National Research Foundation of South Africa, Grant Number 127102. **Conflict of interest:** Authors state no conflict of interest. **Informed consent:** Authors state that informed consent is not applicable. **Ethical approval:** Authors state that no ethical approval was required for this research as no human or animal samples or data were used. This manuscript was written according to recipe [23], without the aid of artificial intelligence. **Data availability statement:** The

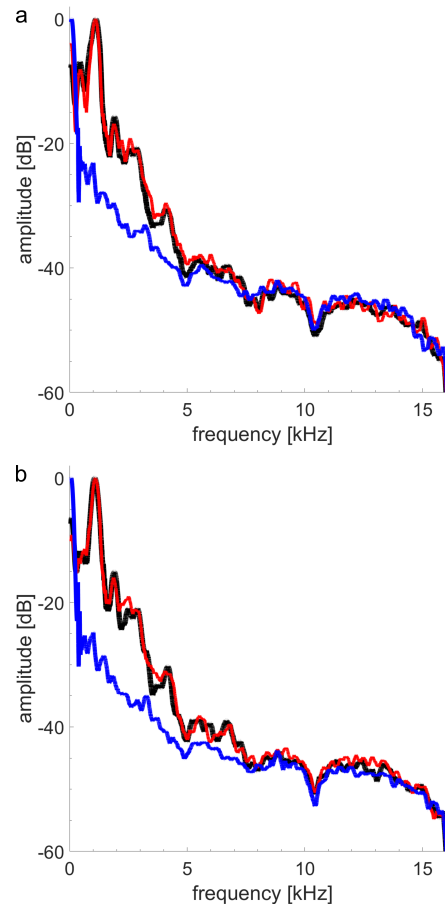

**Fig. 2:** Normalised Fourier amplitude spectra of synchronised bread cheese squeaks from pushing (a) and pulling (b) movements. Black lines represent the first movement, red lines represent the second movement in the same direction, and blue lines represent non-squeaking controls.

data that support the findings of this study are openly available in Zenodo at DOI: 10.5281/zenodo.12570606.

## References

- [1] Zampini M, Spense C. The role of auditory cues in modulating the perceived crispness and staleness of potato chips. *J Sens Stud* 2004;19:347–63.
- [2] Spence C. Eating with our ears: assessing the importance of the sounds of consumption on our perception and enjoyment of multisensory flavour experiences. *Flavour* 2015;4:3.
- [3] Lamberti N, Ardia L, Albanese D, Di Matteo M. An ultrasound technique for monitoring the alcoholic wine fermentation. *Ultrasonics* 2009;49:94–7.
- [4] Bowler AL, Pound MP, Watson NJ. Domain adaptation and federated learning for ultrasonic monitoring of beer fermentation. *Fermentation* 2021;7:253.

- [5] Calkins CO, Webb JC. Temporal and seasonal differences in movement of the Caribbean fruit fly larvae in grapefruit and the relationship to detection by acoustics. *Fla Entomol* 1988;71:409–16.
- [6] Duprat F, Grotte M, Pietri E, Loonis D, Studman CJ. The acoustic impulse response method for measuring the overall firmness of fruit. *J Agric Eng Res* 1997;66:251–9.
- [7] Galili N, Shmulevich I, Benichou N. Acoustic testing of avocado for fruit ripeness evaluation. *Trans ASAE* 1998;41:399–407.
- [8] Eskelinen JJ, Alavuotunki AP, Hæggstrøm E, Alatossava T. Preliminary study of ultrasonic structural quality control of Swiss-type cheese. *J Dairy Sci* 2007;90:4071–7.
- [9] Conde T, Mulet A, Clemente G, Benedito J. Detection of internal cracks in Manchego cheese using the acoustic impulse-response technique and ultrasounds. *J Dairy Sci* 2008;91:918–27.
- [10] Gonzalez M, Pérez N, Budelli E, Lema P. Acoustic monitoring of eye formation in Swiss type cheese. *Proc Mtgs Acoust* 2019;38:032002.
- [11] Kamilari E, Anagnostopoulos DA, Papademas P, Kamilari A, Tsaltas D. Characterizing halloumi cheese's bacterial communities through metagenomic analysis. *LWT* 2020;126:109298.
- [12] Zady CG, Paul A, Clement K, Koffi EK. Properties and mechanism of melted cheeses and non-melted cheeses: a case study mozzarella and bread cheese (juustoleipa). *Am J Food Sci Technol* 2019;7:94–8.
- [13] Sandoval-Copado J, Orozco-Villafuerte J, Pedrero-Fuehrer D, Colín-Cruz M. Sensory profile development of Oaxaca cheese and relationship with physicochemical parameters. *J Dairy Sci* 2016;99:7075–84.
- [14] Bodyfelt FW. Making American-type cheese at home. Technical Report FS 226, Oregon State University Extension Service; 1980.
- [15] Smith JR, Hindmarsh JP, Carr AJ, Golding MD, Reid D. Molecular drivers of structural development in mozzarella cheese. *J Food Eng* 2017;214:257–65.
- [16] Moghiseh N, Arianfar A, Salehi EA, Rafe A. Effect of inulin/kefir mixture on the rheological and structural properties of mozzarella cheese. *Int J Biol Macromol* 2021;191:1079–86.
- [17] Kuo M-I, Gunasekaran S, Johnson M, Chen C. Nuclear magnetic resonance study of water mobility in pasta filata and non-pasta filata mozzarella. *J Dairy Sci* 2001;84:1950–8.
- [18] Gianferri R, Maioli M, Delfini M, Brosio E. A low-resolution and high-resolution nuclear magnetic resonance integrated approach to investigate the physical structure and metabolic profile of Mozzarella di Bufala Campana cheese. *Int Dairy J* 2007;17:167–76.
- [19] Nurkkala E, Hannula M, Carlson CS, Hopia A, Hyttinen J, Postema M. Micro-computed tomography shows silent bubbles in squeaky mozzarella. *Curr Dir Biomed Eng* 2023;9:5–8.
- [20] Guo MR, Kindstedt PS. Age-related changes in the water phase of mozzarella cheese. *J Dairy Sci* 1995;78:2099–107.
- [21] Sharma P, Munro PA, Dessev TT, Wiles PG, Foegeding EA. Strain hardening and anisotropy in tensile fracture properties of sheared model mozzarella cheeses. *J Dairy Sci* 2018;101:123–34.
- [22] Guettler K. Bows, strings, and bowing. In: Rossinger TD, editor. *The Science of String Instruments*. New York: Springer. 2010;279–99.
- [23] Carlson CS, Postema M. A pocket-sized recipe for cooking up a scientific manuscript. Tampere: Tampere University; 2023.