

Source tracing of fluvial suspended sediments by magnetic, geochemical and spectrocolorimetric particle characterization: example of the Canche Watershed (Nord-Pas-De-Calais, France)

Edouard Patault, Claire Alary, Christine Franke, Maxime Debret, Arnaud Gauthier, Nor-Edine Abriak

▶ To cite this version:

Edouard Patault, Claire Alary, Christine Franke, Maxime Debret, Arnaud Gauthier, et al.. Source tracing of fluvial suspended sediments by magnetic, geochemical and spectrocolorimetric particle characterization: example of the Canche Watershed (Nord-Pas-De-Calais, France). EGU General Assembly 2016, Apr 2016, Vienne, Austria. hal-01630937

HAL Id: hal-01630937 https://hal.science/hal-01630937

Submitted on 8 Nov 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Source tracing of fluvial suspended sediments by magnetic, geochemical and spectrocolorimetric particle characterization: example of the Canche Watershed (Nord-Pas-De-Calais, France)


1 LGCgE, Ecole des Mines de Douai, Département Génie Civil & Environnemental, Douai, France - 2 MINES Paris-Tech, Centre de Géosciences, Fontainebleau, France – 3 UMR 6143 M2C, Université de Rouen, Bât. Irese A, Place Emile Blondel, 76821 Mont-Saint-Aignan Cedex

Introduction

quantify, trace and reduce soil erosion.

1. Objectives

- >Identify the sources of eroded material in the Canche watershed
- ➢ Evaluate the contribution of each the suspended source IN particulate matter (SPM)
- ➢ Provide information for watershed managers and identify most erodible areas

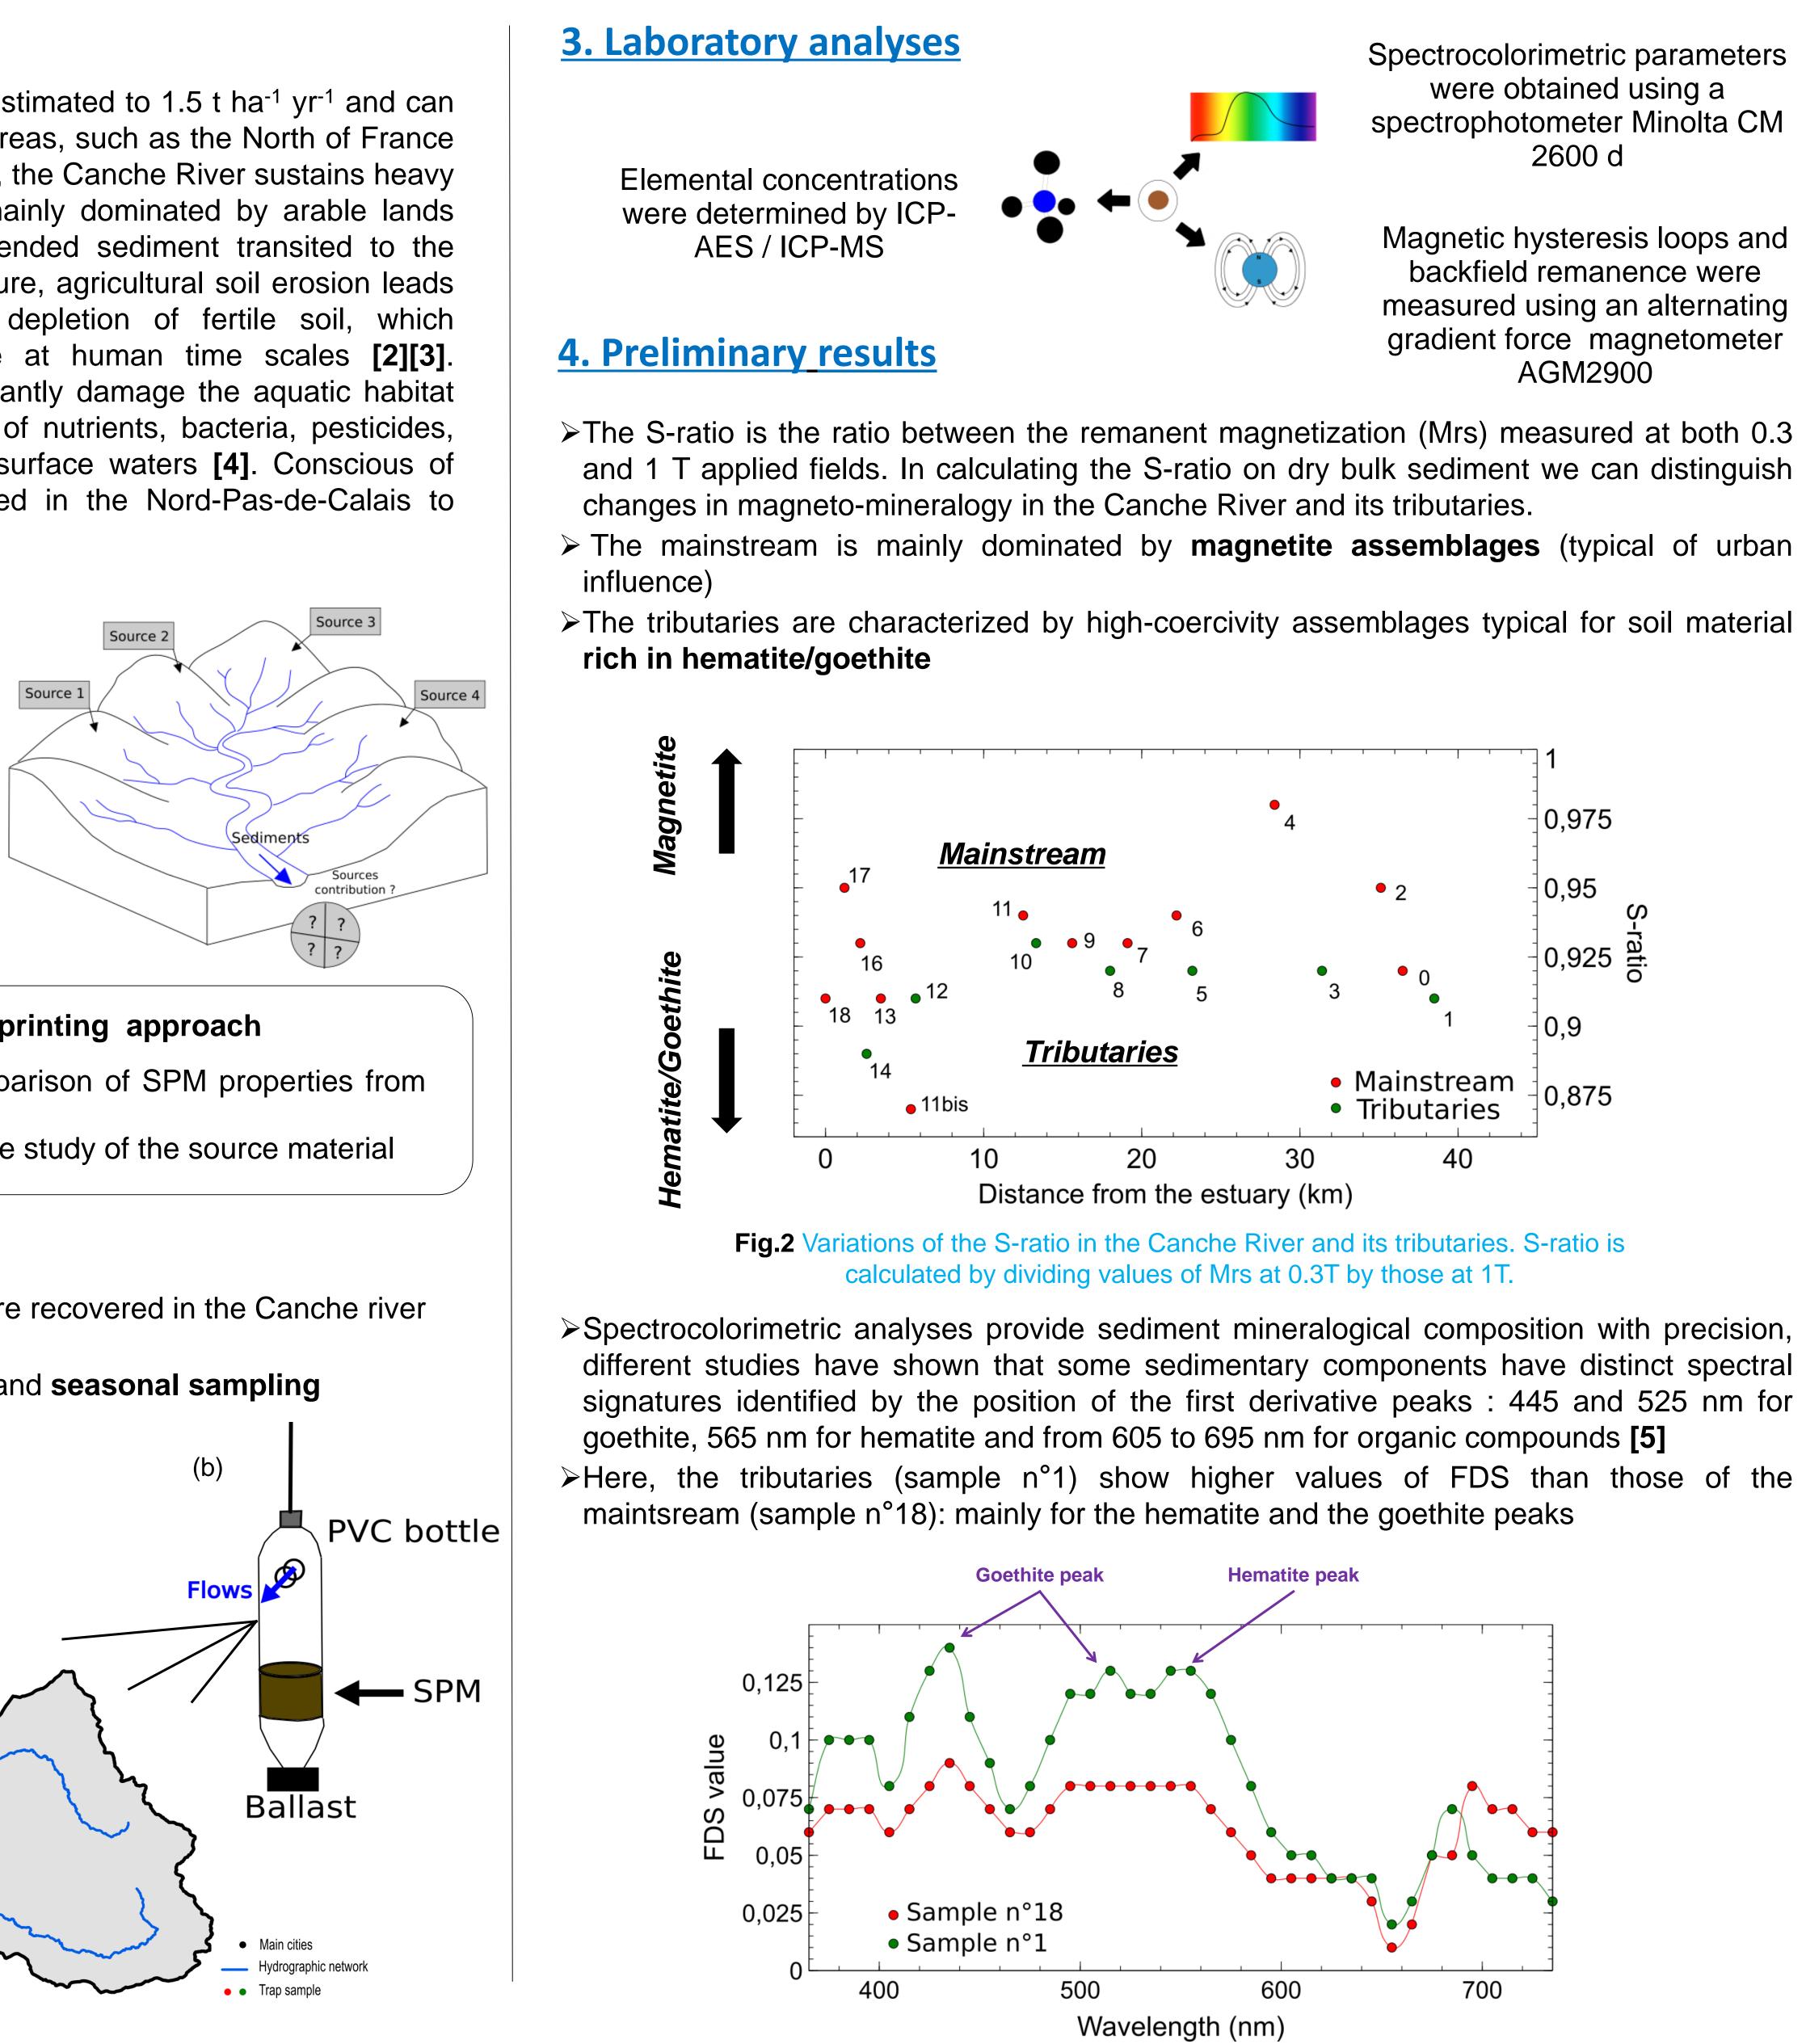

- the Canche River and its tributaries

- and its tributaries
- Sampling perspectives : snap shots and seasonal sampling

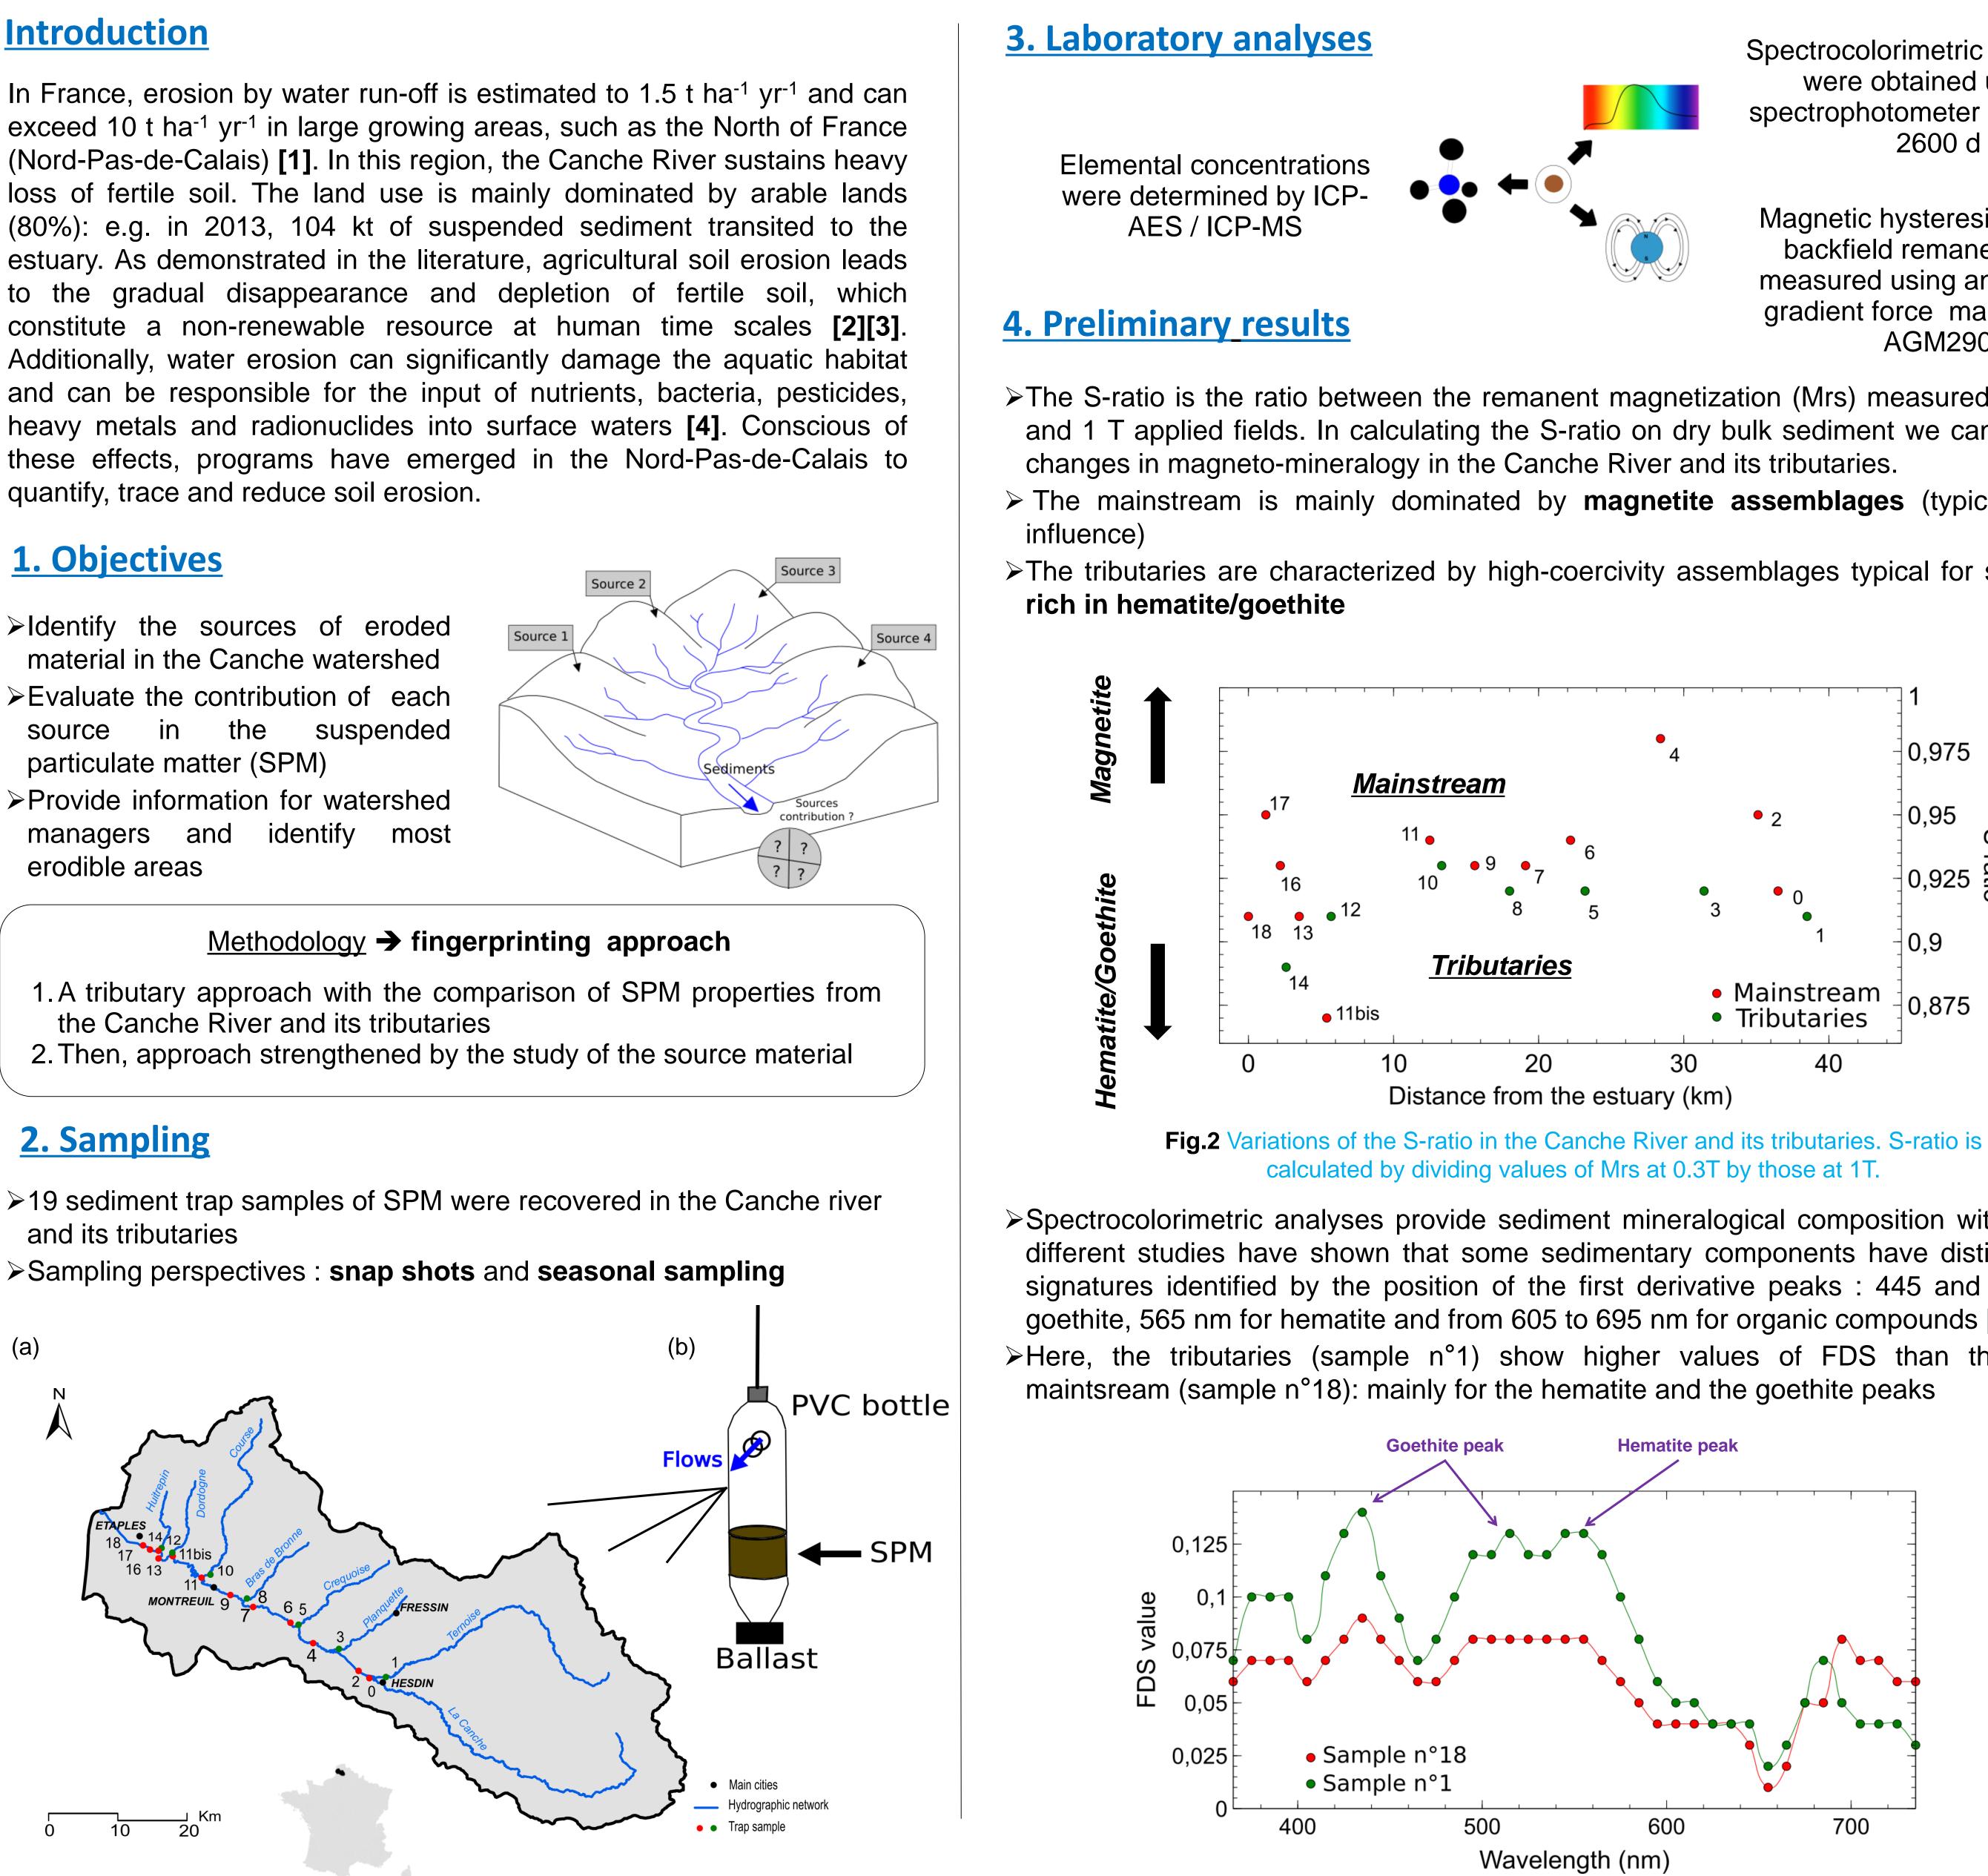


Fig.1 (a) Sample location within the Canche watershed (Nord-Pas-De-Calais, France) (b) Typical trap sample used for the collect of the SPM

Edouard Patault^{1,2,*}, Claire Alary¹, Christine Franke², Maxime Debret³, Arnaud Gauthier¹, Nor-Edine Abriak¹

Fig.3 Variations of the FDS value in the Canche watershed: example for sample n°1 and n°18. Spectral reflectance were measured between 360 and 740 nm with a 10-nm resolution

Spectrocolorimetric parameters were obtained using a spectrophotometer Minolta CM 2600 d

Magnetic hysteresis loops and backfield remanence were measured using an alternating gradient force magnetometer AGM2900

 \succ Finally, when confronting geo-chemical results and magnetic results we can distinguish the **upstream area** and the **downstream area**, that are characterized for example, by different values of Si and S-ratio

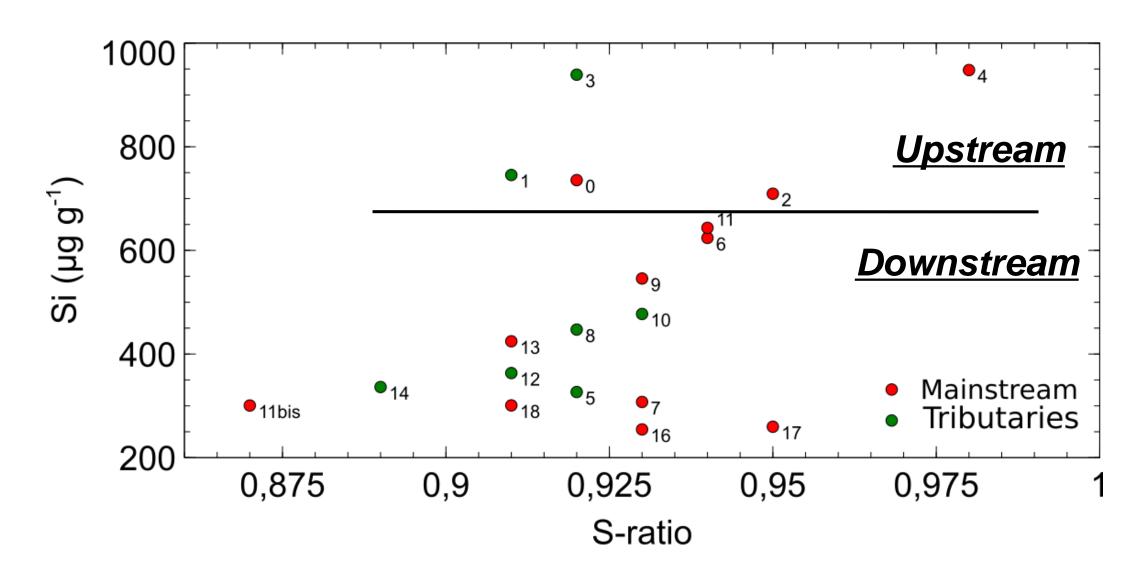


Fig.4 Variations of S-ratio and Silica concentrations in the Canche River and its tributaries.

Conclusions

- the suspended sediment sources

Perspectives

- Sampling campaign of source areas (soils)
- **[6]**)

References

[1] Cerdan, O., Govers, G., Le Bissonnais, Y., Van Oost and al., 2010. The rate and spatial distribution of soil erosion in Europe: A study based on erosion plot data. *Geomorphology.* Vol. 122, 167-177pp. [2] Evrard, O. (2012). Erosion des sols : dispersion des sédiments de Fukushima. (http://www.futurasciences.com/magazines/terre/infos/dossiers/d/geologie-erosion-solsdispersion-sediments-fukushima-1548/ - consulted on October 22, 2015).

[3] Le Bissonnais, Y., Thorette, J., Bardet, C., Daroussin, J. (2002). L'érosion hydrique des sols en France. (http://petiot.free.fr/Marielle/Dossier%20oral%20PLPA/doc/erosion_hydrique_2002_br.pdf - consulted on October 23, 2015).

[4] Takken, I., Jetten, V., Govers, G., Nachtergaele, J., & Steegen, A. (2001). The effect of tillage-induced roughness on runoff and erosion patterns. *Geomorphology*. Vol. 37 (1-2), 1–14pp. [5] Debret, M., Sebag, D., Desmet, M., Balsam, W., Copard, Y., Mourier, B., Winiarski, T. (2011). Spectrocolorimetric interpretation of sedimentary dynamics: The new "Q7/4 diagram." *Earth-Science Reviews*, 109, 1–19pp. [6] Haddadchi, A., Ryder, D. S., Evrard, O., & Olley, J. (2013). Sediment fingerprinting in fluvial systems: review of tracers, sediment sources and mixing models. International Journal of Sediment Research, 28(4), 560–578pp.

Acknowledgements

This work was financially supported by AEAP (Agence de l'Eau Arthois-Picardie, France). We would also like to acknowledge technical support from Symcea (Syndicat Mixte Canche et Affluents, France) and Chambre d'Agriculture Nord-Pas-de-Calais, France. Authors would like to thank UMR 6143 M2C, University of Rouen, who has provided the spectrophotometer



* Edouard Patault

PhD Student Ecole des Mines de Doual Département Génie Civil & Environnemental Phone: (+33)6.25.99.17.08 Mail: edouard.patault@mines-douai.fr



>Specific source areas are distinguishable according to the combination of Sratio values and concentrations in Si (upstream and downstream areas) >The Canche River is mainly dominated by magnetite assemblages whereas the tributaries are mainly characterized by hematite/goethite assemblages \succ The combination of different analyses may give valuable insight into the tracing of

 \succ Geochemical, spectrocolorimetric and magnetic analyses on source material >Evaluation of relative contribution of source material on SPM will be estimated using a multivariate mixing model (e.g. models available in Haddadchi et al., 2013

