



HAL
open science

Source tracing of fluvial suspended sediments by magnetic, geochemical and spectrophotometric particle characterization: example of the Canche Watershed (Nord-Pas-De-Calais, France)

Edouard Patault, Claire Alary, Christine Franke, Maxime Debret, Arnaud Gauthier, Nor-Edine Abriak

► **To cite this version:**

Edouard Patault, Claire Alary, Christine Franke, Maxime Debret, Arnaud Gauthier, et al.. Source tracing of fluvial suspended sediments by magnetic, geochemical and spectrophotometric particle characterization: example of the Canche Watershed (Nord-Pas-De-Calais, France). EGU General Assembly 2016, Apr 2016, Vienne, Austria. hal-01630937

HAL Id: hal-01630937

<https://hal.science/hal-01630937v1>

Submitted on 8 Nov 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Edouard Patault^{1,2,*}, Claire Alary¹, Christine Franke², Maxime Debret³, Arnaud Gauthier¹, Nor-Edine Abriak¹

1 LGCgE, Ecole des Mines de Douai, Département Génie Civil & Environnemental, Douai, France - 2 MINES Paris-Tech, Centre de Géosciences, Fontainebleau, France – 3 UMR 6143 M2C, Université de Rouen, Bât. Irese A, Place Emile Blondel, 76821 Mont-Saint-Aignan Cedex

* **Edouard Patault**
PhD Student
Ecole des Mines de Douai
Département Génie Civil & Environnemental
Phone : (+33)6.25.99.17.08
Mail : edouard.patault@mines-douai.fr




Introduction

In France, erosion by water run-off is estimated to 1.5 t ha⁻¹ yr⁻¹ and can exceed 10 t ha⁻¹ yr⁻¹ in large growing areas, such as the North of France (Nord-Pas-de-Calais) [1]. In this region, the Canche River sustains heavy loss of fertile soil. The land use is mainly dominated by arable lands (80%): e.g. in 2013, 104 kt of suspended sediment transited to the estuary. As demonstrated in the literature, agricultural soil erosion leads to the gradual disappearance and depletion of fertile soil, which constitute a non-renewable resource at human time scales [2][3]. Additionally, water erosion can significantly damage the aquatic habitat and can be responsible for the input of nutrients, bacteria, pesticides, heavy metals and radionuclides into surface waters [4]. Conscious of these effects, programs have emerged in the Nord-Pas-de-Calais to quantify, trace and reduce soil erosion.

1. Objectives

- Identify the sources of eroded material in the Canche watershed
- Evaluate the contribution of each source in the suspended particulate matter (SPM)
- Provide information for watershed managers and identify most erodible areas

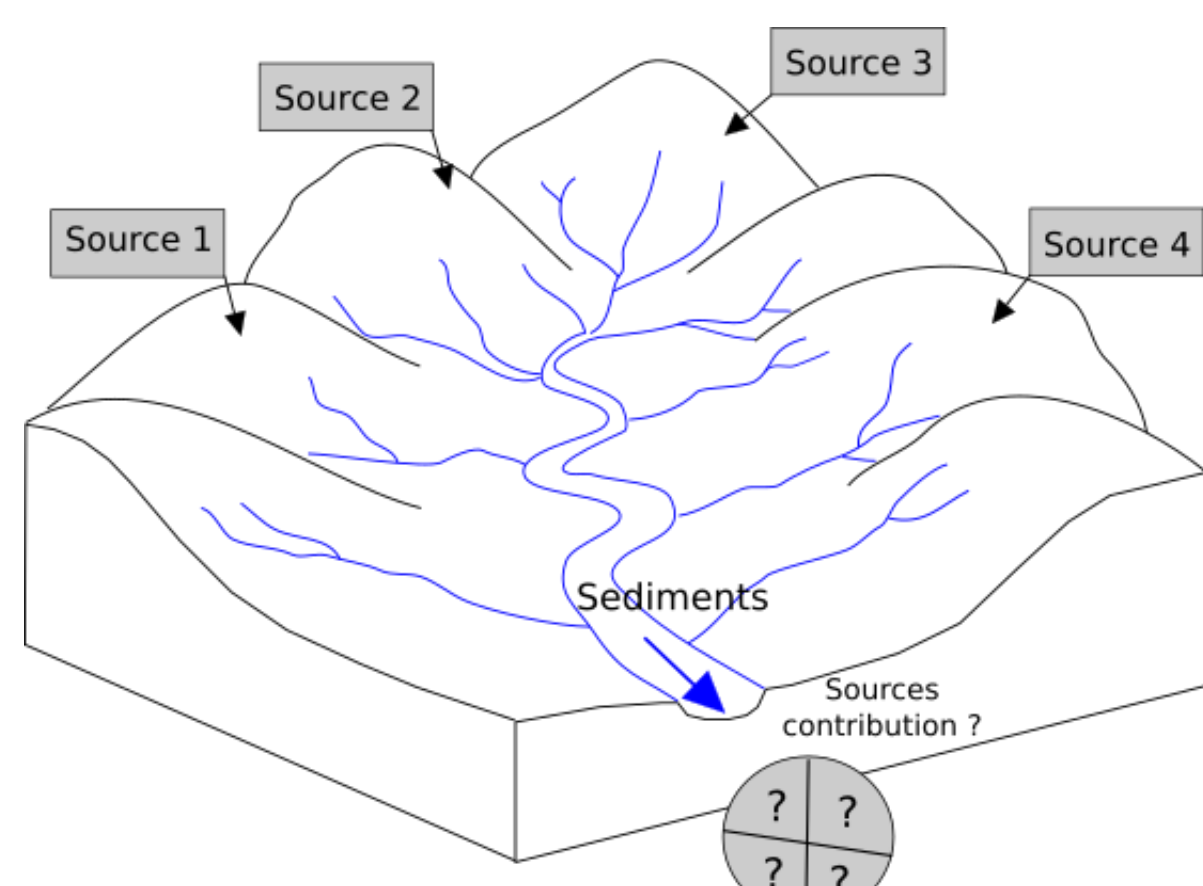

Methodology → fingerprinting approach

1. A tributary approach with the comparison of SPM properties from the Canche River and its tributaries
2. Then, approach strengthened by the study of the source material

2. Sampling

- 19 sediment trap samples of SPM were recovered in the Canche river and its tributaries
- Sampling perspectives : **snap shots** and **seasonal sampling**


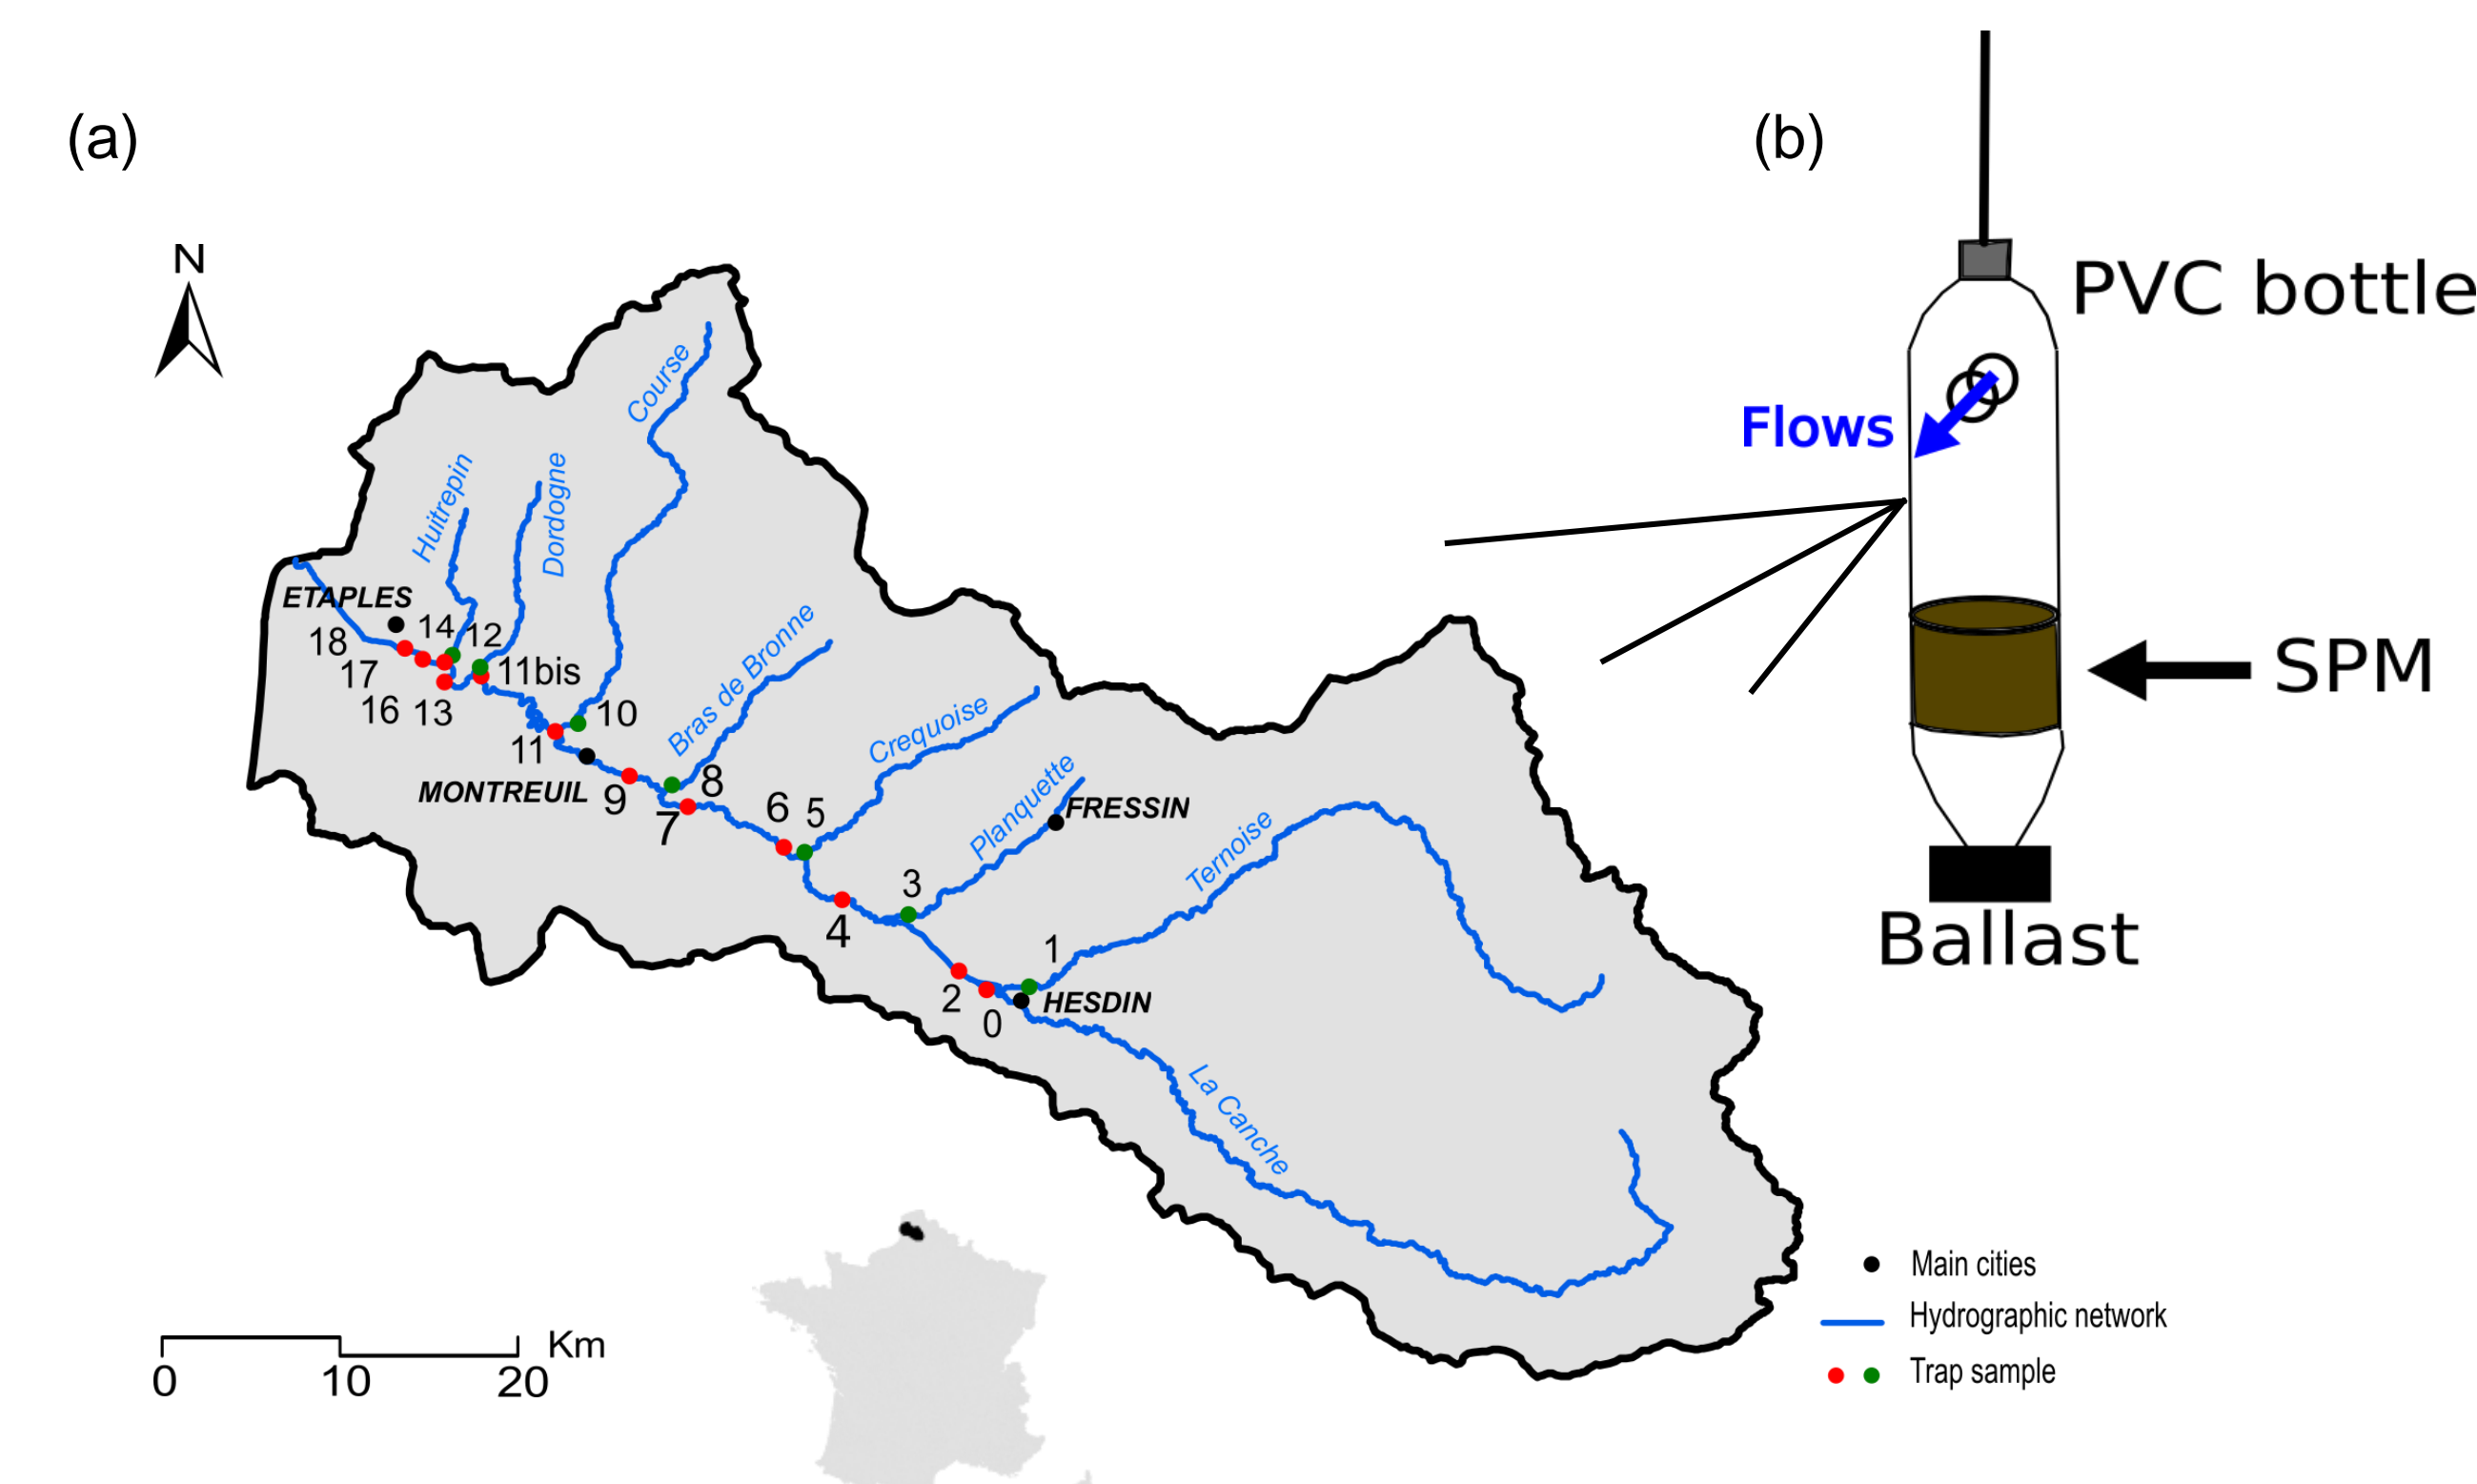


Fig.1 (a) Sample location within the Canche watershed (Nord-Pas-De-Calais, France) (b) Typical trap sample used for the collect of the SPM

3. Laboratory analyses

Elemental concentrations were determined by ICP-AES / ICP-MS

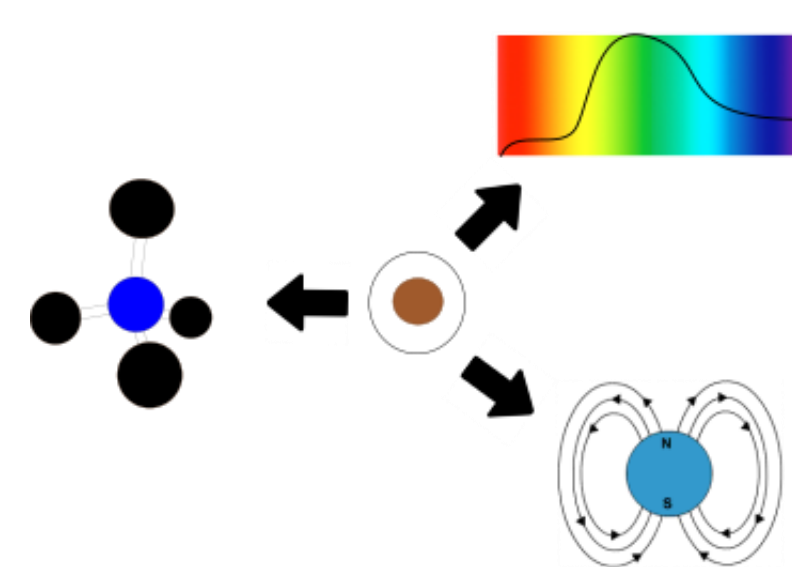

Spectrocolorimetric parameters were obtained using a spectrophotometer Minolta CM 2600 d

Magnetic hysteresis loops and backfield remanence were measured using an alternating gradient force magnetometer AGM2900

4. Preliminary results

- The S-ratio is the ratio between the remanent magnetization (Mrs) measured at both 0.3 and 1 T applied fields. In calculating the S-ratio on dry bulk sediment we can distinguish changes in magneto-mineralogy in the Canche River and its tributaries.
- The mainstream is mainly dominated by **magnetite assemblages** (typical of urban influence)
- The tributaries are characterized by high-coercivity assemblages typical for soil material **rich in hematite/goethite**

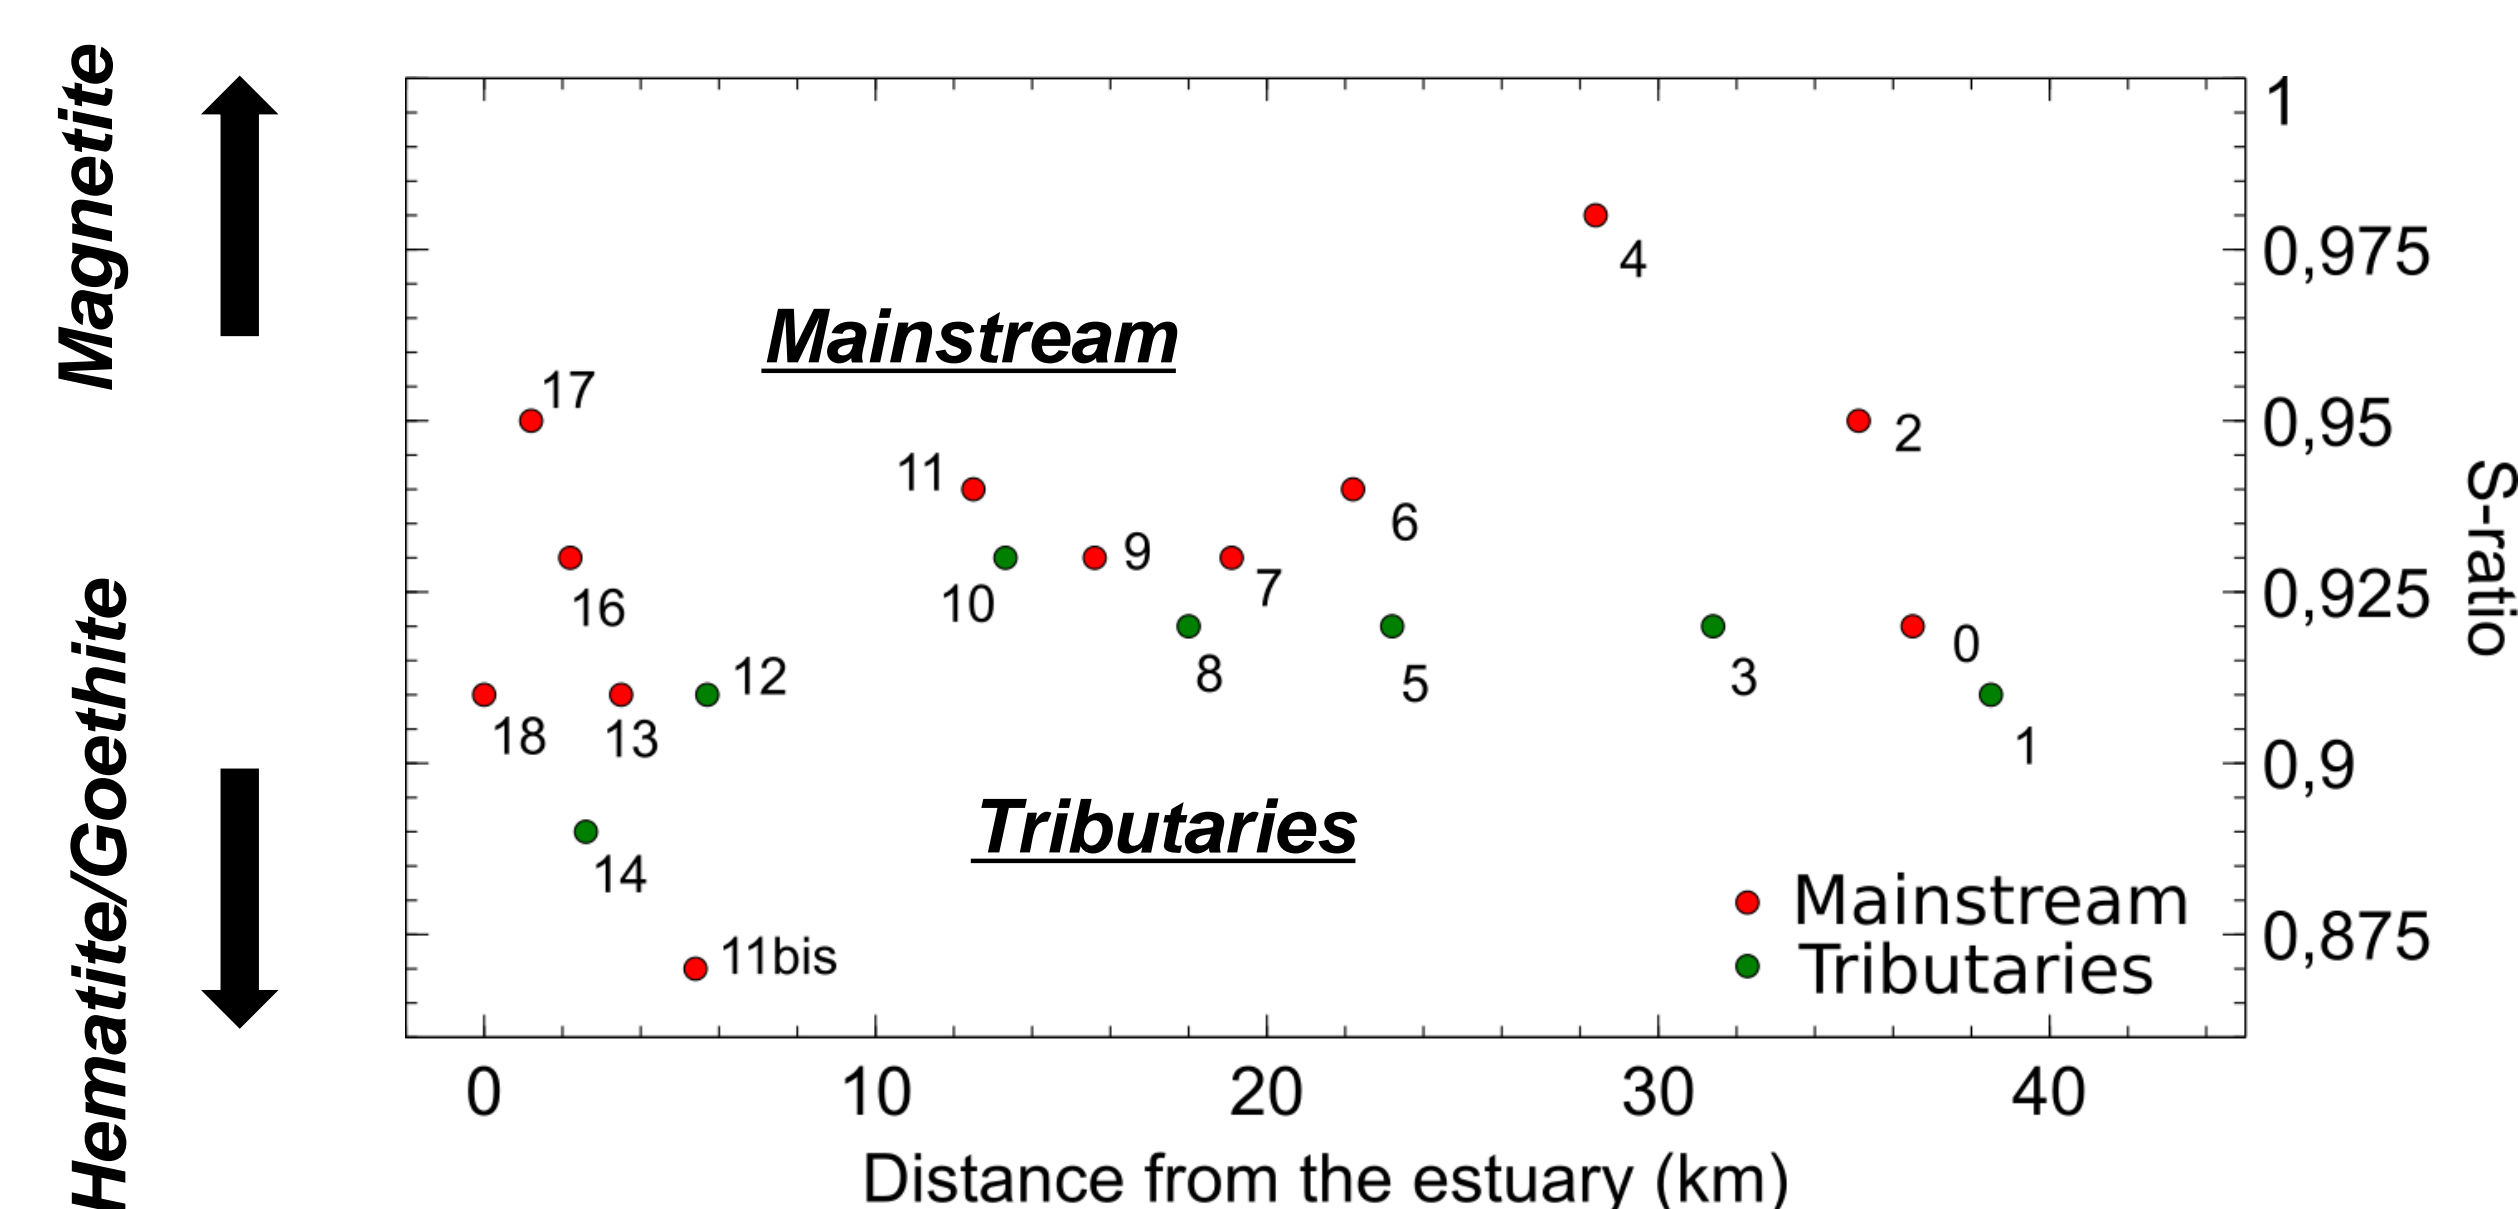


Fig.2 Variations of the S-ratio in the Canche River and its tributaries. S-ratio is calculated by dividing values of Mrs at 0.3T by those at 1T.

- Spectrocolorimetric analyses provide sediment mineralogical composition with precision, different studies have shown that some sedimentary components have distinct spectral signatures identified by the position of the first derivative peaks : 445 and 525 nm for goethite, 565 nm for hematite and from 605 to 695 nm for organic compounds [5]
- Here, the tributaries (sample n°1) show higher values of FDS than those of the mainstream (sample n°18): mainly for the hematite and the goethite peaks

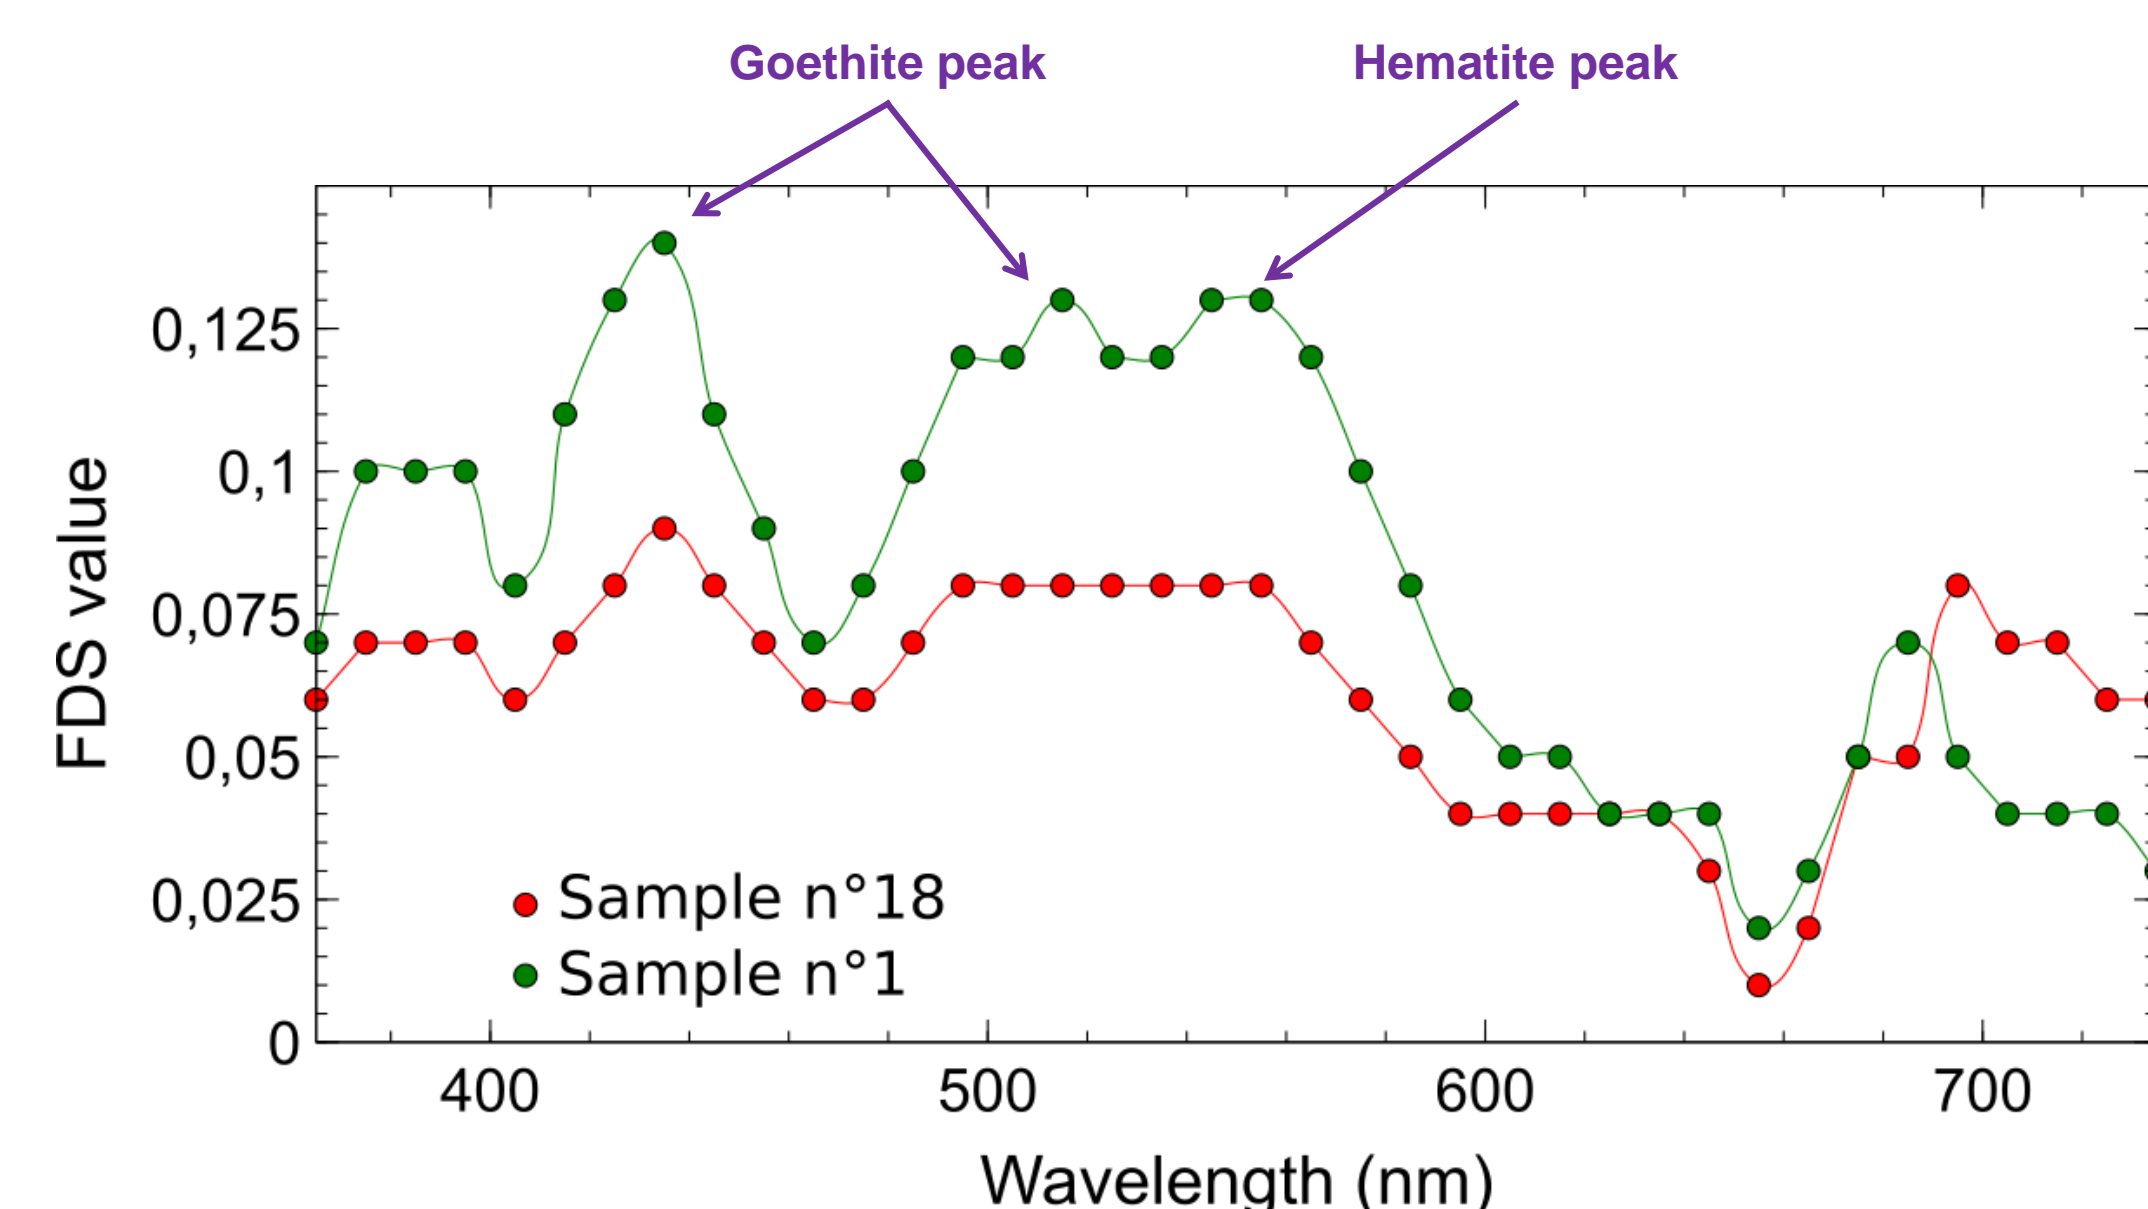


Fig.3 Variations of the FDS value in the Canche watershed: example for sample n°1 and n°18. Spectral reflectance were measured between 360 and 740 nm with a 10-nm resolution

- Finally, when confronting geo-chemical results and magnetic results we can distinguish the **upstream area** and the **downstream area**, that are characterized for example, by **different values of Si and S-ratio**

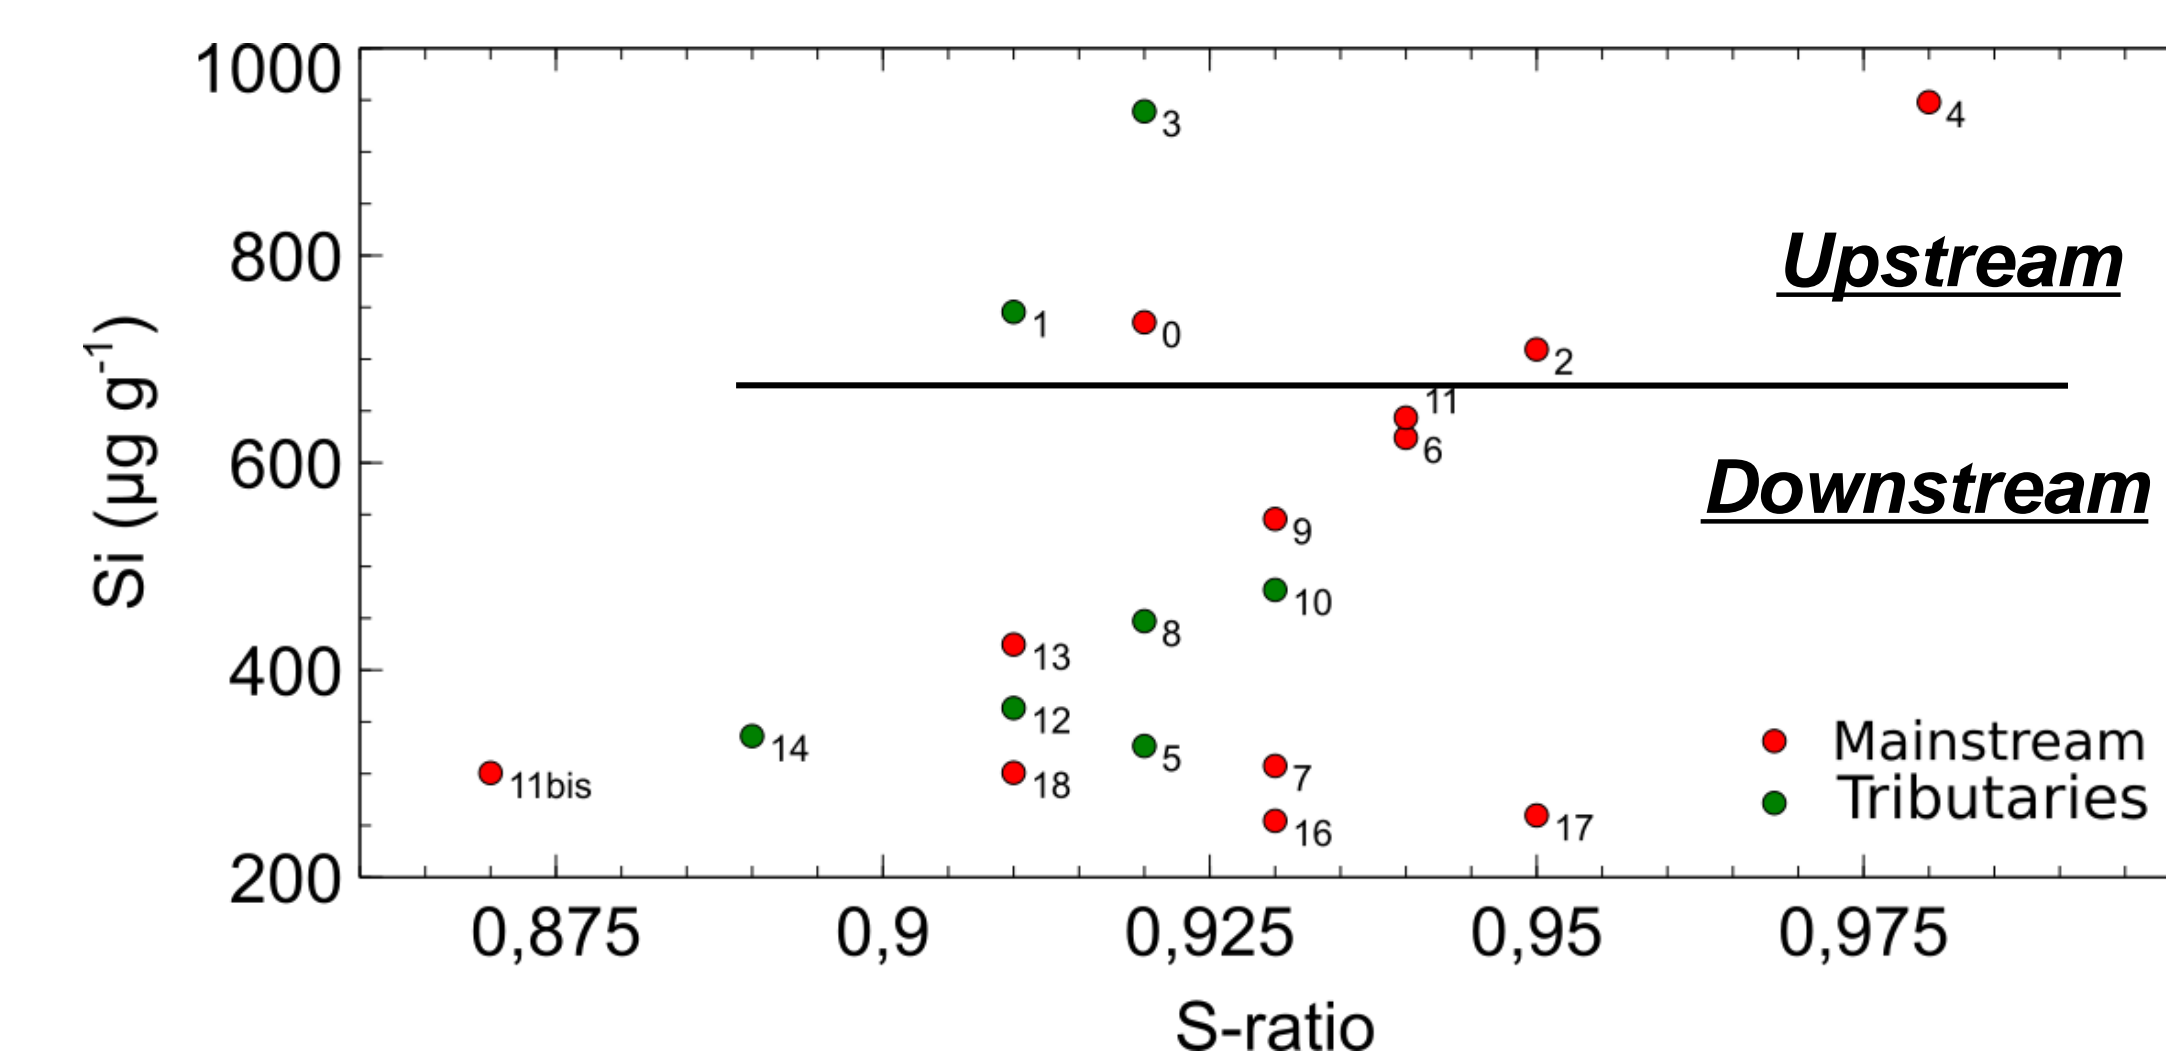


Fig.4 Variations of S-ratio and Silica concentrations in the Canche River and its tributaries.

Conclusions

- **Specific source areas are distinguishable** according to the combination of **S-ratio** values and **concentrations in Si** (upstream and downstream areas)
- The **Canche River** is mainly dominated by **magnetite assemblages** whereas the **tributaries** are mainly characterized by **hematite/goethite assemblages**
- The combination of different analyses may give valuable insight into the tracing of the suspended sediment sources

Perspectives

- Sampling campaign of source areas (soils)
- Geochemical, spectrocolorimetric and magnetic analyses on source material
- Evaluation of relative contribution of source material on SPM will be estimated using a multivariate mixing model (e.g. models available in Haddadchi et al., 2013 [6])

References

- [1] Cerdan, O., Govers, G., Le Bissonnais, Y., Van Oost and al., 2010. The rate and spatial distribution of soil erosion in Europe: A study based on erosion plot data. *Geomorphology*. Vol. 122, 167-177pp.
- [2] Evrard, O. (2012). Erosion des sols : dispersion des sédiments de Fukushima. (<http://www.futura-sciences.com/magazines/terre/infos/dossiers/d/geologie-erosion-solsdispersion-sediments-fukushima-1548/> - consulted on October 22, 2015).
- [3] Le Bissonnais, Y., Thorette, J., Bardet, C., Daroussin, J. (2002). L'érosion hydrique des sols en France. (http://petiot.free.fr/Marielle/Dossier%20oral%20PLPA/doc/erosion_hydrique_2002_br.pdf - consulted on October 23, 2015).
- [4] Takken, I., Jetten, V., Govers, G., Nachtergaele, J., & Steegen, A. (2001). The effect of tillage-induced roughness on runoff and erosion patterns. *Geomorphology*. Vol. 37 (1-2), 1-14pp.
- [5] Debret, M., Sebagn, D., Desmet, M., Balsam, W., Copard, Y., Mourier, B., Winiarski, T. (2011). Spectrocolorimetric interpretation of sedimentary dynamics: The new "Q7/4 diagram." *Earth-Science Reviews*, 109, 1-19pp.
- [6] Haddadchi, A., Ryder, D. S., Evrard, O., & Olley, J. (2013). Sediment fingerprinting in fluvial systems: review of tracers, sediment sources and mixing models. *International Journal of Sediment Research*, 28(4), 560-578pp.

Acknowledgements

This work was financially supported by AEAP (Agence de l'Eau Artois-Picardie, France). We would also like to acknowledge technical support from Symcea (Syndicat Mixte Canche et Affluents, France) and Chambre d'Agriculture Nord-Pas-de-Calais, France. Authors would like to thank UMR 6143 M2C, University of Rouen, who has provided the spectrophotometer