

# Demand Side Management A model driven approach to promote energy self-consumption

Alexandre Rio, Yoann Maurel, Olivier Barais, Yoran Bugni

#### ▶ To cite this version:

Alexandre Rio, Yoann Maurel, Olivier Barais, Yoran Bugni. Demand Side Management A model driven approach to promote energy self-consumption. Colloque de l'institut Mines Télécom, Jun 2018, Rennes, France. hal-02317918

#### HAL Id: hal-02317918 https://hal.science/hal-02317918v1

Submitted on 16 Oct 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



**Stakeholders** 

**Authors** 

Alexandre RIO

Yoann MAUREL

Olivier BARAIS Yoran BUGNI

**OKWIND** 

**♦ IRISA** 

## **Demand Side Management**

A model driven approach to promote energy self-consumption



Agricultural exploitation using solar tracket Credit: GAEC du Faisan


#### Case study: Industrial site self-consumption

- ▶ Self-consumption of renewable energies is defined as electricity that is produced from renewable energy sources
- ► The autonomy of sites with micro-generation capabilities is greatly increased by self-consumption of locally produced energy
- ▶ One of the keys is thus to align production and consumption either by planning processes differently or by relying on storage capabilities.
- Help for "What-if"/ "what-for" questions:
  - How to size local renewable energy production units or storage to meet a site's energy consumption
  - Which region would be the most interesting for the expansion of a
  - What organization of activities enables the best autonomy and selfconsumption?

Simplified version of our metamodel

#### **Proposal: Simulator and Domain Language**

- Model Driven Engineering (MDE) approach to address variability
- Energy Management System (EMS) in simulation or using real sensors
- Domain Specific Language (DSL) to represent an industrial site
  - Production, consumption, storage
  - Activities and constrains modeling
- Description files are used by a simulator.
- Simulator can be extended by experts, through plugins, to model complex devices behavior

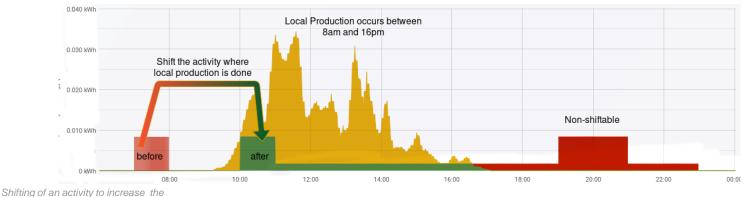

autonomy fo the day from 9% to 20%

#### **Experiences**

### **Evaluation: Activity shift recommendations**

- ▶ Simulator can use third-party prediction to estimate future events: solar production, device usage
- Recommend actions based on context: battery state, user activity to optimize autonomy and self-consumption
- Take into account process constrains and flexibility and battery cycle usage
- Improve autonomy from 30% to 50% or 70%