



HAL
open science

Rico and the jets: Direct numerical simulations of turbulent liquid jets

Cristian R. Constante-Amores, Lyes Kahouadji, Assen Batchvarov, Seungwon Shin, Jalel Chergui, Damir Juric, Omar K. Matar

► **To cite this version:**

Cristian R. Constante-Amores, Lyes Kahouadji, Assen Batchvarov, Seungwon Shin, Jalel Chergui, et al.. Rico and the jets: Direct numerical simulations of turbulent liquid jets. *Physical Review Fluids*, 2020, pp.110501. 10.1103/PhysRevFluids.5.110501 . hal-02993621

HAL Id: hal-02993621

<https://hal.science/hal-02993621v1>

Submitted on 6 Nov 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Rico and the jets: Direct numerical simulations of turbulent liquid jets

C. R. Constante-Amores,¹ L. Kahouadji,¹ A. Batchvarov,¹ S. Shin,² J. Chergui,³ D. Juric,³ and O. K. Matar¹

¹*Department of Chemical Engineering, Imperial College London,
South Kensington Campus, London SW7 2AZ, United Kingdom**

²*Department of Mechanical and System Design Engineering,
Hongik University, Seoul 121-791, Republic of Korea*

³*Laboratoire d'Informatique pour la Mécanique et les Sciences de l'Ingénieur (LIMSI),
Centre National de la Recherche Scientifique (CNRS), Université Paris Saclay,
Bât. 507, Rue du Belvédère, Campus Universitaire, 91405 Orsay, France*

(Dated: September 26, 2020)

This paper is associated with a poster winner of a 2019 American Physical Society's Division of Fluid Dynamics (DFD) Milton van Dyke Award for work presented at the DFD Gallery of Fluid Motion. The original poster is available online at the Gallery of Fluid Motion, <https://doi.org/10.1103/APS.DFD.2019.GFM.P0020>

PACS numbers:

The breakup of an interface into a cascade of droplets and their subsequent coalescence is a generic problem of central importance to a large number of industrial settings. Examples of these applications include the atomisation of propellants in engines, the formation of droplets in injectors, mixers, separators, and the generation of droplets in multiphase flow regime transitions [2, 3, 12]. In all of these situations, it is important to predict the evolving droplet size distribution that results from a competition between breakup and coalescence, which are influenced by a range of multi-scale physics; this includes the interaction of turbulence with interfaces, capillarity, viscosity, and gravity. Therefore, it is unsurprising that the breakup of liquid jets during injection (i.e. atomisation) has received great scientific interest [4, 8, 10, 11, 13].

To the best of our knowledge, the transient dynamics of turbulent liquid/liquid systems have not been reported in the literature. Temporal instabilities and the resulting spatio-temporal interfacial structures are predicted by solving the full three-dimensional two-phase Navier-Stokes system in the context of a hybrid front-tracking/level-set method [14–16]. We consider a cylindrical nozzle with diameter $D = 4$ mm injecting water with density ρ_w and dynamic viscosity μ_w . This water jet enters progressively into the computational domain of size $20D \times 4D \times 4D$, initially filled with a stagnant viscous silicone-oil of density ρ_{so} and viscosity μ_{so} . The surface tension is taken to be that of oil and water (e.g. $\sigma = 35.1$ mN/s) [7]. The Reynolds number is defined as $Re = \rho_w U_{jet} D / \mu_w$ and fixed to the value of $Re = 6530$. The domain has been divided into $48 \times 6 \times 6$ subdomains where each subdomain contains a Cartesian structured grid of 64^3 cells, accounting for a global structured mesh grid of $3072 \times 384 \times 384$. This mesh is sufficiently large to resolve the relevant turbulent length-scales and interfacial singularities (e.g. pinch-off and coalescence).

We use a new solver for massively parallel simulations of fully three-dimensional multiphase flows [15], able to run on a variety of computer architectures, wholly written in Fortran 2008 and adopting an algebraic domain decomposition strategy for parallelization with MPI. The fluid interface solver is based on a parallel implementation of the Level Contour Reconstruction Method (LCRM) which is an adaptation of our high fidelity hybrid front tracking/level set method, able to handle highly deforming interfaces with complex topology changes [1, 5, 6]. This code uses parallel GMRES and multigrid iterative solvers suited to solve the linear systems arising from the implicit solution of the fluid velocities and pressure. More details on the numerical techniques can be found in Shin *et al.* [15, 16].

The spatio-temporal evolution of the interfacial dynamics is shown in Fig. 1. At early injection times, large capillary pressure is generated near the leading edge, due to local interfacial curvature, leading to a radially driven flow. This capillary-induced flow together with the viscous resistance from the stagnant phase yields the formation of a leading-top mushroom-like structure (see Fig. 1a). This structure covers an internal interfacial toroidal sheet whose thickness reduces over time to generate the formation of holes, which expand radially to form ligaments, and eventually entrapped droplets. As time evolves, the free surface behind the leading structure adopts the shape of a 'cylinder' which undergoes a Kelvin-Helmholtz instability (KH) to give the formation of initial corrugations or capillary waves on the free-surface. The KH instabilities on the free surface are triggered by the parallel motion of fluids at different velocities and are amplified by the pulsatile injection.

The interfacial dynamics of the jet can be explained by coupling the vorticity $\omega = \nabla \times \mathbf{u}$ with the interfacial location. During the early stages and close to the injection point, the streamwise vorticity field ω_x is characterised by

*Electronic address: crc15@imperial.ac.uk

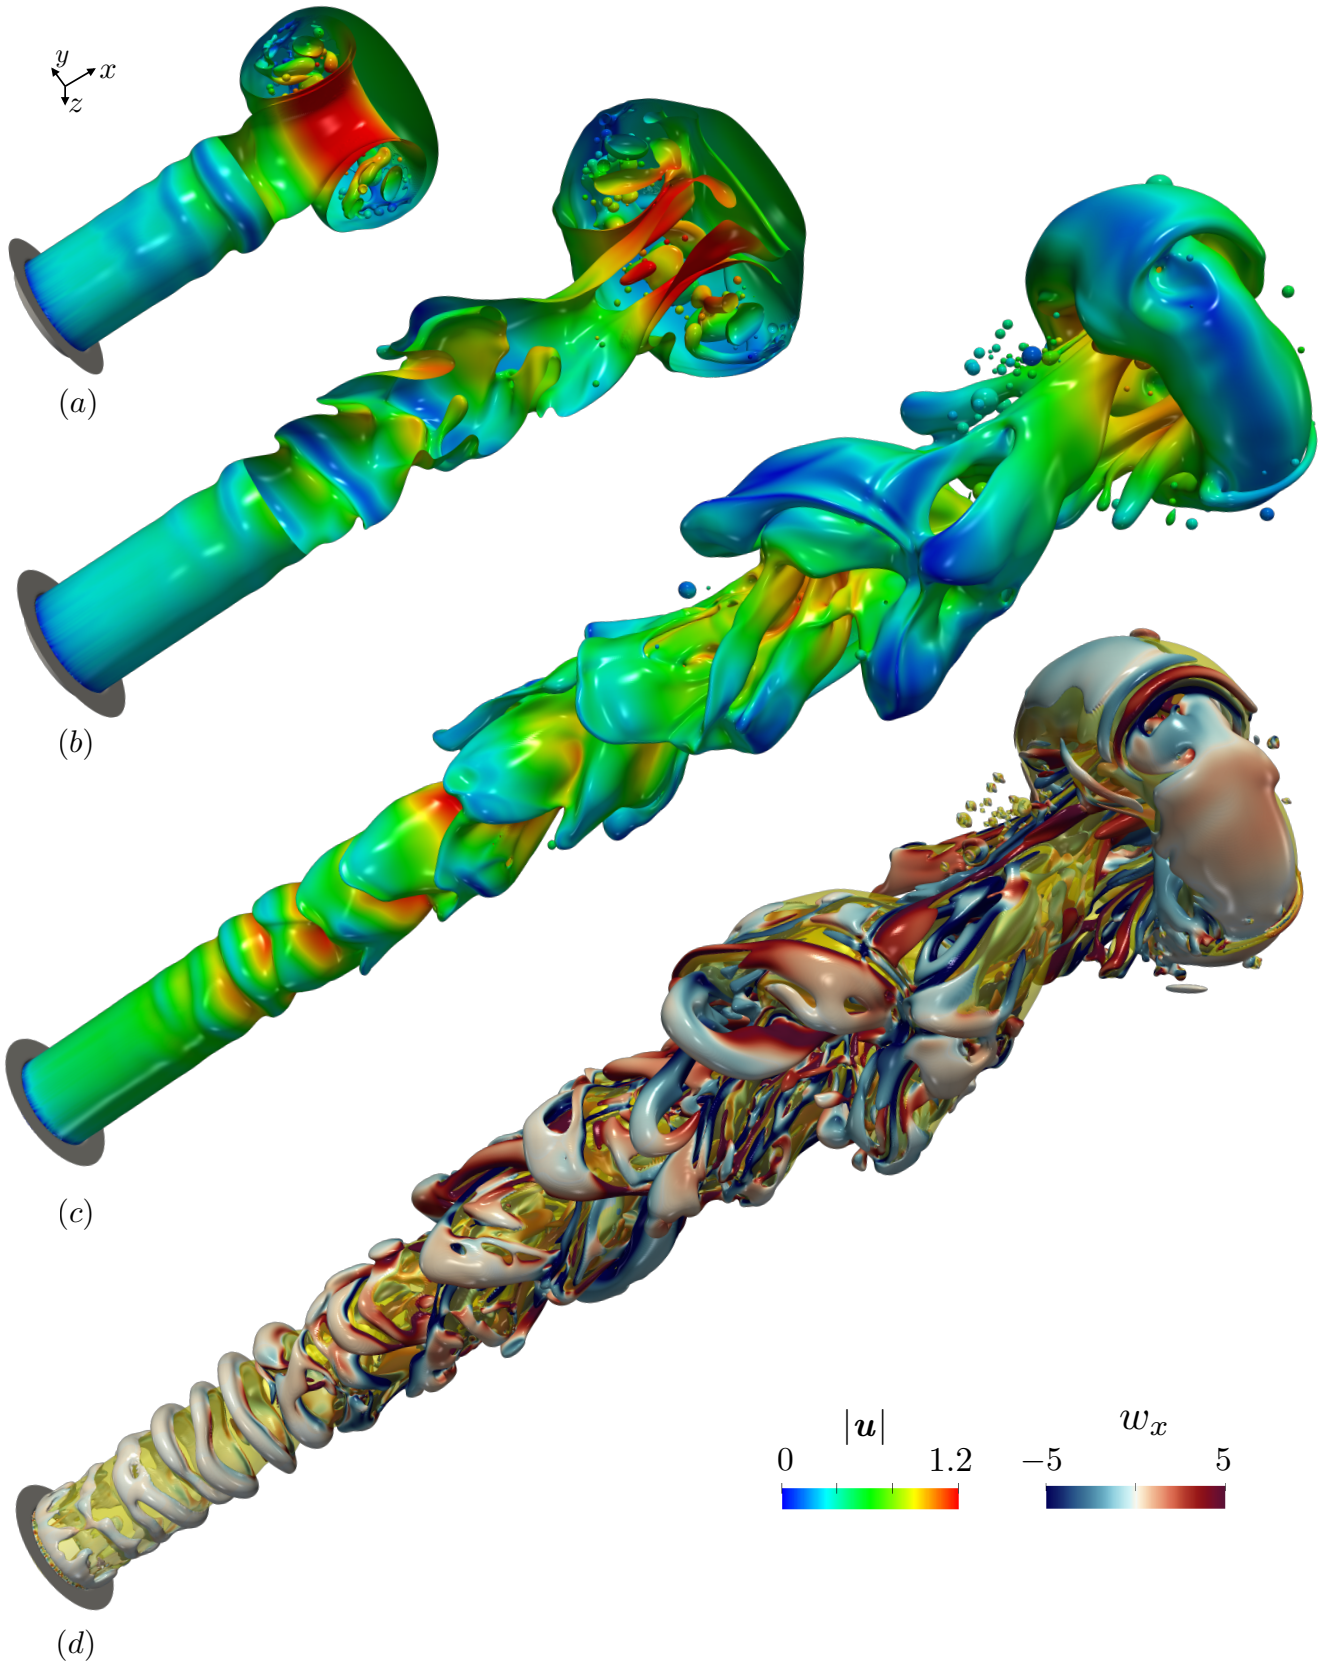


FIG. 1: Spatio-temporal evolution of the interface in the injection of a water jet into a stagnant viscous silicone-oil at $t = (7.25, 12.05, 28.97)$ corresponding to (a), (b) and (c), respectively, when $Re = 6530$. (d) Illustration of the coherent vortical structures through the Q-criterion close to the free-surface (coloured in yellow) at $t = 28.97$. The vortical structures have been coloured by the value of the vorticity in the streamwise direction. In the vorticity representation, blue and red colour represent vortical structures with counter-clockwise and clockwise rotation, respectively. All variables are dimensionless quantities.

values which are two orders of magnitude smaller than the azimuthal vorticity ω_θ . As the flow evolves downstream, ω_x becomes comparable in magnitude with ω_θ , leading to the deformation of axisymmetric KH vortex rings in the streamwise direction adopting a new hairpin shape. These hairpin vortices trigger the formation of interfacial lobes which are stretched downstream (from outer hairpin vortices) and upstream (from inner hairpin vortices) to eventually obtain a hairpin shape (see Fig. 1b,c). We have used the Q-criterion to visualise the three-dimensional nature of the vortical structure (shown in Fig. 1d) [9]. The topological shape of the vortex resembles the instantaneous hairpin-like vortical structures reported in experiments and numerical simulations of [17, 18]. Outer hairpin vortices are observed clearly, whereas the inner hairpin vortices are localised underneath the interface. Additionally, a vortex-cap covers the leading mushroom structure.

Acknowledgements

This work is supported by the Engineering & Physical Sciences Research Council, United Kingdom, through a studentship for RCA in the Centre for Doctoral Training on Theory and Simulation of Materials at Imperial College London funded by the EPSRC (EP/L015579/1) (Award reference:1808927), and through the EPSRC MEMPHIS (EP/K003976/1) and PREMIERE (EP/T000414/1) Programme Grants. OKM also acknowledges funding from PETRONAS and the Royal Academy of Engineering for a Research Chair in Multiphase Fluid Dynamics. We also acknowledge HPC facilities provided by the Research Computing Service (RCS) of Imperial College London for the computing time. DJ and JC acknowledge support through computing time at the Institut du Developpement et des Ressources en Informatique Scientifique (IDRIS) of the Centre National de la Recherche Scientifique (CNRS), coordinated by GENCI (Grand Equipement National de Calcul Intensif) Grant 2020 A0082B06721. The numerical simulations were performed with code BLUE (Shin *et al.* [15]) and the visualisations have been generated using ParaView.

-
- [1] Batchvarov, A., Kahouadji, L., Constante-Amores, C. R., Gonçalves, G. F. N., Shin, S., Chergui, J., Juric, D. and Matar, O. K, Three-dimensional dynamics of falling films in the presence of insoluble surfactants, Submitted to *J. Fluid Mech.* (*arXiv:2005.12669*)
 - [2] J. Eggers, Nonlinear dynamics and breakup of free-surface flows, *Rev. Mod. Phys.*, **69**(3), 865–930 (1997)
 - [3] J. Eggers and E. Villermaux, Physics of liquid jets, *Rep. Prog. Phys.*, **71**, 036601 (2008)
 - [4] O. Desjardins and H. Pitsch Detailed numerical investigation of turbulent atomization of liquid jets, *Atomiz. Sprays*, **20**(4), 311-336 (2010)
 - [5] Constante-Amores, C. R., Kahouadji, L., Batchvarov, A., Shin, S., Chergui, J., Juric, D. and Matar, O. K, Dynamics of retracting surfactant-laden ligaments at intermediate *Oh* number, Submitted to *Phys. Rev. Fluids* (*arXiv:2001.11029*)
 - [6] Constante-Amores, C. R., Kahouadji, L., Batchvarov, A., Shin, S., Chergui, J., Juric, D. and Matar, O. K Dynamics of a surfactant-laden bubble bursting through an interface, Submitted to *J. Fluid Mech.* (*arXiv:2005.04472*)
 - [7] R. Ibarra, O. K. Matar and C. N Markides, Flow structures in low-inclination stratified oil-water pipe-flows using laser-based diagnostic techniques, *18th International Conference on Multiphase Production Technology*, **387**, 353–396 (2017)
 - [8] E. Ibarra, F. Shaffer and O. Savaş, On the near-field interfaces of homogeneous and immiscible round turbulent jets, *J. Fluid Mech.*, **889**, A4 (2020)
 - [9] J. Hunt, A. Wray and P. Moin, Eddies, streams, and convergence zones in turbulent flows, *Center for Turbulence Research Report* CTR-S88, p. 193 (1988)
 - [10] D. Jarrabhshi, W. A. Sirignano, P. P. Popov and F. Hussain Early spray development at high gas density: hole, ligament and bridge formations, *J. Fluid Mech.*, **792**, 186–231 (2016)
 - [11] J. C. Lasheras and E. J Hopfinger, Liquid jet instability and atomization in a coaxial gas stream, *Annu. Rev. Fluid Mech.*, **32**(1), 275-308 (2000)
 - [12] S. P. Lin, R. D. and Reitz, Drop and spray formation from a liquid jet, *Annu. Rev. Fluid Mech.*, **30**(1), 85-105 (1998)
 - [13] P. Marmottant and E. Villermaux, On spray formation, *J. Fluid Mech.*, **498**, 73 - 111 (2004)
 - [14] S. Shin and D. Juric, Modeling three-dimensional multiphase flow using a level contour reconstruction method for front tracking without connectivity, *J. Comp. Phys.* **180** 427–470 (2002).
 - [15] S. Shin, J. Chergui, and D. Juric, A solver for massively parallel direct numerical simulation of three-dimensional multiphase flows, *J. Mech. Sc. Tech.*, **31**, 1739–175 (2017)
 - [16] S. Shin, J. Chergui, D. Juric, L. Kahouadji, O. K. Matar, and R. V. Craster, An interface-tracking technique for multiphase flow with soluble Surfactant, *J. Comp. Phys.*, **359**, 409–435 (2018)
 - [17] A. Zandian, W. A. Sirignano and F. Hussain, Understanding liquid-jet atomization cascades via vortex dynamics, *J. Fluid Mech.*, **843**, 293–354 (2018)
 - [18] J. Zhou, R. J. Adrian, S. Balachandar and T. M. Kendall, Mechanisms for generating coherent packets of hairpin vortices in channel flow, *J. Fluid Mech.*, **387**, 353–396 (1999)