



HAL
open science

Dielectric Barrier Discharge in CO₂: electrical and optical characterization

Corentin Bajon, Simon Dap, Antoine Belinger, Olivier Guaitella, Tomas Hoder,
Nicolas Naudé

► **To cite this version:**

Corentin Bajon, Simon Dap, Antoine Belinger, Olivier Guaitella, Tomas Hoder, et al.. Dielectric Barrier Discharge in CO₂: electrical and optical characterization. 17th International Symposium on High Pressure Low Temperature Plasma Chemistry (HAKONE XVII), Aug 2022, Kerkrade, Netherlands. <hal-03798362>

HAL Id: hal-03798362

<https://hal.science/hal-03798362v1>

Submitted on 5 Oct 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Dielectric Barrier Discharge in CO₂: electrical and optical characterization

C.Bajan¹, S.Dap¹, A.Belinger¹, O.Guaitella², T.Hoder³, N.Naudé¹

¹LAPLACE, Université de Toulouse, CNRS, INPT, UPS, Toulouse, France

²Laboratoire de Physique des Plasmas, Ecole Polytechnique, Route de Saclay, F-91128, Palaiseau Cedex, France

³Department of Physical Electronics, Faculty of Science, Masaryk University, Kotlářská 2, 61137 Brno, Czech Republic

E-mail: cbajan@laplace.univ-tlse.fr

In the past ten years, studies on CO₂ have known a growing interest [1] [2]. Among them, CO₂ recycling [3], design of spacecraft shields for atmosphere re-entry, or oxygen production [4] [5] in the frame of the future Mars missions are of major concern. Non-equilibrium plasmas are an excellent way to induce chemistry in gases. At atmospheric pressure, dielectric barrier discharges (DBD) are widely used to generate cold plasmas, avoiding the transition to the arc regime. Usually, at this pressure, DBDs are filamentary and homogeneous DBD are only reported for few gas compositions such as Nitrogen or noble gases (Ar, He, Ne) with a Penning admixture. In this work, we will present the very first results obtained in a homogeneous dielectric barrier discharge at atmospheric pressure in pure CO₂.

In such conditions, the discharge works in the well-known Townsend regime. The measured current (Fig. 1) presents a large peak during one half-period as typically reported in the literature for Atmospheric Pressure Townsend Discharge (APTD). This operating regime is confirmed by optical measurements (Fig. 2), showing that the maximum light is located on the anode side, which is a characteristic of an APTD.

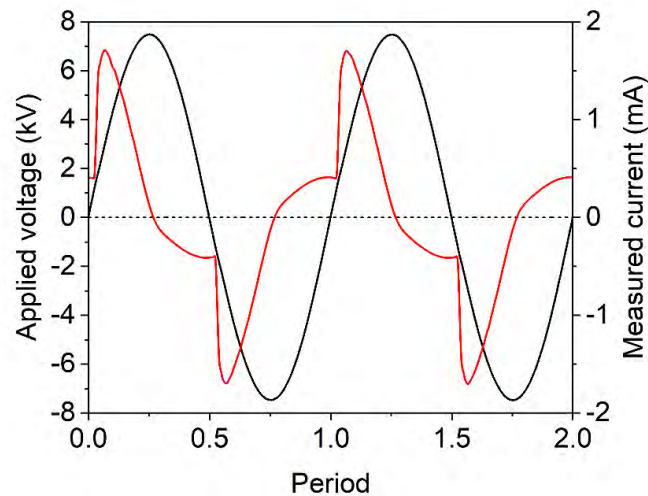


Fig. 1: Voltage and current measured in pure CO₂ DBD at atmospheric pressure.

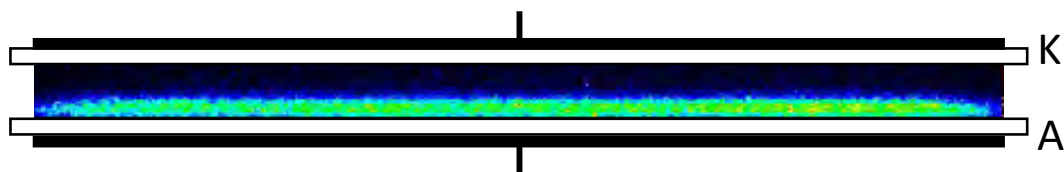


Fig. 2: ICCD image of light emission during one half-period of the applied voltage in pure CO₂ (aperture time=1/4 period).

This work will present the first experimental characterization of the homogeneous discharge in CO₂ using electrical measurements, imaging and optical emission spectroscopy. On the basis of these results, the possible mechanisms involved in this discharge regime will be discussed.

References

- [1] A. Fridman, *Plasma chemistry*, Cambridge: Cambridge University Press, 2008.
- [2] L. D. Pietanza, O. Guaitella, V. Aquilanti, I. Armenise, A. Bogaerts, M. Capitelli, G. Colonna, V. Guerra, R. Engeln, E. Kustova, A. Lombardi, F. Palazzetti et T. Silva, *Advances in non-equilibrium CO₂ plasma kinetics : a theoretical and experimental review*, *Eur. Phys. J. D*, 2021.
- [3] G. Centi et S. Perathoner, «Opportunities and prospects in the chemical recycling of carbon dioxide to fuels,» *Catalysis today* 148, pp. 191-205, 2009.
- [4] V. Guerra, T. Silva, P. Ogloblina, M. Grofulovic, L. Terraz, M. L. da Silva, C. D. Pintassilgo, L. L. Alves et O. Guaitella, «The case for in situ resource utilisation for oxygen production on Mars by non-equilibrium plasmas,» *Plasma Sources Sci. Technol.* 26 , 2017.
- [5] D. Premathilake, R. A. Outlaw, R. A. Quinlan et C. E. Byvik, «Oxygen generation by carbon dioxide glow discharge and separation by permeation through ultrathin silver membranes,» *Earth an Space Science* 6, pp. 557-564, 2018.