

#### Ultraviolet vs. Visible Skylight Polarization Measurements

Antoine Moutenet, Julien Serres, Stéphane Viollet

#### ▶ To cite this version:

Antoine Moutenet, Julien Serres, Stéphane Viollet. Ultraviolet vs. Visible Skylight Polarization Measurements. IEEE. IEEE Sensors 2023, Oct 2023, Vienna, Austria. IEEE, A1P-A01, 2023, 10.1109/SENSORS56945.2023.10325144 . hal-04267742

#### HAL Id: hal-04267742 https://hal.science/hal-04267742v1

Submitted on 2 Nov 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License


# **Ultraviolet vs. Visible Skylight Polarization** Measurements

Antoine Moutenet<sup>1,2</sup>, Julien R Serres<sup>1,3</sup>, Stephane Viollet<sup>1</sup>

<sup>1</sup>: Aix Marseille Univ, CNRS, ISM <sup>2</sup>: Safran Electronics&Defense <sup>3</sup>: Institut Universitaire de France

## Insects using skylight polarization for autonomous outdoor navigation

Autonomous outdoor navigation is mainly based on Global Navigation Satellite Systems (GNSS), magnetic compass and gyro-compass but it redundant, robust and affordable requires strategies to be reliable in all conditions (wheather, electromagnetic disturbances...). Inspired by bees and some ants which are known to use skylight linear polarization for their outside moving heading calculation, a lot of bio-inspired compass using visible skylight polarization were made **[1]**.

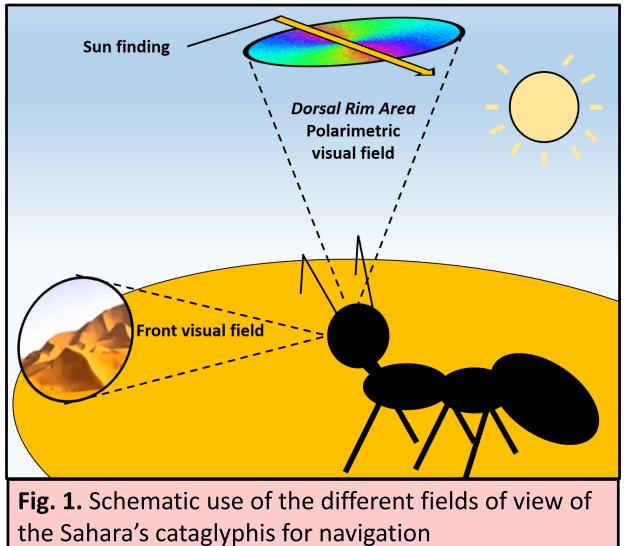

Our experimental setup (Fig. 3) was composed of two camera set on one motorized rotating support rail :

– a polarized monochromatic camera (26° half field of view). It is made of a CMOS sensor with an add-on micro-polarizers array such as, for each square block of four pixels, the four micro-polarizers orientations are at 0, 45, 90 and 135° from the sensor length, see **Fig. 4(a)**.


Its acquisition time is less than 0.1s



Poster No. A1P-A01

### **Experimental Setup**

Those sensors, basically sun-finder devices, coupled with ephemerides computation in order to find true North, provides good results but are still unreliable in highly overcast sky conditions.

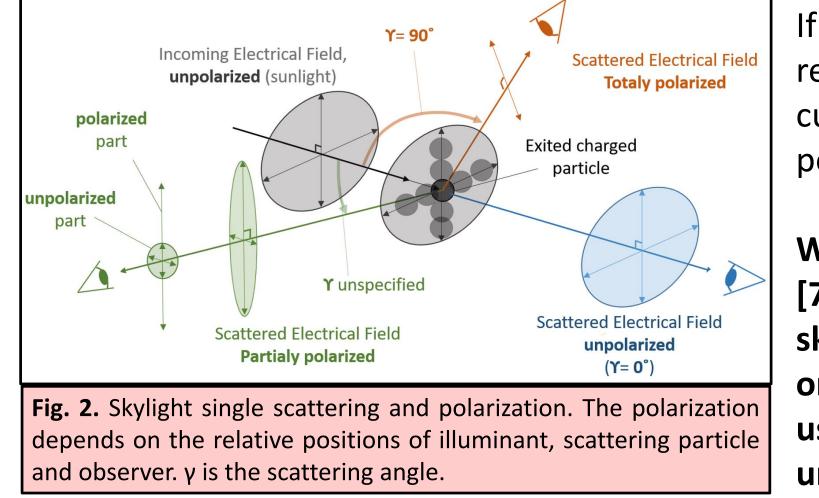


If the UV are not supposed to be reliable under clear sky, insects are curiously also sensitive to linear polarization in this spectral band [2].

We chose, as some of our peers [3]-[7], to compare UV and visible skylight polarization measurements in order to understand if UV could be used to improve heading estimation under overcast skies.



camer

Fig. 3. Outdoor experiment setup. Luminy University Campus, Marseille.

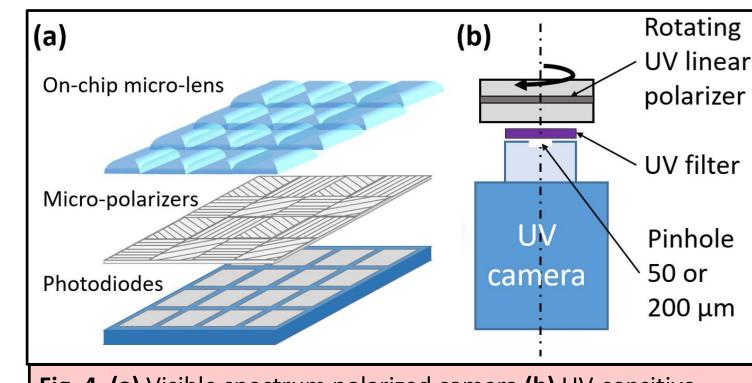

Polarimetric

Fig. 4. (a) Visible spectrum polarized camera (b) UV-sensitive camera fitted with a low-cost objective.

– a UV-sensitive camera (15° half field of view). With, as an objective, a pinhole (50µm or 200µm) and a UVcentered band-pass filter, see Fig. 4(b). Above this elementary UV objective was connected a manually continuous rotating mount (1° precision) with a UV

> polarizer inside, in order to be able to take images of linear polarization orientations at 0, 45, 90 and 135° from the sensor length, and to merge those image into polarimetric camera-like image. Its acquisition time was 8s for the 50µm pinhole and 2s for the 200µm pinhole. The time interval between each images was between 3 and 5s.

Measurements were made at Marseille in France, June 2023. For each measurement, we oriented the SR according to three positions: 0, 10 and 50 ° from the rotating table origine.

# Skylight polarization measurement and polarization formalism

The single scattering model is reliable only for near visible spectrum in clear sky conditions. In facts clouds and aerosols lead to changes in the AoP distribution and in the count of points featuring null DoLP, from 2 to 4 [8],[9]. Only two polarization parameters remains :

### **Measurements results**

|     | measured | d sun azimu |          | azimuth   |      |
|-----|----------|-------------|----------|-----------|------|
| sky | SR at O  | SR at 10    | SR at 50 | sky drift | step |

Sky drift due to the long-time UV captures affected measurements. In order to estimate the sky drift's impact we captured, for each experiment 4 images with the UV camera, with a fixed polarizer position. Then, we merged them like the classical captures and use them to compute a fake DoLP. The fake DoLP value indicate the level of sky drift impact. We classified the intensities of the sky drift as follows : null, low, medium, strong and very strong (Fig. 6).

- the symmetry around solar meridian axis
- the existence of a segment verifying  $AoP_1 = 90^\circ$  on the solar meridian axis

We computed DoLP and  $AoP_L$  in Fig. 5, using the normalized Stokes parameters  $s_1$ and  $s_2$  as follows, with  $\alpha_p$  the azimuth coordinate of each pixel in the image frame:

$$s_{1} = (I_{0} - I_{90})/(I_{0} + I_{90})$$
  

$$s_{2} = (I_{45} - I_{135})/(I_{45} + I_{135})$$
  

$$DoLP. e^{2i.AoP_{L}} = (s_{1} + i.s_{2}). e^{-2i.\alpha_{P}}$$

We use on both images taken by the UV and polarimetric cameras the same image processing algorithms :

- one which displays AoP<sub>1</sub> and DoLP
- one sun azimuth axis finder, relying on a binary threshold of ±90° AoP<sub>1</sub> points and Hough transform [10].

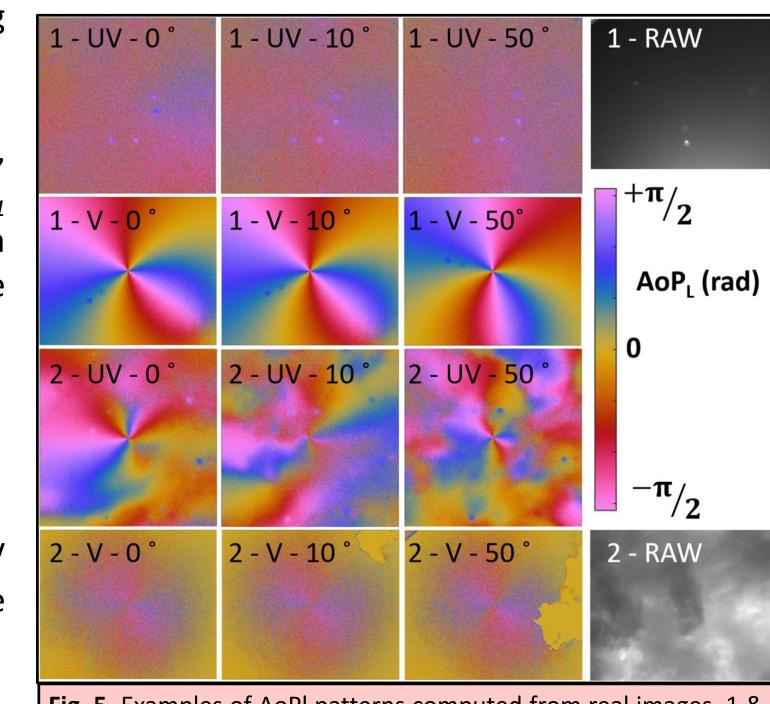


Fig. 5. Examples of AoPI patterns computed from real images. 1 & 2 refer to two sky conditions, clear & thick cloud blanket respectively. UV is for AoPI in the UV, V for AoPI in the visible spectrum. 0°, 10°, 50° correspond to the angular position of the support rail. RAW is a monochromatic image of the sky.

### **Conclusion and futur work**

|             | deg    | deg    | deg    |        | consistency  |
|-------------|--------|--------|--------|--------|--------------|
| clear       | 32.07  | 37.2   | 79.19  | low    | $\checkmark$ |
| Clear       | 35.17  | 44.2   | 82.48  | -      | $\checkmark$ |
| few clouds  | 43.15  | -2.7   | 47.06  | strong | X            |
| Tew clouds  | 63.36  | 71.81  | -68.7  | -      | $\checkmark$ |
| clouds      | 37.93  | 35.52  | 22.7   | low    | X            |
| ciouus      | 38.2   | 45.07  | 48.86  | -      | X            |
| big clouds  | 78.71  | -43.33 | -37.42 | strong | X            |
| Dig ciouus  | -89.46 | -1.12  | 0.07   | -      | X            |
| thin cloud  | 17.2   | 24.56  | 31.04  | medium | X            |
| blanket     | 32.76  | 40.57  | 79.91  | -      | $\checkmark$ |
| thin cloud  | 16.92  | 18.15  | 16.04  | null   | X            |
| blanket     | 32.91  | 34.22  | 48.31  | -      | X            |
| thick cloud | -4.77  | -6.31  | 41.18  | strong | 2            |
| blanket     | 47.32  | 51.04  | 42.47  | -      | X            |

Table 1. Sun azimuth estimation examples for various skies. Each experiment under one sky condition is separated in 3 angular positions of the support rail. Shaded boxes are for UV and clear boxes for visible spectrum. Mesured azimuth's axis takes value between –90° and +90°.

Sky drift refers to changes in skylight intensity while UV captures. Azimuth step consistency refers to correspondence between azimuth measurement and stage rotation steps.

| L  |      |     | Μ    |      |      | S    |      |      |  |
|--|------|-----|------|------|------|------|------|------|--|
|  |      |     |      |      |      |      |      |      |  |
|  |      |     |      |      |      |      |      |      |  |
| 50   |      |     |      |      |      |      |      |      |  |
| 0  | 0.05 | 0.1 | 0.15 | 0.20 | 0.25 | 0.30 | 0.35 | 0.40 |  |
| <b>ig. 6.</b> Fake DoLP examples for sky drift level estimation.<br>. : low sky drift, <b>M</b> : medium, <b>S</b> : strong sky drift. |      |     |      |      |      |      |      |      |  |

Experiments' results are displayed in **Table 1.** Since the sun is always moving, the steps expected in azimuth measurements are 9° and 39°, instead of 10° and 40°.

In Table 1 the first double row (clear) corresponds to measurement 1 in Fig. 5 and L in Fig. 6, seventh double row (thick cloud blanket) corresponds to measurement 2 in Fig. 4 and **S in Fig. 5**, and the fifth double row (thin cloud blanket) corresponds to M in **Fig. 5**.

[1] F. Kong, Y. Guo, J. Zhang, X. Fan, X. Guo, "Review on bio-inspired polarized skylight navigation," Chinese Journal of Aeronautics, May 2023.

[2] G. Horv´ath and D. Varj´u, "Polarized Light in Animal Vision," 2004

As expected from studies carried out on insects, the use of a UV-sensitive camera enhanced with polarized light measurement ability has shown that it could be possible to estimate the sun azimuth under overcast skies.

Nevertheless, this study requires further experiments by mounting a genuine objective mounted on the UV-camera to decrease skydrift effects and achieve a fair comparison with snapshot polarimetric camera sensitive to the visible spectrum.

The first step will be to use a UV objective lenses will allow us to reduce drastically the acquisition time of the camera, due to aperture increasement. The second one will be to use four of these cameras mounted with static linear UV polarizer, one for each linear polarization that classic polarimetric camera are sensitive to.

[3] X. Wang, J. Gao and Z. Fan, "Empirical corroboration of an earlier theoretical resolution to the UV paradox of insect polarized skylight orientation,"Naturwissenschaften, 2014.

[4] I. Pomozi, G. Horv´ath, and R. Wehner, "How the clear-sky angle of polarization pattern continues underneath clouds : full-sky measurements and implications for animal orientation," Journal of Experimental Biology, 2001.

[5] M. Blumthaler and M. Schwarzmann, "Spectral measurements of the polarization of UV sky radiance," SPIE, 2005. [6] N. Carey, and W. Sturzl, "An insect-inspired omnidirectional vision system including UV-sensitivity and polarisation," IEEE International Conference on Computer Vision Workshops, 2011.

[7] H. Zhao, W. Xu, "A Bionic Polarization Navigation Sensor and Its Calibration Method," Sensors , Vol. 16, No. 8, August 2016. [8] M. V. Berry, M. R. Dennis, and R. L. Jr Lee, "Polarization singularities in the clear sky," New Journal of Physics, 2004. [9] G. Horvath, B. Bernath, B. Suhai, and A. Barta, "First observation of the fourth neutral polarization point in the atmosphere," JOSA, 2002.

[10] H. Lu 1, Y. Xie, K. Zhang, H. Zhang, X. M. Zou, J. Wang, and K. C. Zhao, "Construction and test of bio-inspired imaging polarization navigation prototype," The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences, August 2020.





A.M. was supported by a CIFRE doctoral fellowship from the ANRT and Safran Electronics & Defense (agreement #2021/0056).

J.R.S has received funding from the Excellence Initiative of Aix-Marseille Université A\*Midex, a French "Investissements d'Avenir" programme AMX-21-ERC-02 and AMX-20-TRA-043. This research work was also supported by the SUD Provence-Alpes-Côte d'Azur Region (PACA) (Grant#2021/08135).