



**HAL**  
open science

## The dancing beads

Robin Noury, Marie-Charlotte Renoult, Gilles Godard, Denis Lebrun

► **To cite this version:**

Robin Noury, Marie-Charlotte Renoult, Gilles Godard, Denis Lebrun. The dancing beads. APS Division of fluids dynamics, Nov 2023, Washington DC, France. 2023, 10.1103/APS.DFD.2023.GFM.P0037 . hal-04390117

**HAL Id: hal-04390117**

**<https://hal.science/hal-04390117v1>**

Submitted on 12 Jan 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.


L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - NoDerivatives 4.0 International License

# THE DANCING BEADS

Robin Noury, Marie-Charlotte Renoult, Gilles Godard & Denis Lebrun  
CORIA UMR 6614 CNRS, University and INSA of ROUEN Normandy, France

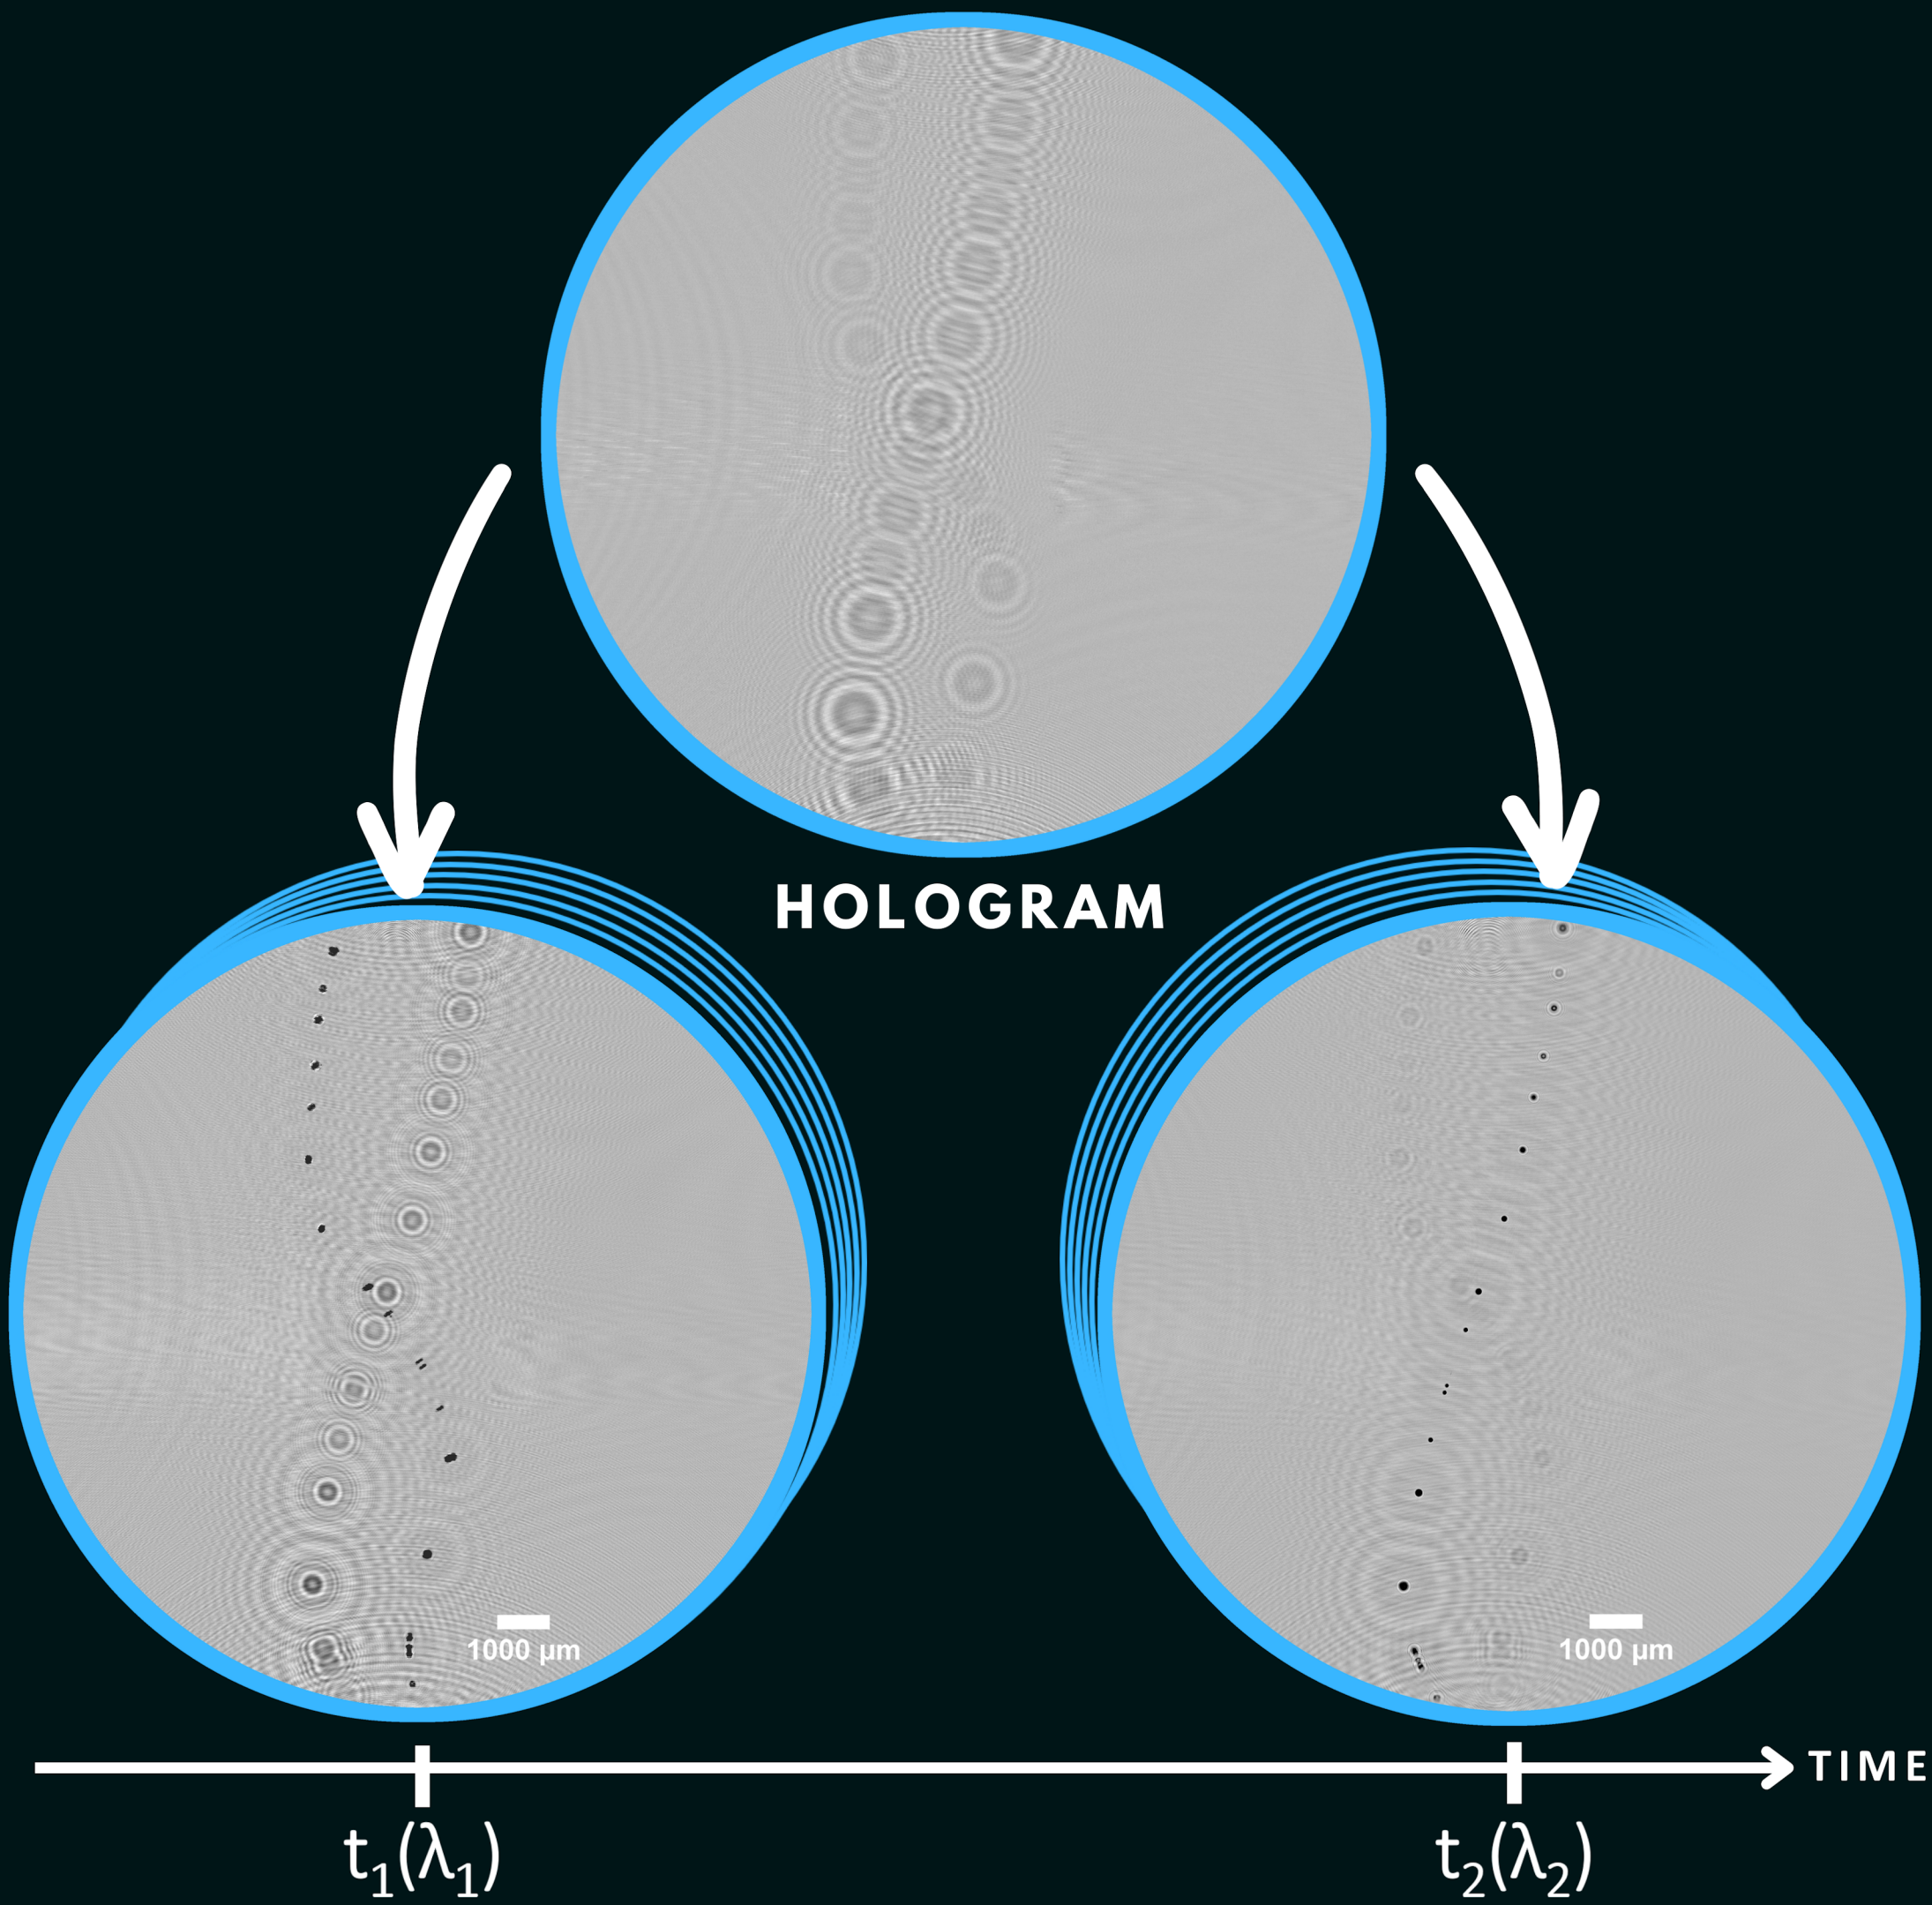

Stretching a viscoelastic fluid element between two plates can lead to the formation of a bead-on-a-string structure. This structure is composed of several drops connected by a filament (not visible here). Submitted to a perturbed environment, it may start to oscillate. Digital holography is a 3D optical method. It consists in recording an infinite number of planes and focusing on each particle image. In the present case, a two-wavelength light source is used to capture the moving objects but at two different times on a single hologram. Measuring the 3D coordinates and velocity of particles is then possible. Here, the oscillation takes the shape of a stationary wave of wavelength equal to the distance between the plates.

Robin Noury et al, "Phase analysis for focus plane detection in digital inline holography: application to three-dimensional locations of drops and threads in a beads-on-a-string structure," *Appl. Opt.* 62, 6241-6252 (2023)