



**HAL**  
open science

## Neutrons as key technique for a better understanding of lithium and postlithium batteries ¶

Corentin Renais, Magda Reuter, Ove Korjus, Sergio Mayer, Adrien Fauchier-Magnan, Emmanuelle Suard, Claire Villevieille

### ► To cite this version:

Corentin Renais, Magda Reuter, Ove Korjus, Sergio Mayer, Adrien Fauchier-Magnan, et al.. Neutrons as key technique for a better understanding of lithium and postlithium batteries ¶. Journées de la diffusion neutronique 2023, Oct 2023, Erquy, France. hal-04711534

**HAL Id: hal-04711534**

**<https://hal.science/hal-04711534v1>**

Submitted on 27 Sep 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Neutrons as key technique for a better understanding of lithium and post-lithium batteries



C. Renais<sup>1</sup>, M. Reuter<sup>1</sup>, O. Korjus<sup>2</sup>, S. Mayer<sup>1</sup>, A. Fauchier-Magnan<sup>1</sup>, E. Suard<sup>3</sup>, C. Villevieille<sup>1</sup>

<sup>1</sup> Univ. Grenoble Alpes, Univ. Savoie Mont Blanc, CNRS, Grenoble INP, LEPMI, 38000 Grenoble, France

<sup>2</sup> Université Grenoble Alpes, CEA, IRIG, 38000 Grenoble, France

<sup>3</sup> Institut Laue Langevin (ILL), avenue des Martyrs, 38000 Grenoble, France



Li-ion batteries are key players for the energy transition and help decrease greenhouse emission owing to their storage ability. But batteries are also very complex electrochemical systems that deserve an in depth characterisations to understand their limitation during cycling. Indeed, batteries are constantly under further development and employing new type of chemistry and materials that needs to be investigated during operation i.e., in operando mode.

Neutron powder diffraction (NPD) is a technique of choice to investigate structural changes, especially for light elements like lithium. Developing an electrochemical cell dedicated to operando neutron diffraction measurements is challenging due to the large amount of electroactive materials needed and due to the incoherent neutron scattering with hydrogen, highly contributing to the background.

We report here an optimal cylindrical cell based on 18650 design<sup>1-3</sup>: i) the casing is made of transparent TiZr alloy<sup>4</sup> and ii) several grams of active materials per electrodes. Additionally, we modified several set-up on D19 neutron diffraction beamline at ILL enabling the investigation of the electrochemical cell during relaxation processes giving information about diffusion. NCM811 vs. graphite was selected as promising full-cell battery due to the high energy density expected with this electrode couple. Figure 1 represents the neutron diffraction patterns evolution of both phases along the first (de)lithiation. As can be seen both the stages in graphite lithiation (peak (002)) and the insertion reaction of NCM811 (peak (003)) can be easily followed and analysed by mean of Rietveld refinement.

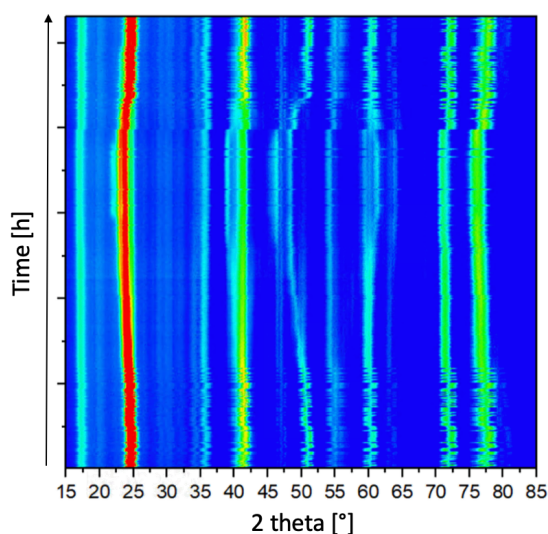


Figure 1. Contour plot representation of the neutron patterns collected during the operando experiment.

In another example, we used neutron imaging to follow the Li diffusion processes by using Li isotopes <sup>6</sup>Li and <sup>7</sup>Li. By monitoring fast charge behaviour in Li-rich cathode materials vs. Li metal, we demonstrated that the electrode engineering is a key parameter to optimise to allow fast charging protocol. Coupling experimental data to modelling reveals the hindrance of several Li transport pathway for electrocoupling fast charge and high-power features. Similar examples will be presented on solid state batteries.

[1] Boulet-Roblin, L. *et al. Journal of Physical Chemistry C* **120** (2016) 17268-17273.

[2] Boulet-Roblin, L. *et al. C. Journal of Materials Chemistry A* **5** (2017) 25574-25582.

[3] Sheptyakov, D. *et al. Journal of Materials Chemistry A* (2020).

[4] Bianchini, M. *et al. Journal of The Electrochemical Society* **160** (2013) A2176-A2183.